

# Universal Box General User Manual

## How to update your box

Step 1, Select Update->Self update tab.

Step 2, Press the „Update” button.

Nokia Ericsson Siemens Setup Update

Self update Files

Name	MCU-Local	MCU-Host	SMCU-Local	SMCU-Host	Info
Boot	1.065	1.065	1.26	0.0	No update needed.
Nokia	1.108	1.108	1.36	1.36	No update needed.
Ericsson	1.26	1.26	1.58	1.58	No update needed.
Siemens	1.042	1.042	1.14	1.14	No update needed.

Update

MCU Boot Version: **1.065**, and up to date.  
SMCU Boot Version: **1.26**, and up to date.  
Receiving latest versions...  
**All available algos are up to date.**  
Current local filepack version: **1.67** is up to date.  
Current local executable version: **1.3.1.303** is up to date.  
MCU Boot Version: **1.065**, and up to date.  
SMCU Boot Version: **1.26**, and up to date.  
Terminated without error.

About Abort Exit

## How to keep your box and main sw automatically updated


Step 1, Select Setup->General tab.

Step 2, Mark the „Enable automatic update”

Step 3, Select the update period which could be: „Always”, „Daily”, „Weekly”, „Monthly”.

The software will preform the update after the selected period is elapsed.

Always means on every software startup.

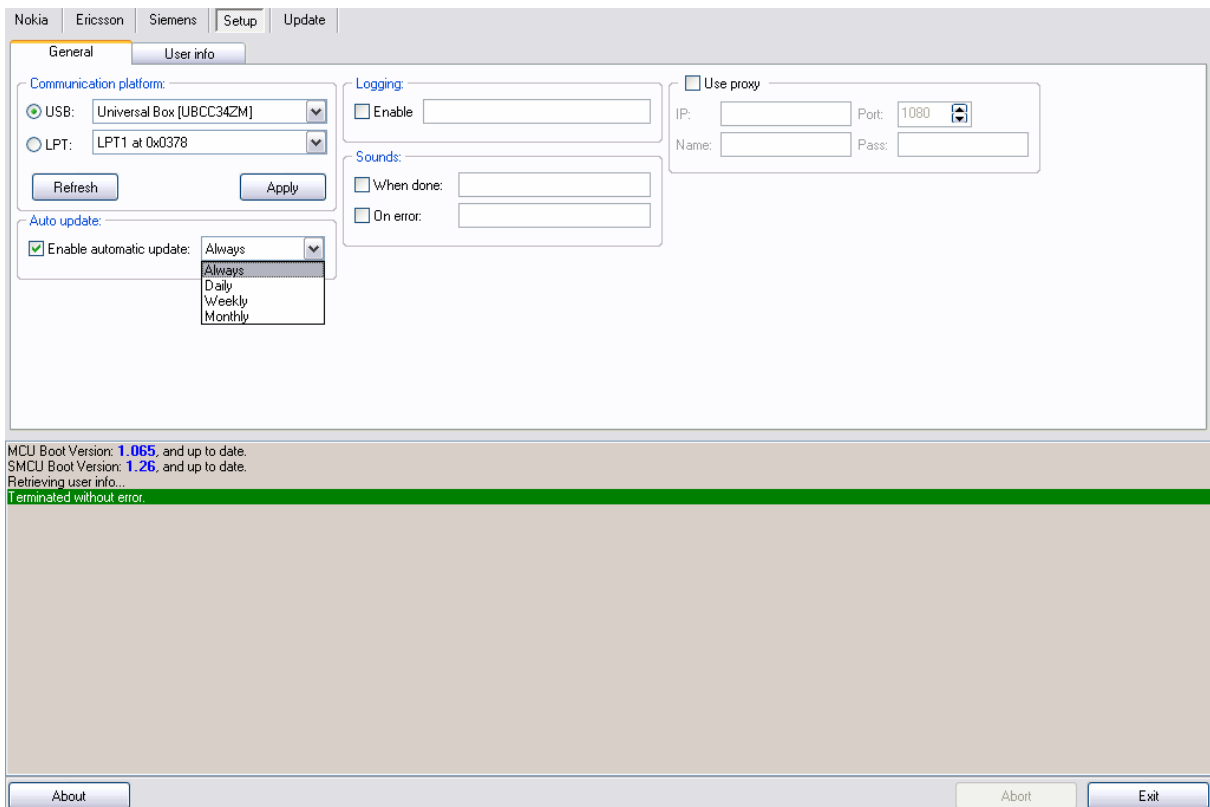


## How to download files

Step 1, Select Update->Files tab.

Step 2, Press the „Refresh” button.

Step 3, Select the files you need.

Step 4, Press the „Download” button.

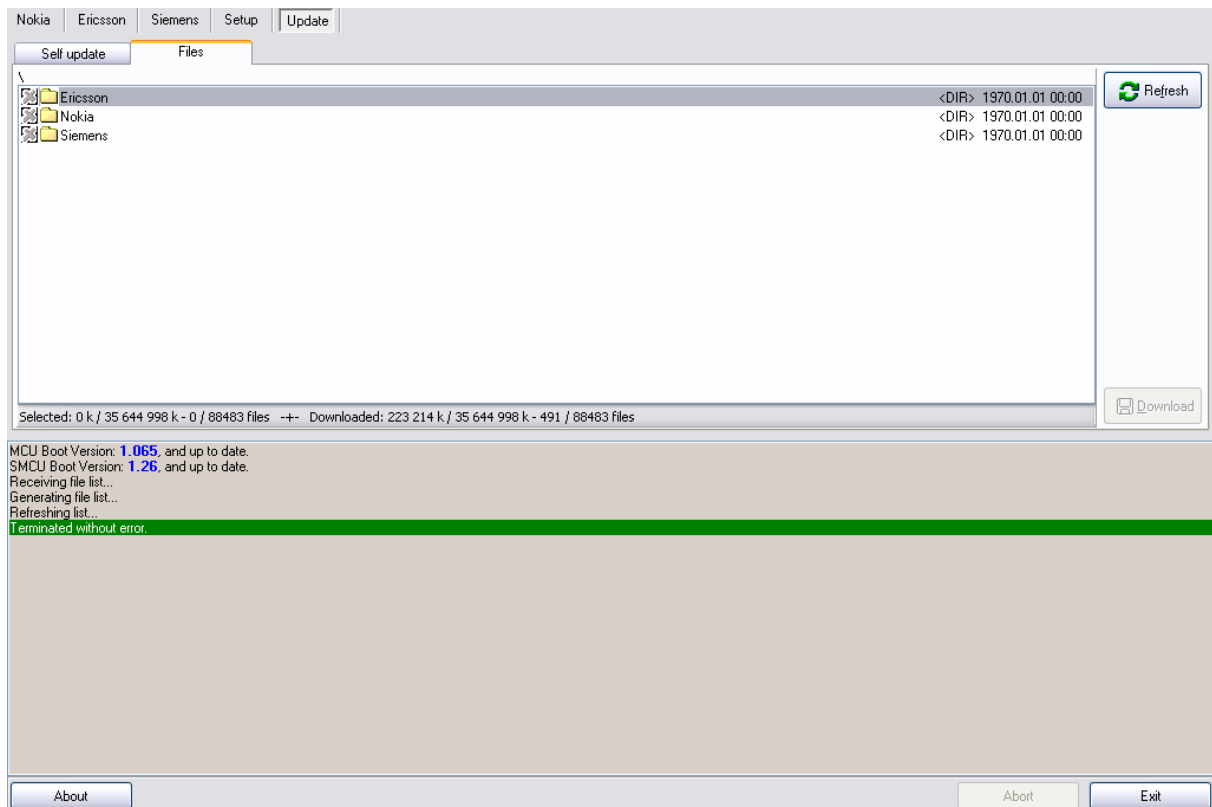


## Icon descriptions

- This means that the file or the whole directory exists on your computer.  
(same size and date as on the server)
- This means this file or directory is selected for download.
- This means a partially downloaded directory.
- Unselected file or directory.

## How to check user info

Step 1, Select Setup->User info tab.

Step 2, Press „Read info” button.

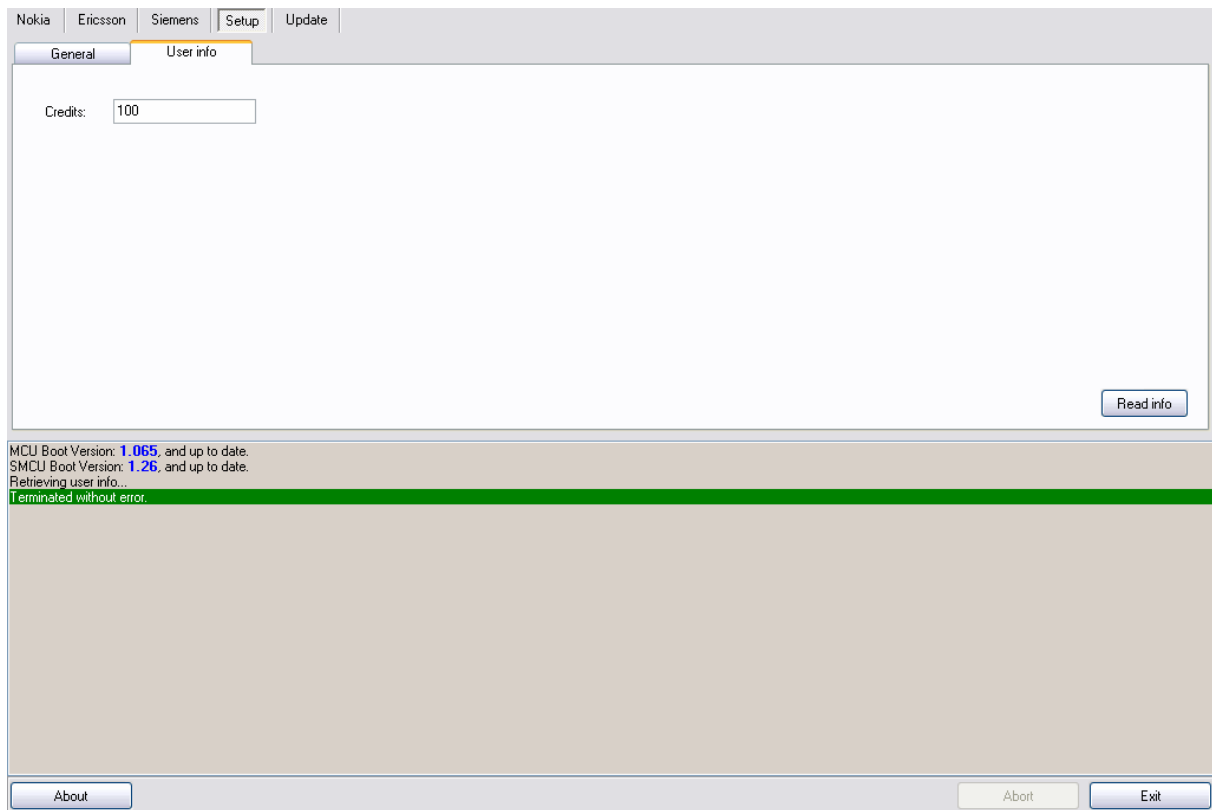


## How to log activities

Step 1, Select Setup->General tab.

Step 2, Check the „Enable” checkbox.

Step 3, Specify the filename for your logfile.

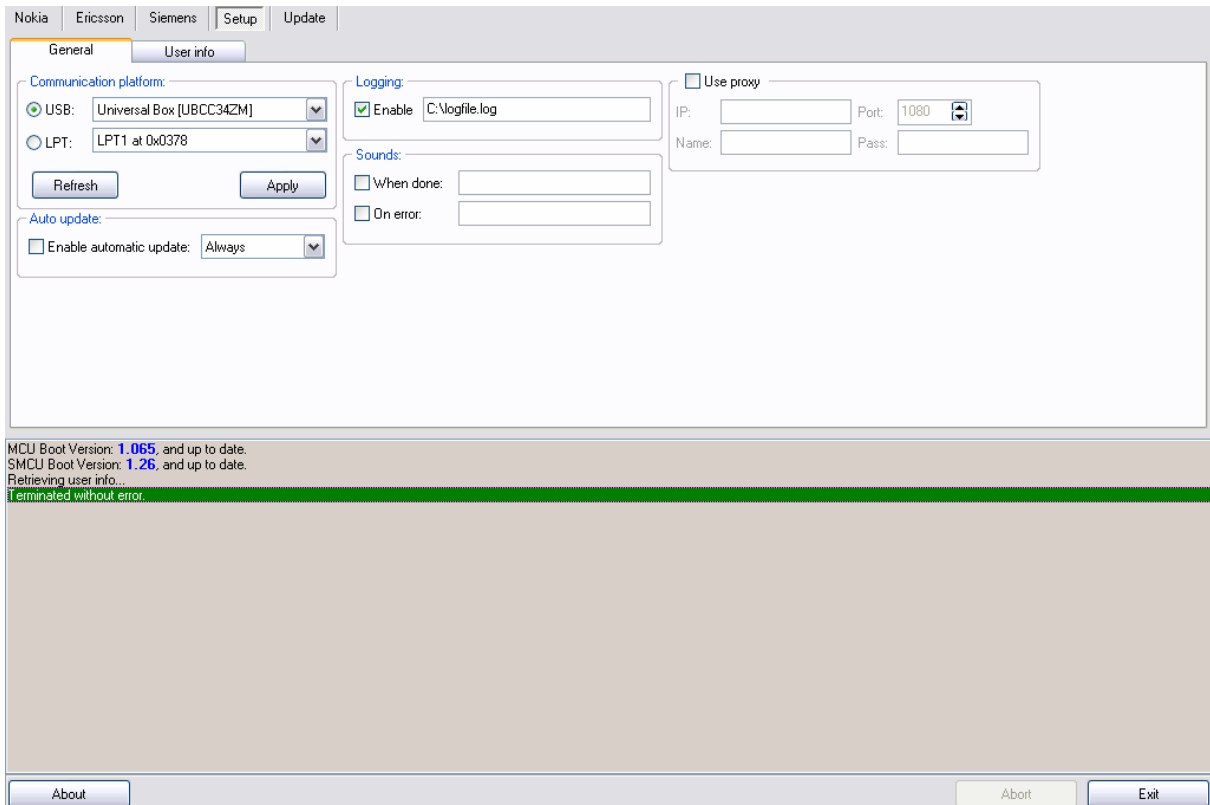


## How to setup alert sounds

Step 1, Select Setup->General tab.

You can assign sounds for two events, faulty and/or successful operation.

Step 2, Select the desired event(s) („When done”, „On error”)

Step 3, Select the corresponding wav file.

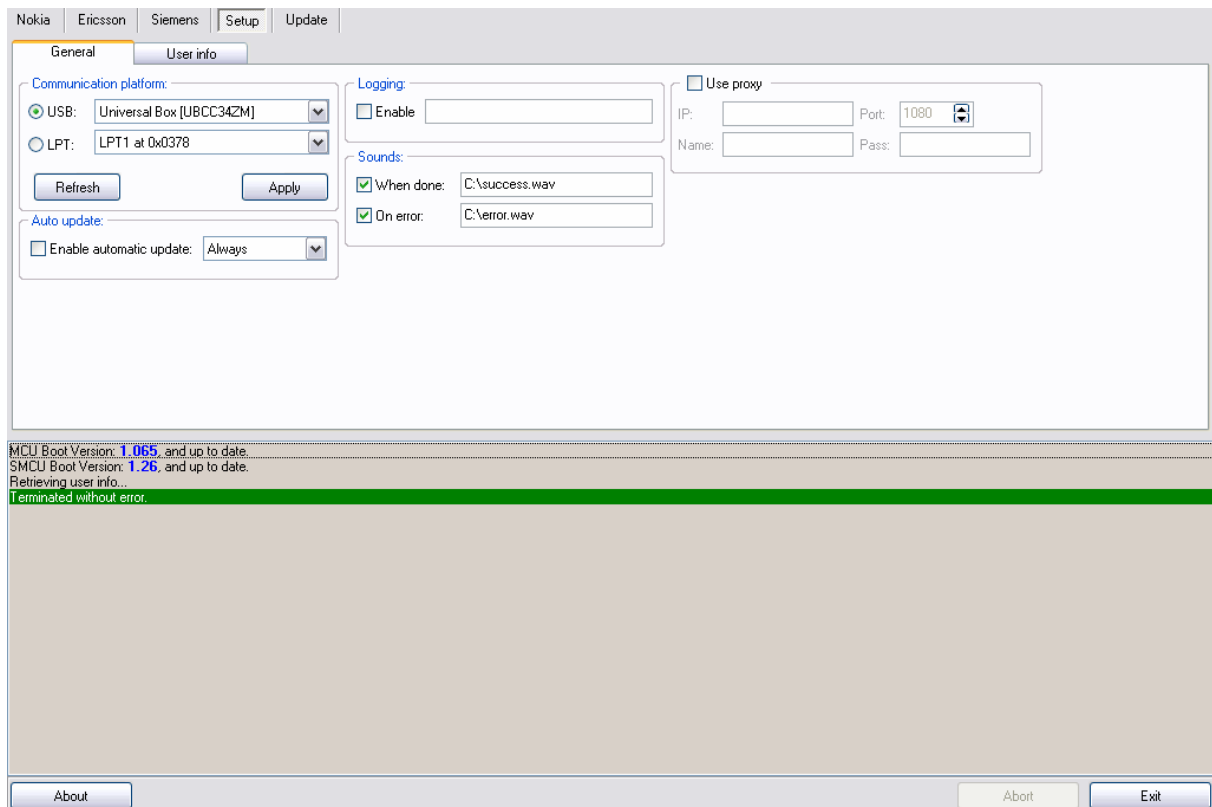

## How to use proxy server

Step 1, Select Setup->General tab.

Step 2, Check the „Use proxy” checkbox.

Step 3, Specify the proxy server’s IP address and port number.

Step 4, Type your proxy username and password into the appropriate fields.

