

# » Kontron Application Note «



## AT8060: IPMI Sensor User Guide

Document Revision 1.1  
May 2014

# Customer Service

## Contact Information: Kontron Canada, Inc.

4555 Rue Ambroise-  
Lafortune  
Boisbriand, Québec, Canada  
J7H 0A4  
Tel: (450) 979-5320  
(800) 354-4223  
Fax: (450) 437-8053  
E-mail:  
[support@ca.kontron.com](mailto:support@ca.kontron.com)

## Kontron Modular Computer GMBH

Sudetenstrasse 7  
87600 Kaufbeuren  
Germany  
+49 (0) 8341 803 333  
  
+49 (0) 8341 803 339  
[support-kom@kontron.com](mailto:support-kom@kontron.com)

Visit our web site at: [www.kontron.com](http://www.kontron.com)

© 2013 Kontron, an International Corporation. All rights reserved.

The information in this user's guide is provided for reference only. Kontron does not assume any liability arising out of the application or use of the information or products described herein. This user's guide may contain or reference information and products protected by copyrights or patents and do not convey any license under the patent rights of Kontron, nor the rights of others.

Kontron is a registered trademark of Kontron. All trademarks, registered trademarks, and trade names used in this user's guide are the property of their respective owners. All rights reserved. Printed in Canada. This user's guide contains information proprietary to Kontron. Customers may reprint and use this user's guide in other publications. Customers may alter this user's guide and publish it only after they remove the Kontron name, cover, and logo.

Kontron reserves the right to make changes without notice in product or component design as warranted by evolution in user needs or progress in engineering or manufacturing technology. Changes that affect the operation of the unit will be documented in the next revision of this user's guide.

# Table of Contents

Scope .....	4
1. Sensor Introduction .....	4
Sensor Model .....	4
Sensor Classes .....	5
Event/Reading Type .....	6
Sensor Type .....	6
Sensor Reading .....	7
Event Data .....	8
Entity .....	8
Sensor ID .....	9
2. ipmitool .....	10
"Get Sensor Reading" Command .....	10
Sensor Command .....	10
Sdr Command .....	11
Sel Command .....	12
3. Pigeon Point's <i>clia</i> .....	13
Sensordata Command .....	13
Sel Command .....	14
4. Example .....	14
Analyzing the SEL .....	14
Read a "discrete" sensor .....	15
Annex A - List of AT8060/RTM8060 sensors .....	16
Annex C - Cause of State Change Values .....	46

# Scope

This document's main purpose is to show how to analyze and understand events generated by sensors of the AT8060 (and RTM8060) which are stored in the System Event Log (SEL).

Typical situations in which the SEL needs to be consulted are as followed:

- Unexpected shutdown or reboot
- Front plate LEDs showing abnormality
- Any unusual behavior

In many cases, analyzing the SEL will allow to determine the root cause of the events and provide essential guidance in determining either preventive or corrective action.

This document also contains all the information needed to understand sensor readings. Readings provide useful information on the board's status. (e.g.: Which jumpers are present or current POST code)

In order to be able to accomplish these tasks, the user will first be introduced to "Sensors" as defined in the *IPMI specification v2.0*. Once the first level knowledge has been acquired, detailed information will be provided on how to analyze and interpret the data collected from these sensors with tools such as [ipmitool](#) and Pigeon Point's [clia](#). Last but not least, "Annex A" presents a detailed list of all the sensors implemented on the AT8060 and RTM8060.

## 1. Sensor Introduction

### Sensor Model

*"Access to monitored information, such as temperatures and voltages, fan status, etc., is provided via the IPMI Sensor Model. Instead of providing direct access to the monitoring hardware IPMI provides access by abstracted sensor commands, such as the Get Sensor Reading command, implemented via a management controller. This approach isolates software from changes in the platform management hardware implementation."*

*Sensors are classified according to the type of readings they provide and/or the type of events they generate. A sensor can return either an analog or discrete reading. Sensor events can be discrete or threshold-based.*

*The different event types, sensor types, and monitored entities are represented using numeric codes defined in the IPMI specification. IPMI avoids reliance on strings for management information. Using numeric codes facilitates internationalization, automated handling by higher level software, and reduces management controller code and data space requirements."*<sup>1</sup>

For the purpose of this document, the two most important characteristics of a sensor are:

- Event/Reading Type
- Sensor Type

---

<sup>1</sup> IPMI v2.0 Section 1.7.5 p:13

## Sensor Classes

Sensors fall into the following classes:

### Discrete:

- These are *State Sensors*. The reading they return contains two bytes where each bit can represent a unique state.
- Up to 15 possible states (not 16 since bit15 from the returned reading is reserved)
- More than one state may be active simultaneously.
- Events are generated by a unique state. Thus, *Event Messages* do not return a bit field, just a single offset value corresponding to a single event.

### 'Digital' Discrete:

- A digital sensor is not really a unique class, but a term commonly used to refer to special case of a discrete sensor that only has two possible states.

### Threshold:

- Threshold based.
- Changes event status on reading comparison to threshold values.
- Threshold enumerations may be considered a special case of the discrete sensor type.

### OEM:

- Special case of discrete where the meanings of the state's (offsets) are *OEM* defined.

## Event/Reading Type

"Event/Reading Type codes are used in SDRs (sensor data records) and Event Messages to indicate the trigger type for an event. These codes are also used in SDRs to indicate what types of present reading a sensor provides.

Event/Reading Type Codes are used to specify a particular enumeration (offset) that identifies a set of possible events that can be generated by a sensor. For "Discrete" sensors, the specification of an Event/Reading Type code enumeration also indicates the type of reading the sensor provides."<sup>2</sup>

Event/Reading Type are listed in the following Table.

Table 1: "Event/Reading Type" Code Ranges<sup>3</sup>

Event/Reading Type Code category	7-bit Event/Reading Type Code Range	Sensor Class	Description
unspecified	00h	n/a	Event/Reading Type unspecified.
Threshold	01h	threshold	Threshold-based. Indicates a sensor that utilizes values that represent discrete threshold states in sensor access and/or events. The Event/Reading event offsets for the different threshold states are given in Table 42-2, <i>Generic Event/Reading Type Codes</i> , below.
Generic	02h-0Ch	discrete	Generic Discrete. Indicates a sensor that utilizes an Event/Reading Type code & State bit positions / event offsets from one of the sets specified for Discrete or 'digital' Discrete Event/Reading class in Table 42-2, <i>Generic Event/Reading Type Codes</i> , below.
Sensor-specific	6Fh	discrete	Sensor-specific Discrete. Indicates that the discrete state information is specific to the sensor type. State bit positions / event offsets for a particular sensor type are specified in the 'sensor-specific offset' column in Table 42-3, <i>Sensor Type Codes</i> , below.
OEM	70h-7Fh	OEM	OEM Discrete. Indicates that the discrete state information is specific to the OEM identified by the Manufacturer ID for the IPM device that is providing access to the sensor.

## Sensor Type

"Discrete" sensors defined with an Event/Reading Type 6Fh (Sensor-specific) will use "Sensor-Specific" definition for their offset and "Event Data". "Sensor-specific" definition is available for many "Sensor Type" and may be "OEM" defined for OEM sensor types.

<sup>2</sup> IPMI v2.0 Section 42.1, p:498

<sup>3</sup> IPMI v2.0 Table 42-1, Event/Reading Type Code Ranges, p:499

## Sensor Reading

Reading from a sensor is available through the "Get Sensor Reading" command. All other more complex commands which provide sensor reading use this raw command. Therefore, it is important to understand the format in which data is returned.

Table 2: "Get Sensor Reading" Command<sup>4</sup>

Request Data	1	sensor number (FFh = reserved)
Response Data	1	Completion Code.
	2	Sensor reading <u>Byte 1:</u> byte of reading. Ignore on read if sensor does not return an numeric (analog) reading.
	3	<div> <div>[7] - 0b = All Event Messages disabled from this sensor</div> <div>[6] - 0b = sensor scanning disabled</div> <div>[5] - 1b = reading/state unavailable (formerly "initial update in progress"). This bit is set to indicate that a 're-arm' or 'Set Event Receiver' command has been used to request an update of the sensor status, and that update has not occurred yet. Software should use this bit to avoid getting an incorrect status while the first sensor update is in progress. This bit is only required if it is possible for the controller to receive and process a 'Get Sensor Reading' or 'Get Sensor Event Status' command for the sensor before the update has completed. This is most likely to be the case for sensors, such as fan RPM sensors, that may require seconds to accumulate the first reading after a re-arm. The bit is also used to indicate when a reading/state is unavailable because the management controller cannot obtain a valid reading or state for the monitored entity, typically because the entity is not present. See Section 16.4, <i>Event Status, Event Conditions, and Present State</i> and Section 16.6, <i>Re-arming</i> for more information.</div> </div> <div>[4:0] - reserved. Ignore on read.</div>
	(4)	<div> <div><u>For threshold-based sensors</u></div> <div>Present threshold comparison status</div> <div>[7:6] - reserved. Returned as 1b. Ignore on read.</div> <div>[5] - 1b = at or above (<math>\geq</math>) upper non-recoverable threshold</div> <div>[4] - 1b = at or above (<math>\geq</math>) upper critical threshold</div> <div>[3] - 1b = at or above (<math>\geq</math>) upper non-critical threshold</div> <div>[2] - 1b = at or below (<math>\leq</math>) lower non-recoverable threshold</div> <div>[1] - 1b = at or below (<math>\leq</math>) lower critical threshold</div> <div>[0] - 1b = at or below (<math>\leq</math>) lower non-critical threshold</div> <div><u>For discrete reading sensors</u></div> <div>[7] - 1b = state 7 asserted</div> <div>[6] - 1b = state 6 asserted</div> <div>[5] - 1b = state 5 asserted</div> <div>[4] - 1b = state 4 asserted</div> <div>[3] - 1b = state 3 asserted</div> <div>[2] - 1b = state 2 asserted</div> <div>[1] - 1b = state 1 asserted</div> <div>[0] - 1b = state 0 asserted</div> </div>
	(5)	<div> <div><u>For discrete reading sensors only. (Optional)</u></div> <div>(00h Otherwise)</div> <div>[7] - reserved. Returned as 1b. Ignore on read.</div> <div>[6] - 1b = state 14 asserted</div> <div>[5] - 1b = state 13 asserted</div> <div>[4] - 1b = state 12 asserted</div> <div>[3] - 1b = state 11 asserted</div> <div>[2] - 1b = state 10 asserted</div> <div>[1] - 1b = state 9 asserted</div> <div>[0] - 1b = state 8 asserted</div> </div>

### Completion Code:

Will not be displayed if the Request Message completes successfully and normally.

### Byte 1: Sensor Reading

- For "Discrete" Sensors, will return 00h
- For "Threshold" based sensors, will return the analog reading. This value is coded according to the *Event/Reading Type* and/or *Sensor type*. Tools such as [ipmitool](#) provide commands which will decode this information in a human readable format.

<sup>4</sup> IPMI v2.0 Table 35-15, Get Sensor Reading Command, p:464

#### Byte 2:

- Provides information on the sensor

#### Byte 3:

- For "Threshold" based sensor: Indicates where the reading stands against the threshold values.
- For "Discrete" sensors: Indicates which sensor offsets (states) are asserted for offset 00h to 07h.

#### Byte 4:

- For "Threshold" based sensor: 80h (since bit 7 is always 1b)
- For "Discrete" sensors: Indicates which sensor offsets (states) are asserted for offset 08h to 14h.

NOTE: Sensors have a reading mask which is "OEM" defined. This is used to ignore unused states during reading. Therefore, if a state that should be asserted is not read, the "Reading Mask" should be verified.

### Event Data

When a sensor changes state, an "Event Message" is sent to the SEL only if the "Event Mask" indicates that the new state must generate an event.

The "Event Data" contains 3 bytes where only the first byte is used. The signification of these bytes is listed in "Annex A" for every sensors implemented on the AT8060 and RTM8060.

### Entity

*"An Entity ID is a standardized numeric code that is used in SDRs to identify the types of physical entities or FRUs in the system"*<sup>5</sup>

In the case of the AT8060, up to 5 entities can be present:

- FRU0 PICMG Front Board (the board itself)
- FRU1 PICMG AdvancedMC Module (AMC)
- FRU2 PICMG Rear Transition Module (RTM8060)
- FRU3 Disk1 or Disk Bay1 (RTM's Disk1)
- FRU4 Disk2 or Disk Bay2 (RTM's Disk2)

---

<sup>5</sup> IPMI v2.0 Section 39, p:488



## Sensor ID

Sensors have a numerical ID used to identify them. The sensor ID as seen in the list from "Annex A" might not be the same in particular cases.

The reason is that the sensor ID's are determined during the board's activation according to the order in which the entities are activated. First sensors to be designated an ID are the ones populated on *FRU0* (Entity: PICMG Front Board). Afterwards, it depends on which entity is the first to ask for activation. Therefore, the RTM's sensors might have an offset compared to the IDs from the "Annex A" list.

The consequence is that only sensor 0 to 103 will be fixed. Therefore, all other *ENTITY* 's (*FRU1* and up) sensors from the list should not be referred by a specific numerical ID but rather by their sensor name (*IE: "FRU1:AMC power denied..."*).

## 2. ipmitool

This section does not list all commands that can be used to get information on sensors. However, these commands provide most of the relevant information.

`ipmitool` can be obtained at: <http://ipmitool.sourceforge.net/>

### "Get Sensor Reading" Command

This PICMG command, introduced in previous section, can be used by raw command:

```
# ipmitool raw 0x04 0x2d <id>
```

```
0x04 :      Network function Code for Sensor Event
0x2d :      Get Sensor Reading command
<id> :      Sensor ID
```

### Sensor Command

This command provides various information on the board's sensors. It is also the only command (excluding raw commands) that lists the reading "Data Byte" 3 and 4 (see "Sensor Reading" from section "1. Sensor Introduction"). Other `ipmitool` command provides sensor reading "Data Byte" 3.

```
# ipmitool sensor
```

Figure 1: "ipmitool sensor" command

Sensor	Analog Reading	Type	Reading Byte 3&4	Threshold Values					
IPMC Storage Err	0x0	discrete	0x0080	na	na	na	na	na	na
IPMC SEL State	0x0	discrete	0x0080	na	na	na	na	na	na
ME Availability	0x0	discrete	0x4280	na	na	na	na	na	na
Jumper Status	0x0	discrete	0x0080	na	na	na	na	na	na
IPMI Info-1	0x0	discrete	0x0080	na	na	na	na	na	na
IPMI Info-2	0x0	discrete	0x0080	na	na	na	na	na	na
RTH:IPMI Info-2	0x0	discrete	0x0080	na	na	na	na	na	na
RTH:IPMI Info-1	0x0	discrete	0x0080	na	na	na	na	na	na
RTH:MHC Stor Err	0x0	discrete	0x0080	na	na	na	na	na	na
RTH:MHC FwUp	0x0	discrete	0x0080	na	na	na	na	na	na
RTH:MHC Reboot	0x0	discrete	0x0180	na	na	na	na	na	na
RTH:FRU Agent	0x0	discrete	0x0180	na	na	na	na	na	na
RTH:IPMBL State	0x88	discrete	0x0880	na	na	na	na	na	na
RTH:Ver Change	0x0	discrete	0x0080	na	na	na	na	na	na
RTH:Health Error	0x0	discrete	0x0180	na	na	na	na	na	na
RTH:Pwr Good Ev	0x0	discrete	0x4780	na	na	na	na	na	na
RTH:Power Good	0x0	discrete	0x4780	na	na	na	na	na	na
RTH:Power State	0x0	discrete	0x0180	na	na	na	na	na	na
RTH:Disk Bay	0x0	discrete	0x0480	na	na	na	na	na	na
RTH:USB1 OC	0x0	discrete	0x0180	na	na	na	na	na	na
RTH:USBO OC	0x0	discrete	0x0180	na	na	na	na	na	na
RTH:SFP-B OC	0x0	discrete	0x0180	na	na	na	na	na	na
RTH:SFP-B Pres	0x0	discrete	0x0080	na	na	na	na	na	na
RTH:SFP-A OC	0x0	discrete	0x0180	na	na	na	na	na	na
RTH:SFP-A Pres	0x0	discrete	0x0080	na	na	na	na	na	na
RTH:Vcc +12VDisk	12.100	Volts	ok	10.560	11.165	na	na	12.870	13.475
RTH:Vcc +12V	10.899	Volts	ok	0.000	10.395	na	na	14.301	16.002
RTH:Vcc BlueLED	6.612	Volts	ok	3.876	5.814	na	na	7.410	9.424
RTH:Vcc +1.2V	1.197	Volts	ok	0.000	1.121	na	na	1.285	1.588
RTH:Vcc +5V	5.079	Volts	ok	0.000	4.666	na	na	5.346	6.124
RTH:Vcc +3.3V	3.296	Volts	ok	0.000	3.072	na	na	3.536	4.032
RTH:Vcc +3.3VSUS	3.298	Volts	ok	0.000	2.941	na	na	3.672	4.335
RTH:Temp MHC	27.000	degrees C	ok	-20.000	-10.000	-5.000	60.000	70.000	80.000
RTH:Temp SASCtrl	56.000	degrees C	ok	-20.000	-10.000	-5.000	105.000	115.000	125.000
RTH:Temp Air Out	37.000	degrees C	ok	-10.000	0.000	5.000	60.000	70.000	80.000
RTH:Temp Air In	27.000	degrees C	ok	-10.000	0.000	5.000	60.000	70.000	80.000

## Sdr Command

The following command will provide additional information on sensors.

```
# ipmitool sdr list -v
```

Figure 2: "ipmitool sdr list -v" Command

```
Sensor ID      : RTM:SFP-A OC (0x82)
Entity ID     : 192.96 (PICMG Rear Transition Module)
Sensor Type (Discrete): Current
States Asserted : Digital State
                  [State Deasserted]
Assertions Enabled : Digital State
                  [State Asserted]
Deassertions Enabled : Digital State
                  [State Asserted]

Sensor ID      : RTM:SFP-A Pres (0x81)
Entity ID     : 192.96 (PICMG Rear Transition Module)
Sensor Type (Discrete): Slot / Connector
Assertions Enabled : Slot/Connector
                  [Fault Status]
                  [Device Installed]
Deassertions Enabled : Slot/Connector
                  [Fault Status]
                  [Device Installed]

Sensor ID      : RTM:Vcc +12VDisk (0x80)
Entity ID     : 192.96 (PICMG Rear Transition Module)
Sensor Type (Analog) : Voltage
Sensor Reading  : 12.100 (+/- 0.220) Volts
Status         : ok
Nominal Reading : 11.990
Normal Minimum  : 11.165
Normal Maximum  : 12.870
Positive Hysteresis : 0.495
Negative Hysteresis : 0.495
Minimum sensor range : Unspecified
Maximum sensor range : Unspecified
Event Message Control : Per-threshold
Readable Thresholds : lnr lcr ucr unr
Settable Thresholds : lnr lcr ucr unr
Threshold Read Mask : lnr lcr ucr unr
Assertions Enabled  : lcr- lnr- ucr+ unr+
Deassertions Enabled : lcr- lnr- ucr+ unr+
```

## Sel Command

The "ipmitool sel" command shows the sensor's NAME and ID and reports in a human readable format the "Event Data". In some cases, *ipmitool* is not able to analyze the "Event Data" and will print "Event Data" 1,2 and 3. When this happens, the "Annex A"'s list should be used to decode these bytes.

```
# ipmitool sel list
```

Figure 3: "ipmitool sel list" Command

```
134 | 11/03/2009 | 14:55:15 | Voltage #0x6b | Lower Critical going low
135 | 11/03/2009 | 14:55:19 | FRU Hot Swap #0x02 | Transition to M4 | Asserted
136 | 11/03/2009 | 14:55:20 | FRU Hot Swap #0x03 | Transition to M4 | Asserted
137 | 11/03/2009 | 14:55:21 | FRU Hot Swap #0x01 | Transition to M4 | Asserted
138 | 11/03/2009 | 14:55:29 | Version Change #0x51 | Firmware or software change detected | Asserted
139 | 11/03/2009 | 14:55:33 | Reset #0x43 | State Asserted
13a | 11/03/2009 | 15:08:27 | System ACPI Power State #0x4e | SO/GO: working | Asserted
13b | 11/03/2009 | 15:56:59 | Reset #0x43 | State Asserted
13c | 11/03/2009 | 15:56:59 | Reset #0x43 | State Asserted
13d | 11/03/2009 | 15:57:33 | Reset #0x43 | State Asserted
13e | 11/03/2009 | 15:59:00 | Reset #0x43 | State Asserted
13f | 11/03/2009 | 16:18:22 | Reset #0x43 | State Asserted
140 | 11/03/2009 | 16:19:16 | System ACPI Power State #0x4e | SO/GO: working | Asserted
141 | 11/03/2009 | 16:22:57 | Reset #0x43 | State Asserted
142 | 11/03/2009 | 16:22:57 | Reset #0x43 | State Asserted
143 | 11/03/2009 | 16:23:58 | System ACPI Power State #0x4e | SO/GO: working | Asserted
144 | 11/03/2009 | 16:26:13 | Reset #0x43 | State Asserted
145 | 11/03/2009 | 16:26:14 | Reset #0x43 | State Asserted
146 | 11/03/2009 | 16:26:33 | Reset #0x43 | State Asserted
147 | 11/03/2009 | 16:27:45 | Reset #0x43 | State Asserted
148 | 11/03/2009 | 16:29:26 | System ACPI Power State #0x4e | SO/GO: working | Asserted
149 | 11/03/2009 | 20:56:15 | IPMB-O Status #0x53 | IPMB-A enabled, IPMB-B disabled | Asserted
14a | 11/03/2009 | 20:56:26 | IPMB-O Status #0x53 | IPMB-A enabled, IPMP-B enabled | Asserted
```

It is recommended to use Pigeon Point's "*clia* sel" command to analyze SEL data since it provides more details on sensors.

### 3. Pigeon Point's *clia*

In this section, two useful commands from the Shelf Manager's "Command Line Interpreter" will be detailed.

For more info consult Pigeon Point's web site: <http://www.pigeonpoint.com/>

#### Sensordata Command

This command can be used to get more details on sensors. It also indicates whether "Event Messages" are enabled or not.

# *clia* sensor board 5 (in this example, the board is located in slot 5)

Figure 4: "clia sensor board 5" Command

The image shows a terminal window with the output of the 'clia sensor board 5' command. The output is divided into three sections, each starting with '8a:'. Red arrows point from labels on the right to specific lines in the output:

- Sensor Name** points to the line: `Type: Threshold (0x01), "Voltage" (0x02)`
- Sensor ID** points to the line: `Belongs to entity (0xc1, 0x65): FRU # 1 (AMC # 5)`
- Event/Reading Class** points to the line: `Raw data: 210 (0xd2)`
- Event/Reading Type Code** points to the line: `Processed data: 2.541000 Volts`
- Sensor Type** points to the line: `Status: 0xc0`
- Sensor Type Code** points to the line: `All event messages enabled from this sensor`
- Board's Address** points to the line: `8a: LUN: 0, Sensor # 108 ("+2.5V")`

The output text is as follows:

```
8a: LUN: 0, Sensor # 108 ("+2.5V")
Type: Threshold (0x01), "Voltage" (0x02)
Belongs to entity (0xc1, 0x65): FRU # 1 (AMC # 5)
Status: 0xc0
    All event messages enabled from this sensor
    Sensor scanning enabled
    Initial update completed
Raw data: 210 (0xd2)
Processed data: 2.541000 Volts
Status: 0xc0

8a: LUN: 0, Sensor # 107 ("+12V")
Type: Threshold (0x01), "Voltage" (0x02)
Belongs to entity (0xc1, 0x65): FRU # 1 (AMC # 5)
Status: 0xc0
    All event messages enabled from this sensor
    Sensor scanning enabled
    Initial update completed
Raw data: 187 (0xbb)
Processed data: 11.033000 Volts
Status: 0xc0
    At or Below Lower Non-Critical Threshold

8a: LUN: 0, Sensor # 106 ("+3.3V MMC")
Type: Threshold (0x01), "Voltage" (0x02)
Belongs to entity (0xc1, 0x65): FRU # 1 (AMC # 5)
Status: 0xc0
    All event messages enabled from this sensor
    Sensor scanning enabled
    Initial update completed
Raw data: 215 (0xd7)
Processed data: 3.354000 Volts
Status: 0xc0


8a: LUN: 0, Sensor # 105 ("+3.3V")
Type: Threshold (0x01), "Voltage" (0x02)
Belongs to entity (0xc1, 0x65): FRU # 1 (AMC # 5)
Status: 0xc0
    All event messages enabled from this sensor
    Sensor scanning enabled
    Initial update completed
Raw data: 213 (0xd5)
Processed data: 3.322800 Volts
Status: 0xc0
```

## Sel Command

The "`clia sel`" command shows all the information you will need to find a definition for the event "Data Bytes" in "Annex A"'s list. Some Events are directly analyzed.

```
# clia sel board 5      (in this example, the board is located in slot 5)
```

Figure 5: "clia sel" Command

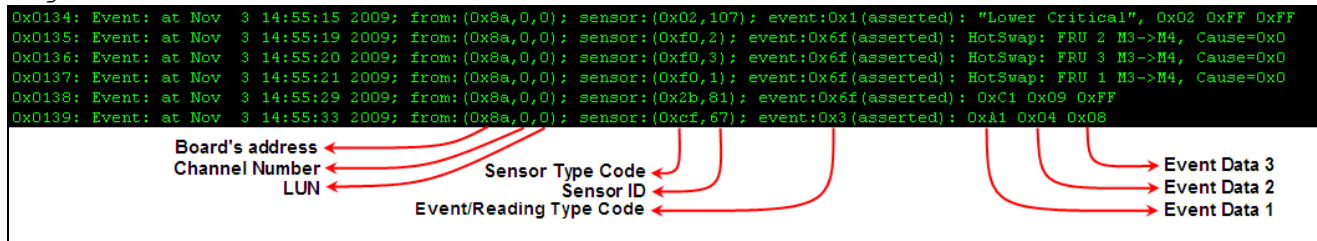

## 4. Example

### Analyzing the SEL

Whenever an unusual situation is reported, the SEL should be consulted:

Figure 6: SEL Event Example

```
0x0138: Event: at Nov 3 14:55:29 2009; from:(0x8a,0,0); sensor:(0x2b,81); event:0x6f(asserted): 0xC1 0x09 0xFF
```

Since the sensor's ID (81) is between 0 and 103 (as explained section "1. Sensor Introduction"), its ID can be used to locate the sensor in the "Annex A" list:

Sens or ID	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Offset	Data Byte 1	Data Byte 2	Data Byte 3
81	FW Ver Change / PICMG Front Board (100.96)	Sensor-specific (Discrete 0x0f) / Version Change (0x2b)	00h (bit 0): Hardware change detected with associated Entity. Informational. This offset does not imply whether the hardware change was successful or not. Only that a change occurred. 01h (bit 1): Firmware or software change detected with associated Entity. Informational. Success or failure not implied. 02h (bit 2): Hardware incompatibility detected with associated Entity. 03h (bit 3): Firmware or software incompatibility detected with associated Entity. 04h (bit 4): Entity is of an invalid or unsupported hardware version. 05h (bit 5): Entity contains an invalid or unsupported firmware or software version. 06h (bit 6): Hardware Change detected with associated Entity was successful. (deassertion event means 'unsuccessful'). 07h (bit 7): Software or F/W Change detected with associated Entity was successful. (deassertion event means 'unsuccessful')	[7:0] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	bit[7:0]: Version change type 00h unspecified 01h management controller device ID (change in one or more fields from 'Get Device ID') 02h management controller firmware revision 03h management controller device revision 04h management controller manufacturer ID 05h management controller IPMI version 06h management controller auxiliary firmware ID 07h management controller firmware boot block 08h other management controller firmware 09h system firmware (EFI / BIOS) change 0Ah SMBIOS change 0Bh operating system change 0Ch operating system loader change 0Dh service or diagnostic partition change 0Eh management software agent change 0Fh management software application change 10h management software middleware change 11h programmable hardware change (e.g. FPGA) 12h board/FRU module change (change of a module plugged into associated entity) 13h board/FRU component change (addition or removal of a replaceable component on the board/FRU that is not tracked as a FRU)	FFh

Let's analyze the "Event Data":

#### Event Data 1: 0xC1

```
0xC1 = 1100 0001
Bit[7:6] = 11b      : sensor-specific event extension code in byte 2
Bit[5:4] = 00b      : unspecified byte 3
Bit[3:0] = 00001b   : offset from Event/Reading code (offset which
triggered the event)
→ 01h (bit 1): Firmware or software change detected with
associated Entity. Informational. Success or failure not
implied.
```

#### Event Data 2: 0x09

```
bit[7:0]: Version change type
→ system firmware (EFI / BIOS) change
```

If the sensor's ID is out of the 0:103 range, use the "[clia](#) sensor" or "[ipmitool](#) sensor" command to determine the sensor's name. With this name, run a search in the "Annex A" list and verify that the other information match since it may occur that two sensors have the same name while they can belong to different "Entity".

### Read a "discrete" sensor

In some cases, it can be useful to consult a discrete sensor's "State". For example, to know which jumpers are installed on a board without pulling it out of the chassis, the "Jumper Status" sensor should be consulted.

To do so, use the "[ipmitool](#) sensor" command or the raw "Get Sensor Reading" command. These commands will provide "Reading Byte" 3&4 (which correspond to "Response Data Byte" 4&5 as shown section "1. Sensor Introduction"). To analyze the reading, table 2 and the offset column on "Annex A" should be consulted.

Example: Reading Bytes 3&4 = 0xA193 for the "Jumper Status" sensor.

Meaning:

```
0xA193 = 1010 0001 1001 0011
• 00h (bit 0): Jumper 00 Present ( JP1: 1-2 )
• 05h (bit 5): Jumper 05 Present ( JP1: 11-12 )
• 07h (bit 7): Jumper 07 Present ( JP2: 1-2 )
• 08h (bit 8): Jumper 08 Present ( JP2: 3-4 )
• 09h (bit 9): Jumper 09 Present ( JP2: 5-6 )
• 0Ch (bit 12): Jumper 12 Present ( JP2: 11-12 )
```

# Annex A – List of AT8060/RTM8060 sensors

**NOTE:** Any changes to this table should also be ported to Sensors\_AT8060vx\_y.xls document.

Corresponding BMC revision : > 1.38

Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
0	0x00	FRU0 Hot Swap / PICMG Front Board (160.96)	Sensor specific (Discrete 0x6F) / PICMG Hot Swap (0xF0)	ATCA Board FRU Hot Swap Sensor for FRU 0 (Front Board)	0 = M0 – FRU Not Installed 1 = M1 – FRU Inactive 2 = M2 – FRU Activation Request 3 = M3 – FRU Activation In Progress 4 = M4 – FRU Active 5 = M5 – FRU Deactivation Request 6 = M6 – FRU Deactivation In Progress 7 = M7 – FRU Communication Lost 8-Fh = Reserved	[7:4] = Ah (OEM code in Event Data 2, OEM code in Event Data 3) [3:0] = Current State 0 = M0 – FRU Not Installed 1 = M1 – FRU Inactive 2 = M2 – FRU Activation Request 3 = M3 – FRU Activation In Progress 4 = M4 – FRU Active 5 = M5 – FRU Deactivation Request 6 = M6 – FRU Deactivation In Progress 7 = M7 – FRU Communication Lost 8-Fh = Reserved	[7:4] = Cause of state change. See Table 3-23, "Cause of state change values," for values. [3:0] = Previous State 0 = M0 – FRU Not Installed 1 = M1 – FRU Inactive 2 = M2 – FRU Activation Request 3 = M3 – FRU Activation In Progress 4 = M4 – FRU Active 5 = M5 – FRU Deactivation Request 6 = M6 – FRU Deactivation In Progress 7 = M7 – FRU Communication Lost 8-Fh = Reserved	[7:0] = FRU Device ID
1	0x01	FRU1 Hot Swap / PICMG AMC B1 (193.101)	Sensor specific (Discrete 0x6F) / PICMG Hot Swap (0xF0)	ATCA Board FRU Hot Swap Sensor for FRU 1 (AMC B1) Available only when AMC is inserted	0 = M0 – FRU Not Installed 1 = M1 – FRU Inactive 2 = M2 – FRU Activation Request 3 = M3 – FRU Activation In Progress 4 = M4 – FRU Active 5 = M5 – FRU Deactivation Request 6 = M6 – FRU Deactivation In Progress 7 = M7 – FRU Communication Lost 8-Fh = Reserved	[7:4] = Ah (OEM code in Event Data 2, OEM code in Event Data 3) [3:0] = Current State 0 = M0 – FRU Not Installed 1 = M1 – FRU Inactive 2 = M2 – FRU Activation Request 3 = M3 – FRU Activation In Progress 4 = M4 – FRU Active 5 = M5 – FRU Deactivation Request 6 = M6 – FRU Deactivation In Progress 7 = M7 – FRU Communication Lost 8-Fh = Reserved	[7:4] = Cause of state change. See Table 3-23, "Cause of state change values," for values. [3:0] = Previous State 0 = M0 – FRU Not Installed 1 = M1 – FRU Inactive 2 = M2 – FRU Activation Request 3 = M3 – FRU Activation In Progress 4 = M4 – FRU Active 5 = M5 – FRU Deactivation Request 6 = M6 – FRU Deactivation In Progress 7 = M7 – FRU Communication Lost 8-Fh = Reserved	[7:0] = FRU Device ID
2	0x02	FRU2 Hot Swap / PICMG RTM (192.96)	Sensor specific (Discrete 0x6F) / PICMG Hot Swap (0xF0)	ATCA Board FRU Hot Swap Sensor for FRU 2 (RTM) Available only when RTM is inserted	0 = M0 – FRU Not Installed 1 = M1 – FRU Inactive 2 = M2 – FRU Activation Request 3 = M3 – FRU Activation In Progress 4 = M4 – FRU Active 5 = M5 – FRU Deactivation Request 6 = M6 – FRU Deactivation In Progress 7 = M7 – FRU Communication Lost 8-Fh = Reserved	[7:4] = Ah (OEM code in Event Data 2, OEM code in Event Data 3) [3:0] = Current State 0 = M0 – FRU Not Installed 1 = M1 – FRU Inactive 2 = M2 – FRU Activation Request 3 = M3 – FRU Activation In Progress 4 = M4 – FRU Active 5 = M5 – FRU Deactivation Request 6 = M6 – FRU Deactivation In Progress 7 = M7 – FRU Communication Lost 8-Fh = Reserved	[7:4] = Cause of state change. See Table 3-23, "Cause of state change values," for values. [3:0] = Previous State 0 = M0 – FRU Not Installed 1 = M1 – FRU Inactive 2 = M2 – FRU Activation Request 3 = M3 – FRU Activation In Progress 4 = M4 – FRU Active 5 = M5 – FRU Deactivation Request 6 = M6 – FRU Deactivation In Progress 7 = M7 – FRU Communication Lost 8-Fh = Reserved	[7:0] = FRU Device ID
3	0x03	FRU3 Hot Swap / PICMG RTM Disk 1 (4.96)	Sensor specific (Discrete 0x6F) / PICMG Hot Swap (0xF0)	ATCA Board FRU Hot Swap Sensor for FRU 3 (RTM Disk 1) Available only when RTM and 1 disk is inserted	0 = M0 – FRU Not Installed 1 = M1 – FRU Inactive 2 = M2 – FRU Activation Request 3 = M3 – FRU Activation In Progress 4 = M4 – FRU Active 5 = M5 – FRU Deactivation Request 6 = M6 – FRU Deactivation In Progress 7 = M7 – FRU Communication Lost 8-Fh = Reserved	[7:4] = Ah (OEM code in Event Data 2, OEM code in Event Data 3) [3:0] = Current State 0 = M0 – FRU Not Installed 1 = M1 – FRU Inactive 2 = M2 – FRU Activation Request 3 = M3 – FRU Activation In Progress 4 = M4 – FRU Active 5 = M5 – FRU Deactivation Request 6 = M6 – FRU Deactivation In Progress 7 = M7 – FRU Communication Lost 8-Fh = Reserved	[7:4] = Cause of state change. See Table 3-23, "Cause of state change values," for values. [3:0] = Previous State 0 = M0 – FRU Not Installed 1 = M1 – FRU Inactive 2 = M2 – FRU Activation Request 3 = M3 – FRU Activation In Progress 4 = M4 – FRU Active 5 = M5 – FRU Deactivation Request 6 = M6 – FRU Deactivation In Progress 7 = M7 – FRU Communication Lost 8-Fh = Reserved	[7:0] = FRU Device ID



Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
4	0x04	FRU4 Hot Swap / PICMG RTM Disk 2 (4.97)	Sensor specific (Discrete 0x6F) / PICMG Hot Swap (0xF0)	ATCA Board FRU Hot Swap Sensor for FRU 4 (RTM Disk 2) Available only when RTM and 2 disks are inserted	0 = M0 – FRU Not Installed 1 = M1 – FRU Inactive 2 = M2 – FRU Activation Request 3 = M3 – FRU Activation In Progress 4 = M4 – FRU Active 5 = M5 – FRU Deactivation Request 6 = M6 – FRU Deactivation In Progress 7 = M7 – FRU Communication Lost 8-Fh = Reserved	[7:4] = Ah (OEM code in Event Data 2, OEM code in Event Data 3) [3:0] = Current State 0 = M0 – FRU Not Installed 1 = M1 – FRU Inactive 2 = M2 – FRU Activation Request 3 = M3 – FRU Activation In Progress 4 = M4 – FRU Active 5 = M5 – FRU Deactivation Request 6 = M6 – FRU Deactivation In Progress 7 = M7 – FRU Communication Lost 8-Fh = Reserved	[7:4] = Cause of state change. See Table 3-23, "Cause of state change values," for values. [3:0] = Previous State 0 = M0 – FRU Not Installed 1 = M1 – FRU Inactive 2 = M2 – FRU Activation Request 3 = M3 – FRU Activation In Progress 4 = M4 – FRU Active 5 = M5 – FRU Deactivation Request 6 = M6 – FRU Deactivation In Progress 7 = M7 – FRU Communication Lost 8-Fh = Reserved	[7:0] = FRU Device ID
5	0x05	FRU0 Reconfig / SDR_ENTID_PICMG_FRONT_BOARD (160.96)	Sensor specific (Discrete 0x6F) / System Event (0x12)	Sensor Population Change on Carrier	00h (bit 0): System Reconfigured 01h (bit 1): OEM System Boot Event 02h (bit 2): Undetermined system hardware failure 03h (bit 3): Entry added to Auxiliary Log 04h (bit 4): PEF Action 05h (bit 5): Timestamp Clock Synch.	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	See Sensor Specific Event (Annex B)	-
6	0x06	Temp Board Inlet / SDR_ENTID_DCM I_SYSBOARD (66.97)	Threshold based (Threshold 0x01) / Temperature (0x01)	Board Inlet Temperature (Degrees)	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present
7	0x07	Temp AMC Outake / SDR_ENTID_DCM I_AIR_INLET (64.97)	Threshold based (Threshold 0x01) / Temperature (0x01)	AMC Outake Temperature (Degrees)	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present
8	0x08	Temp CPU 0 / SDR_ENTID_DCM I_PROCESSOR (65.97)	Threshold based (Threshold 0x01) / Temperature (0x01)	CPU0 Temperature (Degrees)	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present
9	0x09	Temp CPU1 / SDR_ENTID_DCM I_PROCESSOR (65.98)	Threshold based (Threshold 0x01) / Temperature (0x01)	CPU1 Temperature (Degrees)	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present



Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
16	0x10	Temp DIMM E / SDR_ENTID_ME MDEV (32.100)	Threshold based (Threshold 0x01) / Temperature (0x01)	DIMM E Temperature (Degrees)	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present
17	0x11	Temp DIMM F / SDR_ENTID_ME MDEV (32.101)	Threshold based (Threshold 0x01) / Temperature (0x01)	DIMM F Temperature (Degrees)	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present
18	0x12	Temp DIMM G / SDR_ENTID_ME MDEV (32.102)	Threshold based (Threshold 0x01) / Temperature (0x01)	DIMM G Temperature (Degrees)	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present
19	0x13	Temp DIMM H / SDR_ENTID_ME MDEV (32.103)	Threshold based (Threshold 0x01) / Temperature (0x01)	DIMM H Temperature (Degrees)	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present
20	0x14	Temp Disk / SDR_ENTID_DISK_OR_DISK_BAY (4.96)	Threshold based (Threshold 0x01) / Temperature (0x01)	Disk Temperature (Degrees)	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present
21	0x15	Temp Disk1 / SDR_ENTID_DISK_OR_DISK_BAY (4.96)	Threshold based (Threshold 0x01) / Temperature (0x01)	Disk 1 Temperature (Degrees) Available only when RTM 5707 and at least 1 disk is inserted	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present

Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
22	0x16	Temp Disk2/ SDR_ENTID_DIS K_OR_DISK_BAY (4.97 )	Threshold based (Threshold 0x01)/ Temperature (0x01)	Disk 2 Temperature (Degrees)Available only when RTM 5707 and at least 1 disk is inserted	Threshold Values:00h : Lower Non-critical - going low01h : Lower Non-critical - going high02h : Lower Critical - going low03h : Lower Critical - going high04h : Lower Non-recoverable - going low05h : Lower Non-recoverable - going high06h : Upper Non-critical - going low07h : Upper Non-critical - going high08h : Upper Critical - going low09h : Upper Critical - going high0Ah : Upper Non- recoverable - going low0Bh : Upper Non- recoverable - going high	[7:6] - 00b = unspecified byte 2      01b = trigger reading in byte 2      10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2[5:4] - 00b = unspecified byte 3      01b = trigger threshold value in byte 3      10b = OEM code in byte 3      11b = sensor-specific event extension code in byte 3Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified.Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present
23	0x17	Brd Input Power / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Threshold based (Threshold 0x01) / Other Unit-Based Sensor (Watt) (0x0B)	Power consumption in watts of the complete blade (including managed FRU)	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present
24	0x18	FRU0 Brd Power / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Threshold based (Threshold 0x01) / Other Unit-Based Sensor (Watt) (0x0B)	FRU 0 (ATCA Board) Power consumption in watts	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present
25	0x19	FRU1 AMC Power / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Threshold based (Threshold 0x01) / Other Unit-Based Sensor (Watt) (0x0B)	FRU 1 (AMC B1) Power consumption in watts	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present
26	0x1A	FRU2+ RTM Power / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Threshold based (Threshold 0x01) / Other Unit-Based Sensor (Watt) (0x0B)	FRU 2 (RTM) + FRU 3 (RTM's disk 1) + FRU 4 (RTM's disk 2) Power consumption in watts	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present
27	0x1B	Vcc -48V Feed / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Threshold based (Threshold 0x01) / Voltage (0x02)	Voltage on -48v feed board input power supply (Volts)	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present









Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
46	0x2E	Vcc VTT CPU 1 / SDR_ENTID_PW RMODULE (20.97)	Threshold based (Threshold 0x01) / Voltage (0x02)	Voltage on board CPU1 VTT payload power supply (Volts)	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present
47	0x2F	Vcc VDDQ CPU 1 / SDR_ENTID_PW RMODULE (20.97)	Threshold based (Threshold 0x01) / Voltage (0x02)	Voltage on board CPU1 VDDQ payload power supply (Volts)	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present
48	0x30	Vcc VSA CPU 1 / SDR_ENTID_PW RMODULE (20.97)	Threshold based (Threshold 0x01) / Voltage (0x02)	Voltage on board CPU1 VSA payload power supply (Volts)	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present
49	0x31	Vcc PLL CPU 1 / SDR_ENTID_PW RMODULE (20.97)	Threshold based (Discrete 0x01) / Voltage (0x02)	Voltage on board CPU1 VSA payload power supply (Volts)	Threshold Values: 00h : Lower Non-critical - going low 01h : Lower Non-critical - going high 02h : Lower Critical - going low 03h : Lower Critical - going high 04h : Lower Non-recoverable - going low 05h : Lower Non-recoverable - going high 06h : Upper Non-critical - going low 07h : Upper Non-critical - going high 08h : Upper Critical - going low 09h : Upper Critical - going high 0Ah : Upper Non-recoverable - going low 0Bh : Upper Non-recoverable - going high	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	Reading that triggered the event, FFh or not present if unspecified. Do not confuse reading with Threshold Value	threshold value that triggered event, FFh or not present if unspecified. If present, Event Data 2 must be present
50	0x32	Feed A/B Status / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Generic Discrete (Redundancy) (Discrete 0x0B) / Power Supply (0x08)	Feed A/B Redundancy Status	Redundancy States Used: 00h (bit 0): Fully Redundant (formerly "Redundancy Regained") Indicates that full redundancy has been regained. 01h (bit 1): Redundancy Lost Entered any non-redundant state, including Nonredundant: Insufficient Resources.	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	-	-
51	0x33	Fuse-Pres A Feed / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Sensor specific (Discrete 0x6F) / Power Supply (0x08)	Fuse presence and fault detection -48 V on supply A	Redundancy States Used: 00h (bit 0): Fully Redundant (formerly "Redundancy Regained") Indicates that full redundancy has been regained. 01h (bit 1): Redundancy Lost Entered any nonredundant state, including Nonredundant: Insufficient Resources.	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	-	-



Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
52	0x34	Fuse-Pres B Feed / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Sensor specific (Discrete 0x6F) / Power Supply (0x08)	Fuse presence and fault detection +48 V on supply B	Redundancy States Used: 00h (bit 0): Fully Redundant (formerly "Redundancy Regained") Indicates that full redundancy has been regained. 01h (bit 1): Redundancy Lost Entered any nonredundant state, including Nonredundant: Insufficient Resources.	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	-	-
53	0x35	Power State / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Sensor specific (Discrete 0x6F) / Kontron OEM Power State Sensor (0xD0)	Board Power State	00: Power ON 01: Power OFF 02: Power ON Request 03: Power ON in progress 04: Power OFF Request 05: Graceful Power OFF Request 06: Power OFF in progress 07: Synchronise Graceful Power OFF 08: Power OFF Now Request	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	-	-
54	0x36	Power Good / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	OEM (Discrete 0x77) / Power Supply (0x08)	Actual power good status	Bit 0: vccGoodVddq0 Bit 1: vccGoodVddq1 Bit 2: vccGood1v1 Bit 3: vccGood1v2 Bit 4: vccGood1v5 Bit 5: vccGood1v0Sus Bit 6: vccGood1v8Sus Bit 7: vccGoogAggr (or-ed with 12V, 3.3V, 1.5V, 1.25V) Bit 8: vccGoodVcore0 Bit 9: vccGoodVplCpu0 Bit 10: vccGoodVsaCpu0 Bit 11: vccGoodVttCpu0 Bit 12: vccGoodVcore1 Bit 13: vccGoodVplCpu1 Bit 14: vccGoodVsaCpu1 Bit 15: Unused	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	-	-
55	0x37	Power Good2 / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	OEM (Discrete 0x77) / Power Supply (0x08)	Actual power good status (2nd reg)	Bit 0: vccGoodVttCpu1 Bit 1-15: Unused	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	-	-
56	0x38	Power Good Event / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	OEM (Discrete 0x77) / Power Supply (0x08)	Power good status event that occur since the last power on orreset	Bit 0: vccGoodVddq0 Bit 1: vccGoodVddq1 Bit 2: vccGood1v1 Bit 3: vccGood1v2 Bit 4: vccGood1v5 Bit 5: vccGood1v0Sus Bit 6: vccGood1v8Sus Bit 7: vccGoogAggr (or-ed with 12V, 3.3V, 1.5V, 1.25V) Bit 8: vccGoodVcore0 Bit 9: vccGoodVplCpu0 Bit 10: vccGoodVsaCpu0 Bit 11: vccGoodVttCpu0 Bit 12: vccGoodVcore1 Bit 13: vccGoodVplCpu1 Bit 14: vccGoodVsaCpu1 Bit 15: Unused	7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	-	-
57	0x39	Power Good Event2 / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	OEM (Discrete 0x77) / Power Supply (0x08)	Power good status event that occur since the last power on or reset (2nd reg)	Bit 0: vccGoodVttCpu1 Bit 1-15: Unused	7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	-	-

Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
58	0x3A	Board Reset / SDR_ENTID_PIC MG_FRONT_BOARD (160.96)	Digital Discrete (Discrete 0x03) / OEM (Kontron Reset Sensor) (0xCF)	Board reset type and sources	00h State asserted 01h State Deasserted	-	Event Data 2: Reset Type 00h: Warm reset 01h: Cold reset 02h: Forced Cold [Warm reset reverted to cold] 03h: Soft reset [Software jump] 04h: Hard Reset 05h: Forced Hard [Warm reset reverted to Hard]	Event Data 3: Reset Source 00h: IPM Watchdog [cold warm forced cold] (IPM Watchdog2 sensor gives additional details) 01h: IPM commands [cold warm or forced cold] (chassis control fru control) 02h: Processor internal check stop 03h: Processor internal reset request 04h: Reset button [warm or forced cold] 05h: Power up [cold] 06h: Legacy Initial Watchdog / Warm Reset Loop Detection [cold reset] 07h: Legacy Programmable Watchdog [cold Warm or forced cold] 08h: Software initiated [soft cold, warm or forced cold] 09h: Setup Reset [Software initiated Cold] 0Ah: Power Cycle/Full Reset/Global Platform Reset FFh: Unknown
59	0x3B	POST Value / SDR_ENTID_PIC MG_FRONT_BOARD (160.96)	Sensor specific (Discrete 0x6F) / OEM (Kontron POST value sensor) (0xC6)	Show current postcode value. No event generated by this sensor	00h to 07h (bit[0:7]): Post Code low byte value (see AT8050 Manual section C.2) 14h (bit 14): Post code Error All other offset are unused. Only offset 14h triggers an event	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	If offset 14h: POST Low Nibble (see AT8060 Manual section C.3)	If offset 14h: POST High Nibble (see AT8060 Manual section C.3)

Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
60	0x3C	Memory Err / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Sensor specific (Discrete 0x6F) / Memory (0x0C)	Memory Error	<p>00h Correctable ECC / other correctable memory error</p> <p>01h Uncorrectable ECC / other uncorrectable memory error</p> <p>02h Parity</p> <p>03h Memory Scrub Failed (stuck bit)</p> <p>04h Memory Device Disabled</p> <p>05h Correctable ECC / other correctable memory error logging limit reached</p> <p>06h Presence detected. Indicates presence of entity associated with the sensor. Typically the entity will be a 'memory module' or other entity representing a physically replaceable unit of memory.</p> <p>07h Configuration error. Indicates a memory configuration error for the entity associated with the sensor. This can include when a given implementation of the entity is not supported by the system (e.g., when the particular size of the memory module is unsupported) or that the entity is part of an unsupported memory configuration (e.g. the configuration is not supported because the memory module doesn't match other memory modules).</p> <p>08h Spare. Indicates entity associated with the sensor represents a 'spare' unit of memory.</p> <p>The Event Data 3 field can be used to provide an event extension code, with the following definition:</p> <p>Event Data 3</p> <p>[7:0] - Memory module/device (e.g. DIMM/SIMM/RIMM) identification, relative to the entity that the sensor is associated with (if SDR provided for this sensor).</p> <p>09h Memory Automatically Throttled. (memory throttling triggered by a hardware-based mechanism operating independent from system software, such as automatic thermal throttling or throttling to limit power consumption.)</p> <p>0Ah Critical Overtemperature. Memory device has entered a critical overtemperature state, exceeding specified operating conditions. Memory devices in this state may produce errors or become inaccessible.</p>	<p>[7:6] - 00b = unspecified byte 2</p> <p>01b = previous state and/or severity in byte 2</p> <p>10b = OEM code in byte 2</p> <p>11b = sensor-specific event extension code in byte 2</p> <p>[5:4] - 00b = unspecified byte 3</p> <p>01b = reserved</p> <p>10b = OEM code in byte 3</p> <p>11b = sensor-specific event extension code in byte 3</p> <p>[3:0] - Offset from Event/Reading Code for discrete event state</p>	<p>[7:4] - Optional offset from 'Severity' Event/Reading Code.</p> <p>(0Fh if unspecified).</p> <p>[3:0] - Optional offset from Event/Reading Type Code for previous discrete event state. (0Fh if unspecified.)</p>	<p>The Event Data 3 field can be used to provide an event extension code for the 8h offset</p> <p>[7:0] - Memory module/device (e.g. DIMM/SIMM/RIMM) identification, relative to the entity that the sensor is associated with (if SDR provided for this sensor).</p>
61	0x3D	DIMM A Status / SDR_ENTID_ME MDEV (32.96)	Sensor specific (Discrete 0x6F) / Entity Presence (0x25)	DIMM A Status & Presence	<p>This sensor type provides a mechanism that allows a management controller to direct system management software to ignore a set of sensors based on detecting that presence of an entity. This sensor type is not typically used for event generation - but to just provide a present reading.</p> <p>00h Entity Present. This indicates that the Entity identified by the Entity ID for the sensor is present.</p> <p>01h Entity Absent. This indicates that the Entity identified by the Entity ID for the sensor is absent. If the entity is absent, system management software should consider all sensors associated with that Entity to be absent as well - and ignore those sensors.</p> <p>02h Entity Disabled. The Entity is present, but has been disabled. A deassertion of this event indicates that the Entity has been enabled.</p>	No Event for this Sensor,	No Event for this Sensor,	No Event for this Sensor,

Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
62	0x3E	DIMM B Status / SDR_ENTID_ME MDEV (32.97)	Sensor specific (Discrete 0x6F) / Entity Presence (0x25)	DIMM B Status & Presence	<p>This sensor type provides a mechanism that allows a management controller to direct system management software to ignore a set of sensors based on detecting that presence of an entity. This sensor type is not typically used for event generation - but to just provide a present reading.</p> <p>00h Entity Present. This indicates that the Entity identified by the Entity ID for the sensor is present. 01h Entity Absent. This indicates that the Entity identified by the Entity ID for the sensor is absent. If the entity is absent, system management software should consider all sensors associated with that Entity to be absent as well - and ignore those sensors. 02h Entity Disabled. The Entity is present, but has been disabled. A deassertion of this event indicates that the Entity has been enabled.</p>	No Event for this Sensor,	No Event for this Sensor,	No Event for this Sensor,
63	0x3F	DIMM C Status/ SDR_ENTID_ME MDEV (32.98)	Sensor specific (Discrete 0x6F)/ Entity Presence (0x25)	DIMM C Status & Presence	<p>This sensor type provides a mechanism that allows a management controller to direct system management software to ignore a set of sensors based on detecting that presence of an entity. This sensor type is not typically used for event generation - but to just provide a present reading.</p> <p>00h Entity Present. This indicates that the Entity identified by the Entity ID for the sensor is present. 01h Entity Absent. This indicates that the Entity identified by the Entity ID for the sensor is absent. If the entity is absent, system management software should consider all sensors associated with that Entity to be absent as well - and ignore those sensors. 02h Entity Disabled. The Entity is present, but has been disabled. A deassertion of this event indicates that the Entity has been enabled.</p>	No Event for this Sensor,	No Event for this Sensor,	No Event for this Sensor,
64	0x40	DIMM D Status / SDR_ENTID_ME MDEV (32.99)	Sensor specific (Discrete 0x6F) / Entity Presence (0x25)	DIMM D Status & Presence	<p>This sensor type provides a mechanism that allows a management controller to direct system management software to ignore a set of sensors based on detecting that presence of an entity. This sensor type is not typically used for event generation - but to just provide a present reading.</p> <p>00h Entity Present. This indicates that the Entity identified by the Entity ID for the sensor is present. 01h Entity Absent. This indicates that the Entity identified by the Entity ID for the sensor is absent. If the entity is absent, system management software should consider all sensors associated with that Entity to be absent as well - and ignore those sensors. 02h Entity Disabled. The Entity is present, but has been disabled. A deassertion of this event indicates that the Entity has been enabled.</p>	No Event for this Sensor,	No Event for this Sensor,	No Event for this Sensor,

Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
65	0x41	DIMM E Status / SDR_ENTID_ME MDEV (32.100)	Sensor specific (Discrete 0x6F) / Entity Presence (0x25)	DIMM E Status & Presence	<p>This sensor type provides a mechanism that allows a management controller to direct system management software to ignore a set of sensors based on detecting that presence of an entity. This sensor type is not typically used for event generation - but to just provide a present reading.</p> <p>00h Entity Present. This indicates that the Entity identified by the Entity ID for the sensor is present. 01h Entity Absent. This indicates that the Entity identified by the Entity ID for the sensor is absent. If the entity is absent, system management software should consider all sensors associated with that Entity to be absent as well - and ignore those sensors. 02h Entity Disabled. The Entity is present, but has been disabled. A deassertion of this event indicates that the Entity has been enabled.</p>	No Event for this Sensor,	No Event for this Sensor,	No Event for this Sensor,
66	0x42	DIMM F Status / SDR_ENTID_ME MDEV (32.101)	Sensor specific (Discrete 0x6F) / Entity Presence (0x25)	DIMM F Status & Presence	<p>This sensor type provides a mechanism that allows a management controller to direct system management software to ignore a set of sensors based on detecting that presence of an entity. This sensor type is not typically used for event generation - but to just provide a present reading.</p> <p>00h Entity Present. This indicates that the Entity identified by the Entity ID for the sensor is present. 01h Entity Absent. This indicates that the Entity identified by the Entity ID for the sensor is absent. If the entity is absent, system management software should consider all sensors associated with that Entity to be absent as well - and ignore those sensors. 02h Entity Disabled. The Entity is present, but has been disabled. A deassertion of this event indicates that the Entity has been enabled.</p>	No Event for this Sensor,	No Event for this Sensor,	No Event for this Sensor,
67	0x43	DIMM G Status / SDR_ENTID_ME MDEV (32.102)	Sensor specific (Discrete 0x6F) / Entity Presence (0x25)	DIMM G Status & Presence	<p>This sensor type provides a mechanism that allows a management controller to direct system management software to ignore a set of sensors based on detecting that presence of an entity. This sensor type is not typically used for event generation - but to just provide a present reading.</p> <p>00h Entity Present. This indicates that the Entity identified by the Entity ID for the sensor is present. 01h Entity Absent. This indicates that the Entity identified by the Entity ID for the sensor is absent. If the entity is absent, system management software should consider all sensors associated with that Entity to be absent as well - and ignore those sensors. 02h Entity Disabled. The Entity is present, but has been disabled. A deassertion of this event indicates that the Entity has been enabled.</p>	No Event for this Sensor,	No Event for this Sensor,	No Event for this Sensor,

Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
68	0x44	DIMM H Status/ SDR_ENTID_ME MDEV (32.103)	Sensor specific (Discrete 0x6F)/ Entity Presence (0x25)	DIMM H Status & Presence	This sensor type provides a mechanism that allows management controller to direct system management software to ignore a set of sensors based on detecting that presence of an entity. This sensor type is not typically used for event generation - but to just provide a present reading. 00h Entity Present. This indicates that the Entity identified by the Entity ID for the sensor is present. 01h Entity Absent. This indicates that the Entity identified by the Entity ID for the sensor is absent. If the entity is absent, system management software should consider all sensors associated with that Entity to be absent as well - and ignore those sensors. 02h Entity Disabled. The Entity is present, but has been disabled. A deassertion of this event indicates that the Entity has been enabled.	No Event for this Sensor,	No Event for this Sensor,	No Event for this Sensor,
69	0x45	Memory Resize / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Digital Discrete (Discrete 0x03) / POST Memory Resize (0x0E)	POST Memory Resize Indicates if CMOS memory size has changed	00h (bit 0): State Deasserted 01h (bit 1): State Asserted	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	-	-
70	0x46	Boot Error / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Sensor Specific (Discrete 0x6F) / Boot Error (0x1E)	Boot Error	00h No bootable media 01h Non-bootable diskette left in drive 02h PXE Server not found 03h Invalid boot sector 04h Timeout waiting for user selection of boot source	7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	[7:4] - Optional offset from 'Severity' Event/Reading Code. (0Fh if unspecified). [3:0] - Optional offset from Event/Reading Type Code for previous discrete event state. (0Fh if unspecified.)	-
71	0x47	CMOS Passwd / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Sensor Specific (Discrete 0x6F) / Platform Security Violation Attempt (0x06)	CMOS Password Failure	00h Secure Mode (Front Panel Lockout) Violation attempt 01h Pre-boot Password Violation - user password 02h Pre-boot Password Violation attempt - setup password 03h Pre-boot Password Violation - network boot password 04h Other pre-boot Password Violation 05h Out-of-band Access Password Violation	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	[7:4] - Optional offset from 'Severity' Event/Reading Code. (0Fh if unspecified). [3:0] - Optional offset from Event/Reading Type Code for previous discrete event state. (0Fh if unspecified.)	-
72	0x48	PCIe Error / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Sensor Specific (Discrete 0x6F) / Critical Interrupt (0x13)	General PCIe Error	00h Front Panel NMI / Diagnostic Interrupt 01h Bus Timeout 02h I/O channel check NMI 03h Software NMI 04h PCI PERR 05h PCI SERR 06h EISA Fail Safe Timeout 07h Bus Correctable Error 08h Bus Uncorrectable Error 09h Fatal NMI (port 61h, bit 7) 0Ah Bus Fatal Error 0Bh Bus Degraded (bus operating in a degraded performance state)	7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	[7:4] - Optional offset from 'Severity' Event/Reading Code. (0Fh if unspecified). [3:0] - Optional offset from Event/Reading Type Code for previous discrete event state. (0Fh if unspecified.)	-
73	0x49	PCIe AMC Error / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Sensor Specific (Discrete 0x6F) / Critical Interrupt (0x13)	AMC PCIe Error	00h Front Panel NMI / Diagnostic Interrupt 01h Bus Timeout 02h I/O channel check NMI 03h Software NMI 04h PCI PERR 05h PCI SERR 06h EISA Fail Safe Timeout 07h Bus Correctable Error 08h Bus Uncorrectable Error 09h Fatal NMI (port 61h, bit 7) 0Ah Bus Fatal Error 0Bh Bus Degraded (bus operating in a degraded performance state)	7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	[7:4] - Optional offset from 'Severity' Event/Reading Code. (0Fh if unspecified). [3:0] - Optional offset from Event/Reading Type Code for previous discrete event state. (0Fh if unspecified.)	-

Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
74	0x4A	PCIe RTM Error / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Sensor Specific (Discrete 0x6F) / Critical Interrupt (0x13)	RTM PCIe Error	00h Front Panel NMI / Diagnostic Interrupt 01h Bus Timeout 02h I/O channel check NMI 03h Software NMI 04h PCI PERR 05h PCI SERR 06h EISA Fail Safe Timeout 07h Bus Correctable Error 08h Bus Uncorrectable Error 09h Fatal NMI (port 61h, bit 7) 0Ah Bus Fatal Error 0Bh Bus Degraded (bus operating in a degraded performance state)	7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	[7:4] - Optional offset from 'Severity' Event/Reading Code. (0Fh if unspecified). [3:0] - Optional offset from Event/Reading Type Code for previous discrete event state. (0Fh if unspecified.)	-
75	0x4B	PCIe BI Error / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Sensor Specific (Discrete 0x6F) / Critical Interrupt (0x13)	Base Interface PCIe Error	00h Front Panel NMI / Diagnostic Interrupt 01h Bus Timeout 02h I/O channel check NMI 03h Software NMI 04h PCI PERR 05h PCI SERR 06h EISA Fail Safe Timeout 07h Bus Correctable Error 08h Bus Uncorrectable Error 09h Fatal NMI (port 61h, bit 7) 0Ah Bus Fatal Error 0Bh Bus Degraded (bus operating in a degraded performance state)	7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	[7:4] - Optional offset from 'Severity' Event/Reading Code. (0Fh if unspecified). [3:0] - Optional offset from Event/Reading Type Code for previous discrete event state. (0Fh if unspecified.)	-
76	0x4C	PCIe FI Error / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Sensor Specific (Discrete 0x6F) / Critical Interrupt (0x13)	Fabric Interface PCIe Error	00h Front Panel NMI / Diagnostic Interrupt 01h Bus Timeout 02h I/O channel check NMI 03h Software NMI 04h PCI PERR 05h PCI SERR 06h EISA Fail Safe Timeout 07h Bus Correctable Error 08h Bus Uncorrectable Error 09h Fatal NMI (port 61h, bit 7) 0Ah Bus Fatal Error 0Bh Bus Degraded (bus operating in a degraded performance state)	7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	[7:4] - Optional offset from 'Severity' Event/Reading Code. (0Fh if unspecified). [3:0] - Optional offset from Event/Reading Type Code for previous discrete event state. (0Fh if unspecified.)	-
77	0x4D	PCIe MI Error / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Sensor Specific (Discrete 0x6F) / Critical Interrupt (0x13)	Management Interface PCIe Error	00h Front Panel NMI / Diagnostic Interrupt 01h Bus Timeout 02h I/O channel check NMI 03h Software NMI 04h PCI PERR 05h PCI SERR 06h EISA Fail Safe Timeout 07h Bus Correctable Error 08h Bus Uncorrectable Error 09h Fatal NMI (port 61h, bit 7) 0Ah Bus Fatal Error 0Bh Bus Degraded (bus operating in a degraded performance state)	7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	[7:4] - Optional offset from 'Severity' Event/Reading Code. (0Fh if unspecified). [3:0] - Optional offset from Event/Reading Type Code for previous discrete event state. (0Fh if unspecified.)	-
78	0x4E	Bios Flash 0 / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Sensor Specific (Discrete 0x6F) / Boot Error (0x1E)	Bios Flash 0	00h No bootable media 01h Non-bootable diskette left in drive 02h PXE Server not found 03h Invalid boot sector 04h Timeout waiting for user selection of boot source	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	[7:4] - Optional offset from 'Severity' Event/Reading Code. (0Fh if unspecified). [3:0] - Optional offset from Event/Reading Type Code for previous discrete event state. (0Fh if unspecified.)	-
79	0x4F	Bios Flash 1 / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Sensor Specific (Discrete 0x6F) / Boot Error (0x1E)	Bios Flash 1	00h No bootable media 01h Non-bootable diskette left in drive 02h PXE Server not found 03h Invalid boot sector 04h Timeout waiting for user selection of boot source	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	[7:4] - Optional offset from 'Severity' Event/Reading Code. (0Fh if unspecified). [3:0] - Optional offset from Event/Reading Type Code for previous discrete event state. (0Fh if unspecified.)	-

Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
80	0x50	ACPI State / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Sensor Specific (Discrete 0x6F) / System ACPI Power State (0x22)	Advance Configuration and Power Interface State	00h S0 / G0 "working" 01h S1 "sleeping with system h/w & processor context maintained" 02h S2 "sleeping, processor context lost" 03h S3 "sleeping, processor & h/w context lost, memory retained." 04h S4 "non-volatile sleep / suspend-to disk" 05h S5 / G2 "soft-off" 06h S4 / S5 soft-off, particular S4 / S5 state cannot be determined 07h G3 / Mechanical Off 08h Sleeping in an S1, S2, or S3 states (used when particular S1, S2, S3 state cannot be determined) 09h G1 sleeping (S1-S4 state cannot be determined) 0ah S5 entered by override 0bh Legacy ON state 0ch Legacy OFF state 0eh Unknown	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	[7:4] - Optional offset from 'Severity' Event/Reading Code. (0Fh if unspecified). [3:0] - Optional offset from Event/Reading Type Code for previous discrete event state. (0Fh if unspecified.)	-
81	0x51	IPMI Watchdog / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Sensor Specific (Discrete 0x6F) / Watchdog 2 (0x23)	IPMI Watchdog (payload watchdog)	This sensor is recommended for new IPMI v1.0 and later implementations. 00h Timer expired, status only (no action, no interrupt) 01h Hard Reset 02h Power Down 03h Power Cycle 04h-07h reserved 08h Timer interrupt The Event Data 2 field for this command can be used to provide an event extension code, with the following definition: 7:4 interrupt type 0h = none 1h = SMI 2h = NMI 3h = Messaging Interrupt Fh = unspecified all other = reserved 3:0 timer use at expiration: 0h = reserved 1h = BIOS FRB2 2h = BIOS/POST 3h = OS Load 4h = SMS/OS 5h = OEM Fh = unspecified all other = reserved	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	The Event Data 2 field for this command can be used to provide an event extension code, with the following definition: bit[7:4]: interrupt type 0h = none 1h = SMI 2h = NMI 3h = Messaging Interrupt Fh = unspecified all other = reserved bit[3:0]: timer use at expiration: 0h = reserved 1h = BIOS FRB2 2h = BIOS/POST 3h = OS Load 4h = SMS/OS 5h = OEM Fh = unspecified all other = reserved	-
82	0x52	Health Error / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Digital Discrete (Discrete 0x03) / Platform Alert (0x24)	General health status, Aggregation of critical sensor This list is flexible and could be adjust based on customer requirements	This sensor can be used for returning the state and generating events associated with alerts that have been generated by the platform mgmt. subsystem 00h platform generated page 01h platform generated LAN alert 02h Platform Event Trap generated, formatted per IPMI PET specification 03h platform generated SNMP trap, OEM format	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	-	-



Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
83	0x53	IPMB0 Link State / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Sensor specific (Discrete 0x6F) / PICMG Physical IPMB-0 (0xF1)	IPMB-0 fault detection sensor	00h – IPMB-A disabled, IPMB-B disabled 01h – IPMB-A enabled, IPMB-B disabled 02h – IPMB-A disabled, IPMB-B enabled 03h – IPMB-A enabled, IPMB-B enabled	[7:4] = Ah (OEM code in Event Data 2, OEM code in Event Data 3) [3:0] = Offset 00h – IPMB-A disabled, IPMB-B disabled 01h – IPMB-A enabled, IPMB-B disabled 02h – IPMB-A disabled, IPMB-B enabled 03h – IPMB-A enabled, IPMB-B enabled	[7:4] = Channel Number. For AdvancedTCA®, this will typically be 0h to indicate IPMB-0 [3:0] = Reserved	[7] – IPMB B Override State 0b = Override state, bus isolated 1b = Local Control state – IPM Controller determines state of bus. [6:4] = IPMB B Local Status 0h = No Failure. Bus enabled if no override in effect. 1h = Unable to drive clock HI 2h = Unable to drive data HI 3h = Unable to drive clock LO 4h = Unable to drive data LO 5h = Clock low timeout 6h = Under test (the IPM Controller is attempting to determine if it is causing a bus hang) 7h = Undiagnosed Communications Failure [3] – IPMB A Override Status 0b = Override status, bus isolated 1b = Local Control state – IPM Controller determines state of bus. [2:0] = IPMB A Local Status 0h = No Failure. Bus enabled if no override in effect. 1h = Unable to drive clock HI 2h = Unable to drive data HI 3h = Unable to drive clock LO 4h = Unable to drive data LO 5h = Clock low timeout 6h = Under test (the IPM Controller is attempting to determine if it is causing a bus hang) 7h = Undiagnosed Communications Failure
84	0x54	FRU0 IPMBL State / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Sensor specific (Discrete 0x6F) / OEM (Kontron OEM IPMB-L link state) (0xC3)	IPMB-L branch from FRU0 fault detection sensor	02h (bit 2): IPMB-L Disable 03h (bit 3): IPMB-L Enable	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	Always 0	Bit[7:3]: Always 0 Bit[2:0]: 0h = No failure 1h = Unable to drive clock HI 2h = Unable to drive data HI 3h = Unable to drive clock LO 4h = Unable to drive data LO 5h = clock low timeout 6h = Under test (the IPM Controller is attempting to determine who is causing a bus hang) 7h = Undiagnosed Communication Failure
85	0x55	FRU1 IPMBL State / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Sensor specific (Discrete 0x6F) / OEM (Kontron OEM IPMB-L link state) (0xC3)	IPMB-L branch from FRU1 fault detection sensor	02h (bit 2): IPMB-L Disable 03h (bit 3): IPMB-L Enable	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	Always 0	Bit[7:3]: Always 0 Bit[2:0]: 0h = No failure 1h = Unable to drive clock HI 2h = Unable to drive data HI 3h = Unable to drive clock LO 4h = Unable to drive data LO 5h = clock low timeout 6h = Under test (the IPM Controller is attempting to determine who is causing a bus hang) 7h = Undiagnosed Communication Failure
86	0x56	FRU2 IPMBL State / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Sensor specific (Discrete 0x6F) / OEM (Kontron OEM IPMB-L link state) (0xC3)	IPMB-L branch from FRU2 fault detection sensor	02h (bit 2): IPMB-L Disable 03h (bit 3): IPMB-L Enable	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	Always 0	Bit[7:3]: Always 0 Bit[2:0]: 0h = No failure 1h = Unable to drive clock HI 2h = Unable to drive data HI 3h = Unable to drive clock LO 4h = Unable to drive data LO 5h = clock low timeout 6h = Under test (the IPM Controller is attempting to determine who is causing a bus hang) 7h = Undiagnosed Communication Failure

Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
87	0x57	CPU0 Status/ SDR_ENTID_PROCESSOR (3.96)	Sensor specific (Discrete 0x6F)/ Processor (0x07)	Processor 0 Status	00h IERR01h Thermal Trip02h FRB1/BIST failure03h FRB2/Hang in POST failure (used hang is believed to be due or related to a processor failure. Use System Firmware Progress sensor for other BIOS hangs.)04h FRB3/Processor Startup/Initialization failure (CPU didn't start)05h Configuration Error06h SM BIOS 'Uncorrectable CPU-complex Error'07h Processor Presence detected08h Processor disabled09h Terminator Presence Detected0Ah Processor Automatically Throttled (processor throttling triggered by a hardware-based mechanism operating independent from system software, such as automatic thermal throttling or throttling to limit power consumption.)0Bh Machine Check Exception (Uncorrectable)0Ch Correctable Machine Check Error	[7:6] - 00b = unspecified byte 201b = previous state and/or severity in byte 210b = OEM code in byte 211b = sensor-specific event extension code in byte 2[5:4] - 00b = unspecified byte 301b = reserved10b = OEM code in byte 311b = sensor-specific event extension code in byte 3[3:0] - Offset from Event/Reading Code for discrete event state	[7:4] - Optional offset from 'Severity' Event/Reading Code.(0Fh if unspecified).[3:0] - Optional offset from Event/Reading Type Code for previous discrete event state. (0Fh if unspecified.)	-
88	0x58	CPU1 Status / SDR_ENTID_PROCESSOR (3.97)	Sensor specific (Discrete 0x6F) / Processor (0x07)	Processor 1 Status	00h IERR 01h Thermal Trip 02h FRB1/BIST failure 03h FRB2/Hang in POST failure (used hang is believed to be due or related to a processor failure. Use System Firmware Progress sensor for other BIOS hangs.)  04h FRB3/Processor Startup/Initialization failure (CPU didn't start) 05h Configuration Error 06h SM BIOS 'Uncorrectable CPU-complex Error' 07h Processor Presence detected 08h Processor disabled 09h Terminator Presence Detected 0Ah Processor Automatically Throttled (processor throttling triggered by a hardware-based mechanism operating independent from system software, such as automatic thermal throttling or throttling to limit power consumption.) 0Bh Machine Check Exception (Uncorrectable) 0Ch Correctable Machine Check Error	[7:6] - 00b = unspecified byte 201b = previous state and/or severity in byte 210b = OEM code in byte 211b = sensor-specific event extension code in byte 2[5:4] - 00b = unspecified byte 301b = reserved10b = OEM code in byte 311b = sensor-specific event extension code in byte 3[3:0] - Offset from Event/Reading Code for discrete event state	[7:4] - Optional offset from 'Severity' Event/Reading Code.(0Fh if unspecified).[3:0] - Optional offset from Event/Reading Type Code for previous discrete event state. (0Fh if unspecified.)	-
89	0x59	FRU Over Icc / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Digital Discrete (Discrete 0x03) / OEM (Kontron OEM FRU Over Current) (0xCB)	FRU Over Current Sensor	00h (bit 0): State Deasserted 01h (bit 1): State Asserted	[7:6] - 00b = unspecified byte 201b = previous state and/or severity in byte 210b = OEM code in byte 211b = sensor-specific event extension code in byte 2[5:4] - 00b = unspecified byte 301b = reserved10b = OEM code in byte 311b = sensor-specific event extension code in byte 3[3:0] - Offset from Event/Reading Code for discrete event state	00h: Over Current on Management power. 01h: Over Current on Payload power.	FRU ID
90	0x5A	FRU Sensor Error / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Digital Discrete (Discrete 0x03) / OEM (Kontron OEM FRU sensor error) (0xCC)	FRU Error during external FRU Sensor discovery	00h (bit 0): State Deasserted 01h (bit 1): State Asserted	[7:6] - 00b = unspecified byte 201b = previous state and/or severity in byte 210b = OEM code in byte 211b = sensor-specific event extension code in byte 2[5:4] - 00b = unspecified byte 301b = reserved10b = OEM code in byte 311b = sensor-specific event extension code in byte 3[3:0] - Offset from Event/Reading Code for discrete event state	undefined	FRU ID
91	0x5B	FRU Pwr Denied / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Digital Discrete (Discrete 0x03) / OEM (Kontron FRU Power denied) (0xCD)	FRU Power Denial Detection	00h (bit 0): State Deasserted 01h (bit 1): State Asserted	[7:6] - 00b = unspecified byte 201b = previous state and/or severity in byte 210b = OEM code in byte 211b = sensor-specific event extension code in byte 2[5:4] - 00b = unspecified byte 301b = reserved10b = OEM code in byte 311b = sensor-specific event extension code in byte 3[3:0] - Offset from Event/Reading Code for discrete event state	Power denial cause 00h : Explicit by shelf manager or application 01h : Decided by carrier based on fru information 03h : Timeout (shelf manager didn't grant power in time) FFh : Undefined	FRU ID

Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
92	0x5C	FRU MngtPwr Fail / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Digital Discrete (Discrete 0x03) / OEM (Kontron FRU Management Power Fail) (0xD2)	FRU Management Power Fail	00h (bit 0): State Deasserted 01h (bit 1): State Asserted	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	undefined	FRU ID
93	0x5D	FRU0 Agent / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Generic Discrete (Discrete 0x0A) / OEM (Kontron FRU Info Agent) (0xC5)	FRU Information Agent - FRU0 Data Error Detection	Only States (00h, 01h, 02h, 06h, 08h) trigger an event 00h (bit 0) = transition to Running 01h (bit 1) = transition to In Test 02h (bit 2) = transition to Power Off 03h (bit 3) = transition to On Line 04h (bit 4) = transition to Off Line 05h (bit 5) = transition to Off Duty 06h (bit 6) = transition to Degraded 07h (bit 7) = transition to Power Save 08h (bit 8) = Install Error	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	Event Data 2 is used as bit flag error Bit 7: unspecifiedError Bit 6: notPresentError Bit 5: multirecHeaderError Bit 4: multirecDataError Bit 3: timeout error Bit 2: ipmcError Bit 1: fruDataError Bit 0: commonHeaderError	Event Data 3 is used as a bit flag error Bit 7: SetClockState Not Supported Bit 6: SetClockState Error Bit 5: SetPortState Not Supported Bit 4: SetPortState Error Bit 3: Clock Internal Mismatch Bit 2: Clock Match Error, Not a single clock matches Bit 1: Internal mismatch Bit 0: Match Error, Not in single link matches
94	0x5E	FRU1 Agent / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Generic Discrete (Discrete 0x0A) / OEM (Kontron FRU Info Agent) (0xC5)	FRU Information Agent - FRU1 Data Error Detection	Only States (00h, 01h, 02h, 06h, 08h) trigger an event 00h (bit 0) = transition to Running 01h (bit 1) = transition to In Test 02h (bit 2) = transition to Power Off 03h (bit 3) = transition to On Line 04h (bit 4) = transition to Off Line 05h (bit 5) = transition to Off Duty 06h (bit 6) = transition to Degraded 07h (bit 7) = transition to Power Save 08h (bit 8) = Install Error	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	Event Data 2 is used as bit flag error Bit 7: unspecifiedError Bit 6: notPresentError Bit 5: multirecHeaderError Bit 4: multirecDataError Bit 3: timeout error Bit 2: ipmcError Bit 1: fruDataError Bit 0: commonHeaderError	Event Data 3 is used as a bit flag error Bit 7: SetClockState Not Supported Bit 6: SetClockState Error Bit 5: SetPortState Not Supported Bit 4: SetPortState Error Bit 3: Clock Internal Mismatch Bit 2: Clock Match Error, Not a single clock matches Bit 1: Internal mismatch Bit 0: Match Error, Not in single link matches
95	0x5F	FRU2 Agent / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Generic Discrete (Discrete 0x0A) / OEM (Kontron FRU Info Agent) (0xC5)	FRU Information Agent - FRU2 Data Error Detection	Only States (00h, 01h, 02h, 06h, 08h) trigger an event 00h (bit 0) = transition to Running 01h (bit 1) = transition to In Test 02h (bit 2) = transition to Power Off 03h (bit 3) = transition to On Line 04h (bit 4) = transition to Off Line 05h (bit 5) = transition to Off Duty 06h (bit 6) = transition to Degraded 07h (bit 7) = transition to Power Save 08h (bit 8) = Install Error	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	Event Data 2 is used as bit flag error Bit 7: unspecifiedError Bit 6: notPresentError Bit 5: multirecHeaderError Bit 4: multirecDataError Bit 3: timeout error Bit 2: ipmcError Bit 1: fruDataError Bit 0: commonHeaderError	Event Data 3 is used as a bit flag error Bit 7: SetClockState Not Supported Bit 6: SetClockState Error Bit 5: SetPortState Not Supported Bit 4: SetPortState Error Bit 3: Clock Internal Mismatch Bit 2: Clock Match Error, Not a single clock matches Bit 1: Internal mismatch Bit 0: Match Error, Not in single link matches
96	0x60	FRU3 Agent / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Generic Discrete (Discrete 0x0A) / OEM (Kontron FRU Info Agent) (0xC5)	FRU Information Agent - FRU3 Data Error Detection	Only States (00h, 01h, 02h, 06h, 08h) trigger an event 00h (bit 0) = transition to Running 01h (bit 1) = transition to In Test 02h (bit 2) = transition to Power Off 03h (bit 3) = transition to On Line 04h (bit 4) = transition to Off Line 05h (bit 5) = transition to Off Duty 06h (bit 6) = transition to Degraded 07h (bit 7) = transition to Power Save 08h (bit 8) = Install Error	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	Event Data 2 is used as bit flag error Bit 7: unspecifiedError Bit 6: notPresentError Bit 5: multirecHeaderError Bit 4: multirecDataError Bit 3: timeout error Bit 2: ipmcError Bit 1: fruDataError Bit 0: commonHeaderError	Event Data 3 is used as a bit flag error Bit 7: SetClockState Not Supported Bit 6: SetClockState Error Bit 5: SetPortState Not Supported Bit 4: SetPortState Error Bit 3: Clock Internal Mismatch Bit 2: Clock Match Error, Not a single clock matches Bit 1: Internal mismatch Bit 0: Match Error, Not in single link matches
97	0x61	FRU4 Agent / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Generic Discrete (Discrete 0x0A) / OEM (Kontron FRU Info Agent) (0xC5)	FRU Information Agent - FRU4 Data Error Detection	Only States (00h, 01h, 02h, 06h, 08h) trigger an event 00h (bit 0) = transition to Running 01h (bit 1) = transition to In Test 02h (bit 2) = transition to Power Off 03h (bit 3) = transition to On Line 04h (bit 4) = transition to Off Line 05h (bit 5) = transition to Off Duty 06h (bit 6) = transition to Degraded 07h (bit 7) = transition to Power Save 08h (bit 8) = Install Error	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	Event Data 2 is used as bit flag error Bit 7: unspecifiedError Bit 6: notPresentError Bit 5: multirecHeaderError Bit 4: multirecDataError Bit 3: timeout error Bit 2: ipmcError Bit 1: fruDataError Bit 0: commonHeaderError	Event Data 3 is used as a bit flag error Bit 7: SetClockState Not Supported Bit 6: SetClockState Error Bit 5: SetPortState Not Supported Bit 4: SetPortState Error Bit 3: Clock Internal Mismatch Bit 2: Clock Match Error, Not a single clock matches Bit 1: Internal mismatch Bit 0: Match Error, Not in single link matches

Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
98	0x62	Ver Change IPMC/ SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Sensor specific (Discrete 0x6F)/ Version Change (0x2B)	IPMC Firmware Change Detection	00h Hardware change detected with associated Entity. Informational. This offset does not imply whether the hardware change was successful or not. Only that a change occurred.01h Firmware or software change detected with associated Entity. Informational. Success or failure not implied.02h Hardware incompatibility detected with associated Entity.03h Firmware or software incompatibility detected with associated Entity.04h Entity is of an invalid or unsupported hardware version.05h Entity contains an invalid or unsupported firmware or software version.06h Hardware Change detected with associated Entity was successful. (deassertion event means 'unsuccessful').07h Software or F/W Change detected with associated Entity was successful. (deassertion event means 'unsuccessful') Event data 2 can be used for additional event information on the type of version change, with the following definition: Event Data 2 7:0 Version change type 00h unspecified 01h management controller device ID (change in one or more fields from 'Get Device ID') 02h management controller firmware revision 03h management controller device revision 04h management controller manufacturer ID 05h management controller IPMI version 06h management controller auxiliary firmware ID 07h management controller firmware boot block 08h other management controller firmware 09h system firmware (EFI / BIOS) change 0Ah SMBIOS change 0Bh operating system change 0Ch operating system loader change 0Dh service or diagnostic partition change 0Eh management software agent change 0Fh management software application change 10h management software middleware change 11h programmable hardware change (e.g. FPGA) 12h board/FRU module change (change of a module plugged into associated entity) 13h board/FRU component change (addition or removal of a replaceable component on the board/FRU that is not tracked as a FRU) 14h board/FRU replaced with equivalent version 15h board/FRU replaced with newer version 16h board/FRU replaced with older version 17h board/FRU hardware configuration change (e.g. strap, jumper, cable change, etc.)	[7:6] - 00b = unspecified byte 201b = previous state and/or severity in byte 210b = OEM code in byte 211b = sensor-specific event extension code in byte 2[5:4] - 00b = unspecified byte 301b = reserved10b = OEM code in byte 311b = sensor-specific event extension code in byte 3[3:0] - Offset from Event/Reading Code for discrete event state	bit[7:0]: Version change type00h unspecified01h management controller device ID (change in one or more fields from 'Get Device ID')02h management controller firmware revision03h management controller device revision04h management controller manufacturer ID05h management controller IPMI version06h management controller auxiliary firmware ID07h management controller firmware boot block08h other management controller firmware09h system firmware (EFI / BIOS) change0Ah SMBIOS change0Bh operating system change0Ch operating system loader change0Dh service or diagnostic partition change0Eh management software agent change0Fh management software application change10h management software middleware change11h programmable hardware change (e.g. FPGA)12h board/FRU module change (change of a module plugged into associated entity)13h board/FRU component change (addition or removal of a replaceable component on the board/FRU that is not tracked as a FRU)	-

Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
99	0x63	Ver Change FPGA / SDR_ENTID_SYS_FIRM (34.97)	Sensor specific (Discrete 0x6F) / Version Change (0x2B)	FPGA Firmware Change Detection	<p>00h Hardware change detected with associated Entity. Informational. This offset does not imply whether the hardware change was successful or not. Only that a change occurred.</p> <p>01h Firmware or software change detected with associated Entity. Informational. Success or failure not implied.</p> <p>02h Hardware incompatibility detected with associated Entity.</p> <p>03h Firmware or software incompatibility detected with associated Entity.</p> <p>04h Entity is of an invalid or unsupported hardware version.</p> <p>05h Entity contains an invalid or unsupported firmware or software version.</p> <p>06h Hardware Change detected with associated Entity was successful. (deassertion event means 'unsuccessful').</p> <p>07h Software or F/W Change detected with associated Entity was successful. (deassertion event means 'unsuccessful')</p> <p>Event data 2 can be used for additional event information on the type of version change, with the following definition:</p> <p>Event Data 2</p> <p>7:0 Version change type</p> <p>00h unspecified</p> <p>01h management controller device ID (change in one or more fields from 'Get Device ID')</p> <p>02h management controller firmware revision</p> <p>03h management controller device revision</p> <p>04h management controller manufacturer ID</p> <p>05h management controller IPMI version</p> <p>06h management controller auxiliary firmware ID</p> <p>07h management controller firmware boot block</p> <p>08h other management controller firmware</p> <p>09h system firmware (EFI / BIOS) change</p> <p>0Ah SMBIOS change</p> <p>0Bh operating system change</p> <p>0Ch operating system loader change</p> <p>0Dh service or diagnostic partition change</p> <p>0Eh management software agent change</p> <p>0Fh management software application change</p> <p>10h management software middleware change</p> <p>11h programmable hardware change (e.g. FPGA)</p> <p>12h board/FRU module change (change of a module plugged into associated entity)</p> <p>13h board/FRU component change (addition or removal of a replaceable component on the board/FRU that is not tracked as a FRU)</p> <p>14h board/FRU replaced with equivalent version</p> <p>15h board/FRU replaced with newer version</p> <p>16h board/FRU replaced with older version</p> <p>17h board/FRU hardware configuration change (e.g. strap, jumper, cable change, etc.)</p>	<p>[7:6] - 00b = unspecified byte 2</p> <p>01b = previous state and/or severity in byte 2</p> <p>10b = OEM code in byte 2</p> <p>11b = sensor-specific event extension code in byte 2</p> <p>[5:4] - 00b = unspecified byte 3</p> <p>01b = reserved</p> <p>10b = OEM code in byte 3</p> <p>11b = sensor-specific event extension code in byte 3</p> <p>[3:0] - Offset from Event/Reading Code for discrete event state</p>	<p>bit[7:0]: Version change type</p> <p>00h unspecified</p> <p>01h management controller device ID (change in one or more fields from 'Get Device ID')</p> <p>02h management controller firmware revision</p> <p>03h management controller device revision</p> <p>04h management controller manufacturer ID</p> <p>05h management controller IPMI version</p> <p>06h management controller auxiliary firmware ID</p> <p>07h management controller firmware boot block</p> <p>08h other management controller firmware</p> <p>09h system firmware (EFI / BIOS) change</p> <p>0Ah SMBIOS change</p> <p>0Bh operating system change</p> <p>0Ch operating system loader change</p> <p>0Dh service or diagnostic partition change</p> <p>0Eh management software agent change</p> <p>0Fh management software application change</p> <p>10h management software middleware change</p> <p>11h programmable hardware change (e.g. FPGA)</p> <p>12h board/FRU module change (change of a module plugged into associated entity)</p> <p>13h board/FRU component change (addition or removal of a replaceable component on the board/FRU that is not tracked as a FRU)</p>	-

Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
100	0x64	Ver Change BIOS / SDR_ENTID_SYS_FIRM (34.98)	Sensor specific (Discrete 0x6F) / Version Change (0x2B)	BIOS Firmware Change Detection	<p>00h Hardware change detected with associated Entity. Informational. This offset does not imply whether the hardware change was successful or not. Only that a change occurred.</p> <p>01h Firmware or software change detected with associated Entity. Informational. Success or failure not implied.</p> <p>02h Hardware incompatibility detected with associated Entity.</p> <p>03h Firmware or software incompatibility detected with associated Entity.</p> <p>04h Entity is of an invalid or unsupported hardware version.</p> <p>05h Entity contains an invalid or unsupported firmware or software version.</p> <p>06h Hardware Change detected with associated Entity was successful. (deassertion event means 'unsuccessful').</p> <p>07h Software or F/W Change detected with associated Entity was successful. (deassertion event means 'unsuccessful')</p> <p>Event data 2 can be used for additional event information on the type of version change, with the following definition:</p> <p>Event Data 2</p> <p>7:0 Version change type</p> <p>00h unspecified</p> <p>01h management controller device ID (change in one or more fields from 'Get Device ID')</p> <p>02h management controller firmware revision</p> <p>03h management controller device revision</p> <p>04h management controller manufacturer ID</p> <p>05h management controller IPMI version</p> <p>06h management controller auxiliary firmware ID</p> <p>07h management controller firmware boot block</p> <p>08h other management controller firmware</p> <p>09h system firmware (EFI / BIOS) change</p> <p>0Ah SMBIOS change</p> <p>0Bh operating system change</p> <p>0Ch operating system loader change</p> <p>0Dh service or diagnostic partition change</p> <p>0Eh management software agent change</p> <p>0Fh management software application change</p> <p>10h management software middleware change</p> <p>11h programmable hardware change (e.g. FPGA)</p> <p>12h board/FRU module change (change of a module plugged into associated entity)</p> <p>13h board/FRU component change (addition or removal of a replaceable component on the board/FRU that is not tracked as a FRU)</p> <p>14h board/FRU replaced with equivalent version</p> <p>15h board/FRU replaced with newer version</p> <p>16h board/FRU replaced with older version</p> <p>17h board/FRU hardware configuration change (e.g. strap, jumper, cable change, etc.)</p>	<p>[7:6] - 00b = unspecified byte 2</p> <p>01b = previous state and/or severity in byte 2</p> <p>10b = OEM code in byte 2</p> <p>11b = sensor-specific event extension code in byte 2</p> <p>[5:4] - 00b = unspecified byte 3</p> <p>01b = reserved</p> <p>10b = OEM code in byte 3</p> <p>11b = sensor-specific event extension code in byte 3</p> <p>[3:0] - Offset from Event/Reading Code for discrete event state</p>	<p>bit[7:0]: Version change type</p> <p>00h unspecified</p> <p>01h management controller device ID (change in one or more fields from 'Get Device ID')</p> <p>02h management controller firmware revision</p> <p>03h management controller device revision</p> <p>04h management controller manufacturer ID</p> <p>05h management controller IPMI version</p> <p>06h management controller auxiliary firmware ID</p> <p>07h management controller firmware boot block</p> <p>08h other management controller firmware</p> <p>09h system firmware (EFI / BIOS) change</p> <p>0Ah SMBIOS change</p> <p>0Bh operating system change</p> <p>0Ch operating system loader change</p> <p>0Dh service or diagnostic partition change</p> <p>0Eh management software agent change</p> <p>0Fh management software application change</p> <p>10h management software middleware change</p> <p>11h programmable hardware change (e.g. FPGA)</p> <p>12h board/FRU module change (change of a module plugged into associated entity)</p> <p>13h board/FRU component change (addition or removal of a replaceable component on the board/FRU that is not tracked as a FRU)</p>	-
101	0x65	EventRcv ComLost / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96)	Digital Discrete (Discrete 0x03) / Cable/Interconnect (0x1B)	Detects communication with the event receiver (ShMc)	<p>00h Cable/Interconnect is connected</p> <p>01h Configuration Error - Incorrect cable connected / Incorrect interconnection</p>	<p>[7:6] - 00b = unspecified byte 2</p> <p>01b = previous state and/or severity in byte 2</p> <p>10b = OEM code in byte 2</p> <p>11b = sensor-specific event extension code in byte 2</p> <p>[5:4] - 00b = unspecified byte 3</p> <p>01b = reserved</p> <p>10b = OEM code in byte 3</p> <p>11b = sensor-specific event extension code in byte 3</p> <p>[3:0] - Offset from Event/Reading Code for discrete event state</p>	-	-

Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
102	0x66	IPMC Reboot / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Digital Discrete (Discrete 0x03) / Platform Alert (0x24)	IPMC reboot detection	00h (bit 0): State Deasserted 01h (bit 1): State Asserted	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	-	-

Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
103	0x67	IPMC Storage Err / SDR_ENTID_PIC MG_FRONT_BOARD (160.96)	Sensor specific (Discrete 0x6F) / Management Subsystem Health (0x28)	Management subsystem health: non volatile memory error	<p>00h sensor access degraded or unavailable (A sensor that is degraded will still return valid results, but may be operating with a slower response time, or may not detect certain possible states. A sensor that is unavailable is not able to return any results (scanning is disabled).)</p> <p>01h controller access degraded or unavailable (The ability to access the controller has been degraded, or access is unavailable, but the party that is doing the monitoring cannot determine which.)</p> <p>02h management controller off-line (controller cannot be accessed for normal operation because it has been intentionally taken off-line for a non-error condition. Note that any commands that are available must function according to specification.)</p> <p>03h management controller unavailable (controller cannot be accessed because of an error condition)</p> <p>04h Sensor failure (the sensor is known to be in error. It may still be accessible by software)</p> <p>Event Data 2 The Event Data 2 field for this offset can be used to provide additional information on the type of failure with the following definition: [7:0] - Sensor Number. Number of the failed sensor corresponding to event offset 04h or 00h.</p> <p>05h FRU failure The Event Data 2 and 3 fields for this offset can be used to provide additional information on the type of failure with the following definition: Event Data 2 [7] - logical/physical FRU device 0b = device is not a logical FRU Device 1b = device is logical FRU Device (accessed via FRU commands to mgmt. controller)</p> <p>[6:5] - reserved. [4:3] - LUN for Master Write-Read command or FRU Command. 00b if device is non-intelligent device directly on IPMB. [2:0] - Private bus ID if bus = Private. 000b if device directly on IPMB, or device is a logical FRU Device.</p> <p>Event Data 3 For LOGICAL FRU DEVICE (accessed via FRU commands to mgmt. controller): [7:0] - FRU Device ID within controller that generated the event.FFh = reserved. For non-intelligent FRU device: [7:1] - 7-bit I2C Slave Address of FRU device . This is relative to the bus the device is on. For devices on the IPMB, this is the slave address of the device on the IPMB. For devices on a private bus, this is the slave address of the device on the private bus. [0] - reserved.</p>	<p>[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2</p> <p>[5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3</p> <p>[3:0] - Offset from Event/Reading Code for discrete event state</p>	See Sensor Specific Event (Annex B)	See Sensor Specific Event (Annex B)



Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
104	0x68	IPMC SEL State/ SDR_ENTID_PIC MG_FRONT_BOARD (160.96)	Sensor specific (Discrete 0x6F)/ Event Logging Disable (0x10)	Specify if the status of the SEL (Cleared/Almost Full/Full)	00h (bit 0): Correctable Memory Error LoggingDisabled01h (bit 1): Event 'Type' Logging Disabled02h (bit 2): Log Area Reset/Cleared03h (bit 3): All Event Logging Disabled04h (bit 4): SEL Full05h (bit 5): SEL Almost Full06h (bit 6): Correctable Machine Check ErrorLogging Disabled	[7:6] - 00b = unspecified byte 210b = previous state and/or severity in byte 210b = OEM code in byte 211b = sensor-specific event extension code in byte 2[5:4] - 00b = unspecified byte 301b = reserved10b = OEM code in byte 311b = sensor-specific event extension code in byte 3[3:0] - Offset from Event/Reading Code for discrete event state	See Sensor Specific Event (Annex B)	See Sensor Specific Event (Annex B)
105	0x69	SEL Time Set / SDR_ENTID_SYS BOARD (160.96)	Sensor specific (Discrete 0x6F) / System Event (0x12)	Specify when SEL time change	00h (bit 0):System Reconfigured 01h (bit 1):OEM System Boot Event 02h (bit 2):Undetermined system hardware failure 03h (bit 3):Entry added to Auxiliary Log 04h (bit 4):PEF Action 05h (bit 5):Timestamp Clock Synch.	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	See Sensor Specific Event (Annex B)	-
106	0x6A	Jumper Status / SDR_ENTID_PIC MG_FRONT_BOARD (160.96)	Sensor specific (0x6F) / OEM (Kontron OEM Jumper Status) (0xD3)	Reflects on-board jumper presence	00h (bit 0): Jumper 00 Present ( JP1: 1-2 ) 01h (bit 1): Jumper 01 Present ( JP1: 3-4 ) 02h (bit 2): Jumper 02 Present ( JP1: 5-6 ) 03h (bit 3): Jumper 03 Present ( JP1: 7-8 ) 04h (bit 4): Jumper 04 Present ( JP1: 9-10 ) 05h (bit 5): Jumper 05 Present ( JP1: 11-12 ) 06h (bit 6): Jumper 06 Present ( JP1: 13-14 ) 07h (bit 7): Jumper 07 Present ( JP2: 1-2 ) 08h (bit 8): Jumper 08 Present ( JP2: 3-4 ) 09h (bit 9): Jumper 09 Present ( JP2: 5-6 ) 0Ah (bit 10): Jumper 10 Present ( JP2: 7-8 ) 0Bh (bit 11): Jumper 11 Present ( JP2: 9-10 ) 0Ch (bit 12): Jumper 12 Present ( JP2: 11-12 ) 0Dh (bit 13): Jumper 13 Present ( JP2: 13-14 ) 0Eh (bit 14): Jumper 14 Present ( JP4: TEST )	No Event for this Sensor	No Event for this Sensor	No Event for this Sensor
107	0x6B	ME Availability / SDR_ENTID_PIC MG_FRONT_BOARD (160.96)	Generic Discrete (Discrete 0x0A) / Management Subsystem Health (0x28)	Provides status on the chipset Management Engine	00h (bit 0) = transition to Running 01h (bit 1) = transition to In Test 02h (bit 2) = transition to Power Off 03h (bit 3) = transition to On Line 04h (bit 4) = transition to Off Line 05h (bit 5) = transition to Off Duty 06h (bit 6) = transition to Degraded 07h (bit 7) = transition to Power Save 08h (bit 8) = Install Error	[7:6] - 00b = unspecified byte 2 01b = previous state and/or severity in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = reserved 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 [3:0] - Offset from Event/Reading Code for discrete event state	-	-
108	0x6C	LAN BI 0 Link / SDR_ENTID_PIC MG_FRONT_BOARD (160.96)	Sensor Specific (Discrete 0x6F) / LAN (0x27)	Base Interface 0 link status	00h LAN Heartbeat Lost 01h LAN Heartbeat	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	-	-
109	0x6D	LAN BI 1 Link / SDR_ENTID_PIC MG_FRONT_BOARD (160.96)	Sensor Specific (Discrete 0x6F) / LAN (0x27)	Base Interface 1 link status	00h LAN Heartbeat Lost 01h LAN Heartbeat	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	-	-

Sensor ID	ID hex	Sensor Name / Entity (ID)	Event/Reading Type (Class and Code) / Sensor Type (Code)	Description	Offset	Data Byte 1	Data Byte 2	Data Byte 3
110	0x6E	LAN FI 0 Link / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Sensor Specific (Discrete 0x6F) / LAN (0x27)	Fabric Interface 0 link status	00h LAN Heartbeat Lost 01h LAN Heartbeat	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	-	-
111	0x6F	LAN FI 1 Link / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Sensor Specific (Discrete 0x6F) / LAN (0x27)	Fabric Interface 1 link status	00h LAN Heartbeat Lost 01h LAN Heartbeat	[7:6] - 00b = unspecified byte 2 01b = trigger reading in byte 2 10b = OEM code in byte 2 11b = sensor-specific event extension code in byte 2 [5:4] - 00b = unspecified byte 3 01b = trigger threshold value in byte 3 10b = OEM code in byte 3 11b = sensor-specific event extension code in byte 3 Bit [3:0] = Offset from Event/Reading Code for threshold event.	-	-
112	0x70	IPMI Info-1 / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Kontron OEM Internal Diagnostic (Discrete 0x70) / Kontron OEM Firmware Info (0xC0)	Internal Management Controller firmware diagnostic	Sensor giving info about firmware state According to the Event/Reading Type The 2 first bits will have assertion mask set. used with event/reading type code: ----- 0x70-OEM Firmware Info 1 0x71-OEM Firmware Info 2 0x75-OEM Firmware Info 2	Should not generate Event. Please contact Kontron Canada Inc. Technical Support if an Event is triggered.	-	-
113	0x71	IPMI Info-2 / SDR_ENTID_PIC MG_FRONT_BOA RD (160.96 )	Kontron OEM Internal Diagnostic (Discrete 0x75) / Kontron OEM Firmware Info (0xC0)	Internal Management Controller firmware diagnostic	Sensor giving info about firmware state According to the Event/Reading Type The 2 first bits will have assertion mask set. used with event/reading type code: ----- 0x70-OEM Firmware Info 1 0x71-OEM Firmware Info 2 0x75-OEM Firmware Info 2	Should not generate Event. Please contact Kontron Canada Inc. Technical Support if an Event is triggered.	-	-

# Annex B – Sensor-Specific Event

Sensor Type	Sensor Type Code	Sensor Offset	Event Data 2	Event Data 3
System Event	12h	00h	No Event Generated	
		01h	No Event Generated	
		02h	No Event Generated (this event would typically require system-specific diagnostics to determine FRU / failure type)	
		03h	(see PICMG 2.0: 31.12, Get Auxiliary Log Status Command and 31.13, Set Auxiliary Log Status Command, for more information)  [7:4] - Log Entry Action 0h = entry added 1h = entry added because event did not be map to standard IPMI event 2h = entry added along with one or more corresponding SEL entries 3h = log cleared 4h = log disabled 5h = log enabled all other = reserved [3:0] - Log Type 0h = MCA Log 1h = OEM 1 2h = OEM 2 all other = reserved	
		04h	The following bits reflect the PEF Actions that are about to be taken after the event filters have been matched. The event is captured before the actions are taken. [7:6] - reserved [5] - 1b = Diagnostic Interrupt (NMI) [4] - 1b = OEM action [3] - 1b = power cycle [2] - 1b = reset [1] - 1b = power off	
		05h	This event can be used to record when changes are made to the timestamp clock(s) so that relative time differences between SEL entries can be determined. See Note [1].  [7] - first/second 0b = event is first of pair. 1b = event is second of pair. [6:4] - reserved [3:0] - Timestamp Clock Type 0h = SEL Timestamp Clock updated. (Also used when both SEL and SDR Timestamp clocks are linked together.) 1h = SDR Timestamp Clock updated.	

System Firmware Progress (formerly POST Error)	0Fh	00h	00h Unspecified. 01h No system memory is physically installed in the system. 02h No usable system memory, all installed memory has experienced an unrecoverable failure. 03h Unrecoverable hard-disk/ATAPI/IDE device failure. 04h Unrecoverable system-board failure. 05h Unrecoverable diskette subsystem failure. 06h Unrecoverable hard-disk controller failure. 07h Unrecoverable PS/2 or USB keyboard failure. 08h Removable boot media not found 09h Unrecoverable video controller failure 0Ah No video device detected 0Bh Firmware (BIOS) ROM corruption detected 0Ch CPU voltage mismatch (processors that share same supply have mismatched voltage requirements) 0Dh CPU speed matching failure 0Eh to FFh reserved	
		01h	uses same Event Data 2 definition as following System Firmware Progress offset	
		02h	00h Unspecified. 01h Memory initialization. 02h Hard-disk initialization 03h Secondary processor(s) initialization 04h User authentication 05h User-initiated system setup 06h USB resource configuration 07h PCI resource configuration 08h Option ROM initialization 09h Video initialization 0Ah Cache initialization 0Bh SM Bus initialization 0Ch Keyboard controller initialization 0Dh Embedded controller/management controller initialization 0Eh Docking station attachment 0Fh Enabling docking station 10h Docking station ejection 11h Disabling docking station 12h Calling operating system wake-up vector 13h Starting operating system boot process, e.g. calling Int 19h 14h Baseboard or motherboard initialization 15h reserved 16h Floppy initialization 17h Keyboard test 18h Pointing device test 19h Primary processor initialization 1Ah to FFh reserved	

Event Logging Disabled	10h	00h	[7:0] - Memory module/device (e.g. DIMM/SIMM/RIMM) identification, relative to the entity that the sensor	
		01h	Event Logging is disabled for following event/reading type and offset has been disabled.  Event Data 2: Event/Reading Type Code	[7:6] - reserved. Write as 00b. [5] - 1b = logging has been disabled for all events of given type [4] - 1b = assertion event, 0b = deassertion event [3:0] - Event Offset
		02h	-	-
		03h	-	-
		04h	-	-
		05h		If Event Data 3 is not provided, then by default this event represents the SEL has reached a point of being 75% or more full. For example, if the SEL supports 215 entries, the 75% value would be 161.25 entries. Therefore, the event would be generated on the 162nd entry. Note that if this event itself is logged, it would be logged as the 163rd entry.  Event Data 3: Contains hex value from 0 to 100 decimal (00h to 64h) representing the % of which the SEL is filled at the time the event was generated: 00h is 0% full (SEL is empty), 64h is 100% full, etc.
		06h	If the following field is not provided, then this event indicates that Correctable Machine Check error logging has been disabled for all Processor sensors.  Event Data 2: Event Data 2 may be optionally used to return an Entity Instance or a vendor selected processor number that identifies the processor associated with this event. [7:0] - Instance ID number of the (processor) Entity that the sensor is associated with (if SDR provided for this sensor), or a vendor selected logical processor number if no SDR.	If Event Data 2 is provided then Event Data 3 may be optionally used to indicate whether Event Data 2 is being used to hold an Entity Instance number or a vendor-specific processor number. If Event Data 2 is provided by Event Data 3 is not, then Event Data 2 is assumed to hold an Entity Instance number. [7] - 0b = Entity Instance number 1b = Vendor-specific processor number [6:0] - reserved
Management Subsystem Health	28h	00h	-	-
		01h	-	-
		02h	-	-
		03h	-	-
		04h	[7:0] - Sensor Number. Number of the failed sensor corresponding to event offset 04h or 00h.	-
		05h	[7] - logical/physical FRU device 0b = device is not a logical FRU Device 1b = device is logical FRU Device (accessed via FRU commands to mgmt. controller) [6:5] - reserved. [4:3] - LUN for Master Write-Read command or FRU Command. 00b if device is non-intelligent device directly on IPMB. [2:0] - Private bus ID if bus = Private. 000b if device directly on PMB, or device is a logical FRU Device.	For LOGICAL FRU DEVICE (accessed via FRU commands to mgmt. controller): [7:0] - FRU Device ID within controller that generated the event.FFh = reserved.  For non-intelligent FRU device: [7:1] - 7-bit I2C Slave Address of FRU device . This is relative to the bus the device is on. For devices on the IPMB, this is the slave address of the device on the IPMB. For devices on a private bus, this is the slave address of the device on the private bus. [0] - reserved.

1. To track the relationship between timestamps, the timestamp change events should be logged in pairs - the first event being logged just before the timestamp clock update followed by a second event that is logged after the timestamp clock has been updated. This enables software that reads the SEL to be able to determine time relationship between events that were logged before the update and those logged afterward. The generation of these events is normally the responsibility of the software that changes the timestamp clock. Note that some implementations may queue events prior to their being logged. It is recommended that generic software read the SEL to verify that the first event has been recorded with the relative timestamp before setting the new timestamp value and generating the second event.

# Annex C – Cause of State Change Values

Cause offset	Cause of State Change Description
0h	Normal State Change. This is used when the FRU is proceeding normally through the state chart. For instance, an M3 to M4 transition is a normal state change. Other values in this table can be used to provide greater levels of detail about what initiated a transition. Valid for the M0 to M1, M1 to M2, M2 to M3, M3 to M4, M4 to M5, M5 to M6, and M6 to M1 transitions.
1h	Change Commanded by Shelf Manager with Set FRU Activation. The Shelf Manager has issued a command to change states, typically during an insertion or extraction. Valid for the M2 to M1, M2 to M3, M4 to M6, M5 to M4, and M5 to M6 transitions.
2h	State Change due to operator changing a Handle Switch. The FRU has changed states as a result of an operator changing the state of a Handle Switch. Valid for the M1 to M2, M3 to M6, M4 to M5, and M5 to M4 transitions.
3h	State Change due to FRU programmatic action. The FRU has changed states due to some non-operator related internal requirement (such as Locked bit being cleared). Valid for the M1 to M2, M3 to M6, M4 to M5, and M5 to M4 transitions
4h	Communication Lost or Regained. The Shelf Manager has lost or regained contact with the FRU and generated an event on its behalf. Valid for the M2 to M7, M3 to M7, M4 to M7, M5 to M7, and M6 to M7, M7 to M1, M7 to M2, M7 to M3, M7 to M4, M7 to M5 and M7 to M6 transitions.
5h	Communication Lost or Regained—locally detected. The FRU has changed state as a result of an internal detection by the IPM Controller. This is only valid for FRUs represented by a physically separate IPM Controller (e.g., mezzanine cards). Valid for the M2 to M7, M3 to M7, M4 to M7, M5 to M7, M6 to M7, M7 to M1, M7 to M2, M7 to M3, M7 to M4, M7 to M5 and M7 to M6 transitions.
6h	Surprise State Change due to extraction. The FRU has changed state abruptly to M0 due to a non-compliant removal from the system. This is only valid for FRUs represented by a physically separate IPM Controller (e.g., mezzanine cards). Valid for the M2 to M0, M3 to M0, M4 to M0, M5 to M0, M6 to M0, and M7 to M0 transitions.
7h	State Change due to provided information. A new state is known for the FRU that could not be deduced previously. This is used when a user verifies that a FRU has been extracted from the Shelf and is no longer available. Valid for the M7 to M0 state transition.
8h	Invalid Hardware Address Detected. This is an error condition where the Hardware Address did not pass the parity check. Valid for the M0 to M0 transition.
9h	Unexpected Deactivation. The FRU has transitioned to deactivating without requesting permission from the Shelf Manager first. Valid for M4 to M6 transition.
Ah	Surprise State Change due to power failure. Case 1: The FRU has abruptly changed state to M0 due to a serious power failure that precludes further use of the FRU until it is extracted and reinserted or replaced (for example, due to overcurrent in the Management Power domain). This is valid for M0, M1, M2, M3, M4, M5, M6, and M7 to M0 transitions. Case 2: The FRU has cut off the power to its Payload or a managing FRU has cut off the Payload Power to its Managed FRU due to an unexpected power failure that does not preclude further use of the FRU (for example, due to overcurrent in the Payload Power domain). This is valid for M3, M4, M5, M7 to M6, and M6, M7 to M1 transitions.
Fh	State Change, Cause Unknown. No cause could be determined.
All other values	Reserved