

INSTALLATION MANUAL FOR FULL-GLASS SAUNA DOOR

„Premium”

- Installation requires two persons.
At no time should the edge of the glass touch a hard floor or wall surface.
- Handle the door with care. Before installation put planks or boards on the floor, on top of which the glass door can be temporarily lifted.
- If you have to store the door in its carton packaging, store it horizontally.

PROCEDURE

1. Set the door up in a horizontal position on a flat base and open the package.
2. Loosen the screws on the door's hinge leave.
4. Remove the door glass from the frame
5. Put the frame in position according to the direction of opening that you desire.*
6. Place the door-glass into the frame.
7. Tighten the screws.
8. Attach the handle in position.
9. If the door requires adjustment, the hinges can be adjusted laterally. Remove the metal faceplate by turning the hexagonal screw counterwise (Figure 1) and loose a bit two hexagonal screws (Figure 2). Move the glass to correct position and tighten the screws. If the glass needs no further correction, remove yellow backing paper behind the faceplate (Figure 3) (usually no need). Attach the faceplate back to the right place and turn the little screw (Figure 1).


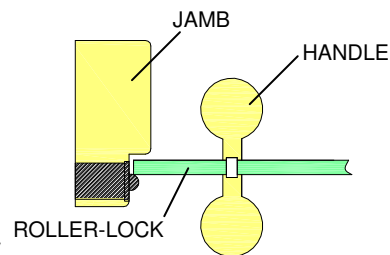


Figure 1.



Figure 2.




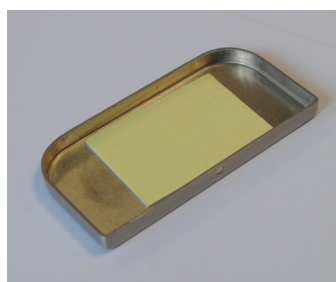


Figure 3.

* If it is necessary to change hanging, move the top rail to the other end. Put the door on the floor, unscrew the upper plank's four screws, put the plank on the opposite side of the door and screw it up with the same four screws. Now it's ready.

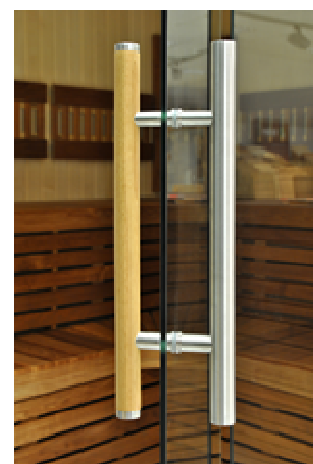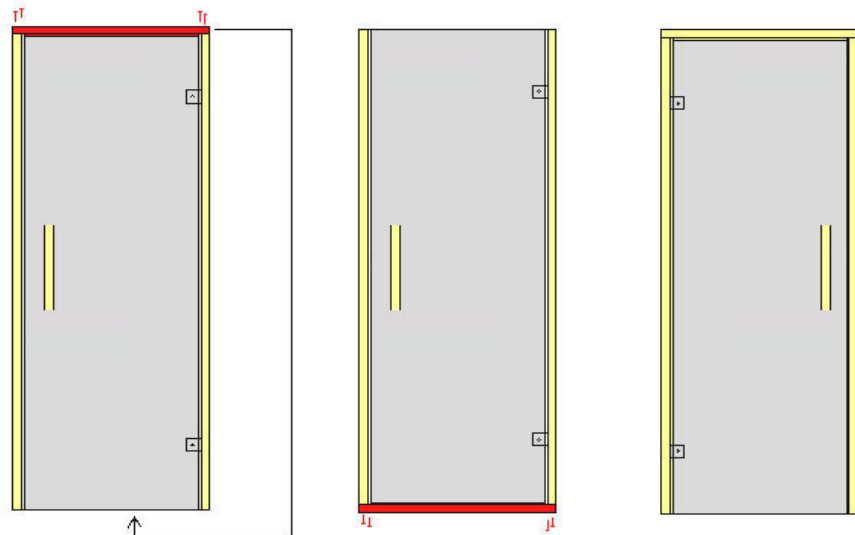

For making the door move easily, regulate the roller-lock when needed.

MAINTENANCE OF THE DOOR

- Check fastenings of the roller-lock and hinges regularly. Fasten hinge bolts if necessary.
- Avoid direct flow of water to the doorjamb!
- Clean the door glass regularly using special glass cleaner. Try to avoid abrasive cleaners, which may cause damage to the glass surface.