

INSTALLATION MANUAL

ST0539 Stallion Shower



ATTENTION INSTALLERS:

These Instructions
Must Be Left With
The Customer

1300 765 885

sales@stallionproducts.com.au



www.stallionproducts.com.au

Position the shower tray
Set the shower tray to the final parking position.
Adjust the leveling feet so that each foot contact with the ground and thus ensures sustainability.



The shower tray can be moved for mounting the shower again from the position!

The residual water drainage of the steam should be passed through the hole in the shower tray to drain.



(The installation of the panels can be done individually.)


The position of the shower column is clearly installed on the higher part in the shower tray.

We recommend to screw the shower column with the half rear glass wall, then with the second.




Now put the complete glass Wall element at the specified position in the shower tray.

Begin at the back corner.

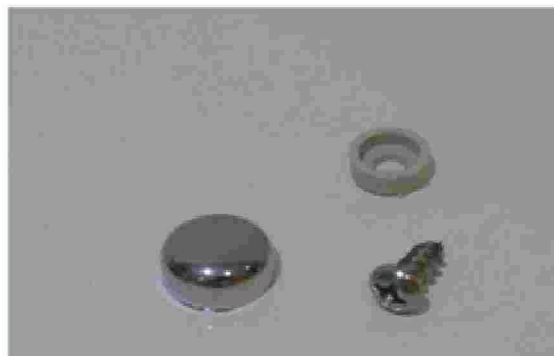

Screw the corner to fixed the first wall element..
Use the screw with plastic washer - thus the cap can be pressed..

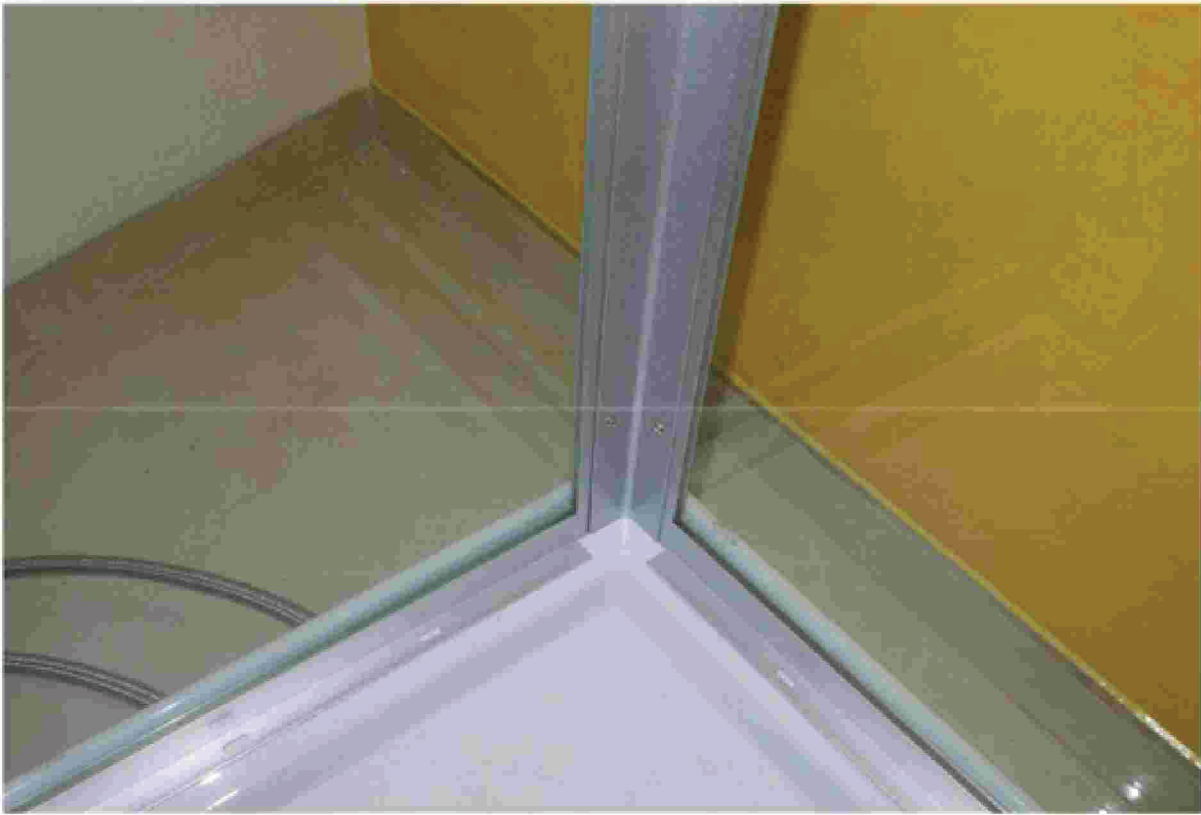

Repeat for each side..

At the last sidewall - usually the side with the entry.



Using drilling to make bore and screw on the shower tray.




Then screw the bottom bar just like the corner strips with screws + caps. if necessary, can be sealed with silicone under the bottom bar..



Put the ceiling on - and connect to the respective terminals of the ceiling panels and the waterfall shower.

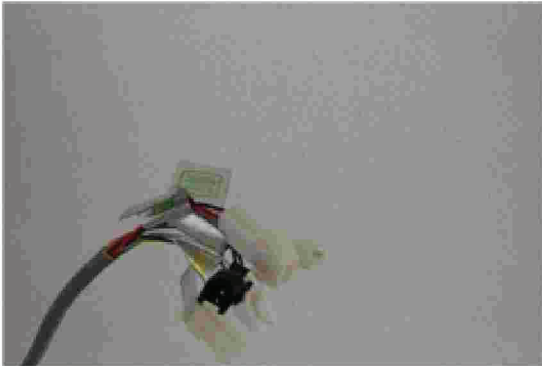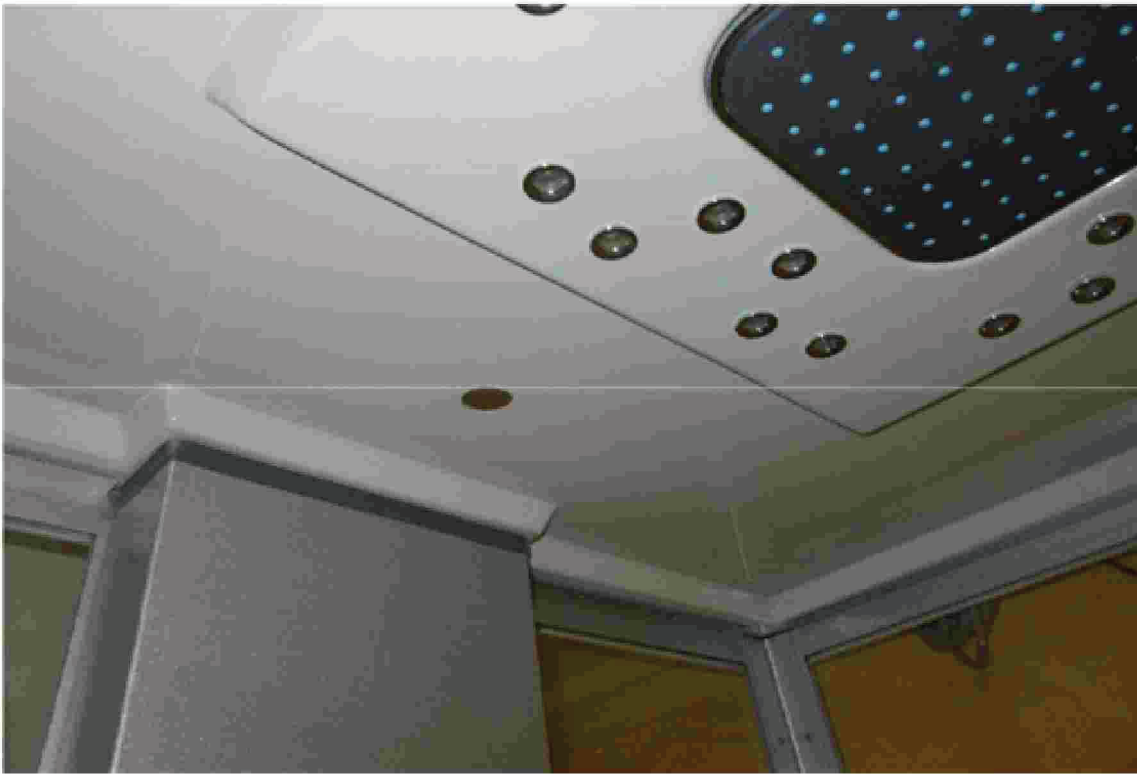

Now install the holder for the hand shower.

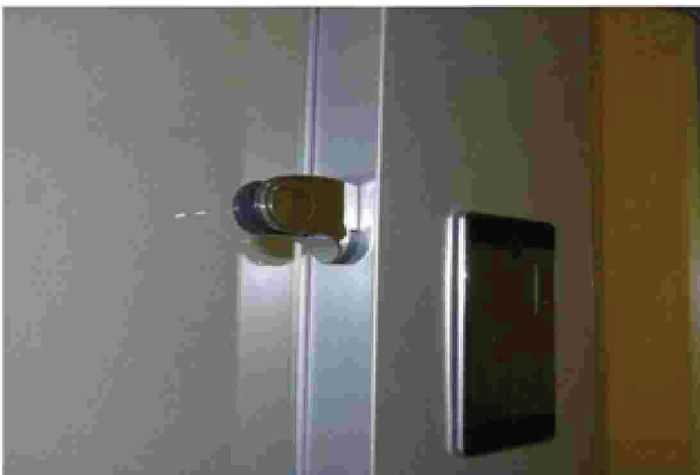

Connect hot and cold water connection to the shower.
Connect the shower into a proper electrical outlet with local regulations..

Test to run the shower first before to position the complete shower set. It may have come loose during transport and handling glands. If necessary, they must be tightened..

After a successful trial run, the shower can be made to your destination.

