

ML-D3




SPECIFICATIONS

Total power consumed	3W
Power supply	12V AC/DC
Beam angle	30 degrees
IP Rating	IP44
Output colour	White: 6000K, Warm White: 3000K
Light output	White: 150lm Warm White: 120lm

MEASUREMENTS

Diameter: 50 W:29.7 (mm)

INSTALLATION MANUAL

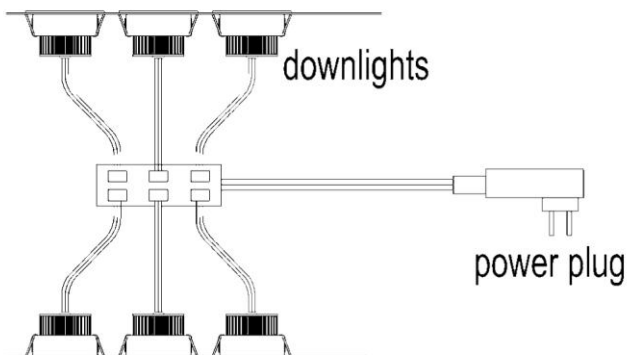

1. Make sure power is off when operating as follows, mounting: recessed ceiling
2. Mark and cut out 40mm hole in ceiling
3. Wire up new LED power supply in accordance with marked terminals
4. It is recommended to use M-Elec Pty Ltd drivers with installation
5. These lights are for indoor use only.

INFORMATION

- MUST BE INSTALLED BY LICENCED ELECTRICIAN
- Do not extend low voltage cables from the output of power supply
- All components may not be mechanically stressed
- Assembly must not damage or destroy conducting paths on the circuit board
- Electrical and safety standards – only qualified personnel should be allowed to perform installations
- Correct electrical polarity needs to be observed, wrong polarity may destroy the downlights which is not covered under warranty
- Damage by corrosion will not be honored as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements