

BAO-CARD80 User Manual

KEY FEATURES

- > Compact, portable and lightweight design
- > Provides USB2.0 interface, full backward compatibility with USB1.1 devices
- > Supports high-speed data transfer rate up to 480 Mbps
- > Provides LED indicators for power and in-use status
- > Powered by USB, no external power required
- > Plug-and-play, hot swappable
- > Mac Compatible*

SPECIFICATION

Interface: USB


Data transfer Rate: Supports high-speed 480Mbps/ full-speed 12Mbps/low-speed 1.5Mbps Indicators: Led for power and R/W access Operating Temperature: 0~70°C Storage Temperature: -20~60°C Operating Humidity: 0%~60% RH, non-condensing System Support: Windows ME/2000/XP/Vista/Mac OS 10.2 or above*

*Mac Compatibility

In order to work properly for Mac systems, the card needs to be safely saved and ejected from the Windows system before use on Mac. Otherwise cards will not be recognized by the Mac system.

1

DIRECTLY INSERT SUPPORT

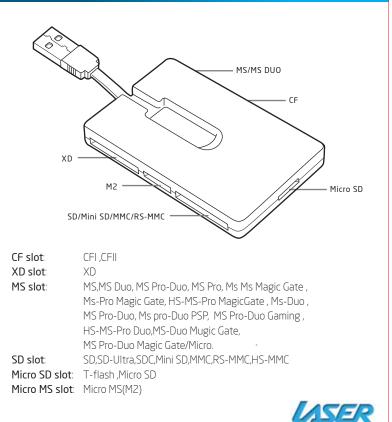

2

LASER