





MOST AUX-IN Connector for AUDI

User manual



Product Content

The interface includes the parts listed below. Please make sure all the parts are included. If there is anything missing, please contact us.

 A white rectangular device with a blue RJ45 port on the left, a black display screen in the center, and two yellow buttons on the right.	AUX-IN Connector x 1
 A power cable with a yellow and black braided outer jacket and a white plastic connector at the end.	Power Cable x 1
 A black optical cable with a D-sub connector on one end and a square optical connector on the other.	Optical cable x 1:
 A black AUX-IN cable with a 3.5mm jack on one end and a multi-pin connector on the other.	AUX-IN cable x 1:

Installation Guide




Step 1 : Pull out the Head unit




Step 2 : Disconnect the cables




Step 3 : Change the MOST connector
(indicated with red circle)

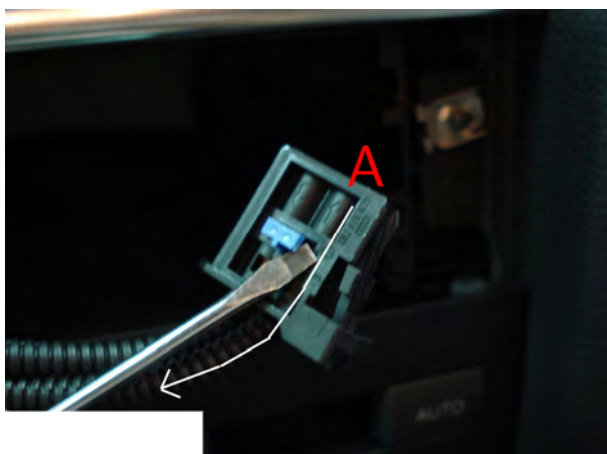

Step 4 : Eject the original optical input cable A
(the one has light)

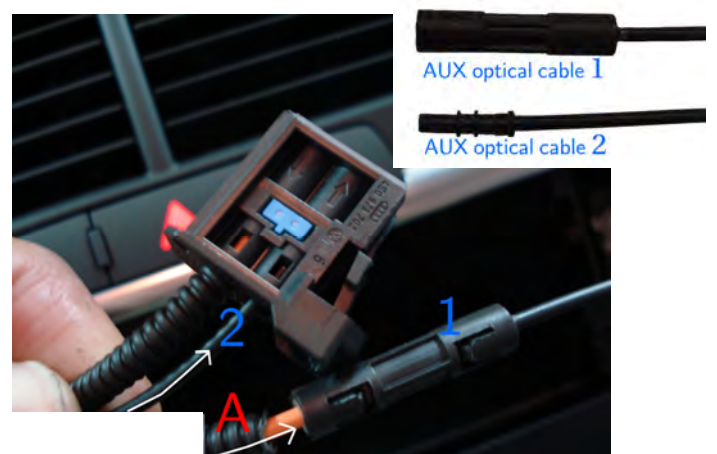

Step 5 : Connect the original optical input
cable A (ejected in step 4) to the
affiliated AUX optical connector 1.
Insert the affiliated AUX optical cable 2
to original input.

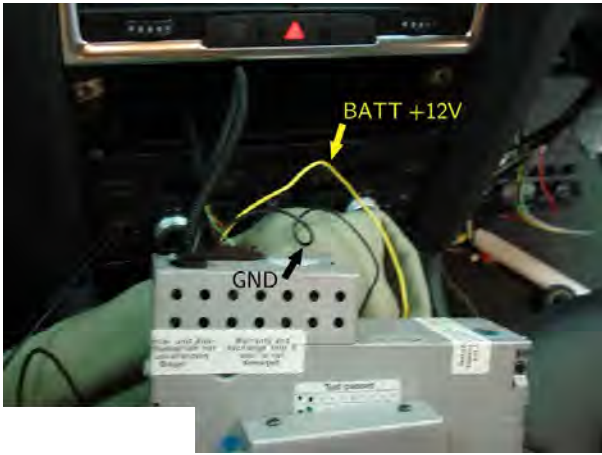


Step 6 : Yellow cable is BATT +12V
 Black cable is GND

CAUTION:

To prevent sound noises, please try not to bend the optical cables.

Operation

- Go to CD changer
- The original CD1~6 will be moved to CD7~12

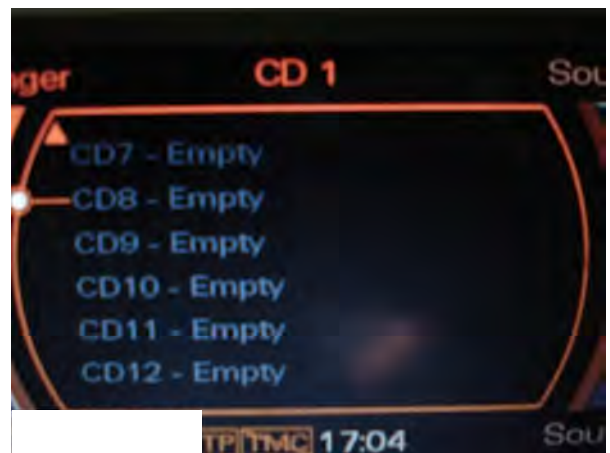

- CD1 will become the aux-in source
- If you wish to play the aux-in source (from DVD/DTV...etc), just simply select CD1. The sound will synchronize with picture.

