

■ Specification

1/3" Sony Super HAD CCD 520 TVL 0.8Lux

1/3" Sony Super HAD CCD 480TVL 0.8Lux

1/3" Sony Super HAD CCD 420TVL 0.5Lux

1/3" Sharp CCD 420 TVL 0.8Lux

1/4" Sharp CCD 420 TVL 0.8Lux

Pixels	520/480TVL	NTSC: 811x508		PAL:795x596	
	420TVL	NTSC: 537x505		PAL:537x597	
Sync. System	Internal Synchronization				
S/N Ratio	48dB (AGC OFF)				
Electronic Shutter	NTSC: 1/60~1/120,000 sec. PAL: 1/50~1/120,000 sec.				
Auto Iris	VIDEO/DC				
Lens Mount	C/CS				
B.L.C. Function	ON/OFF switchable				
White Balance	ATW / AWC switchable				
Gain Control	AGC ON / OFF switchable				
Audio Output	1.0V p-p 600 ohm				
Video Output:	Composite 1.0V p-p at 75 ohm				
Gamma Correction	0.45				
Operation Temperature	-10℃~50℃				
Operational Humidity	Within 85%RH				
Power Supply	DC12V±1V/180mA				
Dimensions(mm) (LxWxH)	112X64X55				
Weight-Net	380g				

■ Content

No	Name	QTY.
1.	Standard Color Box Camera	1
2.	UserGuide	1

User Manual


Standard Color Box Camera



Notes : Before providing power for the camera, please read this User Guide in detail!

Do not attempt to disassemble the camera. If the camera can not work, please contact local franchiser or our company.

■ CONNECTING

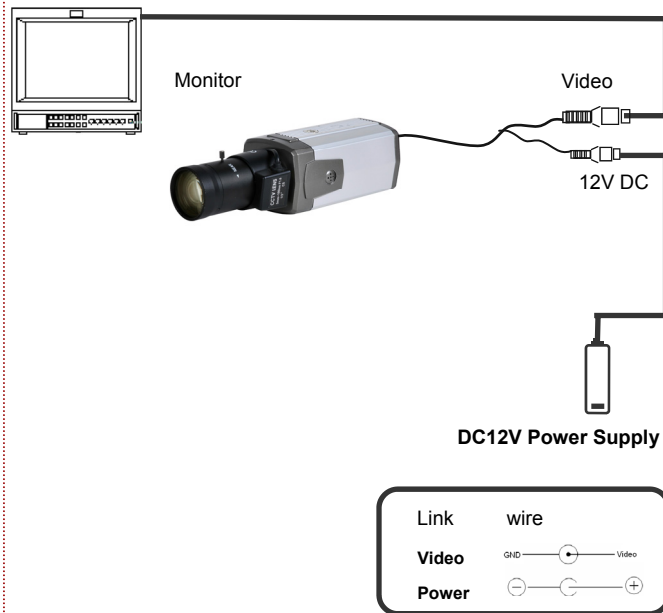

Notes:

- The power supply must through safe attestation. Its output voltage、current、voltage polarity and operating temperature must match the camera's requirement.
- When using the camera in the thunderbolt condition, please note to mount Anti-thunder device or put off the power supply plug and cable.
- In order to capture high quality pictures, the power supply's cable and video output cable should not be too long.

■ PRODUCT IMAGE



■ TROUBLE AND SOLUTION

1. No Picture after providing power

- . May be the power supply voltage abnormity, please check the power supply voltage and pole whether exactitude.
- . Please check all the connecting cable and monitors whether be connected correctly or not.

2. The picture level direction have flowing interference ripples

- . May be caused by the power supply AC ripples, it need filter the wave of the power supply.
- . Check the monitor and peripheral equipments used.

3. The picture background color changes continuously

- . The fluorescent lamp's electromagnetic field cause color roll. This is proper phenomenon of the cameras.
- . Reduce the fluorescent lamp numbers or increase the distance between the camera and the fluorescent lamps can improve it.
- . Use power supply external sync. camera can solve it.

4. The picture smear too mass

- . The power supply's voltage unstable.
- . Connecting cables not connect correctly or have high impedance.

■ INTRODUCTION

Congratulations on your purchase of this product. We adopt the latest SONY technical of sensor and driver. The most attractive characteristics are water-resistant, and widely applicable to day & night, indoor & outdoor. In addition, it owns the characters of high definition and stability, strong anti-jamming, rich and real color. Fixing and using this model are convenient too. It is very good for you to apply to yours CCTV system.

Please read this instruction manual carefully to ensure proper use of the product.



To prevent fire or shock hazarded. Do not expose the unit into water too long time directly.



The symbol is intended to alert the user to the presence of important operating and maintenance (servicing) Instructions in the literature accompanying the appliance.



The symbol is intended to alert the user to the presence of uninsulated 'dangerous voltage' within the product's enclosure that may be of sufficient Magnitude to constitute a risk of electric shock to persons.



CAUTION:

RISK OF ELECTRIC. DO NOT OPEN



CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK DO NOT REMOVE COVER OR BANCK NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO OUALIFIED SERVICE PERSONNEL.

CAUTION:

To prevent electric shocks and risk of fire hazards, do NOT use other than specified power source.



Note:

- Please note the camera's operating temperature and its using environment requirement. Avoid using the camera at too high or too low temperatures. The operating temperature is -10℃-50℃. (Recommendatory operating temperature is -5℃-40℃.)
- Never make the camera face the sun or bright object. Otherwise, it will damage the CCD.
- Do not mount the camera near by the radiator or heater.