

## PROW-8 Tabletop Proofer

Project \_\_\_\_\_

Item \_\_\_\_\_

Quantity \_\_\_\_\_



**SIZE:**

**PROW-8** - 42-3/4" High, 24-1/4" Wide, 34-1/2" Deep  
1086 mm High, 616 mm Wide, 876 mm Deep

NU-VU's PROW-8 tabletop proofer has a stainless steel exterior and tempered glass doors for full view of your product. These units feature the AutoMist humidity system, which eliminates the need for a water pan; however, it does require a 1/4" waterline connection. This feature utilizes a mist, which is sprayed directly onto a fan that distributes the heat and humidity evenly throughout the proofer cavity.

The PROW-8 has a capacity of 8 full size pans and 16 half-size pans.

**CONSTRUCTION:**

- Welded stainless steel
- Fully insulated
- Control panel accessible through front and top of unit
- Heating elements accessible inside of cabinet and through top

**CONTROLS:**

- Mechanical controls
- Indicator light for thermostat
- Separate heat and humidity controls

**STANDARD FEATURES:**

- Stainless steel exterior
- Aluminum interior
- Set of 4" adjustable legs
- Full view tempered glass door
- Silicone rubber door gasket
- AutoMist humidity system

**OPTIONAL FEATURES:**

- Warmer
- Set of four casters

**LABORATORY CERTIFICATION AND APPROVAL**




**NU-VU® PROW-8 Tabletop Proofer**



**NU-VU® Food Service Systems**


www.nu-vu.com  
5600 13th Street  
Menominee, MI 49858

1-800-338-9886 Toll Free  
1-906-863-4401 Phone  
1-906-863-5889 Fax

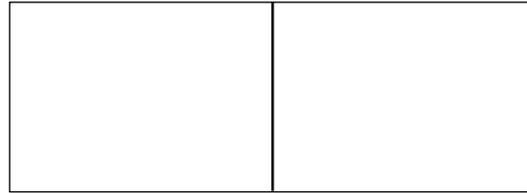

Approval / Stamp

**PROW-8 Tabletop Proofer**

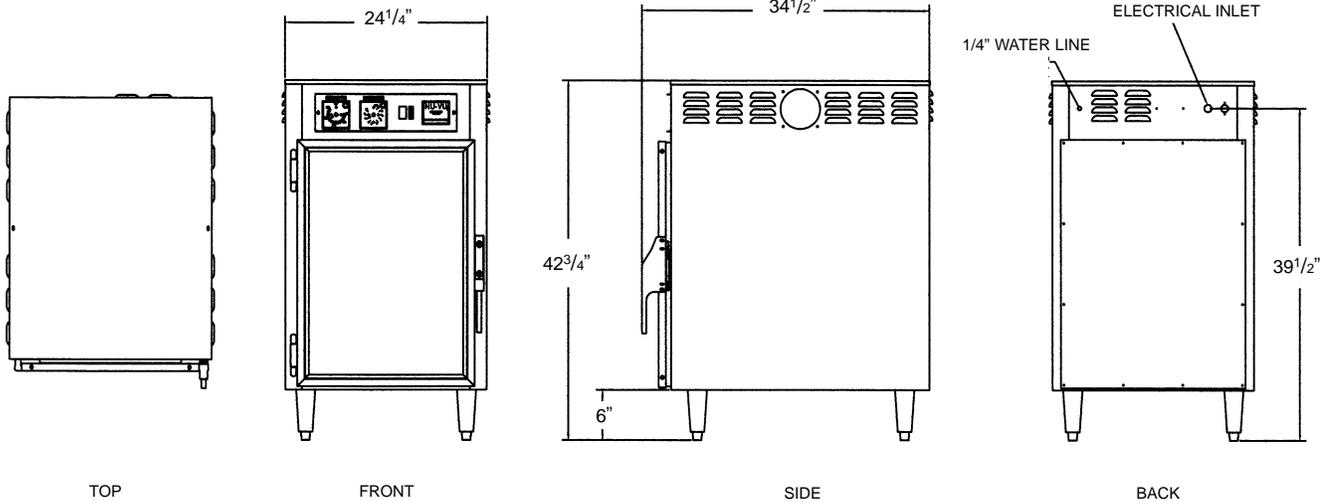

**NU-VU® PROW-8 Tabletop Proofer**

**SPECIFICATIONS:**

**ELECTRICAL:**

- 120-Volt single phase is standard.

**SERVICE CONNECTIONS:**

- Unit is shipped from factory with cord and plug.
- A 1/4" water line is required.
- NEMA 5-20 P

**ELECTRICAL:**

Amp Draw	120/1
L1	16

**LISTINGS:**

The PROW-8 has NSF and C-ETL-US listings.



**INSTALLATION:**

Allow four inches on each side and back of unit for ventilation of oven.

**CAPACITY:**

	18"x26" Sheet Pans	13"x18" Sheet Pans	Spacing
Proofer	8	16	3-1/4"

**DIMENSIONS:**

	Height	Width	Depth
Exterior	42-3/4"	24-1/4"	34-1/2"
Interior	27"	18-1/2"	29"

**DOOR SWING:** Proofer - 24" (610 mm)

**PACKING SIZE:**

45" High, 36" Wide, 36" Deep  
(1143 mm High, 914 mm Wide, 914 mm Deep)

**SHIPPING WEIGHT:**

230 Pounds (104 Kg), FOB Menominee, MI 49858