



## OUTDOOR—COOKING

### 53"W. Outdoor Range™ Ultra-Premium Grill Cart with Gas Oven



## Standard Features & Accessories

### All models include

- Compatibility with 53"W. grills (**sold separately**—see individual product pages)
- Commercial styling and construction
  - No assembly required
  - Built from thick sheets of rugged, heavy-duty, non-rusting stainless steel
- Large inboard 10" solid rubber rear wheels and locking caster front wheels provide maneuverability and stability, and allow unit to fit flush against wall.
- Two stainless steel 16"W. x 24"D. fold-down side shelves
- Two storage drawers (center of cart)
- Front pullout access for LP tank, with storage area
- VGSO gas oven **included**
  - Agency-certified for outdoor use
  - Capacity—2.5 cu. ft.
    - 18-1/8"W. x 12-7/16"H. x 18-3/4"D. oven cavity
  - Electronic ignition powered by 9-volt battery
  - 20,000 BTU gas burner
  - 200 – 550° F (93 – 288° C) thermostat
  - Natural airflow bake function
  - Three heavy-duty racks/four rack positions
- Must be factory ordered for use with LP/propane gas (L) or natural gas (N)
  - LP/propane gas models equipped with high-capacity hose/regulator assembly
  - To convert a grill from natural to LP/propane, or LP/propane to gas, you must use a Viking conversion kit (see **Installation Notes & Accessories**)

## Model Options



**BQC053T1\***  
**Outdoor Range™**  
**Ultra-Premium**  
**Cart with Oven**

### FINISH DETAILS

- Stainless Steel (SS)
- Brass Trim Option (BR)—includes nameplate, drawer handle/brackets, and knob bezels. Brass components have a durable protective coating for maintenance-free normal use.

\*Shown throughout with VGBQ530 grill, sold separately.

### ORDERING INSTRUCTIONS

You must specify fuel type ("N" or "L") following model number (BQC053T1NSS). If ordering optional brass trim, specify code at end (BQC053T1NSSBR).





# OUTDOOR—COOKING

## 53"W. Outdoor Range™ Ultra-Premium Grill Cart with Gas Oven




★ Please see Installation Notes and Accessories for important information, including grills, fuel conversion kits and protective covers.

### Dimensions & Specifications

#### PRODUCT DIMENSIONS



**BQC053T1**  
Outdoor Range™  
Ultra-Premium  
Cart with Oven

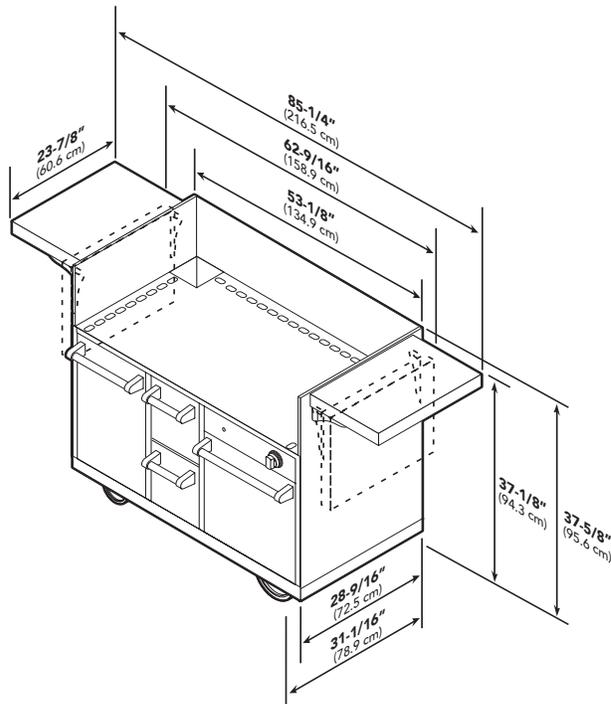

BQC053T1	
Overall width	53-1/8" (134.9 cm)
With shelves folded down	62-9/16" (158.9 cm)
With shelves extended*	85-1/4" (216.5 cm)
Overall height (from bottom of wheels)	37-5/8" (95.6 cm)
Overall depth	
To edge of side	28-9/16" (72.5 cm)
To end of handle bracket	31-1/16" (78.9 cm)
With LP drawer open	51-7/8" (131.8 cm)
Oven interior	
Width	18-1/8" (46.1 cm)
Height	12-7/16" (31.6 cm)
Depth	18-3/4" (47.6 cm)
Approx. ship wt. lbs. (kg)	319 (143.5)

\*Shelves can be removed, but you must take them off before installing grill. (See Installation Instructions for removal.)





# OUTDOOR—COOKING

## 53"W. Outdoor Range™ Ultra-Premium Grill Cart with Gas Oven




### Dimensions & Specifications

#### DOOR SWING



**BQC053T1**  
**Outdoor Range™**  
**Ultra-Premium**  
**Cart with Oven**

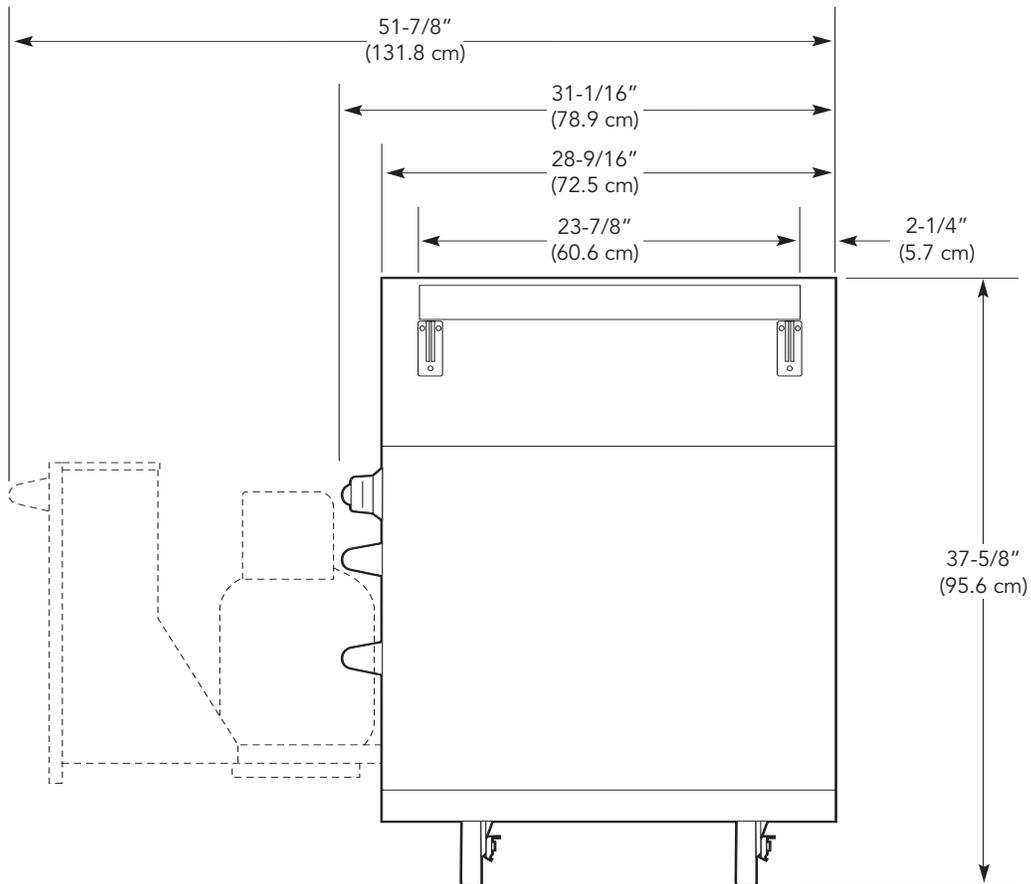



# OUTDOOR—COOKING

## 53"W. Outdoor Range™ Ultra-Premium Grill Cart with Gas Oven



### Installation Requirements



**BQC053T1**  
**Outdoor Range™**  
**Ultra-Premium**  
**Cart & Oven**

#### UTILITY REQUIREMENTS



##### **GAS**

###### **Burner rating**

- One bake burner, @ 20,000 BTU (5.7 kW) Nat./LP

###### **Fixed piping installations**

- Check with local gas utility company or with local codes for instructions on installing gas supply lines. All gas connections should be made by a competent technician and in accordance with local codes and ordinances. In the absence of codes, the installation must comply with the National Fuel Gas Code ANSI Z223.1.
- An installer-supplied gas shut-off valve must be installed in an easily accessible location. All installer-supplied parts must conform to local codes.
- Must be isolated from the gas supply piping system by closing its individual manual shut-off valve during any pressure testing of that system at test pressures equal to or less than 1/2 psi (3.5 kPa).

###### **Natural gas models**

- Water column pressure
  - Operating pressure—4.0" WCP

- Supply pressure of 6" – 14" WCP
- If incoming pressure exceeds 14" WCP, a step-down regulator is required.
- Accepts standard residential 1/2" (1.3 cm) ID gas service line; 1/2" (1.3 cm) NPT male with 7/8" (2.2 cm) flare adapter.
  - If using a Viking GSH12 flexible hose, remove the 1/2" (1.3 cm) flare adapter and attach hose to the 7/8" (2.2 cm) male flare on the regulator assembly.

###### **LP/propane models**

- Water column pressure
  - Operating pressure—10" WCP
  - Supply pressure of 11" – 14" WCP (for fixed piping installations)
  - If incoming pressure exceeds 14" WCP, a step-down regulator is required.
- Accepts standard residential 1/2" (1.3 cm) ID gas service line; 1/2" (1.3 cm) NPT male with 3/8" (0.95) flare adapter.

###### **LP/propane tank installations**

- Water column pressure
  - Operating pressure—10" WCP

- Includes high-capacity hose/regulator assembly for connection to a standard 5-gal./20-lb. (approx. 12" diameter/18"H.) LP/propane gas cylinder equipped with a Type 1, QCC-1 connector
  - The cylinder connection device must be compatible with the Type 1, QCC-1 connector on the outdoor cooking appliance.
  - The cylinder must be provided with a shut-off valve terminating in an LP/propane gas supply cylinder valve outlet specified.
  - The cylinder supply system must be arranged for vapor withdrawal and provided with a listed OPD (overfilling prevention device).



##### **ELECTRICAL**

- 9-volt DC battery for electronic ignition



##### **PLUMBING**

Not applicable





# OUTDOOR—COOKING

## 53"W. Outdoor Range™ Ultra-Premium Grill Cart with Gas Oven



### ✦ Installation Notes & Accessories

#### Gas Grills

**Note:** Before installing a grill onto the cart, remove the grill's drip tray, grates, flavor grids, and warming racks.

- Stainless Steel (SS)
- 53"W. Ultra-Premium gas grills
- See individual product pages for more information and additional specifications.

Model	Description	Approx. ship wt. lbs. (kg)
VGBQ530	53"W. four-burner all grill	460 (208.8)
VGBQ532	53"W. three-burner grill w/side burner	490 (222.5)
VGIQ530	53"W. four-burner all grill w/TruSear	460 (208.8)
VGIQ532	53"W. three-burner grill w/side burners & TruSear	490 (222.5)

#### Gas Conversion Kits

- For field conversions
- Conversions should be performed only by an authorized technician
- Kit includes all hardware necessary for conversion

Model	Description	Approx. ship wt. lbs. (kg)
TNK-BQCO	Conversion kit—LP/propane to natural (for outdoor gas ovens)	3 (1.2)
TLPK-BQCO	Conversion kit—natural to LP/propane (for outdoor gas ovens)	3 (1.2)

#### 12' Natural Gas Supply Hose & Quick Disconnect Assembly

- For use with natural gas fuel supply
- For outdoor use only with portable appliances that may be moved for convenience of operation
- Valve in the socket automatically allows full gas flow when the plug is connected, and prevents gas flow when the plug is disconnected
- Kit includes quick disconnect socket with female pipe threads, plug/hose assembly, and adapter to mate with female fitting on the grill (remove for mating hose to male fittings)

Model	Description	Approx. ship wt. lbs. (kg)
GSH12	Supply hose/disconnect assembly	3 (1.4)

#### Vinyl Covers

- Sturdy, reinforced vinyl exterior; felt-lined interior for protection

Model	Description	Approx. ship wt. lbs. (kg)
CV53T-C	Cover for 53"W. all grill & cart	15 (6.8)
CV53T-CSB	Cover for 53"W. grill w/side burners & cart	15 (6.8)

#### Compliance Information



#### WARRANTY SUMMARY\*

- One-year full warranty—complete product
- Lifetime limited warranty—rust through on all stainless steel components
- Ten-year limited warranty—porcelain oven
- Five-year limited warranty—tube burners
- Two-year limited warranty—door hinges and drawer slides
- Ninety-day limited warranty—cosmetic parts such as glass, painted, & decorative items

\* For complete warranty see *Use & Care Guide*. Warranty valid on Viking products shipped within the United States and Canada.

