

SCOUT[®] MANUFACTURED HOUSING



Standard-Vent and Direct-Vent Gas Water Heaters



Complies with HUD Standards for Manufactured Housing Installation. Design-Certified by CSA International -

Also complies with National Appliance Energy Conservation Act (NAECA) energy-efficiency standards effective January 20, 2004.

Gas Control Is Convertible for Natural and Propane Gas -

For flexibility to meet the varying needs of Manufactured Housing installations.

Side-Mounted 3/4" Cold Water Inlet - For ease of installation when cold water supply originates below the structure. Top-mounted 3/4" hot water outlet.

Direct-Vent Models Packaged with Bottom Intake Air Vent -

To draw all combustion make-up air from outside the structure.

Optional Ducted Air Inlet Kit for Direct-Vent Models - For use when water heater is installed over a basement. Provision for horizontal air inlet ducting up to 30 feet, using Schedule 40 PVC pipe. Kit includes 45° rodent-proof termination cap and wall collars. Kit #9002986 for 30 and 40 gallon models. Kit #9002987 for 50-gallon models.

Approved Roof Jack Kits Required for Installation of Direct-Vent Models -

Four kits available to accommodate vertical vent distances from 12" to 96" (see back of sheet).

Green Choice™ Eco-Friendly Gas Burner - Patented design reduces NOx emissions by up to 33% and complies with Southern California and Texas requirements.

Glass-Lined Tank - For long-lasting protection against rust and corrosion.

Anode Rod - Helps protect against rust and corrosion for long life.

Factory-Installed Temperature & Pressure (T&P) Relief Valve

Maximum Hydrostatic Working Pressure 150 PSI

1-Year or 6-Year Limited Tank Warranty

For more information on Scout® contact:
State Water Heaters
500 Tennessee Waltz Parkway, Ashland City, TN 37015
800-365-0024 Toll-free
www.statewaterheaters.com

SOLID.STATE.




SCOUT[®] MANUFACTURED HOUSING



Standard-Vent and Direct-Vent Gas Water Heaters

MODEL NUMBER	PEAK DEMAND OUTPUT (1st Hour Rating Gallons)	ENERGY FACTOR	GAL. CAP.	BTU INPUT PER HOUR NATURAL/PROPANE	RECOVERY 90°F RISE GALLONS	R VALUE	DIMENSIONS IN INCHES						APPROX. SHIPPING WEIGHT (LBS.)	
							A	B	C	D	E	F		DRAFT HOOD OUTLET
STANDARD-VENT MODELS – See Figure 1														
SCI 30 YOMT	69	0.61	30	35,000/32,000	36	8	61-3/4	57-1/4	16	13-1/4	17-3/4	51-1/2	3-4	115
SCI 40 YOMT	66	0.59	40	35,500/35,500	37	8	59-1/4	54-3/4	18-1/2	13-1/4	17-3/4	48-1/2	3-4	134
SCI 50 YOMT	88	0.58	50	40,000/37,000	41	8	61-1/2	57	20	13-1/4	TOP	50	3-4	168

Recoveries are rounded to nearest gallon.

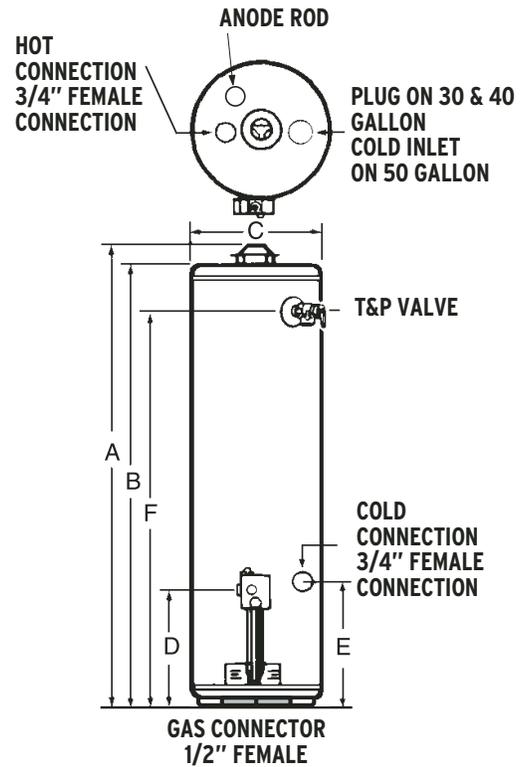

Standard-Vent Models (Figure 1)

For complete information on limited warranties, consult written warranty, or contact the State Customer Care Center, 1-800-365-0024.

State Industries, Inc. reserves the right to make product changes or improvements without prior notice.

For more information on Scout® contact:
 State Water Heaters
 500 Tennessee Waltz Parkway, Ashland City, TN 37015
 800-365-0024 Toll-free
 www.statewaterheaters.com

SOLID. STATE.

