



power auto
reset

REDRING
xpressions

temperature

Contents

The Ultimate Showering Experience	05
Why Choose Redring?	07
Identifying Your System	08
Choosing Your Shower	09
Introducing Smart Fit	10
Instantaneous Electric Showers	13
Active	14
Active Plus	16
Slimline 620	18
Slimline 650	20
Xpressions	22
Xpressions Plus	24
Xpressions Premier	26
Xpressions Eco-T	28
Selectronic Premier	30
Expressions 570	34
Power Showers	36
Expressions 520	38
Digimix	40
Accessories	44
Shower Features	46
We're Here To Help	48
Xpelair Ventilation	50

The ultimate showering experience...

At Redring, we understand the importance of a refreshing and exhilarating shower. That's why we design and manufacture our products with you in mind, bringing ground-breaking technologies and stylish designs to the comfort of your bathroom.

We know that your shower is a haven, a place that you can wake up, wind down and wash away the stresses of the day. A place where you can forget about that growing list of jobs and settle into a calming reverie where the only concern is how long it will take you to emerge. Our showers don't just look good, they are functional and packed full of features so that you can enjoy your shower knowing that it has been produced to the exacting standards of a manufacturer with 45 years of valuable experience.

We know that one shower does not fit all, which is why we pride ourselves on offering a wide range of showers that combine quality, performance and design to give you your ultimate showering experience.

quality
performance
design



Why Choose Redring?

Redring have been UK market leaders in showering for over 45 years, with expert design, manufacturing and sales teams on hand to bring innovative showering solutions to your bathroom. Our expertise and dedication is second to none and we work tirelessly to bring you high quality showers in a range of designs and styles so that you can find your ultimate showering solution.



We're a British Manufacturer

We pride ourselves on the fact that all of our showers are produced in the UK at our state-of-the-art facility in Peterborough. Our commitment as a British manufacturer means that our showers undergo extensive quality control measures to meet the relevant British safety standards and provide you with a safe shower that performs to the high standard you expect from us.



Mark of approval

Our products are tested and retested to ensure that they are of the upmost quality and in line with their specification before we make them ready for distribution. Our showers carry the BEAB mark of approval for extra peace of mind. Remember, we only put our name on products when we are certain they will satisfy our valued customers.



Innovation has no boundaries

We know the ultimate showering experience is different for everyone, so we're committed to developing new, innovative solutions to keep up-to-date with your showering needs. Our showers boast a range of modern features such as thermostatic control, digital control, water saving functions and energy saving functions, not to mention the first shower timer function on the market.




Interested?

If you're liking the sound of the Redring shower range but aren't sure where to start or which shower is best for you, our team of expert technical and sales advisors will be happy to help. Give us a call on 0844 372 7761 or visit our website on www.redring.co.uk to browse our full range of showering and water heating solutions.


Identifying your system

We like to help our customers every step of the way when it comes to choosing a shower, starting with identifying which type of plumbing system you have.

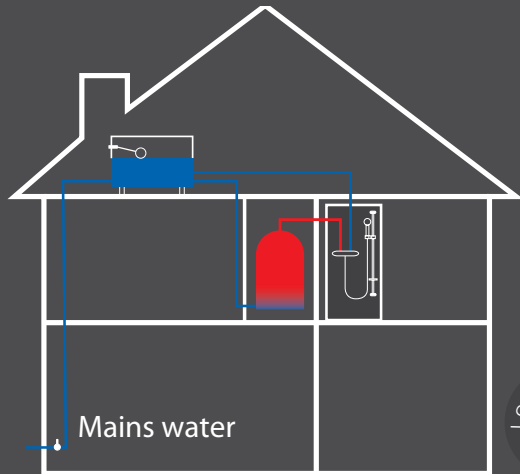


Gravity System (Low Pressure)

If you have a gravity system, you will have a cold water header tank installed in your roof space and a hot water cylinder in your airing cupboard.

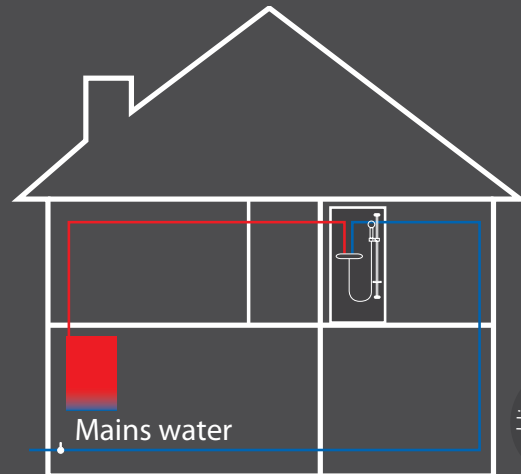


Combination Boiler (High Pressure)

If you have a combination boiler system, you will have a boiler that heats water as it is used and you will not have a hot water cylinder or cold water header tank.

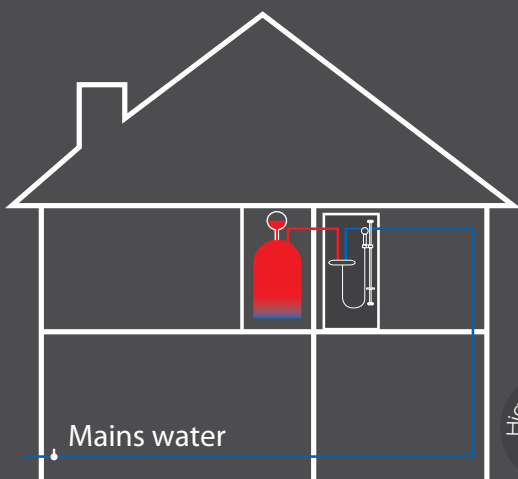

Mains Fed Unvented System (High Pressure)

If you have an unvented mains fed system, you will have a boiler that heats a high pressure water cylinder but no cold water header tank in your roof space.

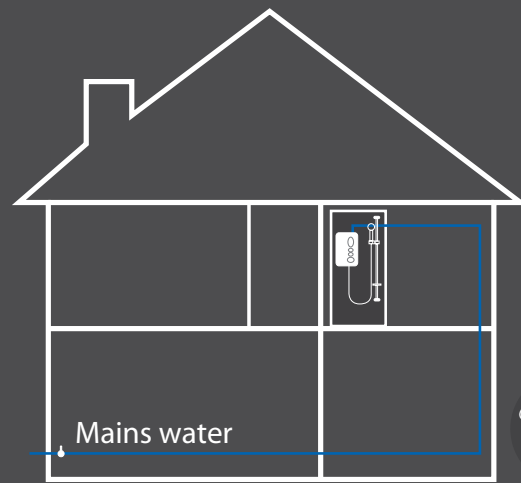

Cold Mains Supply

A cold mains supply can connect to most electric showers, and you can use your cold mains supply if you have no stored hot water or if you prefer not to use your stored water when you have a shower.

Choosing your shower



Electric showers

An electric shower takes water from your cold water mains supply and heats it on demand using an internal heating element to deliver your desired temperature and flow. They are suitable for installation in any household as they can connect to a cold mains water supply. Redring has a range of stylish and safe electric showers, including the pumped Expressions 570 for those of you with low pressure systems.



Power showers

A power shower takes water from your existing stored hot and cold water supplies and uses an integrated mixer valve to deliver your selected temperature and flow. They are suitable for use with low pressure systems only. Our power showers contain a booster pump so that you still get a powerful flow of water and an invigorating shower.



Digital mixer showers

Our digital mixer showers are renowned for their accuracy and safety. By mixing water from your hot and cold water supplies through the remotely sited base unit, digital mixers give you your perfect temperature and flow every time. The wireless remote control allows for easy operation of the shower from a distance, meaning the temperature and flow can be set ready for when you step in. Redring have both pumped and non-pumped digital mixer showers.

Speak to your installer if you're unsure about which type of shower would best suit your system.

Introducing Smart Fit™

SMARTFIT


- Left and right hand connection options to suit every installation
- Large profile enables the unit to be installed directly over most market equivalents, eliminating the need for redecoration in most cases
- Adjustable fixing brackets on accessories means existing fixing points can be used in most cases, offering ultimate flexibility
- For more information, see our Xpressions ranges on pages 22, 24 and 26



The ultimate
replacement shower



Transferable
terminal block for
ease of electrical
connection

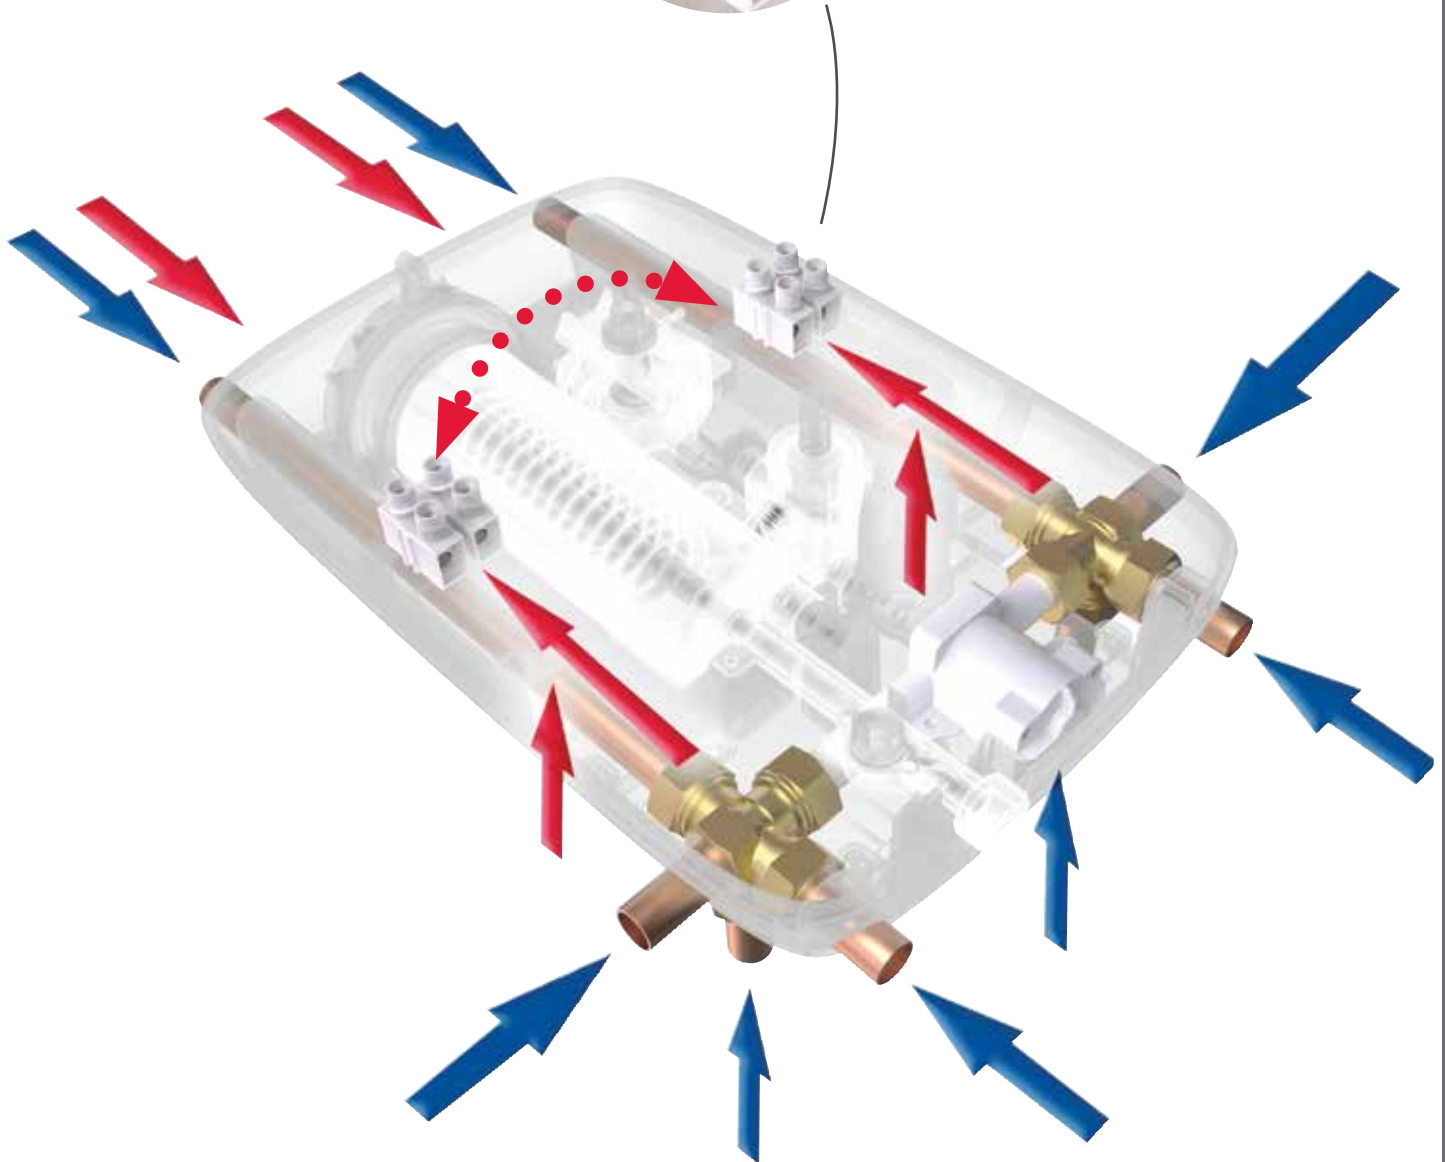

6

cable entry points

8

pipe entry points



Instantaneous electric showers

Instantaneous electric showers take cold water from your mains water supply and pass this water over an internal heating element to deliver the selected temperature and flow rate. As they only heat the water that they use, electric showers are considered highly efficient.

Look out for...



Smart Fit™ – providing the ultimate flexible installation, our Smart Fit™ showers feature 8 pipe entry points and 6 cable entry points as well as a transferable terminal block to allow for quick and easy installation with both left and right hand entry options. Our Flexi Kit™ accessories include an adjustable fixing bracket, meaning there is no need to alter existing tiling or decoration.



Thermostatic – this features enables the chosen temperature of your shower to be maintained even when the water pressure changes, for example if a tap is turned on elsewhere. Our thermostatic showers maintain their temperature to ± 1 to 2° , so you can be assured that your Redring shower will be safe and comfortable every time.



Scale Flush – this advanced feature allows your shower to flush out any residual hot water when you switch it off, helping to prevent lime scale build up and ensuring that the shower temperature is safe for the next user.



Eco – these showers feature innovative functions to help you save water and energy, such as reducing the power and automatically adjusting the flow rate. Eco showers are an easy way to help the environment and save money on household bills.



What do we mean by kW rating?

Quite simply, the kW has an effect on the flow rate of your electric shower. The higher the kW rating of your shower, the better the flow rate can be at your selected temperature.

As a guide, you can see below how the kW rating affects the flow of your shower:

- 8.5 kW Up to 18% more flow than a 7.2kW shower
- 9.5kW Up to 32% more flow than a 7.2kW shower
- 10.5kW Up to 46% more flow than a 7.2kW shower

Remember, when replacing an electric shower make sure you check that the wiring and fusing is compatible with the kW rating you've chosen. You cannot replace a 7.2kW shower with an 10.5kW shower without first ensuring that your wiring and fusing suits the new power rating.



Active

The Active range of instantaneous electric showers is the ideal every day showering solution. The range features ergonomic rotary control dials for simple operation and a contoured body styling to look at home in any domestic showering application.



Key Features

- Available in 7.2kW and 8.5kW
- Three power settings for energy efficiency and reduced running costs
- Rotary control for start/stop and power selection
- Rotary control for temperature/flow
- Multiple fixing centres for ease of replacement of previous Redring Active models
- Accessory kit with hose, soap dish and single mode rub-clean shower head
- 2 year UK guarantee

Technical Specification

- Operating water pressure 1 -10 bar (15-150psi)
- Water pressure operated power switch
- Water connection - 15mm plain shank push fit or standard compression fittings
- Removable corner section for ease of installation
- kW loading at 240V: 7.2 or 8.5
- Right hand top, bottom or rear cable access and right hand top, bottom, rear or side pipe access
- Recommended cable sizes and fuse ratings:
7.2kW 6mm² 30 Amps
8.5kW 6 - 10mm² 40 Amps

Product Range

Product Reference

Active 7.2kW White
Active 8.5kW White

Model

A7
A8

Cat. No

53561001
53561201



Active Plus

The Active Plus range provides a convenient and value for money showering experience. These showers feature push button start/stop for 'set and forget' seasonal operation and neon indicators for improved user interaction, perfect for modern bathrooms.



Key Features

- Available in 7.2kW and 8.5kW
- Push button start/stop for 'set and forget' operation
- Rotary power selection
- Rotary temperature/flow control
- Three power settings for energy efficiency and reduced running costs
- Multiple fixing centres for ease of replacement of previous Redring Active models
- Neon indicators for power on and auto reset
- Accessory kit with hose, soap dish and 3 mode rub-clean shower head
- 2 year UK guarantee

Technical Specification

- Operating water pressure 1 -10 bar (15-150psi)
- Water connection - 15mm plain shank push fit or standard compression fittings
- Removable corner section for ease of installation
- Right hand top, bottom or rear cable access and right hand top, bottom, rear or side pipe access
- kW loading at 240V: 7.2 or 8.5
- Recommended cable sizes and fuse ratings:
7.2kW 6mm² 30 Amps
8.5kW 6 - 10mm² 40 Amps


Product Range

Product Reference	Model	Cat. No
Active Plus 7.2kW White	AP7	53561601
Active Plus 8.5kW White	AP8	53561801



Slimline 620

The sleek design and ultra slim profile of the Slimline 620 makes it an ideal low profile solution in domestic bathrooms. With rotary flow and temperature selection, Scale Flush and multi-service points, the Slimline 620 is ideal for replacing or upgrading existing showers.



Key Features

- Available in 8.5kW and 9.5kW
- Push button start/stop for 'set and forget' operation
- Rotary power select
- Rotary flow/temperature control
- Ultra slim profile of only 70mm
- Fully temperature stabilised
- Four power settings for efficiency and reduced running costs
- Accessory kit with hose, soap dish and 3 mode rub-clean shower head
- 2 year UK guarantee

Technical Specification

- Operating water pressure 1-10 bar (14.5-145psi)
- Water pressure operated power switch
- Water connection - 15mm plain shank push fit or standard compression fittings
- Right hand side top, bottom or rear cable and water entry
- Product has a removable side section for ease of installation
- kW loading at 240V: 8.5 or 9.5
- Recommended cable sizes and fuse ratings:
8.5kW 6 - 10mm² 40 Amps
9.5kW 10mm² 45 Amps

Product Range

Product Reference

Slimline 620 8.5kW White
Slimline 620 9.5kW White

Model

R6208
R6209

Cat. No


53555201
53556201





Slimline 650

The Slimline 650 range effortlessly combines style and functionality to provide a super slim shower with the convenience of push button control. Available in white and chrome, this modern shower range will make a striking statement in any contemporary bathroom.

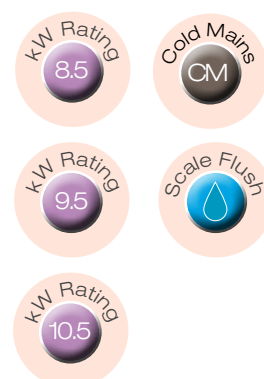

Key Features

- Available in 8.5kW, 9.5kW and 10.5kW
- Push button power selection and start/stop
- Rotary flow/temperature control
- Ultra slim profile of only 70mm
- Scale Flush reduces scale and ensures cool start for next user
- Accessory kit with hose, soap dish and 6 mode rub-clean shower head
- Flexi Kit™ accessories with sliding fixing brackets on chrome models, ideal for replacements
- 2 year UK guarantee

Technical Specification

- Operating water pressure 1-10 bar (14.5-145psi)
- Water pressure operated power switch
- Water connection - 15mm plain shank push fit or standard compression fittings
- Right hand side top, bottom or rear cable and water entry
- Removable side section for ease of installation
- kW loading at 240V: 8.5 or 9.5 or 10.5
- Recommended cable sizes and fuse ratings:
 - 8.5kW 6 - 10mm² 40 Amps
 - 9.5kW 10mm² 45 Amps
 - 10.5kW 10 - 16mm² 45 Amps


Product Range

Product Reference	Model	Cat. No
Slimline 650 8.5kW White	R6508	53557201
Slimline 650 9.5kW White	R6509	53558201
Slimline 650 10.5kW White	R65010	53559201
Slimline 650 8.5kW Chrome	R6508C	53557202
Slimline 650 9.5kW Chrome	R6509C	53558202



Xpressions

Designed with installers in mind, the innovative Xpressions is the ultimate replacement shower. With 8 water entry points and 6 cable entry points as well as flexible fit accessories, the Xpressions is an ideal choice for those that want a quick and easy installation.



Key Features

- Available in 7.2kW, 8.5kW and 9.5kW
- Transferable terminal block and dual water pipe connection for left or right hand installation flexibility
- Push button start/stop for 'set and forget' operation
- Rotary power select
- Rotary temperature/flow control
- Power on and auto reset neon indicators
- Removable, easy clean inlet filter
- Flexi Kit™ accessories with sliding fixing bracket, ideal for replacements
- Hose, soap dish and 3 mode rub-clean shower head
- 2 year UK guarantee

Technical Specification

- Operating water pressure 1-10 bar (15-150psi)
- Water connection - 15mm plain shank push fit or standard compression fittings
- Transferable terminal block for left or right hand electrical connection
- Smart Fit™ maximum connection options for power and water services
- Removable bottom section for ease of installation
- kW loading at 240V: 7.2 or 8.5 or 9.5
- Recommended cable sizes and fuse ratings:
7.2kW 6mm² 30 Amps
8.5kW 6 - 10mm² 40 Amps
9.5kW 10mm² 45 Amps

Product Range



Product Reference	Model	Cat. No
Xpressions 7.2kW White	X7	53563001
Xpressions 8.5kW White	X8	53563201
Xpressions 9.5kW White	X9	53563401





Xpressions Plus

Packed with all of the smart features of the Xpressions, the Xpressions Plus also features Scale Flush technology to ensure a safe start-up of the shower and reduce the risk of lime scale build-up.

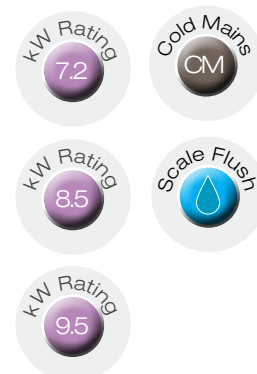

Key Features

- Available in 7.2kW, 8.5kW and 9.5kW
- Transferable terminal block and dual water pipe connection for left or right hand installation flexibility
- Push button start/stop for 'set and forget' operation
- Rotary power select
- Rotary temperature/flow control
- Safety Scale Flush feature
- Power on and auto reset neon indicators
- Removable, easy clean inlet filter
- Flexi Kit™ accessories with sliding fixing bracket, hose, soap dish and 6 mode rub-clean shower head, ideal for replacements
- 2 year UK guarantee

Technical Specification

- Operating water pressure 1-10 bar (15-150psi)
- Water connection - 15mm plain shank push fit or standard compression fittings
- Transferable terminal block for left or right hand electrical connection
- Smart Fit™ maximum connection options for power and water services
- Removable lower section for ease of installation
- kW loading at 240V: 7.2 or 8.5 or 9.5
- Recommended cable sizes and fuse ratings:
7.2kW 6mm² 30 Amps
8.5kW 6 - 10mm² 40 Amps
9.5kW 10mm² 45 Amps

Product Range


Product Reference	Model	Cat. No
Xpressions Plus 7.2kW White	XP7	53565001
Xpressions Plus 8.5kW White	XP8	53565201
Xpressions Plus 9.5kW White	XP9	53565401





Xpressions Premier

Combining ultimate installation flexibility and an array of advanced features, the Xpressions Premier really makes a statement. Its push button control ensures ease of operation, while its 6 minute eco timer gives users control over their shower duration, offering savings on water and energy bills.



Key Features

- Available in 8.5kW and 9.5kW
- Push button start/stop, power select and eco timer button
- Rotary temperature/flow control
- Safety Scale Flush feature
- Power on and auto reset neon indicators
- Removable, easy clean inlet filter
- Flexi Kit™ accessories with adjustable fixing bracket, hose and 6 mode rub-clean shower head, ideal for replacements
- 2 year UK guarantee

Technical Specification

- Operating water pressure 1-10 bar (15-150psi)
- Water connection - 15mm plain shank push fit or standard compression fittings
- Transferable terminal block and dual water pipe connection for left or right hand installation flexibility
- Smart fit™ - maximum entry options for power/water services (top, rear or bottom) both left and right hand sides
- Removable bottom section for ease of installation
- kW loading at 240V: 8.5 or 9.5
- Recommended cable sizes and fuse ratings:
8.5kW 6 - 10mm² 40 Amps
9.5kW 10mm² 45 Amps

Product Range

Product Reference

Xpressions Premier 8.5kW White

Xpressions Premier 9.5kW White

Model

XPR8

XPR9

Cat. No

53564001

53564201





Xpressions Eco-T



The Xpressions Eco-T is an intelligent and thermostatic showering solution for the whole family. Its 6 minute timer gives users control over their shower duration, while its Eco function allows the kW rating of the shower to be reduced to 65%, offering significant water and energy savings and meeting legislative requirements.



Key Features

- Available in 7.2kW, 8.5kW and 9.5kW
- Thermostatic control maintains showering temperature to within +/- 1.5°C
- Eco power button reduces the power used to 65%
- Scale Flush feature helps prevent lime scale and ensures a safe starting temperature for the next user
- Push button start/stop for 'set and forget' operation
- Rotary temperature/flow control
- Accessory kit with hose, soap dish and 6 mode rub-clean shower head
- 2 year UK guarantee

Technical Specification

- Operating water pressure of 0.7 bar - 10 bar (10psi-145psi). (This shower will not operate below 0.7 bar)
- Water flow operated power switch
- Water connection - 15mm standard compression fittings
- Right hand side top, bottom or rear cable and water entry
- Removable side section for ease of installation
- kW loading at 240V: 7.2 or 8.5 or 9.5
- Recommended cable sizes and fuse ratings:
7.2kW 6mm² 30 Amps
8.5kW 6 - 10mm² 40 Amps
9.5kW 10mm² 45 Amps

Product Range

Product Reference

Xpressions Eco-T 7.2kW White
Xpressions Eco-T 8.5kW White
Xpressions Eco-T 9.5kW White

Model

EXT7
EXT8
EXT9

Cat. No

53677701
53678701
53679701



To view a demo of the Xpressions Eco-T on our YouTube channel, please scan this code




“A real tactile shower! The only thermostatic electric shower on the market that is totally push button operated.”

“Looking for a thermostatic electric shower with flow capabilities of below 6 litres per minute to suit a new build development? Look no further!”

“A unique temperature override facility beats the competitors’ products, enabling the shower to be used effectively by the whole family.”



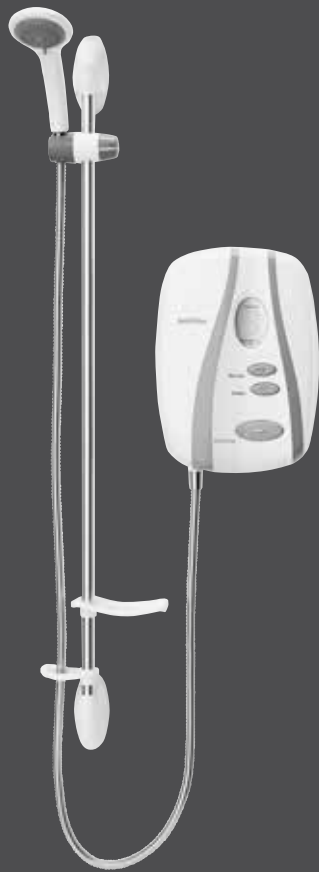

Selectronic Premier

Our Selectronic Premier range of state of the art electric showers is second to none in the care sector and boasts an array of features that make it perfect for less able, elderly or partially sighted users. We put a lot of care into making a shower range that excels in performance and function but that also focuses on the little details to make it really stand out from the crowd. Read on to discover why the Selectronic Premier is still going strong as a market leader in the care sector....

You're sure to find the perfect model for you

The Selectronic Premier range sets the bar for all other care showers on the market with its revolutionary technology and design. Three different models are available in 8.5kW, 9.5kW and 10.8kW variants to provide a solution for every application, all packed with unique features and functions to provide a safe and comfortable shower.

The Plus models incorporate a 1 metre riser rail and 2 metre hose which allows for the shower to be operated from lower down - ideal for users who shower whilst seated. The Remote model offers further convenience as it allows the unit to be operated at a distance, so carers can operate the shower for their dependents without getting into the shower themselves.

They are endorsed by the experts

The Selectronic Premier has been recognised by independent organisations and endorsing bodies due to its superb reliability, performance and safety, giving you absolute peace of mind.

RNIB

RNIB Inclusive Design Approved

The Selectronic Premier is fully endorsed by the Royal National Institute of Blind People (RNIB) and has been classed as suitable for all sections of the community following independent testing.

BEAB CARE

BEAB Care

The BEAB CARE mark has been developed in recognition of the additional performance requirements of certain products within the care industry. The Selectronic Premier was approved to carry the mark following an exacting test to measure specific performance issues relating to its application in the care sector.

Disability Discrimination Act Compliant

The Disability Discrimination Act (DDA) aims to end discrimination against less able people, and the Selectronic Premier shower range has been developed with all users in mind to meet and exceed the requirements of the DDA.

They are approved by our customers

We work hard to ensure that our products meet your expectations. The Selectronic Premier range has become increasingly popular and now maintains its position as the strongest contender in the care showering market.



Selectronic Premier/LAP

Fully thermostatic and easy to operate, the Selectronic Premier is a state of the art range of electric showers ideal for the care sector. Offering ultimate style and function, the range is available in three versions, including one with a user friendly wireless remote control.

Key Features

- Available in 8.5kW, 9.5kW and 10.8kW
- Large, tactile push button operation for start/stop and temperature/flow
- Fully thermostatic operation maintains the showering temperature to within +/- 1°C
- Temperature lock mode eliminates any accidental temperature increases
- Eco Power-Save function automatically adjusts the power of the shower to achieve the selected water temperature
- Level access pump model provides state of the art showering in applications where a gravity drain is not an option
- Remote control model enables carers to operate the shower without getting in
- Audible feedback response to commands
- Large LED digital readout display
- Accessory kit with hose, soap dish and 6 mode rub-clean shower head
- 3 year UK guarantee

Technical Specification

- Operating water pressure 0.7-10 bar (10-145psi)
- Cable entries: top, bottom and rear (up to 16mm²)
- Pipe entries - top, bottom and rear (on right hand side)
- Water connection - 15mm inlet connection
- kW loading at 240V: 8.5 or 9.5 or 10.8
- Recommended cable sizes and fuse ratings:
8.5kW 6 - 10mm² 40 Amps
9.5kW 10mm² 45 Amps
10.8kW 10 - 16mm² 45 Amps



Pump
included with
LAP models



Product Range

Selectronic Premier

Selectronic Premier	Standard 8.5kW White
Selectronic Premier	Plus 8.5kW White
Selectronic Premier	Remote 8.5kW White
Selectronic Premier	Standard 9.5kW White
Selectronic Premier	Plus 9.5kW White
Selectronic Premier	Remote 9.5kW White
Selectronic Premier	Standard 10.8kW White
Selectronic Premier	Plus 10.8kW White
Selectronic Premier	Remote 10.8kW White

Selectronic Premier LAP

Selectronic Premier 8.5kW White	complete with Pump Kit
Selectronic Premier 9.5kW White	complete with Pump Kit

Model	Cat. No
SELP85S	53677501
SELP85P	53677505
SELP85PR	53677510
SELP95S	53678501
SELP95P	53678505
SELP95PR	53678510
SELP108S	53679501
SELP108P	53679505
SELP108PR	53679510

SELP85LAP 53677590


SELP95LAP 53678590



Expressions 570



Ideal for areas where no access to mains pressure or poor water pressure prevents the use of normal electric showers, the Expressions 570 instant electric shower features an integral booster pump to provide a constant water flow through connection to a cold water header tank.



Key Features

- Available in 8.5kW and 9.5kW
- Instant electric shower with integral pump
- High and low power selection
- Rotary control for temperature/flow selection
- Neon indicators for over temperature and power
- Accessory kit with hose, soap dish and 6 mode rub-clean shower head
- 2 year UK guarantee

Technical Specification

- Cold water cistern fed
- Operating water pressure - 3" minimum head to 33' maximum head (0.08m to 10m)
- Right hand top, bottom and rear water and cable entry points
- Water connection - 15mm push fit connection
- The unit incorporates a 240V 140W AC motor to boost flow
- Maximum flow rate: 7.0 litres / min
- kW loading at 240V: 8.5 or 9.5
- Recommended cable sizes and fuse ratings:
8.5kW 6 - 10mm² 40 Amps
9.5kW 10mm² 45 Amps

Product Range

Product Reference

Expressions 570 8.5kW White
Expressions 570 9.5kW White

Model

EXP5708
EXP5709

Cat. No

24555515
24556015





Power showers

Power showers take stored hot and cold water and use a mixer valve to provide the perfect showering temperature. Our Expressions power showers feature an integrated booster pump so that your low water pressure doesn't compromise on the showering performance.

Look out for...



Thermostatic – thermostatic power showers ensure that your chosen temperature remains consistent and comfortable even if there are fluctuations in the incoming water pressure or temperature.

Can I use a power shower?

Power showers work by taking stored hot water from a cylinder and cold water from a header tank, mixing the water as required to achieve the selected temperature. This makes them ideal for use in traditional gravity fed systems. Power showers contain a pump to boost the flow of water to deliver a powerful spray where low water pressure prevents high volumes of water.



Expressions 520



The Expressions 520 delivers luxury showering performance from an integrated booster pump and mixer valve, making plumbing installation simple. Taking both hot and cold water from the cylinder and header tank, the integral pump delivers up to a maximum of 14 litres per minute.



520TS
model only



Key Features

- Available in manual and thermostatic options
- Rotary start/stop and flow control
- Rotary temperature control
- Adjustable temperature limiter with override feature
- Push-fit pipe connections on the right hand side
- Multi-entry options
- Accessory kit with hose, soap dish and multi-mode rub-clean shower head
- 2 year UK guarantee

Technical Specification


- Gravity fed
- Motor rating: 140W at 240V
- Mains supply: 220 - 240V
- Right hand top, bottom and rear water and cable entry points
- Operating water pressure: 3" minimum head to 33' maximum head (0.08m to 10m)
- Flow rate on full:
Manual 14 litres/minute
Thermostatic 12 litres/minute

Product Range


Product Reference	Model	Cat. No
Expressions 520M White	EXM520WC	46598415
Expressions 520TS White	EXTS520WC	46599415




Digimix



Loft installation



Airing or
bathroom
cupboard
installation



Under the bath
installation

How does it work?

The Digimix system is comprised of a compact base mixer unit and a user friendly wireless remote control. The base unit mixes water from hot and cold supplies to create your selected temperature and flow rate, maintaining consistent thermostatic temperature control throughout.

The convenient wireless operation of the Digimix control means that the base mixer unit can be sited up to ten metres away, enabling a simple and flexible installation and maintaining the aesthetic appeal of the Digimix shower unit.

The remote control is battery operated and can be used up to ten metres from the base unit to operate your shower, offering ultimate convenience. It comes complete with a wall mounted docking station so that you can simply pick it up and operate the shower.

The base unit can be fitted vertically or horizontally in the loft, in a cupboard or even under a bath, providing the ultimate flexible installation.

Pumped or Non-Pumped?

The Digimix is available in two versions: pumped and non-pumped. The pumped version is for gravity fed systems and has an integrated booster pump in the base unit to ensure you get a powerful shower regardless of the pressure from your gravity fed water system. The non-pumped version can be used with high pressure systems.

Choose from these four stylish accessory kits to complement your Digimix shower:

Portia – a stunningly designed accessory kit with a diverter control that enables you to switch between an overhead rain shower and a multi-mode shower head – perfect for occasions when you don't want to wet your hair.

Cordelia – a sleek and sophisticated through the ceiling accessory kit with a height adjustable multi-mode shower head for an invigorating shower.

Emilia – a stylish fixed through the ceiling shower head that provides the perfect rain shower experience.

Ophelia – a contemporary designed accessory kit with a curved riser rail and multi-mode shower head.




Portia



Ophelia



Cordelia

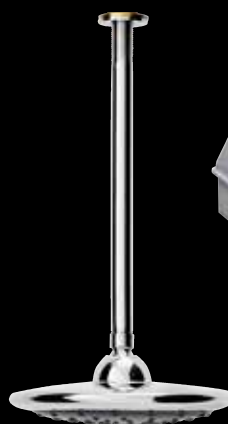

Emilia



Base unit



Digimix

Stylish and functional, the Digimix digital mixer shower brings together contemporary design and advanced performance in an easy to use remote control. The beauty of the Digimix lies in its ability to pre-programme shower settings from up to 10 metres away, meaning the perfect shower can be prepared before you even step in.



Key Features

- Available in pumped for gravity-fed plumbing systems and non-pumped for high pressure systems
- Remote siting of base mixer unit allows for an easy installation
- LCD digital temperature and flow readout
- Push button control for start/stop, temperature and flow with innovative pause button
- Three programmable buttons allowing flow and temperature preferences to be set
- Pre-settable flow limiter
- Choice of four stylish accessory kits available to suit any bathroom décor
- 3 year UK guarantee

Accessories:

- **Portia** - Chrome through-the-wall diverter with dual shower head kit
- **Cordelia** - Chrome extendable through-the-ceiling riser rail and shower head kit
- **Emilia** - Chrome fixed through-the-ceiling shower head kit
- **Ophelia** - Chrome bulk-head riser rail and shower head kit

Product

Reference Model	Colour	Cat. No
Portia	DMACC4	Chrome 83671104
Cordelia	DMACC3	Chrome 83671103
Emilia	DMACC2	Chrome 83671102
Ophelia	DMACC1	Chrome 83671101

Technical Specification - Digimix Pumped

- Operating water pressure - 0.15 bar min to 1 bar max (0.15 bar = 1.5m)
- Water connection - 15mm plain shank push fit or standard compression fittings
- RF remote control handset range 10m
- Colour coded inlet pipes - red and blue
- Anti-vibration mounting on mixer base unit
- Mains supply 40V
- Rating 200W @ 240V
- Base supplied with 2m pre-wired cable
- Fixing pack supplied
- AAA batteries supplied for remote

Technical Specification - Non-Pumped

- Operating water pressure - 1 bar min to 5 bar max
- Water connection - 15mm plain shank push fit or standard compression fittings
- RF remote control handset range 10m
- Colour coded inlet pipes - red and blue
- Anti-vibration mounting on mixer base unit
- Mains supply 240V
- Rating 50W @ 240V
- Base supplied with 2m pre-wired cable
- Fixing pack supplied
- AAA batteries supplied for remote

Product Range

Product Reference	Model	Cat. No
Digimix Pumped Digital Mixer	DMP1	46678001
Digimix Non-Pumped Digital Mixer	DMNP1	46677001

Accessories

Accessories

The Redring accessory kits provide consistent performance in a range of styles to suit all design preferences. With modern and minimalist designs, these accessory kits include a shower head, riser rail, brackets, shower head holder, soap dish and hose to complement any electric shower unit.



Standard white and chrome kit with single mode shower head
Product Reference
Standard Single Mode
Model STDKITW
Cat. No 83595340




Flexi Kit white and chrome kit with 3 mode shower head and adjustable top bracket
Product Reference
Flexi Kit 3 Mode
Model FLEXKIT3W
Cat. No 83595343



Flexi Kit white and chrome kit with 6 mode shower head and adjustable top bracket
Product Reference
Flexi Kit 6 Mode
Model FLEXKIT6W
Cat. No 83595344



Premium white and chrome kit with 3 mode shower head
Product Reference
Premium Kit 3 Mode
Model PREMKIT3W
Cat. No 83595341

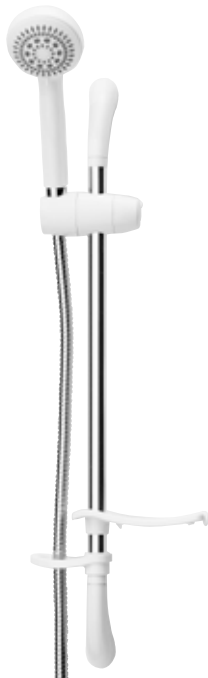

Premium white and chrome kit with 6 mode shower head
Product Reference
Premium 6 Mode
Model PREMKIT6W
Cat. No 83595342



Flexi Kit chrome kit with 6 mode shower head
Product Reference
Flexi Kit 6 Mode
Chrome
Model FLEXKIT6C
Cat. No 83595345






Complete Care Pack white with extended 2 metre hose and 1 metre riser rail
Model CCP1
Cat. No 83595322







Grab rail (plastic)
Curtain and rail pack with fixings
Extended 1m riser rail

PGR	83595315
CU1	83792812
RAILC2	83595323

Shower features

	Active Active Plus		Slimline 620 Slimline 650		Xpressions Xpressions Plus	
						
Electric Shower	●	●	●	●	●	●
Power Shower						
Digital Mixer Shower						
High Pressure						
Low Pressure						
Cold Mains	●	●	●	●	●	●
Pumped						
Scale Flush			●	●		●
Smart Fit					●	●
Flexi Kit				● *	●	●
Eco						
Thermostatic						
Right Hand Entry	●	●	●	●	●	●
Left Hand Entry					●	●
Rotary Control	●	●	●	●	●	●
Push Button Control		●	●	●	●	●
6 Minute Timer						

*Chrome only

Xpressions Premier	Xpressions Eco-T	Selectronic Premier	Expressions 570	Expressions 520	Digimix
					
●	●	●	●		
				●	
					●
					●
		●	●	●	●
●	●	●			
		●	●	●	●
●	●	●			
●					
●					
	●	●			●
	●	●		●**	●
●	●	●	●	●	
●					
●	●		●	●	
●	●	●			●
●	●				

**520TS only





We're here to help

We know that choosing your perfect shower isn't always easy, so at Redring we're committed to providing you with high quality service every step of the way. Whether you need advice about products or you require information about stockists or spare parts, our dedicated service teams are on hand to help with your enquiry.

Product Queries

Our Product Service and Repair team are happy to help with any technical queries you have about your product. If you wish to speak to someone over the phone, the team can be contacted on 0844 372 7766.

Our UK based call centre is open Monday to Friday from 8:00 until 17:30.

Alternatively, you can email the team with your query any time at technical.services@redringxpelair.com.

In the unlikely event that your product is not performing as expected or has developed a fault, please call 0844 372 7766 or email service.request@redringxpelair.com. Our experienced team will then diagnose the fault and arrange a service call from an engineer if necessary.

Sales Queries

If you've chosen your Redring shower and are eager to purchase it and get it installed, or if you require spare parts for your unit, our Sales team will be happy to help you find a local stockist. The team can be contacted on 0844 372 7750 from 8:30 until 5:00 Monday to Friday.

The information you need may just be a click away....

The Redring website provides a comprehensive overview of all our showering products, as well as access to product manuals and brochures. You can also find a glossary of showering terms and Frequently Asked Questions to look up anything you don't understand. Visit www.redring.co.uk for quick and easy access to this information.

You can also send us your query through the website by filling out an online enquiry form at www.redring.co.uk/contacts.



We do more than showers

Our ventilation brand Xpelair specialises in the development of ventilation products for use in your home. Xpelair has a range of stylish and functional ventilation solutions available, all of which have been designed to effectively remove moisture and stale air from your home. Visit www.xpelair.co.uk to browse our product range and discover the benefits an Xpelair fan can offer you.



Why we need to ventilate

It's important that adequate levels of ventilation are maintained in your bathroom so that moisture and steam generated from your shower is extracted effectively. Not doing so will lead to the moisture condensing to cold surfaces, such as mirrors and tiles. If this moisture isn't extracted effectively it can lead to damp, mould growth and poor indoor air quality.

Ventilation

Xpelair manufacture a range of domestic ventilation solutions for bathroom and kitchen applications, including axial, centrifugal and inline fans. Installing fans in the wet rooms of your home ensures that moisture, odours, stale air and steam are extracted effectively to maintain fresh and healthy indoor air quality. Xpelair have a range of fans suitable for installation in windows, walls or ceilings to suit any application.

Ventilation with heat recovery

Ideal for both new build and refurbishment applications, single room heat recovery units extract stale air from individual wet rooms in your property to the outside while simultaneously supplying filtered air back into the room. Single room heat recovery units from Xpelair can be run continuously.

Whole house systems

Whole house systems offer a complete ventilation solution for your home. Designed for new build applications, they work by extracting stale air from your home either through a single MEV (Mechanical Extract Ventilation) unit that is ducted to wet rooms.

Alternatively, multiple dMEV (decentralised Mechanical Extract Ventilation) units can be installed to run continuously in separate wet rooms, ideal for providing clean and fresh air to any home.

Whole house systems with heat recovery

Whole house heat recovery systems work by extracting moisture and stale air from your property and resupplying fresh air into the property, transferring heat along the way to ensure it is not wasted. They have high efficiency levels to keep running costs low and can provide a constant supply of fresh, tempered air into your home to maintain high indoor air quality.



Contour



Slimline



Muro



Xplus 2 EC



Xcell 300





Newcombe House
Newcombe Way
Orton Southgate
Peterborough
PE2 6SE

Telephone: +44 (0) 844 372 7761
Fax: +44 (0) 844 372 7762
www.redring.co.uk



Redring reserve the right to alter product specification or appearance without prior notice. All finishes in the brochure are as accurate as printing processes allow. All rights reserved.

R058 (July 2013)