



ITEM# 1 - DISHTABLE

Custom Model SOIL TABLE (1 REQ'D)

Soil dish table with pas thru, under shelf, disposal cone, " L" shaped

ACCESSORIES:

MFR	Qty	Model	Spec
InSink	1	SS-75-15C-MRS	Complete Disposer Package, with 15" diameter bowl, 6 5/8" diameter inlet, with removable splash baffle, 3/4 HP motor, s/s construction, includes syphon breaker, solenoid valve, flow control valve, manual reverse switch
InSink	1		1 yr. parts & labor warranty from date of installation (std)
Fisher	1	34444	Pre-Rinse Unit, 8" c/c backsplash mount, with spring action flexible gooseneck, wall bracket, Add-On-Faucet with 8" swing spout

PROJECT: _____ ITEM NO.: _____



1/2 – 1-1/4 H.P. DISPOSER MODELS

Heavy-duty disposer designed for continuous operation in restaurants, hotels, hospitals and cafeterias. Food waste including steak bones is quickly and efficiently removed with this labor-saving, self-cleaning, environmentally sound disposer.

SPECIFICATIONS

- **Grind Chamber:** Corrosion Resistant Stainless Steel
- **Mounting:** 3/4" (19.1 mm) rubber mounting above grinding chamber isolates sound and eliminates vibration. Mounting is enclosed in chrome plated covers for sanitation and appearance.
- **Motor:** 1/2 – 1-1/4 HP Induction Motor, 1725 RPM, totally enclosed to provide protection against outside moisture. Controlled power air flow cools motor for efficiency and longer life. Built-in thermal overload protection.
- **Cutting Elements:** Stationary and rotating shredding elements made from cast nickel chrome alloy for long life and corrosion resistance, designed for reverse action grinding.
- **Main Bearings:** Double-tapered Timken roller bearings provide a shock absorbing cushion.
- **Motor Seals:** Triple lip seal protects motor from water damage. Secondary spring-loaded oil seal provides double protection against water and loss of grease.
- **Finish:** All Stainless Steel and Chrome plated. Paint-free for lasting sanitation.
- **Warranty:** 1 year full warranty from date of installation.
- **A Disposer Package Includes:** 1 Mounting/Bowl Assembly, 1 Electrical Control, 1 Syphon Breaker, 1 Solenoid Valve, and 1 Flow Control Valve. The standard Flow Control Valve will be sent with the unit unless the optional valve is specified.



MODEL & HORSEPOWER/ELECTRICAL REQUIREMENTS

<input type="checkbox"/> SS-50 1/2 H.P.	<input type="checkbox"/> 115/208-230V, 60 Hz, 1 Ph, 8.4/4.0/4.2 amps, UL	<input type="checkbox"/> 115/208-230V, 60 Hz, 1 Ph, 8.4/4.0/4.2 amps, CSA
	<input type="checkbox"/> 208-230/460V, 60 Hz, 3 Ph, 2.0/2.2/1.1 amps, UL	<input type="checkbox"/> 208-230/460V, 60 Hz, 3 Ph, 2.0/2.2/1.1 amps, CSA
<input type="checkbox"/> SS-75 3/4 H.P.	<input type="checkbox"/> 115/208-230V, 60 Hz, 1 Ph, 10.0/4.2/5.0 amps, UL	<input type="checkbox"/> 115/230V, 50 Hz, 3 Ph, 7.7/3.7 amps
	<input type="checkbox"/> 208-230/460V, 60 Hz, 3 Ph, 2.5/3.0/1.5 amps, UL	<input type="checkbox"/> 230/460V, 50 Hz, 3 Ph, 2.7/1.4 amps
	<input type="checkbox"/> 115/208-230V, 60 Hz, 1 Ph, 10.4/4.3/5.0 amps, CSA	<input type="checkbox"/> 380V, 50 Hz, 3 Ph, 1.1 amps
	<input type="checkbox"/> 208-230/460V, 60 Hz, 3 Ph, 2.5/3.0/1.5 amps, CSA	
<input type="checkbox"/> SS-100 1 H.P.	<input type="checkbox"/> 115/208-230V, 60 Hz, 1 Ph, 11.6/5.1/5.7 amps, UL	<input type="checkbox"/> 208-230/460V, 60 Hz, 3 Ph, 2.2/3.0/1.5 amps, CSA
	<input type="checkbox"/> 208-230/460V, 60 Hz, 3 Ph, 2.2/3.0/1.5 amps, UL	<input type="checkbox"/> 120/208-240V, 60 Hz, 1 Ph, 11.6/5.1/5.7 amps, NOM
	<input type="checkbox"/> 115/208-230V, 60 Hz, 1 Ph, 11.6/5.1/5.7 amps, CSA	<input type="checkbox"/> 100/200-230V, 50/60 Hz, 1 Ph, 10.4/5.2/5.4 amps
<input type="checkbox"/> SS-125 1-1/4 H.P.	<input type="checkbox"/> 115/208-230V, 60 Hz, 1 Ph, 12.8/5.9/6.6 amps, UL	<input type="checkbox"/> 115/208-230V, 60 Hz, 1 Ph, 12.8/5.9/6.6 amps, CSA
	<input type="checkbox"/> 208-230/460V, 60 Hz, 3 Ph, 2.6/3.3/1.9 amps, UL	<input type="checkbox"/> 208-230/460V, 60 Hz, 3 Ph, 2.6/3.3/1.9 amps, CSA

NOTE: All amp ratings denote amp draw during a grind load.

ELECTRICAL CONTROLS



AS-101 Control Center "Aqua Saver" (Auto-Reversing)



CC-101 Control Center (Auto-Reversing)



CC-202 Control Center (Auto-Reversing)



Manual Reverse Switch (Dual Direction)



Manual Switch (Single Direction)

Our products appear on **The KCL CADalog** CD-ROM based CAD Foodservice Symbol Library. More information is available from **Kochman Consultants, Ltd.** at www.kclcad.com.



4700 21st STREET
RACINE, WI 53406
TEL: 800-845-8345
FAX: 262 554-3620

www.insinkerator.com



The Emerson logo is a trademark and a service mark of Emerson Electric Co.



InSinkEerator is a division of Emerson Electric Co.

InSinkEerator ©2008

Printed in USA

Form No. F307-09D-45-02

DISPOSER MOUNTING ASSEMBLIES (choose one)

Bowl Mounts

- Type A Sink Bowl Assembly: Includes bowl, water nozzle(s), bowl cover, splash baffle
- Type B Sink Bowl Assembly: Includes bowl, water nozzle(s), silver guard, splash baffle
- Type C Sink Bowl Assembly: Includes bowl, water nozzle(s), splash baffle

Sink Bowl Assembly Size

- 12" (304.8 mm) with one adjustable water nozzle
- 15" (381.0 mm) with one adjustable water nozzle
- 18" (457.2 mm) with two adjustable water nozzles

Collar Mounts

- #5 Sink Flange Mounting Assemblies for 3-1/2" – 4" (88.9 mm – 101.6 mm) sink opening (support legs are recommended)
- #6 Collar Adaptor for welding into trough, provides 6-5/8" (168.3 mm) opening, includes splash baffle
- #7 Collar Adaptor for welding into sink, provides 6-5/8" (168.3 mm) opening, includes splash baffle and stopper


DIMENSIONS

IMPORTANT: Use dimension chart below for adaptor height in place of InSinkErator bowl sink height when mounting directly to a sink.


Bowl Sinks	Flange O.D. X	Work Table Hole Y	Flange I.D. Z	Height
12" (304.8 mm)	13-1/2" (342.9 mm)	12-1/4" (311.2 mm)	12" (304.8 mm)	6-1/2" (165.1 mm)
15" (381 mm)	16-1/2" (419.1 mm)	15-1/4" (387.4 mm)	15" (381.0 mm)	6-1/2" (165.1 mm)
18" (457.2 mm)	19-1/2" (495.3 mm)	18-1/4" (463.6 mm)	18" (457.2 mm)	6-1/2" (165.1 mm)
Adaptors	X	Y	Z	Height
No. 5	Fits Standard Sink Opening: 3-1/2" – 4" (88.9 mm – 101.6 mm)			2-3/4" (69.9 mm)
No. 6	7-13/16" (198.4 mm)	6-7/8" (174.6 mm)	6-5/8" (168.3 mm)	1-3/16" (30.2 mm)
No. 7	9-1/8" (231.8 mm)	7-7/8" (200.0 mm)	7-5/8" (193.7 mm)	2-1/16" (52.4 mm)

NOTE:

- Adaptors are available upon request for all competitor sink bowls or cones.
- Please have sink bowl/cone type with the necessary dimensions when ordering adaptors.

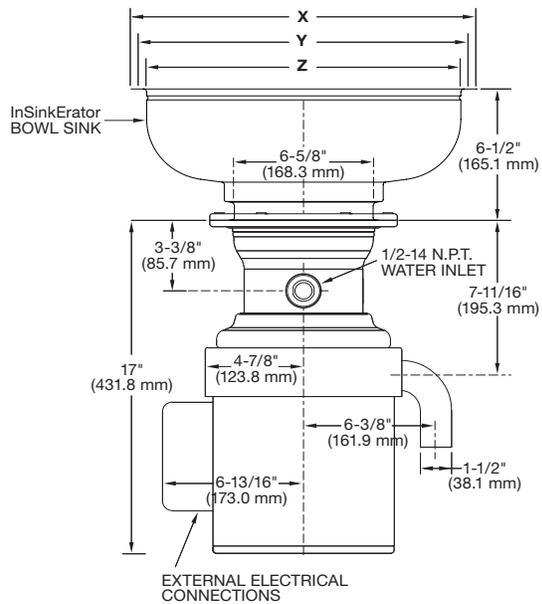

RECOMMENDED INSTALLATION

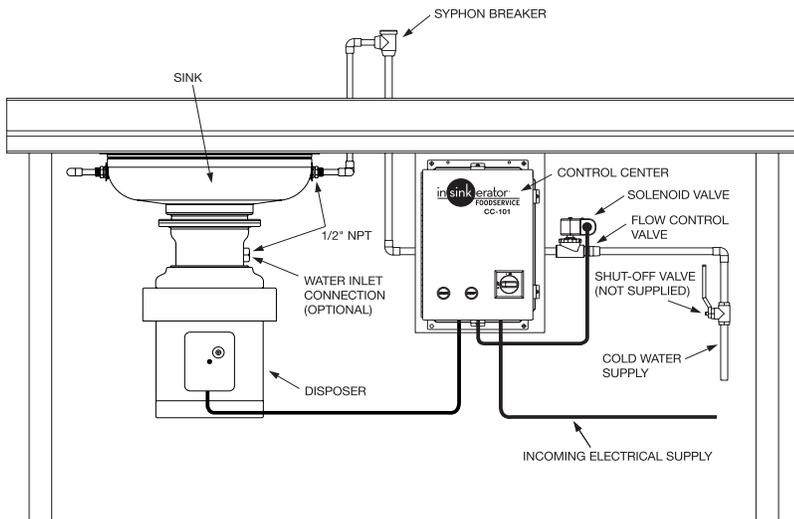

RECOMMENDED WATER USAGE

	Standard	Optional
SS-50	3 GPM (11.4 LPM)	N/A
SS-75	3 GPM (11.4 LPM)	N/A
SS-100	5 GPM (18.9 LPM)	3 GPM (11.4 LPM)
SS-125	5 GPM (18.9 LPM)	3 GPM (11.4 LPM)

For additional information, see Foodservice Product Information Binder.

APPLICATION:

PRODUCT NAME:
8" C/C BACKSPLASH MOUNT PRE-RINSE SPRING STYLE WITH ADD-ON FAUCET


JOB NAME:

SPECIAL CONFIGURATION
 CHECK BASE MODEL AND OPTIONS

QUANTITY:

ITEM NO.

MODEL:
 34436 WITH 6" SWING SPOUT
 34444 WITH 8" SWING SPOUT
 34452 WITH 10" SWING SPOUT
 34460 WITH 12" SWING SPOUT
 34479 WITH 14" SWING SPOUT
 34487 WITH 16" SWING SPOUT

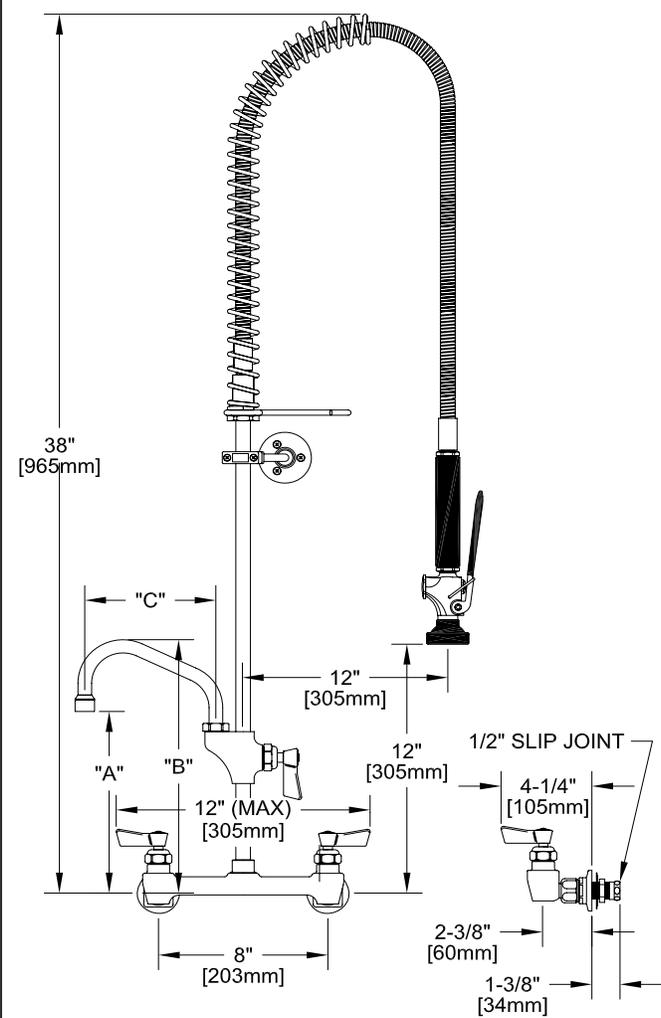

OPTIONS OR MODIFICATIONS:
 SUPPLY LINES (24" OR 36") CIRCLE LENGTH
 IN-LINE DUAL CHECK VALVE
 BRUSH
 HANDLES (CROSS OR WRIST) CIRCLE STYLE
 VANDAL RESISTANT KIT
 OTHER _____

FEATURES
MAIN CONTROL VALVE
 * 8" C/C BACKSPLASH MOUNT
 * INTERNAL SPRING LOADED CHECK VALVES
 * SWIVELLING SEAT DISKS
 * HOT SIDE STEM - RIGHT HAND CHECK
 * COLD SIDE STEM - LEFT HAND CHECK
 * STAINLESS STEEL SEATS, SEAT SCREWS, AND HANDLE SCREWS

HOSE
 * 36" LENGTH
 * STAINLESS STEEL END FITTINGS
 * STAINLESS STEEL EXTERNAL JACKET
 * 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE
 * REPAIRABLE IN-FIELD WITH SIMPLE TOOLS

ULTRA SPRAY VALVE
 * LOWEST ENERGY USER - 1.15 GPM @ 60 PSI
 * CLEANS FASTER - TEST PROVEN
 * ENGINEERED TO LAST - NO 'O' RINGS TO LEAK
 * INTERCHANGEABLE - FITS ALL BRANDS

WAL BRACKET
 * ADJUSTS FROM 2" TO 12"

SYSTEM LIMITS
 * TEMP: 40°F MIN. TO 140°F MAX.
 * PRESSURE: 200 PSI MAX. STATIC

SHIPPING WEIGHT
 * 15.0 LBS

ROUGH-IN	MODEL	DIM "A"	DIM "B"	DIM "C"
	34436	8-3/4" [221mm]	12-3/8" [313mm]	6" [152mm]
	34444	9" [228mm]	12-7/8" [326mm]	8" [203mm]
	34452	9-5/8" [244mm]	13-3/8" [340mm]	10" [254mm]
	34460	10-1/4" [259mm]	13-7/8" [351mm]	12" [305mm]
	34479	10-5/8" [275mm]	14-3/4" [374mm]	14" [356mm]
	34487	11-1/2" [292mm]	15-3/8" [390mm]	16" [406mm]

EPAct 2005 Compliant



ANSI/A112.18.1M



FISHER MANUFACTURING COMPANY
 TOLL FREE: 800-421-6162 - FAX: 800-832-8238
 information@fisher-mfg.com - www.fisher-mfg.com



ITEM# 2 - DISHWASHER, DOOR/HOOD TYPE

CMA Dishmachines Model CMA-180B S (1 REQ'D)

Dishwasher, door type, high temperature sanitizing w/built-in booster heater, straight-thru design, 60 racks/hour, external Poly Pro™ scrap accumulator, s/s construction, electric tank heat, auto fill, includes (1) open & (1) peg rack, ENERGY STAR®

ACCESSORIES:

MFR	Qty	Model	Spec
CMADish	1		208v/60/1-ph, 71 amps, std.
CMADish	1		SafeT-Temp feature assures 180 degree sanitizing rinse
CMADish	1	13470.10	Drain water tempering kit (factory installed only)



Corner Model



FEATURES:

- **Energy Star Qualified.**
- 60 racks / 240 covers per hour.
- Economical to operate. Uses only .96 gallons of water per cycle.
- Automatic soil purging system. Filters wash water and traps plate debris into an external tray. Tray can be easily removed for dumping contents.
- All stainless steel construction offers durable performance and years of trouble free operation.
- Built-in chemical resistant industrial 5kW heater and optional 12kW booster heater are proven to be more durable than commercial style heaters.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps. Specially designed pull-pins allow wash arms to be easily removed for cleaning.
- Top mounted control box is water tight and includes a rack counter, extended wash/delimer switch and easy to read temperature gauges.
- Auto start/stop makes operation safe and easy.
- Field convertible for a wide range of applications.
- Safety Temp feature assures 180°F sanitizing rinse every cycle.
- Built-in booster heater configured for both 40°F and 70°F temperature rise.
- Single point electrical connection.
- Field convertible to single or three phase, corner or straight through operation.
- Automatic tank fill.
- Interchangeable upper and lower arms.



Top mounted control box is water tight and includes a rack counter, extended wash/delimer switch and easy to read temperature gauges.



External scrap tray maintains clean wash water and prevents debris from clogging the drain.



Industrial wash tank and optional booster heaters are designed for years of trouble free service.



Unique pull-pin design allows wash arms to be easily removed for cleaning.



CMA Dishmachines 12700 Knott Street Garden Grove, CA 92841 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com


CMA reserves the right to modify specifications or discontinue models without prior notification.

Printed in the U.S.A.

© 2009 CMA, Inc.



WARNING: Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

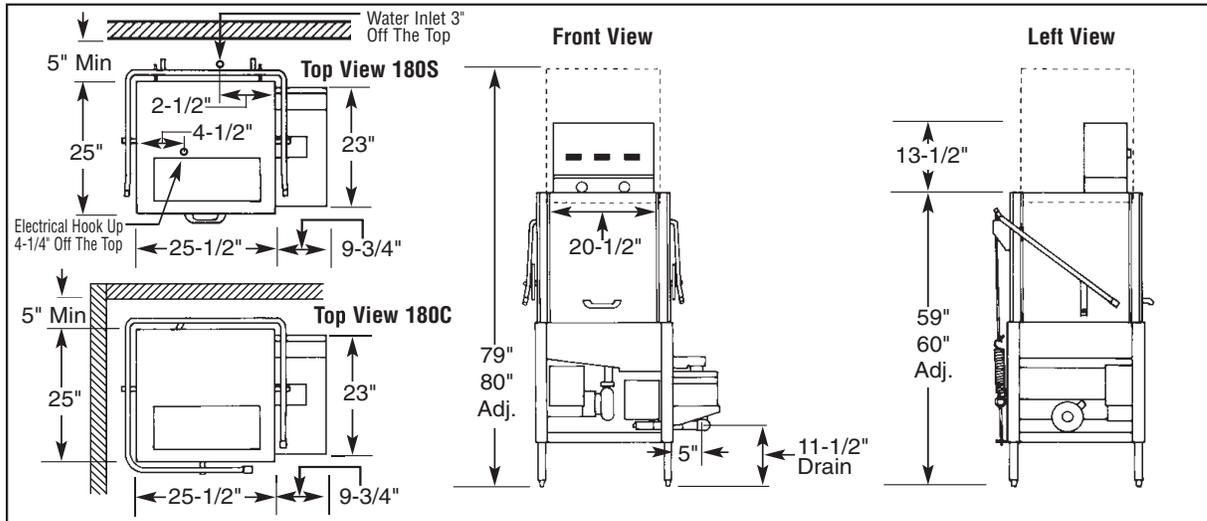

Specifications:

MODEL CMA-180	USA	METRIC	USA	METRIC
WATER CONSUMPTION				
PER RACK	.96 GAL	(3.6 L)		
PER HOUR	52 GPH	(197 L)		
OPERATING CYCLE				
WASH TIME - SEC.	49	49		
RINSE TIME - SEC.	12	12		
TOTAL CYCLE	61	61		
OPERATING CAPACITY				
RACKS PER HOUR	60	60		
WASH TANK CAPACITY	8 GAL.	(30.3 L)		
PUMP CAPACITY	52 GPM	(197 LPM)		
WATER REQUIREMENTS				
WITHOUT BOOSTER HEATER	180°F	(82°C)		
WITH BOOSTER HEATER	140°F	(60°C)		
WATER INLET	3/4"	(1.9cm)		
DRAIN CONNECTION	2"	(5.1cm)		
RINSE PRESSURE SET	20 ± 5psi	(1.41 kg/cm ²)		
OPERATING TEMPERATURE				
WASH-°F (MIN)	155°F-160°F	(68°C-71°C)		
RINSE-°F (MIN)	180°F-195°F	(82°C-90°C)		
WASH PUMP MOTOR HP			1	1
DIMENSIONS				
DEPTH			25"	(63.5cm)
WIDTH			25-1/2"	(65cm)
HEIGHT			59"-60"	(150-152cm)
STANDARD TABLE HEIGHT			34"	(86.3cm)
MAX CLEARANCE FOR DISHES			17-1/2"	(44cm)
DRAIN CONNECTION (OFF FLOOR)			11-1/2"-12-1/2"	(29-32cm)
STANDARD DISHRACK				
DIMENSIONS			19-3/4" X 19-3/4"	(50X50cm)
ELECTRICAL RATING				
WITHOUT BOOSTER	VOLTS		PHASE	AMPS
	208		1	28
	240		1	30
	208		3	19
WITH BOOSTER	240		3	21
	480		3	9
	208		1	71
	240		1	80
WITH BOOSTER	208		3	45
	240		3	50
	480		3	23
SHIPPING WEIGHT				
WITHOUT BOOSTER			332#	(151kg)
WITH BOOSTER			375#	(170kg)

Summary Specifications: Model CMA-180

The model CMA-180 single tank, high temperature dishwasher is designed for years of trouble free service, producing sparkling results while conserving energy, water and chemicals. This machine is available with an optional "built in" booster heater, assuring a continuous supply of 180°F hot water, and is easily field convertible for either corner or straight installation. Unique soil purging system filters wash water and plate debris into an external tray. The CMA-180 is NSF, UL, CUL and CE approved. Constructed entirely of stainless steel.

Available Models

- CMA-180S Straight
- CMA-180SB Straight with booster
- CMA-180C Corner
- CMA-180CB Corner with booster

Available Options:

- Exhaust Fan Time Control
- Built-in 12kW booster heater
- CMA-180 Conversion Kit Corner to Straight
- CMA-180 Conversion Kit Straight to Corner
- Alternative electrical available for export
- Stainless steel dishtables
- Dual power supply connections



CMA Dishmachines 12700 Knott Street Garden Grove, CA 92841 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

CMA reserves the right to modify specifications or discontinue models without prior notification.

Printed in the U.S.A.

© 2009 CMA, Inc.



ITEM# 3 - DISHTABLE, CLEAN

Advance Tabco Model DTC-S30-60R (1 REQ'D)

Straight-Clean Dishtable, left-to-right, 10-1/2" backsplash, 3" rolled front & side rims, galvanized legs, with no crossrails, 36" long, 16/304 stainless steel


ACCESSORIES:

MFR	Qty	Model	Spec
Advance	1		SPECIFY DISH MACHINE BRAND AND MODEL to ensure proper fit, refer to attached document (AQNet only) or consult www.advancetabco.com for compatibility listing. Certain dish machines require modifications at additional cost not shown here
Advance	1	DTA-SS-30	Undershelf, 30", stainless steel
Advance	1	TA-94-3	16 ga. s/s 304 series undershelf upgrade (3 lin. ft.)




STAINLESS STEEL
ECONOMY DISHTABLES
CLEAN STRAIGHT

16 Gauge, 304 Stainless Steel



DTC-S60-60L-X Shown



Stainless Steel Welded Leg Assembly with Cross Bracing (Standard on S70 Series)

Item #: _____ **Qty #:** _____
Model #: _____
Project #: _____

FEATURES:

Tile edge for ease of installation.
 Dishtable system consists of SOIL and CLEAN sections.
 Table is furnished with 10-1/2" Backsplash with a 2" return.

S70 SERIES: Stainless Steel Welded Leg Assembly with Cross Bracing.
 Stainless Steel Legs with Stainless Steel Bullet Feet.

S60 SERIES: Galvanized Legs with Plastic Bullet Feet.

CONSTRUCTION:

All TIG welded.
 Welded areas blended to match adjacent surfaces and to a satin finish.
 Stainless Steel Gussets welded to a stainless steel support channel.

16 Gauge 304 TOP S/S Welded Leg Assembly, Stainless Steel Bullet Feet	16 Gauge 304 TOP Galvanized Legs Plastic Bullet Feet
---	--

Nominal Size	"L"	S70 SERIES	S60 SERIES	Approx. Wt.
2 Ft.	24"	DTC-S70-24L or R-X	DTC-S60-24L or R-X	35 lbs.
3 Ft.	36"	DTC-S70-36L or R-X	DTC-S60-36L or R-X	45 lbs.
4 Ft.	48"	DTC-S70-48L or R-X	DTC-S60-48L or R-X	60 lbs.
5 Ft.	60"	DTC-S70-60L or R-X	DTC-S60-60L or R-X	70 lbs.
6 Ft.	72"	DTC-S70-72L or R-X	DTC-S60-72L or R-X	85 lbs.
8 Ft.	96"	DTC-S70-96L or R-X	DTC-S60-96L or R-X	110 lbs.

Nominal sizing for ease of installation.



Optional Stainless Steel UNDERSHELF with Die Cast LEG CLAMP

secured to shelf eliminates unsightly nuts & bolts

ACCESSORIES	Model #	Qty
Prerinse Faucet	DTA-53-1X	
Rack Shelf		
Undershelf		



DTA-53-1X



NEW YORK
 (800) 645-3166
 Fax: (631) 242-6900

GEORGIA
 (800) 832-1218
 Fax: (770) 775-5625

TEXAS
 (800) 527-0353
 Fax: (972) 932-4795

NEVADA
 (800) 446-8684
 Fax: (775) 972-1578



For Assistance with Smart Modifications & Accessories Call: 1-800-498-6634 Fax: 631-586-2933
 smartfab@advancetabco.com

DIMENSIONS and SPECIFICATIONS


TOL ± .500"

ALL DIMENSIONS ARE TYPICAL

SEE DISH MACHINE COMPATIBILITY CHART TO ENSURE PROPER FIT
DISH MACHINE COMPATIBILITY CHART CAN BE FOUND IN BACK OF THE SECTION "P" INDEX

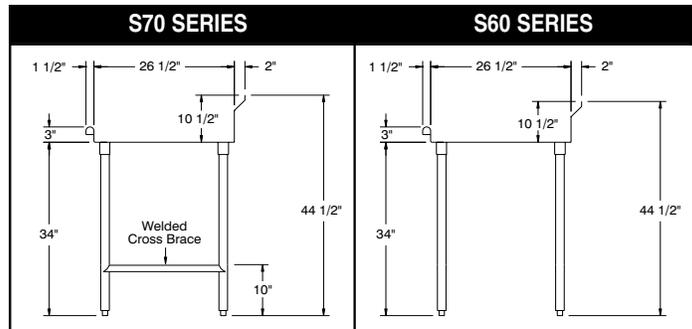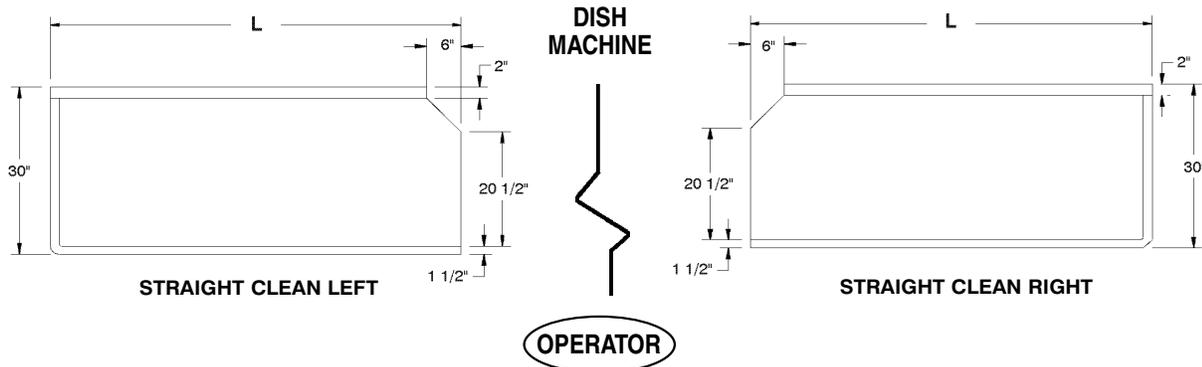

CUSTOMIZE YOUR OWN SYSTEM
by Ordering Optional Accessories from our
PRODUCT & PRICE GUIDE



Description	S70 SERIES	S60 SERIES
Material	16 Ga. 304 Series	16 Ga. 304 Series
1 5/8" Dia. Legs	Stainless Steel	Galvanized
Gussets	Stainless Steel	Stainless Steel
Bullet Feet (1" adj.)	Stainless Steel	Plastic
Cross Bracing	Welded	Optional



P-2a

200 Heartland Boulevard, Edgewood, NY 11717-8380

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, APRIL 2006



DISHTABLE SHELVING

Item #: _____ **Qty #:** _____

Model #: _____

Project #: _____

SORTING SHELVES

KD TUBULAR



TRADITIONAL



TRADITIONAL DESIGN

FEATURES:

A solid die formed wall mounted rack shelf with solid end brackets.


CONSTRUCTION:

TIG-welded with exposed areas blended to a satin finish.

MATERIAL:

Brackets are 16 gauge type 300 series stainless steel.

Shelf is 16 gauge type 300 series stainless steel.

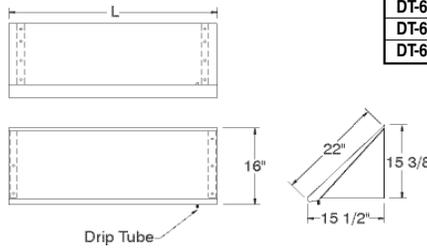

MODEL #	# of Racks	L	Wt
DT-6R-11	1	22"	20 lbs.
DT-6R-12	2	42"	30 lbs.
DT-6R-13	3	62"	40 lbs.
DT-6R-14	4	82"	50 lbs.

KD TUBULAR DESIGN

FEATURES:

A dual purpose open tubular design wall mounted rack shelf with solid end brackets bolted in field. Unit completely knock down.

CONSTRUCTION:


No welds. Unit is supplied with assembly hardware.

MATERIAL:

Brackets are 16 gauge type 300 series stainless steel.

Tubing is 1 5/8" diameter stainless steel 18 gauge tubing.

Stainless steel bolts (included).

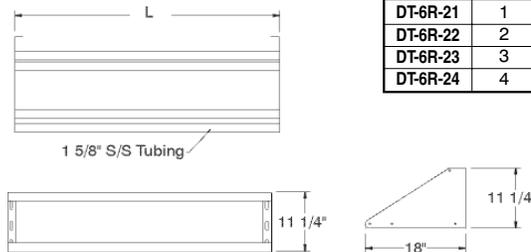

MODEL #	# of Racks	L	Wt
DT-6R-21	1	22"	15 lbs.
DT-6R-22	2	42"	23 lbs.
DT-6R-23	3	62"	30 lbs.
DT-6R-24	4	82"	38 lbs.

ADVANCE TABCO
SMART FABRICATION™
www.advancetabco.com

Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK
Fax: (631) 242-6900

GEORGIA
Fax: (770) 775-5625

TEXAS
Fax: (972) 932-4795

NEVADA
Fax: (775) 972-1578



DISHTABLE SHELVING



Recommended for D, G and U-Shaped Series Dishtables Only.

TABLE MOUNTED TUBULAR RACK SHELF DOUBLE SIDED DESIGN

Mounts to backsplash and end roll of dishtable

FEATURES:

A dual purpose double sided open tubular design table mounted rack shelf with solid ends.

CONSTRUCTION:

Factory assembled for ease of Installation.
Mounts to dishtable with stainless steel bolts (included).

MATERIAL:

Side Plates are 14 gauge type 304 series stainless steel.
Tubing is 1 5/8" diameter 18 gauge type 300 stainless steel tubing.

9' AND LONGER HAVE CENTER SUPPORT

Shelf shipped separated from table to reduce freight costs and chance of shipping damage.



DOUBLE SIDED SLANT RACK SHELF

MODEL #	Qty.
DTA-79	



DTA-79

Minimum Length 48"

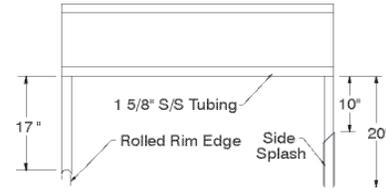

Stainless Steel Undershelves



FEATURES:

Stainless steel construction featuring the adjustable die cast leg clamp.

CONSTRUCTION:


No welds. Shelf completely die formed.

MATERIAL:

Stainless steel.

UNDERSHELVES

MODEL #	L	Wt.
DTA-SS-18	18"	15 lbs.
DTA-SS-24	24"	18 lbs.
DTA-SS-30	30"	24 lbs.
DTA-SS-42	42"	33 lbs.
DTA-SS-54	54"	42 lbs.
DTA-SS-66	66"	50 lbs.
DTA-SS-78	78"	60 lbs.

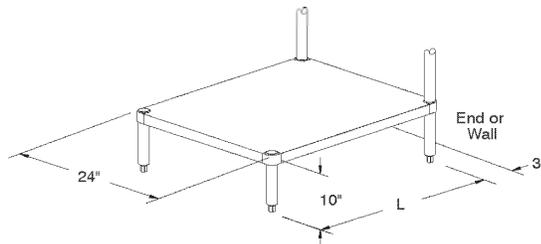

Shelving is Reversible (Left or Right)

Size Undershelf to be at least 6" shorter than dishtable.



g-3a

200 Heartland Boulevard, Edgewood, NY 11717-8380

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, MARCH 2010

SMART TABLE MODIFICATIONS

SIZE MODIFICATIONS

- ___ **TA-33** Special Working Height
- ___ **TA-59** 36" Wide Equipment Stand
- ___ **TA-6** Extra Length for Standard Tables over 12'
(Tables Over 14' Require Field Joint TA-57)
- ___ **TA-61** Special Modification Charge (1 Charge Per Table)
- ___ **TA-65** Enclosed Base Units Over 12' (Open Base Table)
- ___ **TA-66** Enclosed Base Units Over 12' (Sliding Door Units)
- ___ **TA-67** Enclosed Base Units Over 12' (Hinged Door Units)
- ___ **TA-78** Additional Lin. Ft. Past 12' For Table Mt. Shelf
(For ODS, OTS, TS & DS Shelving only)
- ___ **TA-79** Flour Trough (Factory installation only)
- ___ **TA-105** Modify Enclosed Base Table with Drawers to 24" W
- ___ **TA-110** Modify Enclosed Base Table with Drawers to 36" W

TOP MODIFICATIONS

- ___ **TA-1** Notch Backsplash For Roll Up Door with Pass-Thru
- ___ **TA-3** Stainless Steel Hat Channel & Gusset Upgrade
- ___ **TA-7** 10" Rear Splash
- ___ **TA-8** Column Notch in Rear Splash (Includes Splash)
- ___ **TA-10** 5" Partial Back Splash
- ___ **TA-12** Countertop Edge
- ___ **TA-22** Square Edge Table
- ___ **TA-28** Cut-Out For Cold Well
- ___ **TA-30** 1-1/2" Side Splash
- ___ **TA-30A** 1-1/2" Turn Up For Tables Tops
- ___ **TA-31** 5" Side Splash
- ___ **TA-32** 10" Side Splash
- ___ **TA-34** Top Cut-Out
- ___ **TA-35** Splash Cut-Out
- ___ **TA-56** 5" NSF Partition
- ___ **TA-56A** 18" NSF Partition
- ___ **TA-57** Prepare Welded Field Joint (Welded in field by others)
- ___ **TA-57A** Bolted Field Joint (Bolted in field by others)
- ___ **TA-58** Stepdow to 24" Working Height



TA-58 Shown

- ___ **TA-62** Duplex Electrical Outlet (Under Flat Top)
- ___ **TA-62A** Duplex Electrical Outlet (in VKS Rear Splash)
- ___ **TA-62B** Duplex Electrical Outlet (in KSS Rear Splash. Includes 2" Return)
- ___ **TA-62C** Duplex Electrical Outlet GFI (Specify Location)
- ___ **TA-62D** Doghouse Electrical Outlet Box (Includes Duplex Outlet)
- ___ **TA-64** Urn Trough (Factory installation only)

- ___ **TA-75** Mitered Edge
- ___ **TA-76** Paint on Sound Deadening
- ___ **TA-82** Scrap Chute (6" dia. opening)
- ___ **TA-84** Simple Pass-Thru



TA-84 Shown

- ___ **TA-87** Enclosed Rear Splash
- ___ **TA-91** Poly Retaining Clips Includes TA-22
- ___ **TA-93** Wall Brackets (Includes 2. For 5" & 10 1/2" splash only)
- ___ **TA-96A** Can Opener Provision for openers w/ Bolt-on Base
(Customer to provide location)
- ___ **TA-96B** Can Opener Surface Mount Provision w/4" S/S Tube
for Openers w/o Base (Customer to provide location)
- ___ **TA-96C** Can Opener Spacer Plate Provision for Use on
Tables with Countertop Edge & Can Opener Base
Customer to provide location)
- ___ **TA-100** Bull Nose All Sides of Worktable
- ___ **TA-100A** Bull Nose All Sides of Shelf
- ___ **TA-101** Rear Tray Lock
- ___ **TA-106** Mirror HI-LITE Edge
- ___ **TA-108** 2" Hole with Grommet for Appliance Cord
(Specify Hole Location)
- ___ **TA-112** Hubble Outlet
- ___ **TA-113** Notch Top for Buyout Unit

BASE MODIFICATIONS

- ___ **TA-4** Removable Access Panel
- ___ **TA-5** Curb Mounting Provision
- ___ **TA-13** Pad Lock Hasp
- ___ **TA-15** Provision for Built In Drawer Warmer
- ___ **TA-23** Welded Set-Up Table/Crating
- ___ **TA-24** Shell Crating
- ___ **TA-27** Control Panel (Must add TA-34A or TA-34B)
- ___ **TA-36A** Sliding/Hinge Stainless Steel Doors
- ___ **TA-36B** Two 1/2 Height Stainless Steel Hinge Doors
- ___ **TA-37** Stainless Enclosed Base
- ___ **TA-39** 24" Louvered Hinged Doors



TA-39 Shown

- ___ **TA-40** Remove Undershef in Cabinet Base For Slide in Buyout
- ___ **TA-42** Interior Partition (2.5"x30")
- ___ **TA-43** Filler Panel (3"x30" with Flanged Feet)



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK
Fax: (631) 242-6900

GEORGIA
Fax: (770) 775-5625

TEXAS
Fax: (972) 932-4795

NEVADA
Fax: (775) 972-1578

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice. © ADVANCE TABCO, MARCH 2010 **K-1**

SMART TABLE MODIFICATIONS

- ___ **TA-44** K.D. Aluminum Pan Rack Slides (6 slides. Table min. lgth. 3 ft.)
- ___ **TA-45** K.D. Aluminum Glass Rack Slides (3 slides. Table min. lgth. 3 feet)
- ___ **TA-46** Door Locks
- ___ **TA-48** 12"x12" Cut-Out in Back Panel or Undershef for Plumbing
- ___ **TA-55** Remove Back Panel (on Enclosed Base)
- ___ **TA-70** S/S Tubular Tray Divider (12" sections)
- ___ **TA-73** Tubular Tray Slide w/Dropdown
(Stationary Tray Slide Available. Factory installation only)
- ___ **TA-74** Solid Tray Slide
- ___ **TA-91** Poly Retaining Clips **Includes TA-22** (S/S top table)
- ___ **TA-92** 12" Apron (in front of sink)
- ___ **TA-92A** 17" Stainless Steel Apron t Cover Sink Bowls and Support Lever Drain Handles
- ___ **TA-109** Rear Flush Finished Inset Panel



TA-109 Shown

- ___ **TA-116** Adjustable Enclosed Base Cabinet Mid Shelf
Add to price of Enclosed Base Table with Fixed Mid Shelf (M) Shelves over 36" in length require multiple sections with center partition.

SINK MODIFICATIONS

- ___ **TA-107** Vacuum Breaker Holes on Tables
(Includes Backsplash with 2" Return)

UNDERSHELF MODIFICATIONS



- ___ **TA-9** 1-1/2" Turn-Up for Undershelves
- ___ **TA-48** 12"x12" Cut-Out in Back Panel or Undershef for Plumbing
- ___ **TA-94** Upgrade 16 Ga. 304 S/S Undershef
- ___ **TA-366** Reinforced Understructure For Undershelves

OVERSHELF MODIFICATIONS

- ___ **TA-9A** 1" Turn-Up for all Table Mounted Shelves
- ___ **TA-47** Shelf Mounting Bracket for Existing Table
- ___ **TA-49** Wall Shelf 2" offset
- ___ **TA-60** Special Sizing Charge for Shelves
- ___ **TA-62** Duplex Electrical Outlet (Under Flat Top)
- ___ **TA-62D** Doghouse Electrical Outlet Box (Includes Duplex Outlet)
- ___ **TA-71** Heat Lamp Mounting Provision
- ___ **TA-77** Check Minder Shelf Provision (Factory installation only)
- ___ **TA-99** 16 Ga. S/S 304 Upgrade for Wall and Over Shelves
- ___ **TA-102** 24" x 24" Extension for Microwave or Computer Shelf
(Add to OTS and ODS Shelves. See page 45)
- ___ **TA-103** 24" Wide PT Shelf (Mid mount only, PT Series Shelf, see pg. 47. Add to 18" Wide Shelf)
- ___ **TA-104** Additional Length Over 12' (Add to 18" Shelf)
(CU & CDS Shelving Only. Max. Lgth. is 14' as Single Piece)

LEG MODIFICATIONS

- ___ **TA-16** Galvanized Leg with Plastic Bullet Foot
- ___ **TA-19** Flanged Stainless Steel Bullet Feet
- ___ **TA-20** Stainless Steel Leg with S/S Bullet Foot
- ___ **TA-21** Stainless Steel Bullet Foot
- ___ **TA-95** Upgrade 16 Ga. 304 S/S Legs Only

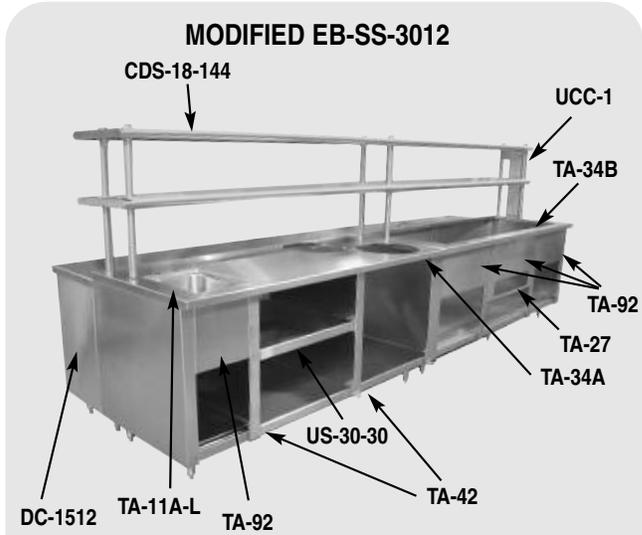

Duplex Electrical Outlets
TA-62
TA-62A
TA-62B
TA-62C

Doghouse Duplex Electrical Outlet
TA-62D



TA-77 Check Minder Shelf Provision



TA-56 5" NSF Partition
TA-56A 18" NSF Partition
TA-92 \$120 lin. ft.
12" Apron



TA-75 Mitered Edge



TA-112 Hubble Outlet

TOP ACCESSORIES

- ___ **TA-29** Rear Splash Capping Strip
- ___ **TA-41** Poly-Vance 5/8" Cutting Board
- ___ **TA-521** Drop-In urn Trough 1'
- ___ **TA-522** Drop-In urn Trough 2'
- ___ **TA-523** Drop-In urn Trough 3'
- ___ **TA-524** Drop-In urn Trough 4'
- ___ **TA-812** 2' Stainless Steel Cutting Surface
- ___ **TA-813** 3' Stainless Steel Cutting Surface
- ___ **TA-814** 4' Stainless Steel Cutting Surface
- ___ **TA-815** 5' Stainless Steel Cutting Surface
- ___ **TA-816** 6' Stainless Steel Cutting Surface
- ___ **TA-817** 7' Stainless Steel Cutting Surface

BASE ACCESSORIES

- ___ **TA-54** Removable Kick Plate
- ___ **TA-63** Removable Shelving (In addition to standard shelf)

OVERSHELF ACCESSORIES

- ___ **TA-83** Spice Bins

POTRACK ACCESSORIES

- ___ **TA-86** Stainless Steel Pot Hooks
- ___ **TA-89** Double Sided Plated Pot Hooks (Package of 4)
- ___ **TA-89A** Single Sided Plated Pot Hooks (Package of 4)
- ___ **TA-98** Stainless Steel Flat Bar in lieu of Chain

TOP ACCESSORIES

- ___ **TA-84A** Knife Rack for Rolled Rim Tables
- ___ **TA-84B** Knife Rack for Poly Top Tables
- ___ **TA-84C** Knife Rack for Square Edge Tables

DRAWER ACCESSORIES

- ___ **TA-90** Drawer Adapter (Non-catalog tables. Specify table width)
- ___ **TA-93** Wall Clips (for 5" & 10 1/2" splash only)

LEG ACCESSORIES

- ___ **TA-72** Leg to Wall Brace (Set per table)

SMART TABLE ACCESSORIES

Casters

(125 lbs. Load Capacity Per Caster)



TA-25

- ___ **TA-25** Set of 4
 - ___ **TA-25A** Set of 6
- Add price to Above for:**
- ___ **TA-25B** Brakes on All Casters
 - ___ **TA-25C** Upgrade to Caster with Heavy Duty Urethane Wheels

Heavy Duty Casters for Equipment Stands



TA-255

(1000 lbs. Distributed Weight)

- ___ **TA-255** Super Heavy Duty set of 4
- ___ **TA-256** Super Heavy Duty set of 6

ALL CASTERS SHIP VIA UPS!

REAR SPLASH CAPPING STRIP



16 Ga. "304" Stainless Steel Adhesive Tape Backing

- ___ **TA-29**

BUMPER GUARDS



16 ga., 304 Stainless Steel. Bracket Included

- ___ **BG-48** 2" x 4" x 48"
- ___ **BG-60** 2" x 4" x 60"

CORNER GUARDS



16 Ga. "304" Stainless Steel Adhesive Tape Backing

- ___ **CG-48** 2" x 2" x 48"
- ___ **CG-60** 2" x 2" x 60"

CHECK MINDER

Check Minder holds checks with ease. Floating ball mechanism quickly grabs checks and holds them in place. Mounts to existing wall or shelf.



Ft.	MODEL	Approx. Wt.
2'	___ CM-24	1.5 lbs.
3'	___ CM-36	2.25 lbs.
4'	___ CM-48	3 lbs.



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK
Fax: (631) 242-6900

GEORGIA
Fax: (770) 775-5625

TEXAS
Fax: (972) 932-4795

NEVADA
Fax: (775) 972-1578

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice. © ADVANCE TABCO, MARCH 2010 **K-1b**



ITEM# 4 - HOOD

Captive-Aire Model HOOD (1 REQ'D)

Vapor / exhaust canopy



ITEM# 5 - SHELVING, PLASTIC

Metro Model MX2460G (5 REQ'D)

MetroMax i™ Shelf, 24" W, 60" L, complete with frame, open grid polymer mat with Microban® antimicrobial protection & (4) wedge connectors

ACCESSORIES:

MFR	Qty	Model	Spec
Metro	4	MX74UP	MetroMax i™ Post, 74" H, for use with stem casters, adjusts at 1" increments, corrosion proof all polymer construction with built in Microban® antimicrobial product protection
Metro	4	5MBX	MetroMax Q™ Stem Caster, brake, 5" diameter, 1-1/4" wide face, resilient wheel tread, 200 lb. capacity, NSF
Metro	6	MXD24-8	MetroMax i™ Standard Duty Shelf Divider, 8" x 24" (203x610mm), snaps into place, for grid or solid shelf, polymer, NSF



Item # _____

Job _____

METROMAX i™ POLYMER SHELVING with *Microban Antimicrobial Product Protection

Part of the innovative MetroMax iQ™ Storage System, MetroMax i™ is a lifetime storage solution. The product is corrosion proof, easy to clean, strong like wire shelving, and provides a very efficient use of storage space. MetroMax i™ is integrated with online space planning tools and tutorials. www.metro.com/iQ

- **Lifelong performance and corrosion proof:** All-polymer and Type 304 stainless design offers a lifetime warranty against rust and corrosion.
- **Strong and Durable:** Strong as steel, MetroMax i™ shelves hold as much weight as Metro's wire shelving and are impact resistant. Weight capacity for evenly distributed loads:
800 lbs. (363kg) per shelf for lengths of 24" to 48" (610 to 1220mm)
600 lbs. (275kg) per shelf for lengths of 54" (1370mm) or longer
2,000 lbs. (907kg) maximum per stationary unit.
- **Easiest to clean and maintain:** Smooth surfaces easily wipe clean. Polymer mats can be easily removed and cleaned in a sink or dish machine. Microban antimicrobial product protection is built into the high contact areas of the shelf including the mats, frames, and posts to protect the product from bacteria, mold, mildew, and fungus that cause odors and product degradation. Microban protection keeps the product "cleaner between cleanings".
- **Smooth, Protective Surfaces:** Smooth, flat surfaces protect packaged shelf contents from unwanted rips, tears, or damage.
- **Robust Open Grid and Solid Mat Options:** Open grid shelves promote air circulation and light penetration. One-piece solid mats contain spills and are ideal to protect items on the bottom shelf from dirt or backsplashes from cleaning floors. Shelf mats are sturdy and safely support concentrated loads from instrumentation and equipment.
- **Interchangeable:** Part of the MetroMax iQ™ Storage System, corrosion proof MetroMax i™ shelves and posts are compatible with corrosion resistant MetroMax Q™ shelves and posts.
- **Efficient, Organized Storage:** Premium MetroMax iQ™ accessories efficiently organize, contain, and compartmentalize *all* space between shelves.
- **Fast, Easy Assembly:** MetroMax i™ assembles easily in minutes, without tools. Shelves can be adjusted at 1" (25mm) increments along the post. Shelf wedges have a window to locate your desired position.



MetroMax i™ Mobile Unit



MetroMax i™ with Accessories

*MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban Products Company, Huntersville, NC.



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



MetroMax i™ Polymer Shelving

9.20



METROMAX i™ POLYMER SHELVING

Specifications

- **Longitudinal Beams and Posts:** Pultrusions — continuous glass fibers and thermoset resin composite with built-in Microban® antimicrobial product protection.
- **End Beams, Adjustable Foot and Socket:** Injection molded polyester thermoplastic resin with glass reinforcement
- **Shelf Wedge Connector:** reinforced nylon
- **Mats, Open and Solid:** Mineral reinforced polypropylene. Mats contain Microban® antimicrobial.
- **Post Cap and Center Beam Cap:** High-density polyethylene.
- **“S” Hook Tab Hole Plug:** Vinyl.
- **Collar and “S” Hook:** Type 304 Stainless Steel.
- **Bonding of Longitudinal Beams to End Beams:** High temperature polyamide adhesive and stainless steel screws.
- **Continuous Temperature —** MetroMax i™ can be used continuously within a range of -20/120° F (-29/49° C) with intermittent exposure to 212° F (100° C) for cleaning.

Standard Shelves

- Part number includes shelf with removable mats and one bag of wedges

Nominal Width (in.) (mm)	Nominal Length (in.) (mm)	Shelf with Grid Mat Model No.	Approx. Pkd. Wt. (lbs.) (kg)	Shelf with Solid Mat Model No.	Approx. Pkd. Wt. (lbs.) (kg)
18 457	24 610	MX1824G	8.7 4.0	MX1824F	12.7 5.8
18 457	30 760	MX1830G	10.5 4.7	MX1830F	14.5 6.6
18 457	36 914	MX1836G	12.2 5.5	MX1836F	17.2 7.8
18 457	42 1060	MX1842G	13.9 5.3	MX1842F	20.1 9.1
18 457	48 1220	MX1848G	15.7 7.1	MX1848F	23.1 10.5
18 457	54 1372	MX1854G	17.5 7.9	MX1854F	21.5 9.7
18 457	60 1524	MX1860G	19.2 8.7	MX1860F	23.2 10.5
18 457	72 1829	MX1872G	22.5 10.2	MX1872F	27.5 12.5
24 610	24 610	MX2424G	12.2 5.5	MX2424F	14.2 6.4
24 610	30 760	MX2430G	13.9 6.3	MX2430F	15.9 7.2
24 610	36 914	MX2436G	15.6 7.1	MX2436F	19.6 8.9
24 610	42 1060	MX2442G	17.5 7.9	MX2442F	21.5 9.8
24 610	48 1220	MX2448G	19.3 8.7	MX2448F	25.3 11.5
24 610	54 1372	MX2454G	21.0 9.5	MX2454F	25.0 11.3
24 610	60 1524	MX2460G	22.8 10.5	MX2460F	26.8 12.1
24 610	72 1829	MX2472G	26.0 11.8	MX2472F	31.0 14.1

Actual Dimensions:
 Width: Add 1/4" (6mm) to nominal size.
 Length: Subtract 3/32" (7mm) from nominal size.



MetroMax i Open Grid Shelf



MetroMax i™ Solid Shelf

Heavy-Duty Dunnage Shelves

- Open grid and solid mat options.
- Compatible for use on MetroMax i™ and MetroMax Q shelving units.
- Weight capacity per shelf evenly distributed: 1,200 lbs. (544kg) on shelves up to and including 48" (1220mm) long; 900 lbs. (408kg) for shelves 60" (1524mm) long.
- Dunnage shelves are recommended for use on units with four posts, not as part of an add-on unit with two posts.

Nominal Width (in.) (mm)	Nominal Length (in.) (mm)	Shelf with Grid Mat Model No.	Approx. Pkd. Wt. (lbs.) (kg)	Shelf with Solid Mat Model No.	Approx. Pkd. Wt. (lbs.) (kg)
18 457	36 914	MHP1836G	18 8.2	MHP1836F	22 10.0
18 457	48 1220	MHP1848G	22 10.0	MHP1848F	26 11.8
18 457	60 1524	MHP1860G	26 11.8	MHP1860F	30 13.6
24 610	36 914	MHP2436G	21 9.5	MHP2436F	25 11.3
24 610	48 1220	MHP2448G	27 12.2	MHP2448F	31 14.1
24 610	60 1524	MHP2460G	33 15.0	MHP2460F	37 16.8



Heavy-Duty Dunnage Shelf

METROMAX i™ POLYMER SHELVING



Polymer Posts

- Corrosion proof with built-in Microban antimicrobial product protection.
- Compatible for use with MetroMax i™ and MetroMax Q shelves.
- Stationary posts include an adjustable leveling foot to compensate for uneven floors. Leveling foot can be adjusted 1" (25mm).
- When mounting a shelving unit to a dolly base, stationary posts are used.
- Special height cut posts are available. Consult your Metro representative.

Nominal Height (in.)	Nominal Height (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Stationary Post with Leveling Foot Model No.	Actual Height* (in.)	Actual Height* (mm)	Post for Stem Caster Model No.	Actual Height (in.)	Actual Height (mm)
9	228	0.3	0.15				MX9UP	9 ³ / ₄	235
13	370	0.5	0.2	MX13P	14 ³ / ₄	375	MX13UP	13 ³ / ₄	349
27	685	0.9	0.4	MX27P	26 ³ / ₄	730	MX27UP	27 ³ / ₄	705
33	875	1.0	0.5	MX33P	34 ³ / ₄	883	MX33UP	33 ³ / ₄	857
54	1370	1.6	0.7	MX54P	54 ³ / ₄	1391	MX54UP	53 ³ / ₄	1365
63	1585	1.8	0.8	MX63P	62 ³ / ₄	1594	MX63UP	61 ³ / ₄	1568
74	1690	2.2	1.0	MX74P	74 ³ / ₄	1899	MX74UP	73 ³ / ₄	1873
86	2195	2.5	1.1	MX86P	86 ³ / ₄	2203	MX86UP	85 ³ / ₄	2178



Replacement Leveling Foot: Model No. RPM3-FOOT
 Replacement Post Cap: Model No. RPMX3-POSTCAP
 Replacement MetroMax i™ Wedges: Model No. MX9985 Bag of 4

NOTE: Compatibility with existing Metro polymer mat shelving systems

- MetroMax i™ is interchangeable with MetroMax Q shelves (manufactured within or after April 2009) and MetroMax Q posts.
- MetroMax i™ shelves, posts, and wedges are NOT compatible with original MetroMax shelves, posts, and wedges manufactured before April 2009.

Post Clamp

Adds stability by joining posts of two separate units together. With it, each unit is supported by four posts and buttressed by the adjacent unit.

Model No. 9994X



Foot Plate

Use to add stability to the shelving unit or to bolt units to the floor.

Model No. Zinc 9993Z

Model No. Stainless Steel 9993S



Stem Casters

A variety of stem casters are offered for MetroMax i™ mobile applications. Stem caster models include bumpers. See Catalog Sheet 11.20 for stem casters.

Load Rating: 3 x Stem Caster Load Rating, maximum — 900 lbs. (363kg) per stem caster cart.



Job _____

METROMAX i™ POLYMER SHELVING



Starter and Add-On Units

- 4- and 5-tier models available. Consult the Metro catalog for models.
- Starter units: consist of shelves and (4) posts
- Add-on units: consist of shelves, (2) posts, and "S" Hooks (M9995)


"S" Hook: Used to "add on" one or multiple MetroMax i™ storage systems while eliminating the cost of two posts per unit. Can be used to join units end-to-end, back-to-back, at right angles, etc. Two "S" hooks are required for each shelf.
Model No. M9995

MetroMax i™ Intermediate "S" Hook Kit: Includes one intermediate bracket (pictured) and two "S" hooks. Snaps onto front or back of MetroMax i™ shelf when joining units at right angles.
Model No. MX9996




■	Regular "S" Hook location
✕	Intermediate bracket location
■	Post
□	Post not required


END-TO-END
"S" Hooks
M9995 — qty. 2



RIGHT ANGLES
Intermediate "S" Hook Kit
MX9996 — qty. 1



COMBINATION
Intermediate "S" Hook Kits
MX9996 — qty. 2



MetroMax i™ Carts

- 4- and 5-tier models
- All-grid and all-solid shelf models
- Units consist of shelves, (4) posts, (2) swivel, and (2) swivel brake casters.
- Consult the Metro catalog for models.



All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation
North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741
Fax: 570-825-2852

For Product Information:
U.S. and Canada: 1.800.433.2232

Latin America: 1.561.333.3824
Europe: +31.76.587.7550

Asia/Pacific: +65.6567.8003
Middle East/Africa: +971.4.811.8286

L02-177
Printed in U.S.A. 4/09
Information and specifications are subject to change without notice. Please confirm at time of order.
Copyright © 2009 InterMetro Industries Corp.



Item # _____

Job _____

METROMAX i™ POLYMER SHELVING with *Microban Antimicrobial Product Protection

Part of the innovative MetroMax iQ™ Storage System, MetroMax i™ is a lifetime storage solution. The product is corrosion proof, easy to clean, strong like wire shelving, and provides a very efficient use of storage space. MetroMax i™ is integrated with online space planning tools and tutorials. www.metro.com/iQ

- **Lifelong performance and corrosion proof:** All-polymer and Type 304 stainless design offers a lifetime warranty against rust and corrosion.
- **Strong and Durable:** Strong as steel, MetroMax i™ shelves hold as much weight as Metro's wire shelving and are impact resistant. Weight capacity for evenly distributed loads:
800 lbs. (363kg) per shelf for lengths of 24" to 48" (610 to 1220mm)
600 lbs. (275kg) per shelf for lengths of 54" (1370mm) or longer
2,000 lbs. (907kg) maximum per stationary unit.
- **Easiest to clean and maintain:** Smooth surfaces easily wipe clean. Polymer mats can be easily removed and cleaned in a sink or dish machine. Microban antimicrobial product protection is built into the high contact areas of the shelf including the mats, frames, and posts to protect the product from bacteria, mold, mildew, and fungus that cause odors and product degradation. Microban protection keeps the product "cleaner between cleanings".
- **Smooth, Protective Surfaces:** Smooth, flat surfaces protect packaged shelf contents from unwanted rips, tears, or damage.
- **Robust Open Grid and Solid Mat Options:** Open grid shelves promote air circulation and light penetration. One-piece solid mats contain spills and are ideal to protect items on the bottom shelf from dirt or backsplashes from cleaning floors. Shelf mats are sturdy and safely support concentrated loads from instrumentation and equipment.
- **Interchangeable:** Part of the MetroMax iQ™ Storage System, corrosion proof MetroMax i™ shelves and posts are compatible with corrosion resistant MetroMax Q™ shelves and posts.
- **Efficient, Organized Storage:** Premium MetroMax iQ™ accessories efficiently organize, contain, and compartmentalize *all* space between shelves.
- **Fast, Easy Assembly:** MetroMax i™ assembles easily in minutes, without tools. Shelves can be adjusted at 1" (25mm) increments along the post. Shelf wedges have a window to locate your desired position.



MetroMax i™ Mobile Unit



MetroMax i™ with Accessories

*MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban Products Company, Huntersville, NC.



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



MetroMax i™ Polymer Shelving

9.20



METROMAX i™ POLYMER SHELVING

Specifications

- **Longitudinal Beams and Posts:** Pultrusions — continuous glass fibers and thermoset resin composite with built-in Microban® antimicrobial product protection.
- **End Beams, Adjustable Foot and Socket:** Injection molded polyester thermoplastic resin with glass reinforcement
- **Shelf Wedge Connector:** reinforced nylon
- **Mats, Open and Solid:** Mineral reinforced polypropylene. Mats contain Microban® antimicrobial.
- **Post Cap and Center Beam Cap:** High-density polyethylene.
- **“S” Hook Tab Hole Plug:** Vinyl.
- **Collar and “S” Hook:** Type 304 Stainless Steel.
- **Bonding of Longitudinal Beams to End Beams:** High temperature polyamide adhesive and stainless steel screws.
- **Continuous Temperature —** MetroMax i™ can be used continuously within a range of -20/120° F (-29/49° C) with intermittent exposure to 212° F (100° C) for cleaning.

Standard Shelves

- Part number includes shelf with removable mats and one bag of wedges

Nominal Width (in.) (mm)	Nominal Length (in.) (mm)	Shelf with Grid Mat Model No.	Approx. Pkd. Wt. (lbs.) (kg)	Shelf with Solid Mat Model No.	Approx. Pkd. Wt. (lbs.) (kg)
18 457	24 610	MX1824G	8.7 4.0	MX1824F	12.7 5.8
18 457	30 760	MX1830G	10.5 4.7	MX1830F	14.5 6.6
18 457	36 914	MX1836G	12.2 5.5	MX1836F	17.2 7.8
18 457	42 1060	MX1842G	13.9 5.3	MX1842F	20.1 9.1
18 457	48 1220	MX1848G	15.7 7.1	MX1848F	23.1 10.5
18 457	54 1372	MX1854G	17.5 7.9	MX1854F	21.5 9.7
18 457	60 1524	MX1860G	19.2 8.7	MX1860F	23.2 10.5
18 457	72 1829	MX1872G	22.5 10.2	MX1872F	27.5 12.5
24 610	24 610	MX2424G	12.2 5.5	MX2424F	14.2 6.4
24 610	30 760	MX2430G	13.9 6.3	MX2430F	15.9 7.2
24 610	36 914	MX2436G	15.6 7.1	MX2436F	19.6 8.9
24 610	42 1060	MX2442G	17.5 7.9	MX2442F	21.5 9.8
24 610	48 1220	MX2448G	19.3 8.7	MX2448F	25.3 11.5
24 610	54 1372	MX2454G	21.0 9.5	MX2454F	25.0 11.3
24 610	60 1524	MX2460G	22.8 10.5	MX2460F	26.8 12.1
24 610	72 1829	MX2472G	26.0 11.8	MX2472F	31.0 14.1

Actual Dimensions:
 Width: Add 1/4" (6mm) to nominal size.
 Length: Subtract 3/32" (7mm) from nominal size.



MetroMax i Open Grid Shelf



MetroMax i™ Solid Shelf

Heavy-Duty Dunnage Shelves

- Open grid and solid mat options.
- Compatible for use on MetroMax i™ and MetroMax Q shelving units.
- Weight capacity per shelf evenly distributed: 1,200 lbs. (544kg) on shelves up to and including 48" (1220mm) long; 900 lbs. (408kg) for shelves 60" (1524mm) long.
- Dunnage shelves are recommended for use on units with four posts, not as part of an add-on unit with two posts.

Nominal Width (in.) (mm)	Nominal Length (in.) (mm)	Shelf with Grid Mat Model No.	Approx. Pkd. Wt. (lbs.) (kg)	Shelf with Solid Mat Model No.	Approx. Pkd. Wt. (lbs.) (kg)
18 457	36 914	MHP1836G	18 8.2	MHP1836F	22 10.0
18 457	48 1220	MHP1848G	22 10.0	MHP1848F	26 11.8
18 457	60 1524	MHP1860G	26 11.8	MHP1860F	30 13.6
24 610	36 914	MHP2436G	21 9.5	MHP2436F	25 11.3
24 610	48 1220	MHP2448G	27 12.2	MHP2448F	31 14.1
24 610	60 1524	MHP2460G	33 15.0	MHP2460F	37 16.8



Heavy-Duty Dunnage Shelf

METROMAX i™ POLYMER SHELVING



Polymer Posts

- Corrosion proof with built-in Microban antimicrobial product protection.
- Compatible for use with MetroMax i™ and MetroMax Q shelves.
- Stationary posts include an adjustable leveling foot to compensate for uneven floors. Leveling foot can be adjusted 1" (25mm).
- When mounting a shelving unit to a dolly base, stationary posts are used.
- Special height cut posts are available. Consult your Metro representative.

Nominal Height (in.)	Nominal Height (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Stationary Post with Leveling Foot Model No.	Actual Height* (in.)	Actual Height* (mm)	Post for Stem Caster Model No.	Actual Height (in.)	Actual Height (mm)
9	228	0.3	0.15				MX9UP	9 ³ / ₄	235
13	370	0.5	0.2	MX13P	14 ³ / ₄	375	MX13UP	13 ³ / ₄	349
27	685	0.9	0.4	MX27P	26 ³ / ₄	730	MX27UP	27 ³ / ₄	705
33	875	1.0	0.5	MX33P	34 ³ / ₄	883	MX33UP	33 ³ / ₄	857
54	1370	1.6	0.7	MX54P	54 ³ / ₄	1391	MX54UP	53 ³ / ₄	1365
63	1585	1.8	0.8	MX63P	62 ³ / ₄	1594	MX63UP	61 ³ / ₄	1568
74	1690	2.2	1.0	MX74P	74 ³ / ₄	1899	MX74UP	73 ³ / ₄	1873
86	2195	2.5	1.1	MX86P	86 ³ / ₄	2203	MX86UP	85 ³ / ₄	2178



Replacement Leveling Foot: Model No. RPM3-FOOT
 Replacement Post Cap: Model No. RPMX3-POSTCAP
 Replacement MetroMax i™ Wedges: Model No. MX9985 Bag of 4

NOTE: Compatibility with existing Metro polymer mat shelving systems

- MetroMax i™ is interchangeable with MetroMax Q shelves (manufactured within or after April 2009) and MetroMax Q posts.
- MetroMax i™ shelves, posts, and wedges are NOT compatible with original MetroMax shelves, posts, and wedges manufactured before April 2009.

Post Clamp

Adds stability by joining posts of two separate units together. With it, each unit is supported by four posts and buttressed by the adjacent unit.

Model No. 9994X



Foot Plate

Use to add stability to the shelving unit or to bolt units to the floor.

Model No. Zinc 9993Z

Model No. Stainless Steel 9993S



Stem Casters

A variety of stem casters are offered for MetroMax i™ mobile applications. Stem caster models include bumpers. See Catalog Sheet 11.20 for stem casters.

Load Rating: 3 x Stem Caster Load Rating, maximum — 900 lbs. (363kg) per stem caster cart.



Job _____

METROMAX i™ POLYMER SHELVING



Starter and Add-On Units

- 4- and 5-tier models available. Consult the Metro catalog for models.
- Starter units: consist of shelves and (4) posts
- Add-on units: consist of shelves, (2) posts, and "S" Hooks (M9995)


"S" Hook: Used to "add on" one or multiple MetroMax i™ storage systems while eliminating the cost of two posts per unit. Can be used to join units end-to-end, back-to-back, at right angles, etc. Two "S" hooks are required for each shelf.
Model No. M9995

MetroMax i™ Intermediate "S" Hook Kit: Includes one intermediate bracket (pictured) and two "S" hooks. Snaps onto front or back of MetroMax i™ shelf when joining units at right angles. Order one kit per shelf.
Model No. MX9996




	Regular "S" Hook location
	Intermediate bracket location
	Post
	Post not required


END-TO-END
"S" Hooks
M9995 — qty. 2



RIGHT ANGLES
Intermediate "S" Hook Kit
MX9996 — qty. 1



COMBINATION
Intermediate "S" Hook Kits
MX9996 — qty. 2



MetroMax i™ Carts

- 4- and 5-tier models
- All-grid and all-solid shelf models
- Units consist of shelves, (4) posts, (2) swivel, and (2) swivel brake casters.
- Consult the Metro catalog for models.



All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation
North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741
Fax: 570-825-2852

For Product Information:
U.S. and Canada: 1.800.433.2232

Latin America: 1.561.333.3824
Europe: +31.76.587.7550

Asia/Pacific: +65.6567.8003
Middle East/Africa: +971.4.811.8286

L02-177
Printed in U.S.A. 4/09
Information and specifications are subject to change without notice. Please confirm at time of order.
Copyright © 2009 InterMetro Industries Corp.



METROMAX iQ™ ACCESSORIES

Stem Casters

Stem casters are used with stem caster posts to create transport carts or to enable fully loaded stationary storage units to be easily repositioned when cleaning floors or walls.

Consider stem casters with polymer horns and stainless axles (5PCX, 5PCBX, 5PCRX) for greater corrosion protection.

- **MetroMax iQ Stem Casters:** Use with polymer or steel stem caster posts to create a storage and transport unit to meet your needs.

Model No.	Wheel Tread	Type	Wheel Diameter		Face		Load Rating		Approx. Pkd. Wt.	
			(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)	(lbs.)	(kg)
5MX	Resilient	Stem/Swivel	5	127	1¼	32	200	90	2¾	1.2
5MBX	Resilient	Stem/Brake	5	127	1¼	32	200	90	3	1.4
5MRX	Resilient	Stem/Rigid	5	127	1¼	32	200	90	3¾	1.7
5MPX	Polyurethane	Stem/Swivel	5	127	1¼	32	300	135	2¼	1.0
5MPBX	Polyurethane	Stem/Brake	5	127	1¼	32	300	135	2½	1.1
5MPRX	Polyurethane	Stem/Rigid	5	127	1¼	32	300	135	2¼	1.0
5MDXA	Resilient	Stem/Swivel Donut	5	127	1¼	32	250	110	2½	1.1
5MDBXA	Resilient	Stem/Brake Donut	5	127	1¼	32	250	110	2½	1.1
5MDRXA	Resilient	Stem/Rigid Donut	5	127	1¼	32	250	110	2½	1.1

Donut bumpers included.



5MPX

- **Polymer Casters:** Corrosion-resistant design.

Model No.	Wheel Tread	Type	Wheel Diameter		Face		Load Rating		Approx. Pkd. Wt.	Temperature Range	
			(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)	(lbs.)	(kg)	
5PCX	Polyurethane	Swivel	5	127	1¼	32	300	135	2	.9	-20°F to 120°F
5PCBX	Polyurethane	Brake	5	127	1¼	32	300	135	2	.9	-20°F to 120°F
5PCRX	Polyurethane	Rigid	5	127	1¼	32	300	135	2	.9	-20°F to 120°F



5PCX

Specific Models with Antimicrobial Protection

Cat. No.	Wheel Tread	Type	Wheel Diameter		Face		Load Rating		Approx. Pkd. Wt.	Temperature Range	
			(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)	(lbs.)	(kg)	
5PCXM	Polyurethane	Swivel	5	127	1¼	32	300	135	2	.9	-20°F to 120°F
5PCBXM	Polyurethane	Brake	5	127	1¼	32	300	135	2	.9	-20°F to 120°F

NOTE 1: Optional thread guards (blue) may be ordered by adding "-TG" to the desired model number (e.g. 5PC-TG, 5PCB-TG, 5PCR-TG).

NOTE 2: Stem casters are shipped with donut bumpers at no extra charge.

NOTE 3: Rigid casters are held in place by a connecting channel. When ordering, shelf depth must be provided.



Replacement Bumper
Model No. M9992DBX

Truck Dolly Bases

For heavy duty mobile applications. Truck dollies are available in aluminum or stainless construction with corner bumpers or wrap-around bumpers.

For more information, refer to Spec Sheet 11.37



Mounting Bolt Kit

When ordering a dolly frame for use with MetroMax i™ or MetroMax Q, include mounting bolt kit **DMK-2X** on order.

Order one mounting bolt kit per dolly.



Item # _____

Job _____



MetroMax iQ™ Accessories

METROMAX iQ™ ACCESSORIES

MetroMax iQ Storage System consists of interchangeable corrosion proof MetroMax i™ and corrosion resistant MetroMax Q™ shelves and posts. While most accessories are compatible on both shelf styles, some must be selected based on the style of shelf, and are noted accordingly. Accessories listed in this specification sheet are NSF listed unless noted otherwise.



2" (51mm) Stackable Shelf Ledges

- Prevent items from falling off shelves.
- Snap on and off quickly. Easily stacked to contain larger items
- Corrosion proof: Polymer (High-Density Polypropylene) and Type 304 stainless steel.
- Ships assembled.

i Ledge Model No.	Q Ledge Model No.	Type	Nominal Length (in.) (mm)	
MXLS18-2S	MQLS18-2S	Side	18	457
—	MQLS21-2S	Side	21	530
MXLS24-2S	MQLS24-2S	Side	24	610
MXL24-2S	MQL21-2S	Back	24	610
MXL30-2S	MQL30-2S	Back	30	760
MXL36-2S	MQL36-2S	Back	36	914
MXL42-2S	MQL42-2S	Back	42	1066
MXL48-2S	MQL48-2S	Back	48	1219
MXL54-2S	MQL54-2S	Back	54	1370
MXL60-2S	MQL60-2S	Back	60	1524
MXL72-2S	MQL72-2S	Back	72	1829



8" (203mm) Shelf Dividers — standard duty

- Use to create organized compartments or to simply separate shelf contents.
- Easily repositioned on grid and solid shelves.
- Corrosion proof: Polymer (High-Density Polypropylene).
- Three-piece design — Ships assembled.

i Ledge Model No.	Q Ledge Model No.	Nominal Length (in.) (mm)	
MXD18-8	MQD18-8	18	457
MXD24-8	MQD24-8	24	610



8" (203mm) Universal Shelf Dividers — light duty, for open grid shelves

- Maximum flexibility: Can be repositioned along the entire shelf.
- Easiest divider to install.
- Three-piece design; clips connect to any open grid or wire shelf; divider panel then drops into place. Does not attach to solid shelves.
- Corrosion proof: Polymer (High-Density Polypropylene).

i and Q Model No.	Fits Shelf Depth	Nominal Length (in.) (mm)	
MUD18-8	18", 21" (457, 530mm)	18	457
MUD24-8	24" (610mm)	24	610



Replacement clips: Model No. MTLA Bag of (2)



InterMetro Industries Corporation
 North Washington Street
 Wilkes-Barre, PA 18705
 www.metro.com



9.25

**ITEM# 6 - SINK, HAND**

Advance Tabco Model 7-PS-20 (1 REQ'D)

Hand Sink, wall model, 14" wide x 10" front-to-back x 5" deep, 20 gauge stainless steel construction, with deck mounted fixed faucet, basket drain

ACCESSORIES:

MFR	Qty	Model	Spec
Advance	1	K-320-LU	Wrist Handles, for deck mounted faucets



SPLASH MOUNTED FAUCETS



7-PS-60

7-PS-68



7-PS-50

DECK MOUNTED FAUCET



7-PS-20



7-PS-67

SINGLE HOLE PUNCH
Faucet omitted



7-PS-71

DOUBLE HOLE PUNCH
Faucet omitted



7-PS-70

LARGE SIZE SINK BOWL



7-PS-45

Features Large Size Sink Bowl 16" x 20" x 8"

STAINLESS STEEL
HAND SINKS STANDARD NSF

Item #: _____ **Qty #:** _____
Model #: _____
Project #: _____

Keyhole Bracket for easier installation and greater stability.



FEATURES:

One piece **Deep Drawn** sink bowl design.
Sink bowl is 10" x 14" x 5". (7-PS-45 sink bowl size is 16" x 20" x 8")
All sink bowls have a large liberal radii with a minimum dimension of 2" and are rectangular in design for increased capacity.
Keyhole wall mount bracket.
Stainless steel basket drain 1-1/2" IPS.

Specific Features:

7-PS-50 features lever operated drain and built-in overflow with plastic overflow tube and spring clamps. P-Trap is 1 1/2".
7-PS-20 4" O.C. deck mounted centerset faucet furnished with aerator.
7-PS-50 & 7-PS-60 4" O.C. splash mounted gooseneck faucet, chrome plated & furnished with aerator.
7-PS-45 Same as above plus 2 Support Brackets (Hardware Included).
7-PS-67 features lever operated drain.
7-PS-68 4" O.C. splash mounted gooseneck faucet with Wrist Handles, chrome plated & furnished with aerator.

CONSTRUCTION:

All TIG welded.
Welded areas blended to match adjacent surfaces and to a satin finish.
Die formed Countertop Edge with a No-Drip offset.
One sheet of stainless steel - No Seams.

MATERIAL:

Heavy gauge type 304 series stainless steel.
Wall mounting bracket is Galvanized and of offset design.
All fittings are brass / chrome plated unless otherwise indicated.

MECHANICAL:

Faucet supply is 1/2" IPS male thread hot and cold.

Standard Faucet conforms to NSF 61 Standard 9. An optional faucet upgrade is required for compliance to AB 1953 Standards.

For Replacement Faucets & Upgrades, Drains & Accessories visit our website at www.advancetabco.com



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK
Fax: (631) 242-6900

GEORGIA
Fax: (770) 775-5625

TEXAS
Fax: (972) 932-4795

NEVADA
Fax: (775) 972-1578

DIMENSIONS and SPECIFICATIONS

TOL Overall: ± .500" Interior: ± .250"

FITTINGS SUPPLIED AS SHOWN

ALL DIMENSIONS ARE TYPICAL

<p>7-PS-20</p> <p>15 lbs.</p>	<p>TOP VIEW FOR: 7-PS-50 7-PS-60 7-PS-68 7-PS-70</p> <p>Sink Bowl 10" x 14" x 5"</p>
<p>7-PS-67</p> <p>15 lbs.</p>	<p>7-PS-50</p> <p>15 lbs.</p>
<p>7-PS-45</p> <p>31 lbs.</p>	<p>7-PS-60</p> <p>13 lbs.</p>
	<p>7-PS-68</p> <p>13 lbs.</p>
	<p>7-PS-70</p> <p>12 lbs.</p> <p>7-PS-71 Same as 7-PS-70 with Single Hole Cutout</p>



B-1a 200 Heartland Boulevard, Edgewood, NY 11717-8380

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, APRIL 2010



DECK MOUNTED FAUCETS

<p>Lavatory Faucet</p>  <p>K-22</p>	<p>Drinking Bubbler</p>  <p>K-47</p>	<p>Single Handle Faucet</p>  <p>K-48</p>	<p>8" Swing Spout</p>  <p>K-50</p>
<p>3 1/2" Gooseneck</p>  <p>K-52</p>	<p>12" Swing Spout</p>  <p>K-53</p>	<p>Water Filler</p>  <p>K-54</p>	<p>8 1/2" Gooseneck Large Spout</p>  <p>K-55</p>
<p>Gooseneck with Wrist Handles</p>  <p>K-56</p> <p>Wrist Handles Only</p>  <p>K-320-LU</p>	<p>Swing Spout with Spray</p>  <p>K-58</p>	<p>Extra Heavy Duty Gooseneck</p>  <p>LEAD FREE COMPLIANT</p> <p>K-62</p>	<p>HEAVY DUTY Pre-Rinse Faucet (T&S)</p>  <p>K-115</p> <p>K-114 Replacement Spray Head & Handle</p> 
<p>6" Extended Spout</p>  <p>K-124</p>	<p>Heavy Duty 5-1/2" Gooseneck</p>  <p>K-132</p>	<p>Heavy Duty 9" Swing Spout</p>  <p>K-133</p>	<p>Eye Wash Attachment</p>  <p>K-170</p>
<p>AC/DC powered Hands-Free Gooseneck</p> <p>AC & Battery Operated!</p>  <p>K-180</p>	<p>Metered Faucet</p>  <p>K-190</p>	<p>6" Extended Spout with Wrist Handles</p>  <p>K-208</p>	<p>Hands-Free Wand</p>  <p>K-400</p>
<p>Repair Kit For K-22, K-50, K-52 & K-59</p>  <p>K-03 Repair Kit can only be used on faucets purchased after 12/03</p>			

For Lead Free Compliant Faucets, add -CA after model number (Example: K-50-CA)



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK
Fax: (631) 242-6900

GEORGIA
Fax: (770) 775-5625


TEXAS
Fax: (972) 932-4795

NEVADA
Fax: (775) 972-1578

DIMENSIONS and SPECIFICATIONS


TOL ± .125"

ALL DIMENSIONS ARE TYPICAL

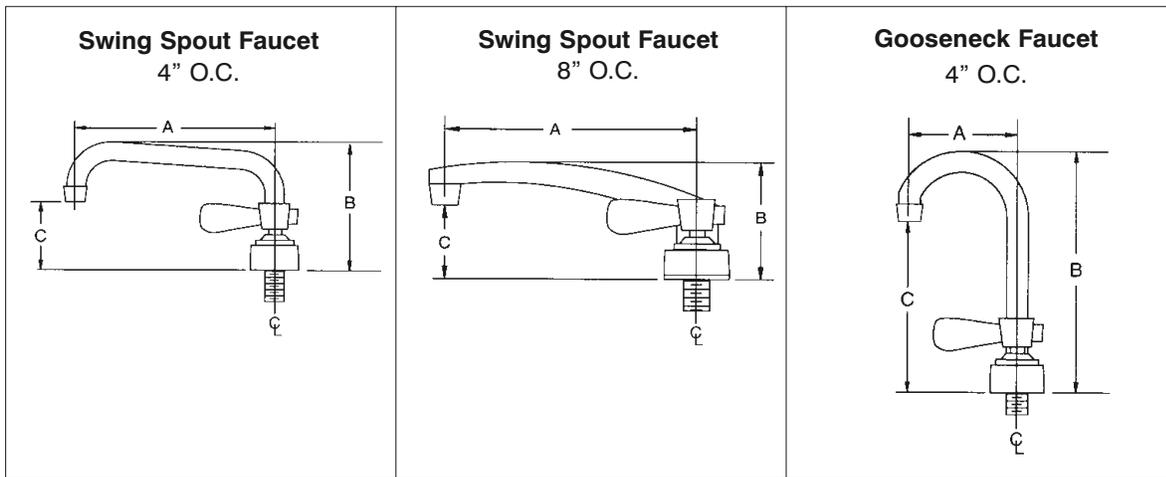

Standard Faucet conforms to NSF 61 Standard 9. An optional faucet upgrade is required for compliance to AB 1953 Standards.
 For Replacement Faucets & Upgrades, Drains & Accessories visit our website at www.advancetabco.com

ALL FAUCET AERATORS CONFORM TO ASTM.A112.18.1M 2.0 GPM/7.56 LPM THREAD: 55/64 - 27 FEMALE K-22 THREAD: 15/16 - 27 MALE

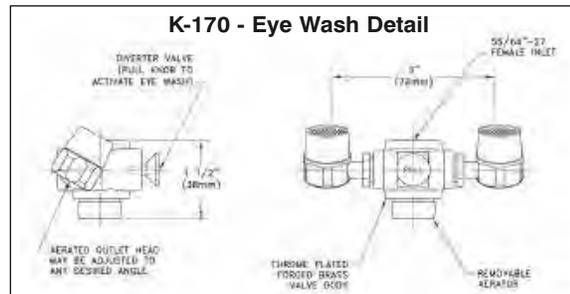

MODEL #	Description	A LENGTH	B HEIGHT	C DECK TO SPOUT	On Center Dimensions
K-03	Repair Kit For K-50, K-52 and K-59	N/A	N/A	N/A	N/A
K-22	Lavatory Faucet	3 1/2"	3"	2"	4" O.C.
K-47	Drinking Bubbler	4 1/16"	5 3/4"	3"	Single Hole
K-48	Single Handle Faucet	8 1/2"	15 3/4"	10"	Single Hole
K-50	8" Swing Spout Faucet	8"	4 3/4"	2"	4" O.C.
K-52	3 1/2" Gooseneck Faucet	3 1/2"	8"	5"	4" O.C.
K-53	12" Swing Spout Faucet	12"	5 1/2"	3 1/2"	4" O.C.
K-54	Water Filler Faucet	2 1/2"	9 1/2"	8"	Single Hole
K-55	8 1/2" Gooseneck Faucet	8 1/2"	14 1/4"	8 1/2"	4" O.C.
K-56	Gooseneck Faucet with Wrist Handles	3 1/2"	8"	5"	4" O.C.
K-58	Swing Spout Faucet with Spray	8"	3 1/2"	2 3/16"	8" O.C.
K-62	Extra Heavy Duty Gooseneck Faucet	3 1/2"	11 7/8"	9 1/4"	4" O.C.
K-115	Heavy Duty Pre-Rinse (T&S) Faucet	15"	40"	9"	Single Hole
K-124	6" Extended Spout Faucet	6"	6"	3 1/4"	4" O.C.
K-132	Heavy Duty 5-1/2" Gooseneck Faucet	5 1/2"	10 11/16"	5 5/8"	8" O.C.
K-133	Heavy Duty 9" Swing Spout Faucet	9"	8 13/16"	6 1/4"	8" O.C.
K-170	Eye Wash Attachment (See Above Detail)	N/A	N/A	N/A	N/A
K-180	Hands Free AC/DC Operated Faucet 6' Cord. INPUT: 100-240VAC 47-6Hz. < 1 Amp Draw. UL LISTED	4 3/8"	10 1/4"	6 3/4"	Single Hole
K-190	Metered Faucet	2 3/4"	5 1/2"	2"	Single Hole
K-208	6" Extended Spout Faucet With Wrist Handles	6"	6"	3 1/4"	4" O.C.
K-400	Hands Free Wand	N/A	N/A	N/A	N/A

N/A = Not Applicable To Faucet



G-1a 200 Heartland Boulevard, Edgewood, NY 11717-8380

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, DECEMBER 2009

**ITEM# 7 - WORK TABLE, 60" LONG**

Advance Tabco Model KMS-305 (1 REQ'D)

Work Table, 30" wide top, with splash at rear only, 60" long, with adjustable undershelf, s/s frame & shelf, 16 gauge, type 304 stainless steel top, 5" backsplash, s/s bullet feet

ACCESSORIES:

MFR	Qty	Model	Spec
Advance	2	SS-2015	Deluxe Drawer, 20" x 15" x 5", stainless steel, with drawer slides



STAINLESS STEEL
WORK TABLES
STANDARD Series - 5" Backsplash - Undershelf Style

Item #: _____ **Qty #:** _____

Model #: _____

Project #: _____

FEATURES:

Top is furnished with a 1 5/8" sanitary rolled rim edge on front, 1 5/8" square side edges, and a 5" splash with a 1" return on the rear side.

TWO hat channels stud welded to reinforce and maintain a level working surface. 30" and 36" wide tables supplied with THREE hat channels.

Pre-engineered welded angle adapters insure ease of future drawer installation.

Aluminum die cast "leg-to-shelf" clamp secures shelf to leg eliminating unsightly nuts and bolts. Undershelf is adjustable.

CONSTRUCTION:

All TIG welded. Exposed weld areas polished to match adjacent surfaces.

Entire top mechanically polished to a satin finish.

Top is sound deadened.

Roll formed embossed galvanized hat channels are secured to top by means of structural adhesive and weld studs.

Gussets welded to support hat sections.



NEW
Rolled Rim Edges on Front & Splash on Back and Square Side Edges



Featuring as Standard:
"THE PROVEN"
ORIGINAL ADVANCE TABCO
Adjustable Undershelf with Die Cast Leg Clamp

MATERIAL:

KMS-SERIES: Stainless Steel Legs & Undershelf

TOP: 16 gauge stainless steel type "304" series.

SHELF: 18 gauge stainless steel.

LEGS: 1 5/8" diameter tubular stainless steel.
1" adjustable stainless steel bullet feet.
Stainless steel gussets.

KMG-SERIES: Galvanized Legs & Undershelf

TOP: 16 gauge stainless steel type "304" series.

SHELF: 18 gauge galvanized steel.

LEGS: 1 5/8" diameter tubular galvanized steel.
1" adjustable plastic bullet feet.
Galvanized steel gussets.

KMS-Series:
Stainless Steel Legs & Undershelf

L	24" Wide	30" Wide	36" Wide
30"	KMS-240	KMS-300	
24"	KMS-242	KMS-302	
36"	KMS-243	KMS-303	KMS-363
48"	KMS-244	KMS-304	KMS-364
60"	KMS-245	KMS-305	KMS-365
72"	KMS-246	KMS-306	KMS-366
84"	KMS-247	KMS-307	KMS-367
96"	KMS-248	KMS-308	KMS-368
108"	KMS-249	KMS-309	KMS-369
120"	KMS-2410	KMS-3010	KMS-3610
132"	KMS-2411	KMS-3011	KMS-3611
144"	KMS-2412	KMS-3012	KMS-3612

KMG-Series:
Galvanized Steel Legs & Undershelf

L	24" Wide	30" Wide	36" Wide
30"	KMG-240	KMG-300	
24"	KMG-242	KMG-302	
36"	KMG-243	KMG-303	KMG-363
48"	KMG-244	KMG-304	KMG-364
60"	KMG-245	KMG-305	KMG-365
72"	KMG-246	KMG-306	KMG-366
84"	KMG-247	KMG-307	KMG-367
96"	KMG-248	KMG-308	KMG-368
108"	KMG-249	KMG-309	KMG-369
120"	KMG-2410	KMG-3010	KMG-3610
132"	KMG-2411	KMG-3011	KMG-3611
144"	KMG-2412	KMG-3012	KMG-3612



Create Your Own Efficient Workstation with the Available Standard Accessories (Visit Section K)



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK
Fax: (631) 242-6900

GEORGIA
Fax: (770) 775-5625

TEXAS
Fax: (972) 932-4795

NEVADA
Fax: (775) 972-1578


DETAILS and SPECIFICATIONS

ALL DIMENSIONS ARE TYPICAL TOL ± .500"



All Units Shipped Unassembled (KD) for Reduced Shipping Costs.

KMS & KMG Series Undershelf Style 5" Backsplash

Finished size of undershelf = Length minus 5 3/4"
Width minus 5 3/4"



Units 8ft. and larger are furnished with six (6) legs

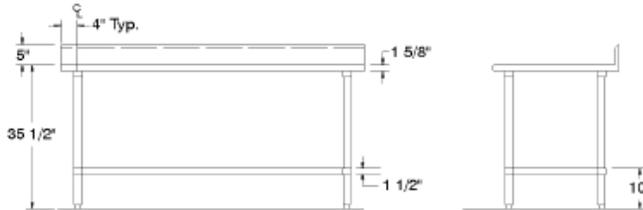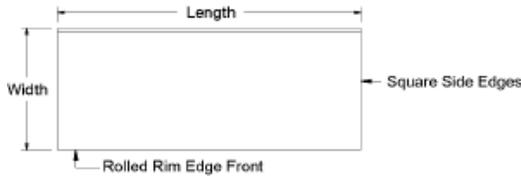

KMS-Series: Stainless Steel Legs & Undershelf

L	24" Wide	Wt.	30" Wide	Wt.	36" Wide	Wt.
30"	KMS-240	55 lbs.	KMS-300	70 lbs.		
24"	KMS-242	50 lbs.	KMS-302	56 lbs.		
36"	KMS-243	66 lbs.	KMS-303	77 lbs.	KMS-363	92 lbs.
48"	KMS-244	81 lbs.	KMS-304	92 lbs.	KMS-364	101 lbs.
60"	KMS-245	95 lbs.	KMS-305	111 lbs.	KMS-365	121 lbs.
72"	KMS-246	113 lbs.	KMS-306	129 lbs.	KMS-366	142 lbs.
84"	KMS-247	135 lbs.	KMS-307	153 lbs.	KMS-367	169 lbs.
96"	KMS-248	150 lbs.	KMS-308	171 lbs.	KMS-368	189 lbs.
108"	KMS-249	165 lbs.	KMS-309	195 lbs.	KMS-369	260 lbs.
120"	KMS-2410	268 lbs.	KMS-3010	294 lbs.	KMS-3610	315 lbs.
132"	KMS-2411	301 lbs.	KMS-3011	331 lbs.	KMS-3611	358 lbs.
144"	KMS-2412	316 lbs.	KMS-3012	346 lbs.	KMS-3612	373 lbs.

KMG-Series: Galvanized Steel Legs & Undershelf

L	24" Wide	Wt.	30" Wide	Wt.	36" Wide	Wt.
30"	KMG-240	55 lbs.	KMG-300	70 lbs.		
24"	KMG-242	50 lbs.	KMG-302	56 lbs.		
36"	KMG-243	66 lbs.	KMG-303	77 lbs.	KMG-363	92 lbs.
48"	KMG-244	81 lbs.	KMG-304	92 lbs.	KMG-364	101 lbs.
60"	KMG-245	95 lbs.	KMG-305	111 lbs.	KMG-365	121 lbs.
72"	KMG-246	113 lbs.	KMG-306	129 lbs.	KMG-366	142 lbs.
84"	KMG-247	135 lbs.	KMG-307	153 lbs.	KMG-367	169 lbs.
96"	KMG-248	150 lbs.	KMG-308	171 lbs.	KMG-368	189 lbs.
108"	KMG-249	165 lbs.	KMG-309	195 lbs.	KMG-369	260 lbs.
120"	KMG-2410	268 lbs.	KMG-3010	294 lbs.	KMG-3610	315 lbs.
132"	KMG-2411	301 lbs.	KMG-3011	331 lbs.	KMG-3611	358 lbs.
144"	KMG-2412	316 lbs.	KMG-3012	346 lbs.	KMG-3612	373 lbs.



J-3a

200 Heartland Boulevard, Edgewood, NY 11717-8380

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, SEPTEMBER 2005



DELUXE AND BUDGET DRAWERS

- Stainless Steel Front
- Ball Bearing Slides
- Removable Inset



MODEL #	Width	Description	Inset
SS-2015	17 3/4"	Stainless Steel	20" x 15" x 5"
GZ-2015	17 3/4"	Galvanized	20" x 15" x 5"
SS-2020	22 3/4"	Stainless Steel	20" x 20" x 5"
GZ-2020	22 3/4"	Galvanized	20" x 20" x 5"

DELUXE AND BUDGET DRAWER ACCESSORIES

Pad Lock Hasp TA-13

Drawer Lock TA-14
(Does not apply to Budget Drawers)

Drawers Modified to 15" L/R x 20" F/B* TA-50

Drawer Adapter/Non Catalog Tables (specify table width) TA-90

- Friction Slides
- Die Formed Handle



MODEL #	Width	Description	Inset
FS-2015	17 3/4"	Stainless Steel	20" x 15" x 5"
FG-2015	17 3/4"	Galvanized	20" x 15" x 5"
FS-2020	22 3/4"	Stainless Steel	20" x 20" x 5"
FG-2020	22 3/4"	Galvanized	20" x 20" x 5"

Item #: _____ **Qty #:** _____

Model #: _____


Project #: _____

DELUXE SERIES DRAWERS

DETAILS and SPECIFICATIONS

TOL ± .500"

ALL DIMENSIONS ARE TYPICAL

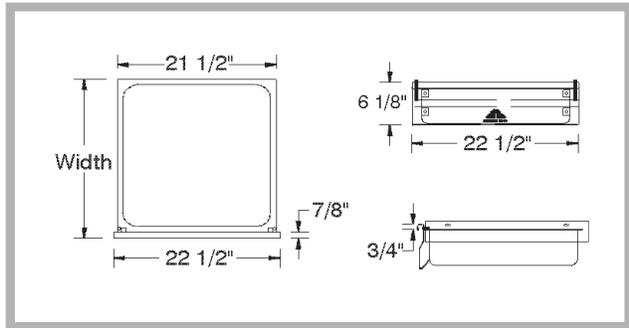


BUDGET SERIES DRAWERS

DETAILS and SPECIFICATIONS

TOL ± .500"

ALL DIMENSIONS ARE TYPICAL

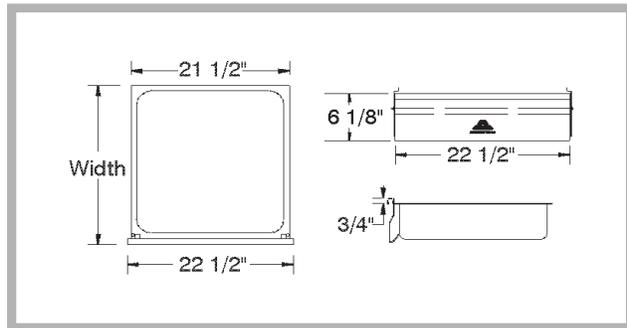

Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK
Fax: (631) 242-6900

GEORGIA
Fax: (770) 775-5625

TEXAS
Fax: (972) 932-4795

NEVADA
Fax: (775) 972-1578

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice. © ADVANCE TABCO, JUNE 2007 **K-3A**

**ITEM# 8 - CABINET, WALL-MOUNTED**

Advance Tabco Model WCH-15-48 (1 REQ'D)

Cabinet, wall-mounted, enclosed design with hinged doors, 48" long with single intermediate shelf, stainless steel construction

ACCESSORIES:

MFR	Qty	Model	Spec
Advance	4	TA-115	Upgrade wall cabinet mid-shelf to be adjustable (applies to WCO, WCS and WCH cabinets only) (per linear foot - must equal width of cabinet)



STAINLESS STEEL
**15" Wide
 WALL CABINETS**



Item #: _____ *Qty #:* _____
Model #: _____
Project #: _____



SLIDING DOORS
 (Shown with Optional Door Lock)



HINGE DOORS
 (Shown with Optional Door Lock)



OPEN

THREE AVAILABLE OPTIONS!

	WCS Series	WCO Series	WCH Series		
L	Sliding Doors Style	Open Style	Hinge Doors Style	Hinge Doors Sizes	Weight
36"	-	WCO-15-36	WCH-15-36	18"	85 lbs.
48"	WCS-15-48	WCO-15-48	WCH-15-48	24"	105 lbs.
60"	WCS-15-60	WCO-15-60	WCH-15-60	30"	125 lbs.

FEATURES:

Wall hung cabinet with intermediate shelf.
 Sloping Top enhances sanitary configuration.

CONSTRUCTION:

All TIG welded using the TIG process.
 Welded seams finished to match adjacent surfaces.
 Unit polished to a satin finish.

MATERIAL:

18 gauge type 430 series stainless steel.
 Stainless steel hinges and handles.
 Mounting hardware is not supplied.

**OPTIONAL
 DOOR LOCK
 TA-46**



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.
 Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK
 Fax: (631) 242-6900

GEORGIA
 Fax: (770) 775-5625

TEXAS
 Fax: (972) 932-4795



NEVADA
 Fax: (775) 972-1578

DETAILS and SPECIFICATIONS



TOL ± .500"

ALL DIMENSIONS ARE TYPICAL



WCO-Series
Open Style

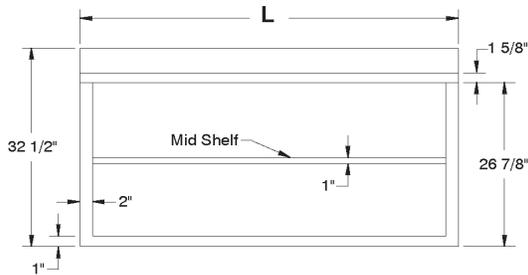


WCS-Series
Sliding Door Style

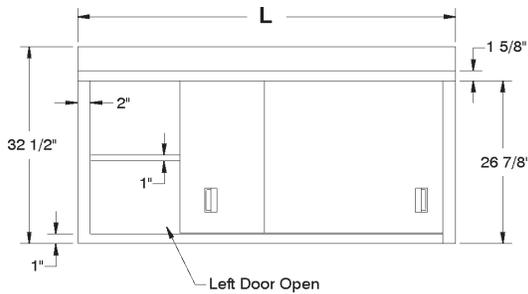

WCH-Series
Hinge Door Style

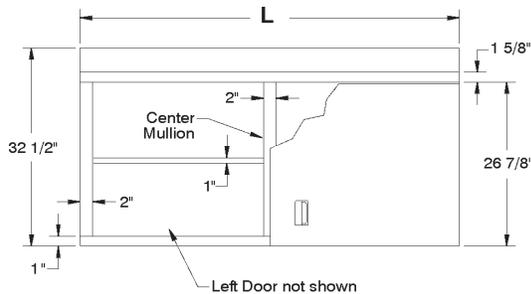

OFFSET DETAIL



L-12a 200 Heartland Boulevard, Edgewood, NY 11717-8380

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, APRIL 2009



STAINLESS STEEL
**15" Wide
 WALL CABINETS**



Item #: _____ *Qty #:* _____
Model #: _____
Project #: _____



SLIDING DOORS
 (Shown with Optional Door Lock)



HINGE DOORS
 (Shown with Optional Door Lock)



OPEN

THREE AVAILABLE OPTIONS!

	WCS Series	WCO Series	WCH Series		
L	Sliding Doors Style	Open Style	Hinge Doors Style	Hinge Doors Sizes	Weight
36"	-	WCO-15-36	WCH-15-36	18"	85 lbs.
48"	WCS-15-48	WCO-15-48	WCH-15-48	24"	105 lbs.
60"	WCS-15-60	WCO-15-60	WCH-15-60	30"	125 lbs.

FEATURES:

Wall hung cabinet with intermediate shelf.
 Sloping Top enhances sanitary configuration.

CONSTRUCTION:

All TIG welded using the TIG process.
 Welded seams finished to match adjacent surfaces.
 Unit polished to a satin finish.

MATERIAL:

18 gauge type 430 series stainless steel.
 Stainless steel hinges and handles.
 Mounting hardware is not supplied.

**OPTIONAL
 DOOR LOCK
 TA-46**





<p>ADVANCE TABCO. SMART FABRICATION™ www.advancetabco.com</p>	<p>Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T. Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933</p>			
	<p>NEW YORK Fax: (631) 242-6900</p>	<p>GEORGIA Fax: (770) 775-5625</p>	<p>TEXAS Fax: (972) 932-4795</p>	<p>NEVADA Fax: (775) 972-1578</p>

DETAILS and SPECIFICATIONS



TOL ± .500"

ALL DIMENSIONS ARE TYPICAL



WCO-Series
Open Style

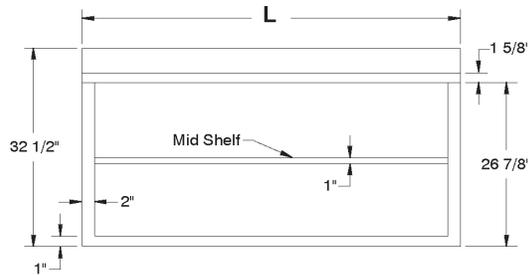


WCS-Series
Sliding Door Style

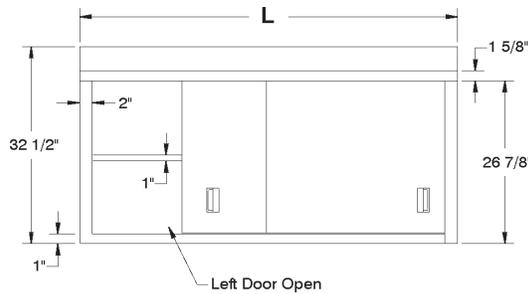

WCH-Series
Hinge Door Style

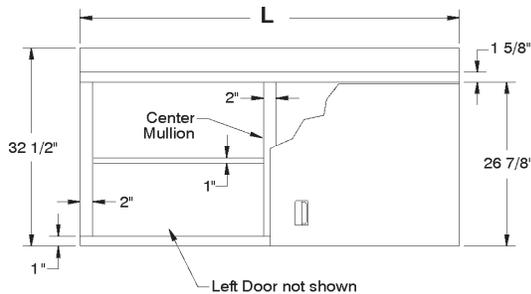

OFFSET DETAIL



L-12a 200 Heartland Boulevard, Edgewood, NY 11717-8380

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, APRIL 2009

**ITEM# 9 - FOOD SLICER****Berkel Inc. Model 827E (1 REQ'D)****Slicer, manual, angled gravity feed, 12" dia. C.S. knife, permanent knife guard, built-in sharpener, 6' cord & plug, 1/3 HP****ACCESSORIES:**

<u>MFR</u>	<u>Qty</u>	<u>Model</u>	<u>Spec</u>
Berkel	1		1 year parts, service & travel warranty, std.
Berkel	1		115v/60/1-ph, 2.5 amps, std.



Model 825E



Safety and Convenience Features

Berkel Models 823E, 825E and 827E manual gravity feed slicers feature Berkel's hollow ground, chromium-plated carbon steel knife and built-in, dual-action sharpener with convenient handle located on the sharpener cover. The permanent, tapered guard covers the non-slicing portion of the knife even when the sharpener and center plate are removed. The ring guard is designed to provide added room behind the knife for easy cleaning. The compact, space-saving design is ideal for limited kitchen counter space. Units are easy to clean and disassemble quickly without tools.

Approved By: _____
Date _____

**Berkel Company • 4406 Technology Drive • South Bend, IN 46628-9700
 574-232-8222 • 800-348-0251 • FAX 888-888-2838 • www.berkel.com**

Form #SPC01-0607R

Item # _____

**Model 800E Series
 Manual Gravity Feed Slicers**

- 823E 9" Knife
- 825E 10" Knife
- 827E 12" Knife

Standard Features

- 1-speed, 1/4 HP, 1/3 HP (827E), totally enclosed and permanently lubricated knife motor
- Furnished in 115/60/1, 2.5 amp, AC, ETL listed.
- Finish is stainless steel and sanitary, anodized aluminum; unit disassembles quickly without tools for easy cleaning
- 45° Product table on 827E model
- 823E is a nominal 9(220 mm) diameter;
 825E is a nominal 10(250 mm) diameter;
 827E is a nominal 12(300 mm) diameter; hollow ground, hardened and polished forged chromium-plated carbon steel knife
- 823E carriage handles food up to 7-1/8" (181 mm) wide, by 6" (152 mm) high or 6" (152 mm) diameter
 825E carriage handles food up to 7-1/2"(191 mm) wide, by 6" (152 mm) high or 7"(178 mm) diameter
 827E carriage handles food up to 8-3/4" (222 mm) wide, by 7-1/4"(184 mm) high or 7" (178 mm) diameter
- Precise slice adjustment to a thickness of 9/16" (14 mm)
- Built-in, top-mounted, two stone knife sharpener with dual-action system
- Permanent, tapered knife ring guard covers non-slicing portion of knife even when the sharpener and center plate are removed; ring guard design provides more room behind the knife for easy cleaning
- Positive, moisture protected, on/off rocker switch (823E, 825E); rotary switch (827E); and power indicator light
- Attached 6-foot, flexible, 3-wire cord and plug for grounded receptacle



Manual Gravity Feed Slicer Model 800E Series



Model 800E Series Manual Gravity Feed Slicers

Manual Gravity Feed Slicer Model 800E Series

Model No.	Cutting Capacity	Slice Thickness	Knife Diameter	Product Dimensions		
				Width A	Depth B	Height C
823E	7-1/8" (181 mm) wide 6" (152 mm) high 6" (152 mm) diameter	to 9/16" (14 mm)	9" (220mm)	15-1/4" (387 mm)	18-3/4" (476 mm)	14-1/2" (368 mm)
825E	7-1/2" (191 mm) wide 6" (152 mm) high 7" (178 mm) diameter	to 9/16" (14 mm)	10" (250mm)	17-1/2" (446 mm)	21-1/8" (537 mm)	15" (381 mm)
827E	8-3/4" (222 mm) wide 7-1/4" (184 mm) high 7" (178 mm) diameter	to 9/16" (14 mm)	12" (300mm)	17-1/4" (438 mm)	22" (559 mm)	16" (406 mm)

	Motor	Electrical	Weight Net	Ship	Box Dimensions		
					Width	Depth	Height
823E	1-speed 1/4 HP	115/60/1	29 lbs. (13 kg.)	36 lbs. (16 kg)	22-1/2" (572 mm)	17-3/4" (451 mm)	16-1/2" (419 mm)
825E	1-speed 1/4 HP	115/60/1	33 lbs. (15 kg.)	40 lbs. (18kg)	24-3/4" (629 mm)	19-3/4" (502 mm)	17-1/2" (445 mm)
827E	1-speed 1/3 HP	115/60/1	41 lbs. (19 kg.)	49 lbs. (22 kg)	24-3/4" (629 mm)	19-3/4" (502 mm)	17-1/2" (445 mm)

Specifications

Motor: 1-speed, 1/4 HP (823E & 825E), 1/3 HP (827E), totally enclosed, permanently lubricated ball bearings, thermally protected.

Electrical: Furnished in 115/60/1, 2.5 amp, AC, ETL listed.

Finish/construction: All food contact areas are stainless steel or anodized aluminum including the pusher, gauge plate, product table, center plate, slice deflector, ring guard and one-piece base. Slicer disassembles quickly without tools for easy cleaning.

Knife: □ 823E is a nominal 9" (220 mm) diameter; □ 825E is a nominal 10" (250 mm) diameter; □ 827E is a nominal 12" (300 mm) diameter; hollow ground, hardened and polished forged chromium-plated carbon steel.


Cutting Capacity: □ 823E carriage handles food up to 7-1/8" (181 mm) wide by 6" (152 mm) high or 6" (152 mm) diameter.

□ 825E carriage handles food up to 7-1/2" (191 mm) wide by 6" (152 mm) high or 7" (178 mm) diameter.

□ 827E carriage handles food up to 8-3/4" (222 mm) wide by 7-1/4" (184 mm) high or 7" (178 mm) diameter.

Slice Thickness: Precision system provides infinite slice adjustment and consistent cuts of hard or soft foods from tissue thin to 9/16" (14 mm).

Full Gravity Feed: Full 45° angle feed on the 827E requires less mechanical pressure. Equipped with anodized aluminum pusher to hold product and minimize waste.

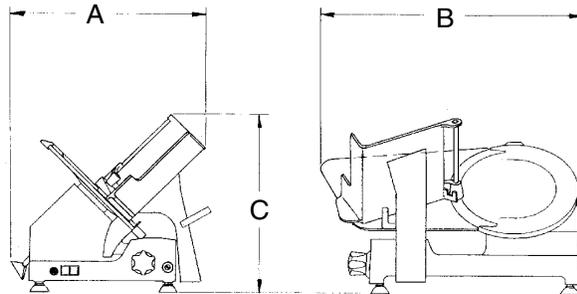

Knife Sharpener: Built-in, top-mounted, two stone dual-action system for a lasting, razor-sharp edge. Unit is removable and submersible for easy cleaning.

Knife Ring Guard: Permanent, tapered guard covers non-slicing portion of knife edge even when the sharpener and center plate are removed. The ring guard is designed to provide added room behind the knife for easy cleaning.

On/Off Switch: Highly reliable, moisture resistant, on/off rocker switch (823E, 825E), rotary switch (827E); and power indicator light.

Cord and Plug: Attached 6-foot, flexible, 3-wire cord and plug for grounded receptacle.

Warranty: All parts, service and travel coverage for one year, excluding wear items.

As we continually strive to improve our products, specifications are necessarily subject to change without notice.

**Berkel Company • 4406 Technology Drive • South Bend, IN 46628-9700
574-232-8222 • 800-348-0251 • FAX 888-888-2838 • www.berkel.com**

Form #SPC01-0607R

© 2002 Berkel Company

Litho in U.S.A.



**ITEM# 10 - FOOD PROCESSOR, ELECTRIC**

Robot Coupe Model R2N (1 REQ'D)

Commercial Food Processor, 3 qt. grey ABS bowl w/handle, kidney-shaped opening, vegetable prep attachment, continuous feed, bowl attachment designed for vertical cutting and mixing, on/off & pulse switch, 2 plates, 1725 RPM, 120v/60/1-hp, 7 amps, 1 HP

ACCESSORIES:

MFR	Qty	Model	Spec
RobotCp	1		1-Year parts & labor warranty

robot coupe

"The Inventor & World Leader in Food Processors"

R2N

Commercial Food Processor

Combination Vegetable Prep and Vertical Cutter-Mixer



- 3 Qt. "stock pot" shaped, cutter bowl with handle and "S" blade.
- Standard model has gray ABS plastic bowl and see-thru lid. Clear and stainless steel bowls are available (R2N CLR - clear bowl and R2N Ultra - stainless steel bowl).
- Direct Drive, fan-cooled, 1 HP motor.
- Large range of 21 processing discs to choose from.
- Continuous feed vegetable prep attachment with two deep feed openings.
- Attachments easily removed for superior cleanability.
- Unit base uses minimal counter space (14 1/4" x 14 1/2").
- Standard package includes two processing discs (R209 - 2mm grating and R211 - 4mm slicing).
- 3 year motor warranty, 1 year parts and labor warranty.

Prepare 850 servings in 3 hours or less!

Vegetable prep attachment designed for quality continuous feed slicing, shredding, grating, french fry, and julienne. Accommodates 21 different processing discs. Bowl attachment designed for mixing, chopping, pureeing, and blending.



Robot Coupe U.S.A., Inc.
P.O. Box 16625
Jackson, MS 39236-6625
1-800-824-1646 • (601) 898-8411
FAX: (601) 898-9134
www.robotcoupeusa.com
e-mail: info@robotcoupeusa.com

SPECIFICATIONS ON REVERSE SIDE

robot coupe

"The Inventor & World Leader in Food Processors"

R2N

Commercial Food Processor

Specifications

STANDARD MODEL: Includes motor base unit, continuous feed attachment, discharge plate, one 5/32" (4mm) slicing disc, one 5/64" (2mm) medium grating disc and 3 Qt. bowl with handle and stainless steel smooth edge "S" blade.

ELECTRICAL REQUIREMENTS: 120V, 60HZ, 7 Amps.

SWITCHING: Control panel with push-type on and off, and pulse buttons.

MOTOR: 1 HP, 1725 RPM, direct-drive, fan-cooled.

WEIGHT: 27 lbs. net, 31 lbs. approximate shipping weight.

OPTIONAL EQUIPMENT: 19 additional processing discs and free standing multiple disc rack.

STANDARDS: ETL electrical & sanitation, cETL (Canada)

Available Discs

Slicing Discs

R291 - 1/32" (1mm)

R210 - 5/64" (2mm)

R292 - 1/8" (3mm)

R211 - 5/32" (4mm)

R293 - 3/16" (5mm)

R270 - 1/4" (6mm)

Ripple Cut Slicers

R212 - 5/64" (2mm)

Graters

R208 - 1/16" (1.5mm)

R209 - 5/64" (2mm)

R281 - 1/8" (3mm)

R280 - 1/4" (6mm)

R215 - 11/32" (9mm)

R271 - Hard Cheese Grate

Pulping

R294 - Fine pulping disc

R295 - Pulping disc

Julienne

R214 - 5/64" (2x2mm)


R296 - 5/64" x 5/32" (2x4mm)

R297 - 5/64"x1/4" (2x6mm)


R288 - 5/32" (4x4mm)

R213 - 1/4" (6x6mm)



R298 - 5/16" (8x8mm)



Bowl Unit



Continuous Feed Attachment

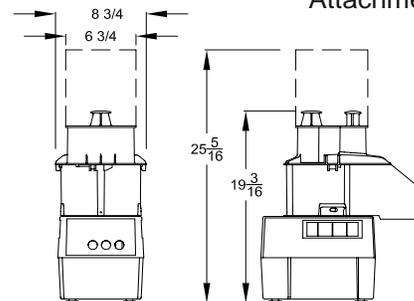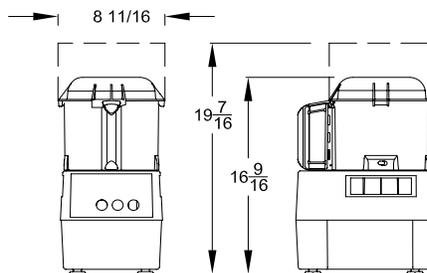

Robot Coupe U.S.A., Inc.
P.O. Box 16625
Jackson, MS 39236-6625
1-800-824-1646
(601) 898-8411
FAX: (601) 898-9134
www.robotcoupeusa.com
e-mail: info@robotcoupeusa.com

Distributed by:

Robot Coupe reserves the right to change specifications. Call the factory for latest specifications and recommendations.
© 2003 Robot Coupe U.S.A., Inc. Litho in U.S.A. WKK 06/03



ITEM# 11 - SINK, THREE (3) COMPARTMENT

Advance Tabco Model 9-23-60-18RL (1 REQ'D)

Regaline Sink, three compartment, w/left & right-hand drainboards, 20" front-to-back x 20" W compartment, 12" deep, with 8" high splash, s/s open frame base, side crossrails, 18" drainboards, 18/304 stainless steel, overall 27" F/B x 103" L/R

ACCESSORIES:

MFR	Qty	Model	Spec
Fisher	1	13277	Faucet, wall/backsplash mount, 8" C.C., 14" long swing spout, 1/2" inlets



STAINLESS STEEL
REGALINE SINKS
 Three Compartments - Two Drainboards



"940" Series shown



FEATURES:

Tile edge for ease of installation.
 One piece **Deep Drawn** sink bowls with integral drainboards with splash.
 Featuring the single bowl unit design.
 All sink bowls have a large liberal 3" radius.
 Placement of the welded leg assembly ensures stability and furnishes direct support of the column load requirement for the entire sink unit.
 "940" series is supplied with front and rear cross brace.

CONSTRUCTION:

All TIG welded.
 Welded areas blended to match adjacent surfaces and to a satin finish.
 Gussets welded to a die-embossed reinforcing channel.

Item #: _____ Qty #: _____

Model #: _____

Project #: _____

Spec-Line: 940 Series - 11" High Splash.
Standard: 930 Series - 8" Splash.
Super Saver: 900 Series - 8" Splash.

MATERIAL:

940 Series: 14 gauge type 304 stainless steel.
930 Series: 16 gauge type 304 stainless steel.
900 Series: 18 gauge type 304 stainless steel.

- LEGS:**
- 1 5/8" diameter tubular stainless steel.
 - Stainless steel gussets & channels.
 - Stainless Steel 1" adjustable bullet feet.

YES! It's SeaLess!

BOWL SIZE	O.A. LENGTH (inches) (mm)		DRBD. SIZE (inches) (mm)		SPEC-LINE 940 Series		STANDARD 930 Series		SUPER SAVER 900 Series		Cubic Feet
					14 Ga. 304 S/S 14" Water Level		16 Ga. 304 S/S 12" Water Level		18 Ga. 304 S/S 12" Water Level		
					MODEL #	Approx. Wt. (lbs.)	MODEL #	Approx. Wt. (lbs.)	MODEL #	Approx. Wt. (lbs.)	
16 x 20 (406 x 508)	91"	2311	18"	457	94-3-54-18RL	230	93-3-54-18RL	189	9-3-54-18RL	182	49
	103"	2616	24"	610	94-3-54-24RL	248	93-3-54-24RL	197	9-3-54-24RL	190	55
	127"	3226	*36"	914	94-3-54-36RL	275	93-3-54-36RL	239	9-3-54-36RL	208	96
20 x 20 (508 x 508)	103"	2616	18"	457	94-23-60-18RL	248	93-23-60-18RL	203	9-23-60-18RL	198	59
	115"	2921	24"	610	94-23-60-24RL	276	93-23-60-24RL	220	9-23-60-24RL	195	65
	139"	3531	*36"	914	94-23-60-36RL	408	93-23-60-36RL	387	9-23-60-36RL	364	89
18 x 24 (457 x 610)	97"	2457	18"	457	94-63-54-18RL	323	93-63-54-18RL	289	9-63-54-18RL	226	62
	109"	2762	24"	610	94-63-54-24RL	334	93-63-54-24RL	304	9-63-54-24RL	233	85
	133"	3372	*36"	914	94-63-54-36RL	418	93-63-54-36RL	367	9-63-54-36RL	325	96
24 x 24 (610 x 610)	127"	3226	24"	610	94-43-72-24RL	390	93-43-72-24RL	331	9-43-72-24RL	318	98
	151"	3835	*36"	914	94-43-72-36RL	448	93-43-72-36RL	393	9-43-72-36RL	345	110
20 x 28 (508 x 711)	103"	2616	18"	457	94-83-60-18RL	358	93-83-60-18RL	315	9-83-60-18RL	277	83
	115"	2921	24"	610	94-83-60-24RL	394	93-83-60-24RL	346	9-83-60-24RL	305	95
	139"	3531	*36"	914	94-83-60-36RL	451	93-83-60-36RL	398	9-83-60-36RL	350	109
† Requires Two Faucets					14" Water Level		12" Water Level		12" Water Level		
* Regalines with 36" Drainboards are Supplied with Two Sets of Legs for Support.					17" Flood Level		15" Flood Level		15" Flood Level		



Customer Service Available To Assist You **1-800-645-3166** 8:30 am - 8:00 pm E.S.T.

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK
 Fax: (631) 242-6900

GEORGIA
 Fax: (770) 775-5625


TEXAS
 Fax: (972) 932-4795

NEVADA
 Fax: (775) 972-1578

DIMENSIONS and SPECIFICATIONS

TOL Overall: ± .500"
Interior: ± .250"

ALL DIMENSIONS ARE TYPICAL

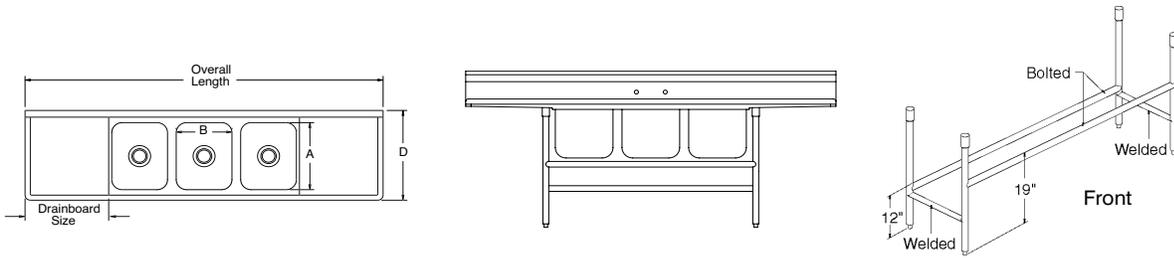


940 Series Cross Bracing

DESCRIPTION

BOWL (SIZE)	Overall Length	DRBD (SIZE)	Recommended Use	A	B	C	D	940 SERIES					900 & 930 SERIES				
								V	W	X	Y	Z	V	W	X	Y	Z
16x20	91"	18"	DISH SINKS	20"	16"	13 5/8"	27"	38"	11"	14"	20"	45"	38"	8"	12"	22"	42"
	103"	24"															
20x20	103"	18"	DISH & POT SINKS	20"	20"	13 5/8"	27"	38"	11"	14"	20"	45"	38"	8"	12"	22"	42"
	115"	24"															
18x24	97"	18"	POT & PAN SINKS	24"	18"	15 5/8"	31"	38"	11"	14"	20"	45"	38"	8"	12"	22"	42"
	109"	24"															
24x24	127"	24"	POT SINKS	24"	24"	15 5/8"	31"	38"	11"	14"	20"	45"	38"	8"	12"	22"	42"
	151"	36"															
20x28	103"	18"	PAN SINKS	28"	20"	17 5/8"	35"	38"	11"	14"	20"	45"	38"	8"	12"	22"	42"
	115"	24"															
	139"	36"															


† Requires Two Faucets

* Regalines with 36" Drainboards are Supplied with Two Sets of Legs for Support.

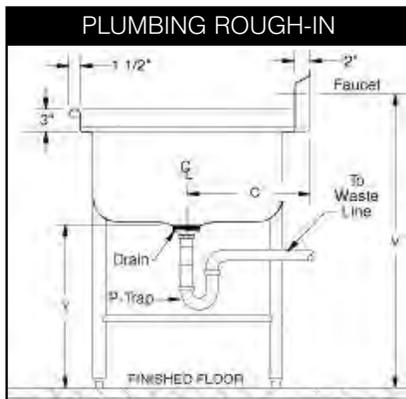

MECHANICAL:

- Supply is 1/2" IPS hot & cold.
- Faucet holes on 8" centers.
- Faucets are not included (**see accessories**).
- Waste drains are 1 1/2" IPS S/S basket type, located in center of sink bowl, and are included.

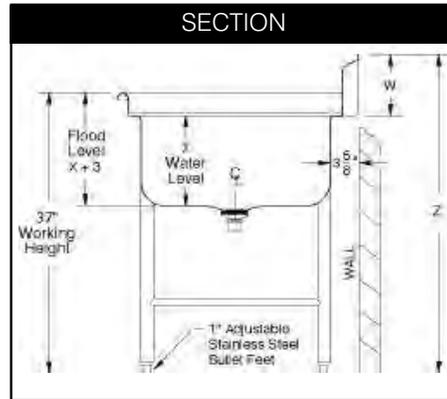

C-5a

200 Heartland Boulevard, Edgewood, NY 11717-8380

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, DECEMBER 2006

SPEC. 13234 REV. D

APPLICATION:


PRODUCT NAME:
8" C/C BACKSPASH FAUCET

JOB NAME:

SPECIAL CONFIGURATION
CHECK BASE MODEL AND OPTIONS

QUANTITY:

ITEM NO.

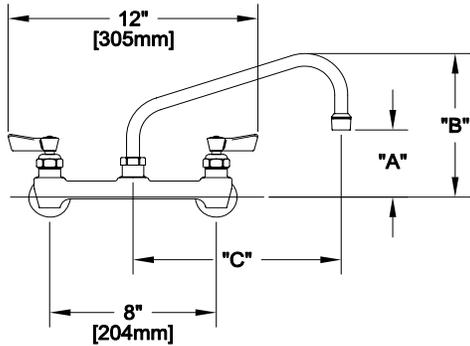

- MODEL:
- 13234 W/ 6" SWING SPOUT
 - 13242 W/ 8" SWING SPOUT
 - 13250 W/ 10" SWING SPOUT
 - 13269 W/ 12" SWING SPOUT
 - 13277 W/ 14" SWING SPOUT
 - 13218 W/ 16" SWING SPOUT

- OPTIONS OR MODIFICATIONS:
- SUPPLY LINES (24" OR 36") CIRCLE LENGTH
 - DJ SUB-ASSY (7-1/4" OR 13") CIRCLE LENGTH
 - ELBOWS
 - VANDAL RESISTANT KIT
 - HANDLES (CROSS OR WRIST) CIRCLE STYLE
 - OTHER _____


MODEL	DIM "A"	DIM "B"	DIM "C"
13234	2-1/4" [57mm]	5-7/8" [149mm]	6" [152mm]
13242	2-1/2" [64mm]	6-3/8" [162mm]	8" [204mm]
13250	3-1/8" [79mm]	6-7/8" [175mm]	10" [254mm]
13269	3-3/4" [95mm]	7-3/8" [187mm]	12" [305mm]
13277	4-3/8" [111mm]	8-1/4" [210mm]	14" [356mm]
13218	5" [127mm]	8-7/8" [225mm]	16" [406mm]

- FEATURES
- CONTROL VALVE
- * 8" C/C BACKSPASH MOUNT
 - * SWIVELLING SEAT DISKS
 - * HOT SIDE STEM - RIGHT HAND
 - * COLD SIDE STEM - LEFT HAND
 - * STAINLESS STEEL SEATS
 - * STAINLESS STEEL SEAT SCREWS
 - * STAINLESS STEEL HANDLE SCREWS
 - * 1/2" SLIP JOINT

- SYSTEM LIMITS
- * TEMP: 40°F MIN. TO 140°F MAX.
 - * PRESSURE: 200 PSI MAX. STATIC
 - * 2.20 GPM AT 80 PSI

SHIPPING WEIGHT
* 5.0 LBS

ROUGH-IN:

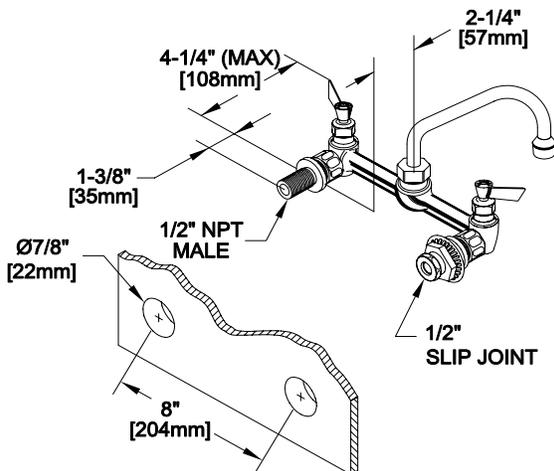

ANSI/A112.18.1M

FISHER
FISHER MANUFACTURING COMPANY
TOLL FREE: 800-421-6162 - FAX: 800-832-8238
information@fisher-mfg.com - www.fisher-mfg.com



ITEM# 12 - WORK TABLE, 48" LONG

Advance Tabco Model TKMS-304 (1 REQ'D)

Work Table, 30" wide top, with splash at rear only, 48" long, with s/s legs, side & rear s/s crossrails, 16 gauge, type 304 stainless steel top, 5" backsplash, s/s bullet feet

ACCESSORIES:

MFR	Qty	Model	Spec
Advance	1	TA-12	Countertop edge, (per table)
Advance	1	TA-11A	Sink Welded Into Table Top, 16" X 20" X 8"
Advance	1	K-2C	Sink Cover, 16" x 20", Poly-Vance™
Fisher	1	34436	Pre-Rinse Unit, 8" c/c backsplash mount, with spring action flexible gooseneck, wall bracket, Add-On-Faucet with 6" swing spout



STAINLESS STEEL
WORK TABLES
STANDARD Series - 5" Backsplash - Open Base Style



Item #: _____ **Qty #:** _____
Model #: _____
Project #: _____

FEATURES:

Top is furnished with 1 5/8" sanitary rolled rim edge on front and square sides, and a 5" splash with a 1" return on the rear side.

TWO hat channels stud welded to reinforce and maintain a level working surface. 30" and 36" wide tables supplied with THREE hat channels.

Pre-engineered welded angle adapters insure ease of future drawer installation.

Front to Back Stretchers bolted to legs and requires assembly. Left to Right Stretcher is welded to legs.

CONSTRUCTION:

All TIG welded. Exposed weld areas polished to match adjacent surfaces.

Entire top mechanically polished to a satin finish.

Top is sound deadened.

Roll formed embossed galvanized hat channels are secured to top by means of structural adhesive and weld studs.

Gussets welded to support hat sections.



NEW
Rolled Rim Edges on Front & Splash on Back and Square Side Edges



1-5/8" LEG STRETCHERS
Ensure Stability

MATERIAL:

TKMS-SERIES: Stainless Steel Legs - Open Base

TOP: 16 gauge stainless steel type "304" series.

STRETCHERS: 1 5/8" dia. tubular stainless steel.

LEGS: 1 5/8" diameter tubular stainless steel.
1" adjustable stainless steel bullet feet.
Stainless steel gussets.

TKMG-SERIES: Galvanized Legs - Open Base

TOP: 16 gauge stainless steel type "304" series.

STRETCHERS: 1 5/8" dia. tubular galvanized steel.

LEGS: 1 5/8" diameter tubular galvanized steel.
1" adjustable plastic bullet feet.
Galvanized steel gussets.

TKMS-Series:
Stainless Steel Legs & Stretchers

L	24" Wide	30" Wide	36" Wide
30"	TKMS-240	TKMS-300	
24"	TKMS-242	TKMS-302	
36"	TKMS-243	TKMS-303	TKMS-363
48"	TKMS-244	TKMS-304	TKMS-364
60"	TKMS-245	TKMS-305	TKMS-365
72"	TKMS-246	TKMS-306	TKMS-366
84"	TKMS-247	TKMS-307	TKMS-367
96"	TKMS-248	TKMS-308	TKMS-368
108"	TKMS-249	TKMS-309	TKMS-369
120"	TKMS-2410	TKMS-3010	TKMS-3610
132"	TKMS-2411	TKMS-3011	TKMS-3611
144"	TKMS-2412	TKMS-3012	TKMS-3612



TKMG-Series:
Galvanized Steel Legs & Stretchers

L	24" Wide	30" Wide	36" Wide
30"	TKMG-240	TKMG-300	
24"	TKMG-242	TKMG-302	
36"	TKMG-243	TKMG-303	TKMG-363
48"	TKMG-244	TKMG-304	TKMG-364
60"	TKMG-245	TKMG-305	TKMG-365
72"	TKMG-246	TKMG-306	TKMG-366
84"	TKMG-247	TKMG-307	TKMG-367
96"	TKMG-248	TKMG-308	TKMG-368
108"	TKMG-249	TKMG-309	TKMG-369
120"	TKMG-2410	TKMG-3010	TKMG-3610
132"	TKMG-2411	TKMG-3011	TKMG-3611
144"	TKMG-2412	TKMG-3012	TKMG-3612

Create Your Own Efficient Workstation with the Available Standard Accessories (Visit Section K)



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK
Fax: (631) 242-6900

GEORGIA
Fax: (770) 775-5625

TEXAS
Fax: (972) 932-4795


NEVADA
Fax: (775) 972-1578

DETAILS and SPECIFICATIONS


ALL DIMENSIONS ARE TYPICAL TOL ± .500"

All Units Shipped Unassembled (KD) for Reduced Shipping Costs.

TKMS & TKMG Series Open Base Style 5" Backsplash



Units 8ft. and larger are furnished with six (6) legs

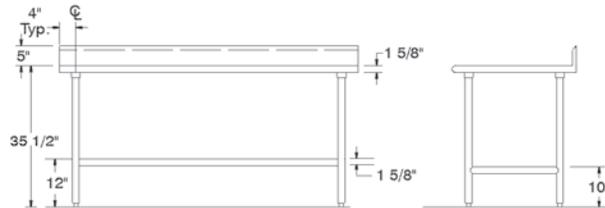

TKMS-Series: Stainless Steel Legs & Stretchers

L	24" Wide	Wt.	30" Wide	Wt.	36" Wide	Wt.
30"	TKMS-240	49 lbs.	TKMS-300	55 lbs.		
24"	TKMS-242	43 lbs.	TKMS-302	48 lbs.		
36"	TKMS-243	55 lbs.	TKMS-303	62 lbs.	TKMS-363	80 lbs.
48"	TKMS-244	67 lbs.	TKMS-304	75 lbs.	TKMS-364	85 lbs.
60"	TKMS-245	77 lbs.	TKMS-305	89 lbs.	TKMS-365	99 lbs.
72"	TKMS-246	89 lbs.	TKMS-306	97 lbs.	TKMS-366	112 lbs.
84"	TKMS-247	107 lbs.	TKMS-307	118 lbs.	TKMS-367	131 lbs.
96"	TKMS-248	119 lbs.	TKMS-308	131 lbs.	TKMS-368	145 lbs.
108"	TKMS-249	135 lbs.	TKMS-309	150 lbs.	TKMS-369	165 lbs.
120"	TKMS-2410	234 lbs.	TKMS-3010	249 lbs.	TKMS-3610	268 lbs.
132"	TKMS-2411	258 lbs.	TKMS-3011	276 lbs.	TKMS-3611	298 lbs.
144"	TKMS-2412	273 lbs.	TKMS-3012	291 lbs.	TKMS-3612	313 lbs.

TKMG-Series: Galvanized Steel Legs & Stretchers

L	24" Wide	Wt.	30" Wide	Wt.	36" Wide	Wt.
30"	TKMG-240	49 lbs.	TKMG-300	55 lbs.		
24"	TKMG-242	43 lbs.	TKMG-302	48 lbs.		
36"	TKMG-243	55 lbs.	TKMG-303	62 lbs.	TKMG-363	80 lbs.
48"	TKMG-244	67 lbs.	TKMG-304	75 lbs.	TKMG-364	85 lbs.
60"	TKMG-245	77 lbs.	TKMG-305	89 lbs.	TKMG-365	99 lbs.
72"	TKMG-246	89 lbs.	TKMG-306	97 lbs.	TKMG-366	112 lbs.
84"	TKMG-247	107 lbs.	TKMG-307	118 lbs.	TKMG-367	131 lbs.
96"	TKMG-248	119 lbs.	TKMG-308	131 lbs.	TKMG-368	145 lbs.
108"	TKMG-249	135 lbs.	TKMG-309	150 lbs.	TKMG-369	165 lbs.
120"	TKMG-2410	234 lbs.	TKMG-3010	249 lbs.	TKMG-3610	268 lbs.
132"	TKMG-2411	258 lbs.	TKMG-3011	276 lbs.	TKMG-3611	298 lbs.
144"	TKMG-2412	273 lbs.	TKMG-3012	291 lbs.	TKMG-3612	313 lbs.



J-7a

200 Heartland Boulevard, Edgewood, NY 11717-8380

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, SEPTEMBER 2005

SMART TABLE MODIFICATIONS

SIZE MODIFICATIONS

- ___ **TA-33** Special Working Height
- ___ **TA-59** 36" Wide Equipment Stand
- ___ **TA-6** Extra Length for Standard Tables over 12'
(Tables Over 14' Require Field Joint TA-57)
- ___ **TA-61** Special Modification Charge (1 Charge Per Table)
- ___ **TA-65** Enclosed Base Units Over 12' (Open Base Table)
- ___ **TA-66** Enclosed Base Units Over 12' (Sliding Door Units)
- ___ **TA-67** Enclosed Base Units Over 12' (Hinged Door Units)
- ___ **TA-78** Additional Lin. Ft. Past 12' For Table Mt. Shelf
(For ODS, OTS, TS & DS Shelving only)
- ___ **TA-79** Flour Trough (Factory installation only)
- ___ **TA-105** Modify Enclosed Base Table with Drawers to 24" W
- ___ **TA-110** Modify Enclosed Base Table with Drawers to 36" W

TOP MODIFICATIONS

- ___ **TA-1** Notch Backsplash For Roll Up Door with Pass-Thru
- ___ **TA-3** Stainless Steel Hat Channel & Gusset Upgrade
- ___ **TA-7** 10" Rear Splash
- ___ **TA-8** Column Notch in Rear Splash (Includes Splash)
- ___ **TA-10** 5" Partial Back Splash
- ___ **TA-12** Countertop Edge
- ___ **TA-22** Square Edge Table
- ___ **TA-28** Cut-Out For Cold Well
- ___ **TA-30** 1-1/2" Side Splash
- ___ **TA-30A** 1-1/2" Turn Up For Tables Tops
- ___ **TA-31** 5" Side Splash
- ___ **TA-32** 10" Side Splash
- ___ **TA-34** Top Cut-Out
- ___ **TA-35** Splash Cut-Out
- ___ **TA-56** 5" NSF Partition
- ___ **TA-56A** 18" NSF Partition
- ___ **TA-57** Prepare Welded Field Joint (Welded in field by others)
- ___ **TA-57A** Bolted Field Joint (Bolted in field by others)
- ___ **TA-58** Stepdown to 24" Working Height



TA-58 Shown

- ___ **TA-62** Duplex Electrical Outlet (Under Flat Top)
- ___ **TA-62A** Duplex Electrical Outlet (in VKS Rear Splash)
- ___ **TA-62B** Duplex Electrical Outlet (in KSS Rear Splash. Includes 2" Return)
- ___ **TA-62C** Duplex Electrical Outlet GFI (Specify Location)
- ___ **TA-62D** Doghouse Electrical Outlet Box (Includes Duplex Outlet)
- ___ **TA-64** Urn Trough (Factory installation only)

- ___ **TA-75** Mitered Edge
- ___ **TA-76** Paint on Sound Deadening
- ___ **TA-82** Scrap Chute (6" dia. opening)
- ___ **TA-84** Simple Pass-Thru



TA-84 Shown

- ___ **TA-87** Enclosed Rear Splash
- ___ **TA-91** Poly Retaining Clips Includes TA-22
- ___ **TA-93** Wall Brackets (Includes 2. For 5" & 10 1/2" splash only)
- ___ **TA-96A** Can Opener Provision for openers w/ Bolt-on Base
(Customer to provide location)
- ___ **TA-96B** Can Opener Surface Mount Provision w/4" S/S Tube
for Openers w/o Base (Customer to provide location)
- ___ **TA-96C** Can Opener Spacer Plate Provision for Use on
Tables with Countertop Edge & Can Opener Base
Customer to provide location)
- ___ **TA-100** Bull Nose All Sides of Worktable
- ___ **TA-100A** Bull Nose All Sides of Shelf
- ___ **TA-101** Rear Tray Lock
- ___ **TA-106** Mirror HI-LITE Edge
- ___ **TA-108** 2" Hole with Grommet for Appliance Cord
(Specify Hole Location)
- ___ **TA-112** Hubble Outlet
- ___ **TA-113** Notch Top for Buyout Unit

BASE MODIFICATIONS

- ___ **TA-4** Removable Access Panel
- ___ **TA-5** Curb Mounting Provision
- ___ **TA-13** Pad Lock Hasp
- ___ **TA-15** Provision for Built In Drawer Warmer
- ___ **TA-23** Welded Set-Up Table/Crating
- ___ **TA-24** Shell Crating
- ___ **TA-27** Control Panel (Must add TA-34A or TA-34B)
- ___ **TA-36A** Sliding/Hinge Stainless Steel Doors
- ___ **TA-36B** Two 1/2 Height Stainless Steel Hinge Doors
- ___ **TA-37** Stainless Enclosed Base
- ___ **TA-39** 24" Louvered Hinged Doors



TA-39 Shown

- ___ **TA-40** Remove Undershef in Cabinet Base For Slide in Buyout
- ___ **TA-42** Interior Partition (2.5"x30")
- ___ **TA-43** Filler Panel (3"x30" with Flanged Feet)



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK
Fax: (631) 242-6900

GEORGIA
Fax: (770) 775-5625

TEXAS
Fax: (972) 932-4795

NEVADA
Fax: (775) 972-1578

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice. © ADVANCE TABCO, MARCH 2010 **K-1**

SMART TABLE MODIFICATIONS

- ___ **TA-44** K.D. Aluminum Pan Rack Slides (6 slides. Table min. lgth. 3 ft.)
- ___ **TA-45** K.D. Aluminum Glass Rack Slides (3 slides. Table min. lgth. 3 feet)
- ___ **TA-46** Door Locks
- ___ **TA-48** 12"x12" Cut-Out in Back Panel or Undershef for Plumbing
- ___ **TA-55** Remove Back Panel (on Enclosed Base)
- ___ **TA-70** S/S Tubular Tray Divider (12" sections)
- ___ **TA-73** Tubular Tray Slide w/Dropdown
(Stationary Tray Slide Available. Factory installation only)
- ___ **TA-74** Solid Tray Slide
- ___ **TA-91** Poly Retaining Clips **Includes TA-22** (S/S top table)
- ___ **TA-92** 12" Apron (in front of sink)
- ___ **TA-92A** 17" Stainless Steel Apron t Cover Sink Bowls and Support Lever Drain Handles
- ___ **TA-109** Rear Flush Finished Inset Panel



TA-109 Shown

- ___ **TA-116** Adjustable Enclosed Base Cabinet Mid Shelf
Add to price of Enclosed Base Table with Fixed Mid Shelf (M) Shelves over 36" in length require multiple sections with center partition.

SINK MODIFICATIONS

- ___ **TA-107** Vacuum Breaker Holes on Tables
(Includes Backsplash with 2" Return)

UNDERSHELF MODIFICATIONS



- ___ **TA-9** 1-1/2" Turn-Up for Undershelves
- ___ **TA-48** 12"x12" Cut-Out in Back Panel or Undershef for Plumbing
- ___ **TA-94** Upgrade 16 Ga. 304 S/S Undershef
- ___ **TA-366** Reinforced Understructure For Undershelves

OVERSHELF MODIFICATIONS

- ___ **TA-9A** 1" Turn-Up for all Table Mounted Shelves
- ___ **TA-47** Shelf Mounting Bracket for Existing Table
- ___ **TA-49** Wall Shelf 2" offset
- ___ **TA-60** Special Sizing Charge for Shelves
- ___ **TA-62** Duplex Electrical Outlet (Under Flat Top)
- ___ **TA-62D** Doghouse Electrical Outlet Box (Includes Duplex Outlet)
- ___ **TA-71** Heat Lamp Mounting Provision
- ___ **TA-77** Check Minder Shelf Provision (Factory installation only)
- ___ **TA-99** 16 Ga. S/S 304 Upgrade for Wall and Over Shelves
- ___ **TA-102** 24" x 24" Extension for Microwave or Computer Shelf
(Add to OTS and ODS Shelves. See page 45)
- ___ **TA-103** 24" Wide PT Shelf (Mid mount only, PT Series Shelf, see pg. 47. Add to 18" Wide Shelf)
- ___ **TA-104** Additional Length Over 12' (Add to 18" Shelf)
(CU & CDS Shelving Only. Max. Lgth. is 14' as Single Piece)

LEG MODIFICATIONS

- ___ **TA-16** Galvanized Leg with Plastic Bullet Foot
- ___ **TA-19** Flanged Stainless Steel Bullet Feet
- ___ **TA-20** Stainless Steel Leg with S/S Bullet Foot
- ___ **TA-21** Stainless Steel Bullet Foot
- ___ **TA-95** Upgrade 16 Ga. 304 S/S Legs Only

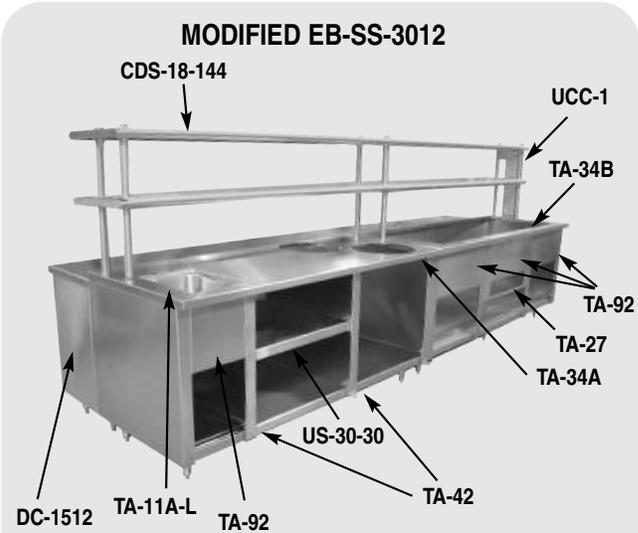

Duplex Electrical Outlets
TA-62
TA-62A
TA-62B
TA-62C



Doghouse Duplex Electrical Outlet
TA-62D



TA-77 Check Minder Shelf Provision



TA-56 5" NSF Partition
TA-56A
18" NSF Partition
TA-92 \$120 lin. ft.
12" Apron



TA-75 Mitered Edge



TA-112 Hubble Outlet

TOP ACCESSORIES

- ___ TA-29 Rear Splash Capping Strip
- ___ TA-41 Poly-Vance 5/8" Cutting Board
- ___ TA-521 Drop-In urn Trough 1'
- ___ TA-522 Drop-In urn Trough 2'
- ___ TA-523 Drop-In urn Trough 3'
- ___ TA-524 Drop-In urn Trough 4'
- ___ TA-812 2' Stainless Steel Cutting Surface
- ___ TA-813 3' Stainless Steel Cutting Surface
- ___ TA-814 4' Stainless Steel Cutting Surface
- ___ TA-815 5' Stainless Steel Cutting Surface
- ___ TA-816 6' Stainless Steel Cutting Surface
- ___ TA-817 7' Stainless Steel Cutting Surface

BASE ACCESSORIES

- ___ TA-54 Removable Kick Plate
- ___ TA-63 Removable Shelving (In addition to standard shelf)

OVERSHELF ACCESSORIES

- ___ TA-83 Spice Bins

POTRACK ACCESSORIES

- ___ TA-86 Stainless Steel Pot Hooks
- ___ TA-89 Double Sided Plated Pot Hooks (Package of 4)
- ___ TA-89A Single Sided Plated Pot Hooks (Package of 4)
- ___ TA-98 Stainless Steel Flat Bar in lieu of Chain

TOP ACCESSORIES

- ___ TA-84A Knife Rack for Rolled Rim Tables
- ___ TA-84B Knife Rack for Poly Top Tables
- ___ TA-84C Knife Rack for Square Edge Tables

DRAWER ACCESSORIES

- ___ TA-90 Drawer Adapter (Non-catalog tables. Specify table width)
- ___ TA-93 Wall Clips (for 5" & 10 1/2" splash only)

LEG ACCESSORIES

- ___ TA-72 Leg to Wall Brace (Set per table)

SMART TABLE ACCESSORIES

Casters

(125 lbs. Load Capacity Per Caster)



TA-25

- ___ TA-25 Set of 4
 - ___ TA-25A Set of 6
- Add price to Above for:**
- ___ TA-25B Brakes on All Casters
 - ___ TA-25C Upgrade to Caster with Heavy Duty Urethane Wheels

Heavy Duty Casters for Equipment Stands



TA-255

(1000 lbs. Distributed Weight)

- ___ TA-255 Super Heavy Duty set of 4
- ___ TA-256 Super Heavy Duty set of 6

ALL CASTERS SHIP VIA UPS!

REAR SPLASH CAPPING STRIP



16 Ga. "304" Stainless Steel Adhesive Tape Backing

- ___ TA-29

BUMPER GUARDS



16 ga., 304 Stainless Steel. Bracket Included

- ___ BG-48 2" x 4" x 48"
- ___ BG-60 2" x 4" x 60"

CORNER GUARDS



16 Ga. "304" Stainless Steel Adhesive Tape Backing

- ___ CG-48 2" x 2" x 48"
- ___ CG-60 2" x 2" x 60"

CHECK MINDER

Check Minder holds checks with ease. Floating ball mechanism quickly grabs checks and holds them in place. Mounts to existing wall or shelf.



Ft.	MODEL	Approx. Wt.
2'	___ CM-24	1.5 lbs.
3'	___ CM-36	2.25 lbs.
4'	___ CM-48	3 lbs.



Customer Service Available To Assist You **1-800-645-3166 8:30 am - 8:00 pm E.S.T.**

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK
Fax: (631) 242-6900

GEORGIA
Fax: (770) 775-5625

TEXAS
Fax: (972) 932-4795

NEVADA
Fax: (775) 972-1578

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice. © ADVANCE TABCO, MARCH 2010 **K-1b**



MULTIPLE SINK SIZES & Accessories (welded into Table Top)



VKS Series COUNTERTOP TABLES with Splash are furnished with **K-1 Splash Mounted Faucet with 12" Spout** as standard

K-50 Deck Mounted Faucet is Standard on tables with 1 1/2", 5" or no rear splash

TA-56 - 5" NSF Partition (Not shown)

Single sink bowl come with **K-50 Swing Spout Faucet & K-6 Basket Drain** unless noted.

Double sink bowls come with **K-53 Swing Spout Faucet & K-6 Basket Drain** unless noted.



Single Bowl	Double Bowl	A	B
TA-11A	TA-11A-2	16" x 20" x 8"	(406mm x 508mm x 203mm)
TA-11B	TA-11B-2	16" x 20" x 12"	(406mm x 508mm x 305mm)
* TA-11C	* TA-11C-2	20" x 20" x 8"	(508mm x 508mm x 203mm)
* TA-11D	* TA-11D-2	20" x 20" x 12"	(508mm x 508mm x 305mm)
* TA-11E	* TA-11E-2	24" x 24" x 12"	(610mm x 610mm x 305mm)
† TA-11F	†† TA-11F-2	10" x 14" x 10"	(254mm x 356mm x 254mm)
* TA-11G	* TA-11G-2	28" x 20" x 12"	(508mm x 711mm x 305mm)
TA-11J	TA-11J-2	14" x 16" x 12"	(356mm x 406mm x 305mm)
TA-11L	TA-11L-2	18" x 24" x 12"	(457mm x 610mm x 305mm)
TA-11N	TA-11N-2	18" x 18" x 12"	(457mm x 457mm x 305mm)

* Only installed in tables 30" (762mm) or wider

† K-52 Faucet Standard (Single Bowl)

†† K-53 Faucet Standard (Double Bowl)

TA-11K DROP-IN FILLER STATION (Factory Install Only)

TA-11KM ICE & FILLER STATION (Factory Install Only)

Includes Cover

Item #: _____ Qty #: _____

Model #: _____

Project #: _____

FAUCETS & ACCESSORIES

- K-2A Poly-Vance Sink Cover 10"x14"
- K-2B Poly-Vance Sink Cover 14"x16"
- K-2C Poly-Vance Sink Cover 16"x20"
- K-2D Poly-Vance Sink Cover 18"x24"
- K-2E Poly-Vance Sink Cover 20"x20"
- K-2F Poly-Vance Sink Cover 24"x24"
- K-2G Poly-Vance Sink Cover 20"x28"
- K-4 Lever Drain Bracket
- K-5 Lever Drain
- K-12 Poly Sink Cover
- K-15 Lever Drain with Overflow
- K-50 Deck Mounted 4" O.C. 8" Swing Spout Faucet
- K-500MIT Omit Swing Spout Faucet
- K-52 Deck Mounted 4" O.C. 3-1/2" Gooseneck Faucet
- K-53 Deck Mounted 4" O.C. 12" Gooseneck Faucet
- K-520MIT Omit Swing Spout Faucet
- K-55 8 1/2" Spout 4" O.C. Deck Mounted Gooseneck Faucet
- K-60 4" O.C. Splash Mounted Gooseneck Faucet
- K-62 X.H.D. 4" O.C. Deck Mounted Gooseneck Faucet
- K-105 14" Splash Mounted 8" O.C. Faucet
- K-112 Extra Heavy Duty 12" Splash Mounted Faucet
- K-320-LU Wrist Handles for Splash Mounted Faucets
- K-452 6"x9" Control Bracket
- K-453 14"x16" Control Bracket
- K-455A Stainless Steel Sink Cover 10"x14"
- K-455B Stainless Steel Sink Cover 14"x16"
- K-455C Stainless Steel Sink Cover 16"x20"
- K-455D Stainless Steel Sink Cover 18"x24"
- K-455E Stainless Steel Sink Cover 20"x20"
- K-455F Stainless Steel Sink Cover 24"x24"
- K-455G Stainless Steel Sink Cover 20"x28"
- K-460 Installation of Disposal Cone with 6"x9" Control Bracket
- K-461 Installation of Collar with 6"x9" Control Bracket
- K-470 14" deep Bowls

TA-11Z (return only)

Optional: 5" Splash Tables require a 2" return for splash mounted faucet

For More Faucet Options & Faucet Specs, See Faucet Specifications in Section G



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK
Fax: (631) 242-6900

GEORGIA
Fax: (770) 775-5625

TEXAS
Fax: (972) 932-4795

NEVADA
Fax: (775) 972-1578


DETAILS and SPECIFICATIONS

TOL ± .500"

ALL DIMENSIONS ARE TYPICAL


MULTIPLE SINK SIZES (WELDED INTO TABLE TOP)

FLAT TOP 24" Wide or Smaller




*For 24" Enclosed Base Tables with Sliding Doors. Faucet on Side.

FLAT TOP or 1-1/2" REAR SPLASH 30" or Wider




5" REAR SPLASH with 1" RETURN




TA-11Z: Optional: 5" Splash Tables require a 2" return for splash mounted faucet


10" REAR SPLASH with 2" RETURN

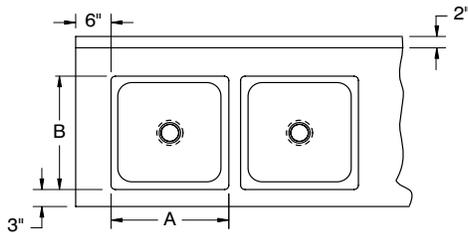

TA-11K - DROP-IN FILLER STATION (FACTORY INSTALL ONLY)

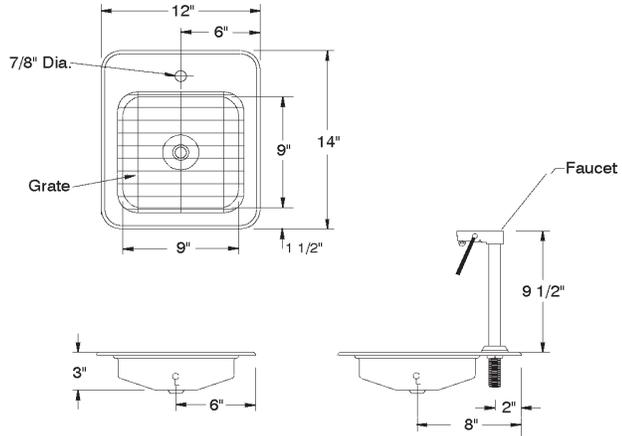

TA-11KM - DROP-IN WATER/ICE STATION (FACTORY INSTALL ONLY)

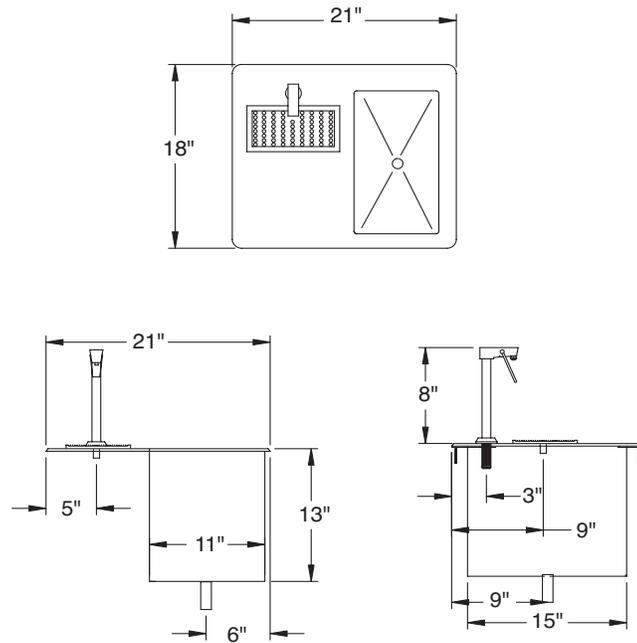

K-2a

200 Heartland Boulevard, Edgewood, NY 11717-8380

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.


© ADVANCE TABCO, DECEMBER 2007



SMART SINK MODIFICATIONS



Item #: _____
 Project #: _____

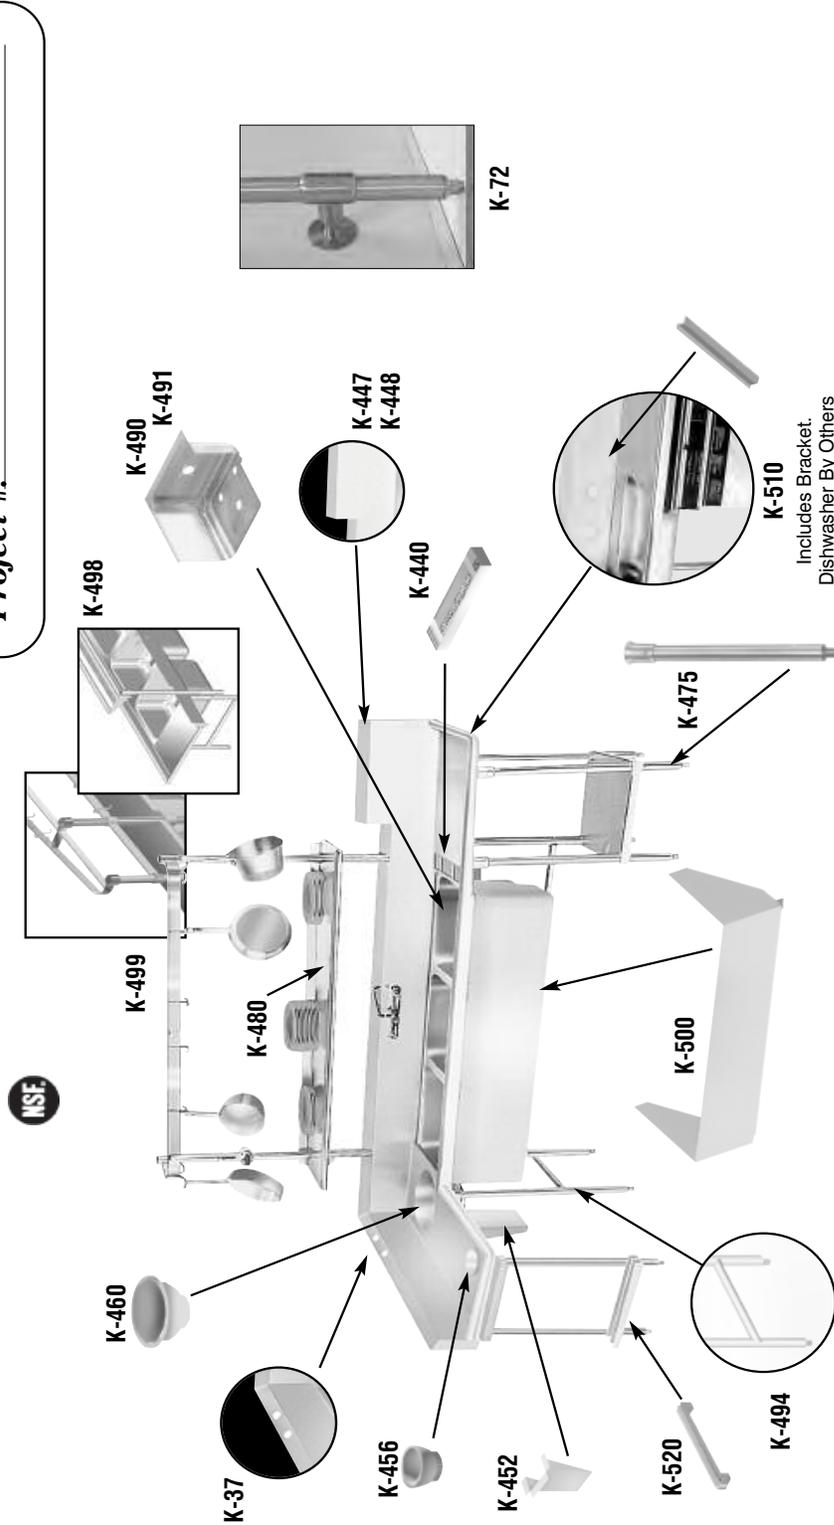

ADVANCE TABCO
 SMART FABRICATION™
 www.advancetabco.com

Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.
 Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK **GEORGIA** **TEXAS** **NEVADA**
 Fax: (631) 242-6900 Fax: (770) 775-5625 Fax: (972) 932-4795 Fax: (775) 972-1578

SMART SINK MODIFICATIONS & ACCESSORIES

SMART MODIFICATIONS

QTY.		QTY.	
___	K-23 Welded Set-Up/Crated	___	K-461A Install Collar with 14" x 16" control bracket (Collar supplied by others)
___	K-24 Shell Crating	___	K-470 Modify Bowl Depth
___	K-37 Anti-Siphon Vacuum Breaker Holes	___	K-472 Faucet Hole Revision
___	K-57 Welded field Joint (Welded in field by others)	___	K-473 Working Height Revision
___	K-77 Splash Cutout (Pipe Chase)	___	K-476 Punch for Over Flow Holes (Only)
___	K-106 Mirror Highlite Edge for Sink	___	K-479 Undershelf Under Drainboard
___	K-440 Waste Trough furnished with a 2" deep removable basket	___	K-480 Stainless Steel 12" Wide Shelf (min. of 3 ft.)
___	K-447 High Backsplash up to 18"	___	K-489 Provision for Pot Washer (for a "Kewanee" only)
___	K-448 High Backsplash up to 13"	___	K-490 Provision for Pot Washer (For a "Wells-PW-106" only)
___	K-450 Extra Drainboard	___	K-491 Provision for Hatco Heater
___	K-451 Drainboard Corner Turn	___	K-495 Turn Down Backsplash
___	K-452 Control Bracket 8 x 12	___	K-498 Tubular Overshelf 12" wide (min. 3 ft.)
___	K-453 Control Bracket 14 x 16	___	K-499 Stainless Steel Pot Rack
___	K-454 Drainboard or Sink Sidesplash	___	K-500 Stainless Steel Apron to cover sink bowls
___	K-456 Scrap Block Installed	___	K-508 Special Sizing Charge
___	K-460 Installation of Disposal Cone with 6" x 9" Control Bracket, Faucet Holes (Cone supplied by others)	___	K-510 Prepare Sink for Undercounter Dishwasher (24" drainboard or larger)
___	K-460A Installation of Disposal Cone with 14" x 16" Control Bracket, Faucet Holes (Cone supplied by others)	___	K-520 Poly Board Holder
___	K-461 Install Collar with 6" x 9" control bracket (Collar supplied by others)	___	K-550 Stainless Steel Tubular Rack Storage

ACCESSORIES

QTY.		QTY.	
___	K-2B 5/8" Poly-Vance Sink Cutting Board For 14"x16" Bowls	___	K-455F Stainless Steel Sink Cover 24"x24"
___	K-2C 5/8" Poly-Vance Sink Cutting Board For 16"x20" Bowls	___	K-455G Stainless Steel Sink Cover 20"x28"
___	K-2D 5/8" Poly-Vance Sink Cutting Board For 18"x24" Bowls	___	K-457 Replacement Rubber Scrap Block (See K-456 for install cost)
___	K-2E 5/8" Poly-Vance Sink Cutting Board For 20"x20" Bowls	___	K-474 16 ga., '304' Series S/S Legs with S/S Feet.
___	K-2F 5/8" Poly-Vance Sink Cutting Board For 24"x24" Bowls	___	K-475 S/S Legs with S/S Feet
___	K-3 Poly-Vance Cutting Board (5/8" Thick)	___	K-478 Stainless Steel Bullet Foot
___	K-30 Faucet Wall Mounting Bracket	___	K-488 Flanged S/S Bullet Foot
___	K-72 Leg To Wall Brace	___	K-493 16 ga., '304' Series Stainless Steel Welded Leg Assembly with Stainless Steel Feet
___	K-397 Wall Bracket for Regaline Sink (Must use K-495)	___	K-494 S/S Welded Leg Assembly with S/S Feet
___	K-455A Stainless Steel Sink Cover 10"x14"	___	K-496 Leg Assembly For Grease Trap with Adjustable Cross-Bracing and S/S Feet (For Grease Traps with 15" Height or less. Consult factory for larger grease traps)
___	K-455B Stainless Steel Sink Cover 14"x16"		
___	K-455C Stainless Steel Sink Cover 16"x20"		
___	K-455D Stainless Steel Sink Cover 18"x24"		
___	K-455E Stainless Steel Sink Cover 20"x20"		



F-1a 200 Heartland Boulevard, Edgewood, NY 11717-8380

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, DECEMBER 2007

APPLICATION:		PRODUCT NAME: 8" C/C BACKSPASH MOUNT PRE-RINSE SPRING STYLE WITH ADD-ON FAUCET																																
JOB NAME:		<input type="checkbox"/> SPECIAL CONFIGURATION <input type="checkbox"/> CHECK BASE MODEL AND OPTIONS																																
QUANTITY:	ITEM NO.	MODEL:																																
		<input type="checkbox"/> 34436 WITH 6" SWING SPOUT <input type="checkbox"/> 34444 WITH 8" SWING SPOUT <input type="checkbox"/> 34452 WITH 10" SWING SPOUT <input type="checkbox"/> 34460 WITH 12" SWING SPOUT <input type="checkbox"/> 34479 WITH 14" SWING SPOUT <input type="checkbox"/> 34487 WITH 16" SWING SPOUT																																
		OPTIONS OR MODIFICATIONS: <input type="checkbox"/> SUPPLY LINES (24" OR 36") CIRCLE LENGTH <input type="checkbox"/> IN-LINE DUAL CHECK VALVE <input type="checkbox"/> BRUSH <input type="checkbox"/> HANDLES (CROSS OR WRIST) CIRCLE STYLE <input type="checkbox"/> VANDAL RESISTANT KIT <input type="checkbox"/> OTHER _____																																
		FEATURES																																
		MAIN CONTROL VALVE * 8" C/C BACKSPASH MOUNT * INTERNAL SPRING LOADED CHECK VALVES * SWIVELLING SEAT DISKS * HOT SIDE STEM - RIGHT HAND CHECK * COLD SIDE STEM - LEFT HAND CHECK * STAINLESS STEEL SEATS, SEAT SCREWS, AND HANDLE SCREWS																																
		HOSE																																
		* 36" LENGTH * STAINLESS STEEL END FITTINGS * STAINLESS STEEL EXTERNAL JACKET * 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE * REPAIRABLE IN-FIELD WITH SIMPLE TOOLS																																
		ULTRA SPRAY VALVE																																
		* LOWEST ENERGY USER - 1.15 GPM @ 60 PSI * CLEANS FASTER - TEST PROVEN * ENGINEERED TO LAST - NO 'O' RINGS TO LEAK * INTERCHANGEABLE - FITS ALL BRANDS																																
		WAL BRACKET																																
		* ADJUSTS FROM 2" TO 12"																																
		SYSTEM LIMITS																																
		* TEMP: 40°F MIN. TO 140°F MAX. * PRESSURE: 200 PSI MAX. STATIC																																
		SHIPPING WEIGHT																																
		* 15.0 LBS																																
		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>ROUGH-IN</th> <th>MODEL</th> <th>DIM "A"</th> <th>DIM "B"</th> <th>DIM "C"</th> </tr> </thead> <tbody> <tr> <td rowspan="6" style="text-align: center; vertical-align: middle;"></td> <td>34436</td> <td>8-3/4" [221mm]</td> <td>12-3/8" [313mm]</td> <td>6" [152mm]</td> </tr> <tr> <td>34444</td> <td>9" [228mm]</td> <td>12-7/8" [326mm]</td> <td>8" [203mm]</td> </tr> <tr> <td>34452</td> <td>9-5/8" [244mm]</td> <td>13-3/8" [340mm]</td> <td>10" [254mm]</td> </tr> <tr> <td>34460</td> <td>10-1/4" [259mm]</td> <td>13-7/8" [351mm]</td> <td>12" [305mm]</td> </tr> <tr> <td>34479</td> <td>10-5/8" [275mm]</td> <td>14-3/4" [374mm]</td> <td>14" [356mm]</td> </tr> <tr> <td>34487</td> <td>11-1/2" [292mm]</td> <td>15-3/8" [390mm]</td> <td>16" [406mm]</td> </tr> </tbody> </table>			ROUGH-IN	MODEL	DIM "A"	DIM "B"	DIM "C"		34436	8-3/4" [221mm]	12-3/8" [313mm]	6" [152mm]	34444	9" [228mm]	12-7/8" [326mm]	8" [203mm]	34452	9-5/8" [244mm]	13-3/8" [340mm]	10" [254mm]	34460	10-1/4" [259mm]	13-7/8" [351mm]	12" [305mm]	34479	10-5/8" [275mm]	14-3/4" [374mm]	14" [356mm]	34487	11-1/2" [292mm]	15-3/8" [390mm]	16" [406mm]
ROUGH-IN	MODEL	DIM "A"	DIM "B"	DIM "C"																														
	34436	8-3/4" [221mm]	12-3/8" [313mm]	6" [152mm]																														
	34444	9" [228mm]	12-7/8" [326mm]	8" [203mm]																														
	34452	9-5/8" [244mm]	13-3/8" [340mm]	10" [254mm]																														
	34460	10-1/4" [259mm]	13-7/8" [351mm]	12" [305mm]																														
	34479	10-5/8" [275mm]	14-3/4" [374mm]	14" [356mm]																														
	34487	11-1/2" [292mm]	15-3/8" [390mm]	16" [406mm]																														
EPAct 2005 Compliant		ANSIA112.18.1M																																



FISHER MANUFACTURING COMPANY
 TOLL FREE: 800-421-6162 - FAX: 800-832-8238
 information@fisher-mfg.com - www.fisher-mfg.com



ITEM# 13 - DISPLAY CASE, REFRIGERATED, COUNTERTOP

True Food Service Equipment, Inc Model GDM-5PT-S (1 REQ'D)

Countertop Pass-Thru Refrigerated Merchandiser, 5 cu ft., (2) shelves, s/s exterior, white aluminum interior w/300 series s/s floor, (1fr/1bk) Low-E thermal glass hinged door, sign decal, leg levelers, 1/5 HP, 115v/60/1-ph, NEMA 5-15P, 5.2 amps, MADE IN USA

ACCESSORIES:

MFR	Qty	Model	Spec
TRUE	1		Self-contained refrigeration standard
TRUE	1		Warranty - 5 year compressor (self-contained only), applicable to US and Canada
TRUE	1		Warranty - 1 year parts and labor, applicable to US and Canada
TRUE	1		Exterior: Permanent non-peel non-chip black vinyl
TRUE	1		Illuminated sign decal: S-TS-01 "TRUE Stripe" graphic, standard
TRUE	1		Barrel lock factory installed, each

 <p>TRUE FOOD SERVICE EQUIPMENT, INC. 2001 East Terra Lane • O'Fallon, Missouri 63366 (636)240-2400 • Fax (636)272-2408 • (800)325-6152 • Intl Fax# (001)636-272-7546 Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truefmfg.com</p>	Project Name: _____ Location: _____ Item #: _____ Qty: _____ Model #: _____	A/A # _____ S/S # _____
	<p>Model: GDM-5PT-S Glass Door Merchandiser: Swing Door Pass-Thru Counter-Top Stainless Steel Exterior Refrigerator</p>	



- GDM-5PT-S**
- ▶ The world's #1 manufacturer of glass door merchandisers.
 - ▶ True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.
 - ▶ Pass-thru design allows for convenient restocking, fast service, and attractive display.
 - ▶ Oversized, factory balanced, refrigeration system holds 33°F to 38°F (.5°C to 3.3°C).
 - ▶ Exterior - gleaming stainless steel.
 - ▶ Interior - attractive, NSF approved, white aluminum interior liner with 300 series stainless steel floor.
 - ▶ Self closing doors. Positive seal, torsion type closure system.
 - ▶ "Low-E", double pane thermal insulated glass door assemblies with mitered plastic channel frames. The latest in energy efficient technology.
 - ▶ Safety shielded fluorescent interior lighting for longer, brighter, shadow-free illumination.
 - ▶ Entire cabinet structure is foamed-in-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the nearest 1/8" (millimeters rounded up to next whole number).

Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			HP	Voltage	Amps	NEMA Config.	Cord Length (total ft.) (total m)	Crated Weight (lbs.) (kg)
			L	D†	H*						
GDM-5PT-S	1 fr/ 1bk	2	24 610	23 7/8 607	37 940	1/5 1/4	115/60/1 230-240/50/1	5.2 3.0	5-15P ▲	9 2.74	200 91

† Depth does not include 1 3/8" (35 mm) each side for door handle.
 * Height does not include 1" (26 mm) for system mechanical components.

▲ Plug type varies by country.

	APPROVALS:	AVAILABLE AT:
4/10 Printed in U.S.A.		

Model:
GDM-5PT-S

Glass Door Merchandiser:
Swing Door Pass-Thru Counter-Top Stainless Steel Exterior Refrigerator



STANDARD FEATURES

DESIGN

- True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.

REFRIGERATION SYSTEM

- contained, capillary tube system using environmentally friendly (CFC free) 134A refrigerant.
- Extra large evaporator coil balanced with higher horsepower compressor and large condenser; maintains cabinet temperatures of 33°F to 38°F (5°C to 3.3°C).
- Sealed, cast iron, self-lubricating evaporator fan motor(s) and larger fan blade gives True merchandisers a more efficient low velocity, high volume airflow design. This unique design ensures faster temperature pull down of warm product, colder holding temperatures and faster recovery in high use situations.

CABINET CONSTRUCTION

- Exterior - gleaming stainless steel for those who appreciate the value of stainless.
- Interior - attractive, NSF approved, white aluminum liner with 300 series stainless steel floor.
- Insulation - entire cabinet structure is foamed-in-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Cabinet fitted with leg levelers.
- Illuminated exterior sign panel. Variety of sign options available.

DOORS

- "Low-E", double pane thermal insulated glass door assemblies with extruded aluminum frames. The latest in energy efficient technology.
- Each door fitted with 12" (305 mm) long extruded handle.
- Self closing doors. Positive seal, torsion type closure system.
- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.

SHELVING

- Two (2) adjustable, heavy duty PVC coated wire shelves 19 1/8" L x 18" D (501 mm x 458 mm). Four (4) chrome plated shelf clips included per shelf.
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on 1/2" (13 mm) increments.

LIGHTING

- Safety shielded fluorescent interior lighting.
- Cabinet lighting utilizes electronic ballast and T-8 bulbs for brighter illumination, longer bulb life and increased energy efficiency.

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- Pass-thru design allows for convenient rear loading and front access for serving.
- See our website www.truemfg.com for latest color and sign offerings.
- Listed under NSF-7 for the storage and/or display of packaged or bottled product.

ELECTRICAL

- Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.



115/60/1
NEMA-5-15R

OPTIONAL FEATURES/ACCESSORIES


Upcharge and lead times may apply.

- 230 - 240V / 50 Hz.
- 4" (102 mm) legs.
- Black exterior.
- Rosewood exterior.
- Walnut exterior.
- White exterior.
- Red wine thermostat.
- White wine thermostat.
- Chocolate thermostat.
- Barrel lock (factory installed).
- Additional shelving.
- 1 1/4" (32 mm) pricing strips.

PLAN VIEW

CUBIC FEET	5
------------	---

* Based on ANSI/AHAM HRF-1-2004

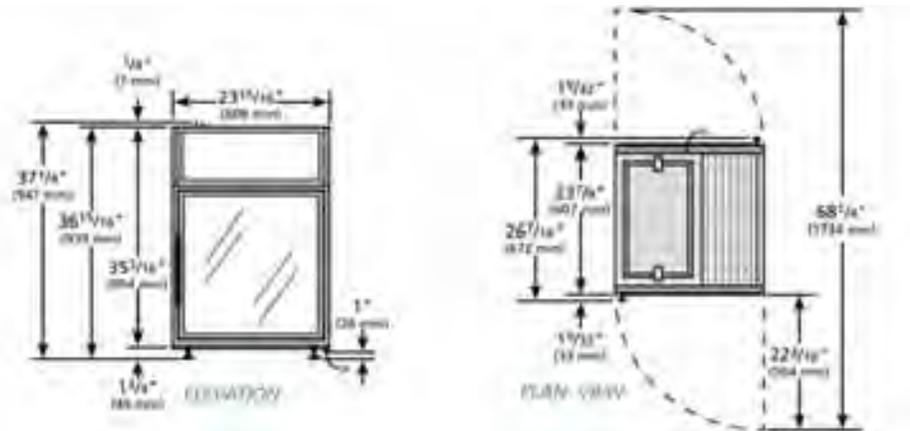

WARRANTY

One year warranty on all parts and labor and an additional 4 year warranty on compressor. (U.S.A. only)

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



Model	Elevation	Right	Plan	3D	Back
GDM-5PT-S	TFAY50E	TFAY51S	TFAY51P	TFAY513	

TRUE FOOD SERVICE EQUIPMENT

2001 East Terra Lane • O'Fallon, Missouri 63366 • (636)240-2400 • Fax (636)272-2408 • (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com



ITEM# 14 - S/S COUNTERTOP

Custom Model COUNTERTOP (1 REQ'D)

Stainless Steel Countertop with 5" backsplash, pass - thru for merchandiser,
size:



ITEM# 15 - FOOD MIXER

Berkel Inc. Model FMS10NH (1 REQ'D)

Mixer, Bench, 10-qt. capacity, five-speed drive w/15 min. timer, painted finish, removable bowl guard w/ingredient chute, s/s bowl, beater, whip & dough hook, cord & plug, 1/2 HP

ACCESSORIES:

MFR	Qty	Model	Spec
Berkel	1		1 year parts, service & travel warranty, std.
Berkel	1		100-120v/50/60/1-ph, 6 amps, std.



Model FMS10



Features

Berkel Model FMS10 planetary mixer is a durable, precision crafted machine that is engineered for long-term reliability, convenience and productivity. This versatile, all-purpose mixer uses a powerful, planetary mixing action to thoroughly blend, mix, aerate and knead ingredients for consistent and predictable results. The variable speed motor drive technology eliminates the clutch and allows changing speeds while the mixer is running (EasyShift™). This 10 quart mixer comes standard with a stainless steel bowl, bowl guard, spiral dough hook, batter beater, wire whip and ingredient chute. The innovative “two point” mounting system increases the ease of installing and removing the mixing bowl. The stainless steel bowl guard slides open for adding ingredients, and is easily removed for cleaning. Operator safety interlocks prevent the mixer from running if the bowl guard is removed, opened or the bowl is lowered. The FMS10 has five (5) speed options including a blend speed to control splash out. The FMS10 can be operated in a continuous run mode or by a 15-minute timer that will automatically shut off the machine after the desired processing period has elapsed. The FMS10 features ergonomically designed moisture resistant switches and No-Volt Release.

Approved By: _____
Date _____

Berkel Company • 2006 Northwestern Parkway • PO Box 696 • Louisville, KY 40201
 800-348-0251 • FAX 888-888-2838 • www.berkel.com

Form #SPC42-0908N

Item # _____

Model FMS10

Planetary Mixer

- FMS10 10 Qt. Bench Type Mixer

Standard Features

- Model FMS10 10 Qt. Mixer with 5-speed, ½ HP (continuous duty), totally enclosed, and permanently lubricated, thermally protected motor; furnished in 100-120/50/60/1, 6 amp, UL listed.
- Variable speed motor drive allows EasyShift™ change of mixer speeds without stopping
- Hardened alloy steel helical planetary gears, fully sealed in lubricant with heavy-duty ball bearings, provide for long-term, dependable operation
- Blend speed and 4 fixed speeds with slow initial acceleration to prevent product splash-out
- Simplified “Two Point” bowl mounting allows easy attachment and removal.
- Manual bowl lift is lever operated, interlocked and self-locking in top position
- Continuous operation or 15-minute timed operation that automatically shuts off the machine in any speed after pre-determined time has elapsed.
- Stainless steel bowl, bowl guard, flat batter beater, wire whip, spiral dough hook and ingredient chute included
- Bowl guard with safety interlocks prevents the mixer from running if guard is opened or removed
- No-Volt Release prevents automatic re-activation in the event of a power interruption.
- Bowl guard easily removed for bowl access and cleaning
- Reliable, moisture resistant stop and start switches
- Solid cast base is mounted on rubber pads for vibration control and rust resistance. Attractive silver metallic epoxy enamel for easy cleaning
- 6-foot, flexible, 3-wire power cord & grounded plug

Options

- 200-240/50/60/1 UL Listed

Accessories

- Stainless Steel Bowl
- Batter Beater
- Wire Whip
- Spiral Hook
- Ingredient Chute





Planetary Mixer Model FMS10



Model FMS10 Planetary Mixer

Model No.	Bowl Capacity	Product Dimensions		
		Width A	Depth B	Height C
FMS10	10 Qts. (10.5 Liters)	13¾" (349 mm)	17½" (445 mm)	25¾" (654 mm)

Model No.	Motor	Electrical	Speed Range Beater (RPM)	Weight		Box Dimensions		
				Net	Ship	Width	Depth	Height
FMS10	5-speed ½ HP	100-120/50/60/1	71 - 369 (72, 103, 190, 289, 369)	106 lbs. (53 kg.)	122 lbs. (55 kg.)	22" (559 mm)	24" (610 mm)	27" (686 mm)

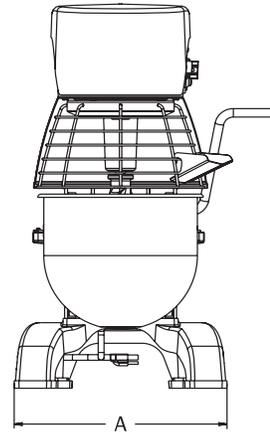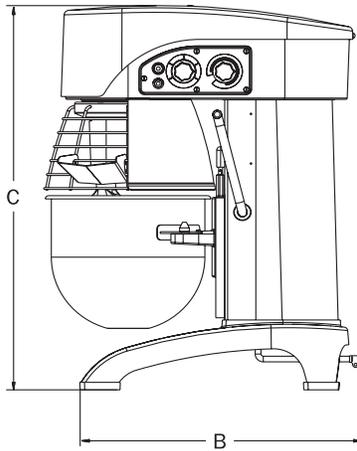

Specifications

Design: Heavy-duty, all purpose mixer uses a powerful, planetary mixing action to thoroughly blend, mix, aerate and knead ingredients with consistent and predictable results.

Motor/Electrical: Model FMS10 10-Qt. Mixer with 5-speed, ½ HP (continuous duty), totally enclosed, and permanently lubricated, thermally protected motor; furnished in 100-120/50/60/1, 6 amp, UL listed.

Finish/Construction: Cast base finished in metallic silver, epoxy enamel for easy cleaning.

Planetary Gears: Hardened alloy steel, helical gears fully sealed in lubricant with heavy-duty ball bearings for highly dependable, quiet operation.

Speeds: "Blend" speed and 4 fixed speeds with slow initial acceleration.

Bowl Guard: Stainless steel bowl guard with interlock prevents the mixer from running if guard is opened or removed. Guard is slideable for adding ingredients and removable for cleaning.

Bowl: Simplified "two point" mounting provides easy attachment and removal of bowl.

Controls: Moisture resistant, conveniently located controls include ergonomically designed on-off switch, a 5-speed selector switch, and a 15 minute timer.

No-Volt Release: Prevents activation of the mixer in the event of a power interruption; operator must restart the mixer.

Standard Equipment: The mixing unit with one stainless steel bowl, bowl guard, flat batter beater, wire whip, spiral dough hook and ingredient chute.

Bowl Lift: Manual bowl lift is lever operated and self-locking in top position.

Cord and Plug: Attached 6-foot flexible 3-wire cord and plug for grounded receptacle on 100-120/50/60/1.

Warranty: All parts, service and travel coverage for one year, exclusive of wear items.

As we continually strive to improve our products, specifications are necessarily subject to change without notice.

**Berkel Company • 2006 Northwestern Parkway • PO Box 696 • Louisville, KY 40201
800-348-0251 • FAX 888-888-2838 • www.berkel.com**

Form #SPC42-0908N

Planetary Mixer Model FMS10



**ITEM# 16 - BUN PAN RACK, MOBILE**

Advance Tabco Model PR20-3K-1X (1 REQ'D)

Rack, mobile pan, full height, open sides, with angle tray guides on 3" centers, capacity 20 - 18" x 26" sheet pans, bolted extruded aluminum frame, front loading, shipped knocked down, 69-1/4" high

ACCESSORIES:


MFR	Qty	Model	Spec
Advance	1	PRC-2-1X	Rack Cover, economy, see-thru plastic



ALUMINUM
PAN RACKS
Knock Down



Item #: _____ **Qty #:** _____
Model #: _____
Project #: _____

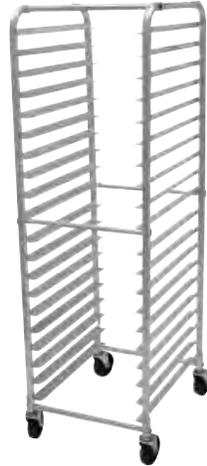

Front Load



Side Load

FEATURES:

Six cylindrical support bars provide strength and durability. 3" shelf spacing.

Plastic endcaps, 1 1/2" ribbed angles, heavy duty 5" stem bolted swivel casters.

Front load pan rack holds [20] 18" x 26" pans or [40] 18" x 13" pans. Side load pan rack holds [20] 18" x 26" pans.

500 lb. capacity. Units shipped K.D.

CONSTRUCTION:

Fully welded 1" square tubing ladder assembly.

Angles are 1" x 1 1/2" x 20" on front load pan rack and 1" x 1 1/2" x 17 3/4" on side load pan rack.

MATERIAL:

6063-T52 extruded aluminum angles, upright tubing, and support pieces.

MODEL #	Description	Pan Capacity	A Shelf Spacing	Overall Size L x W x H	Weight
PR12-5K	Front Load	12 Full Size	5"	20 1/4" x 26" x 69 1/4"	24 lbs.
PR18-3K	Front Load	18 Full Size	3"	20 1/4" x 26" x 63 1/4"	26 lbs.
PR20-3K	Front Load	20 Full or 40 Half Size	3"	20 1/4" x 26" x 69 1/4"	28 lbs.
PR30-2K	Front Load	30 Full Size	2"	20 1/4" x 26" x 69 1/4"	34 lbs.
PR18-3KS	Side Load	18 Full Size	3"	28 1/4" x 18" x 63 1/4"	25 lbs.
PR20-3KS	Side Load	20 Full Size	3"	28 1/4" x 18" x 69 1/4"	27 lbs.



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK
Fax: (631) 242-6900

GEORGIA
Fax: (770) 775-5625

TEXAS
Fax: (972) 932-4795


NEVADA
Fax: (775) 972-1578

R-1

DIMENSIONS and SPECIFICATIONS

TOL ± .500"

ALL DIMENSIONS ARE TYPICAL

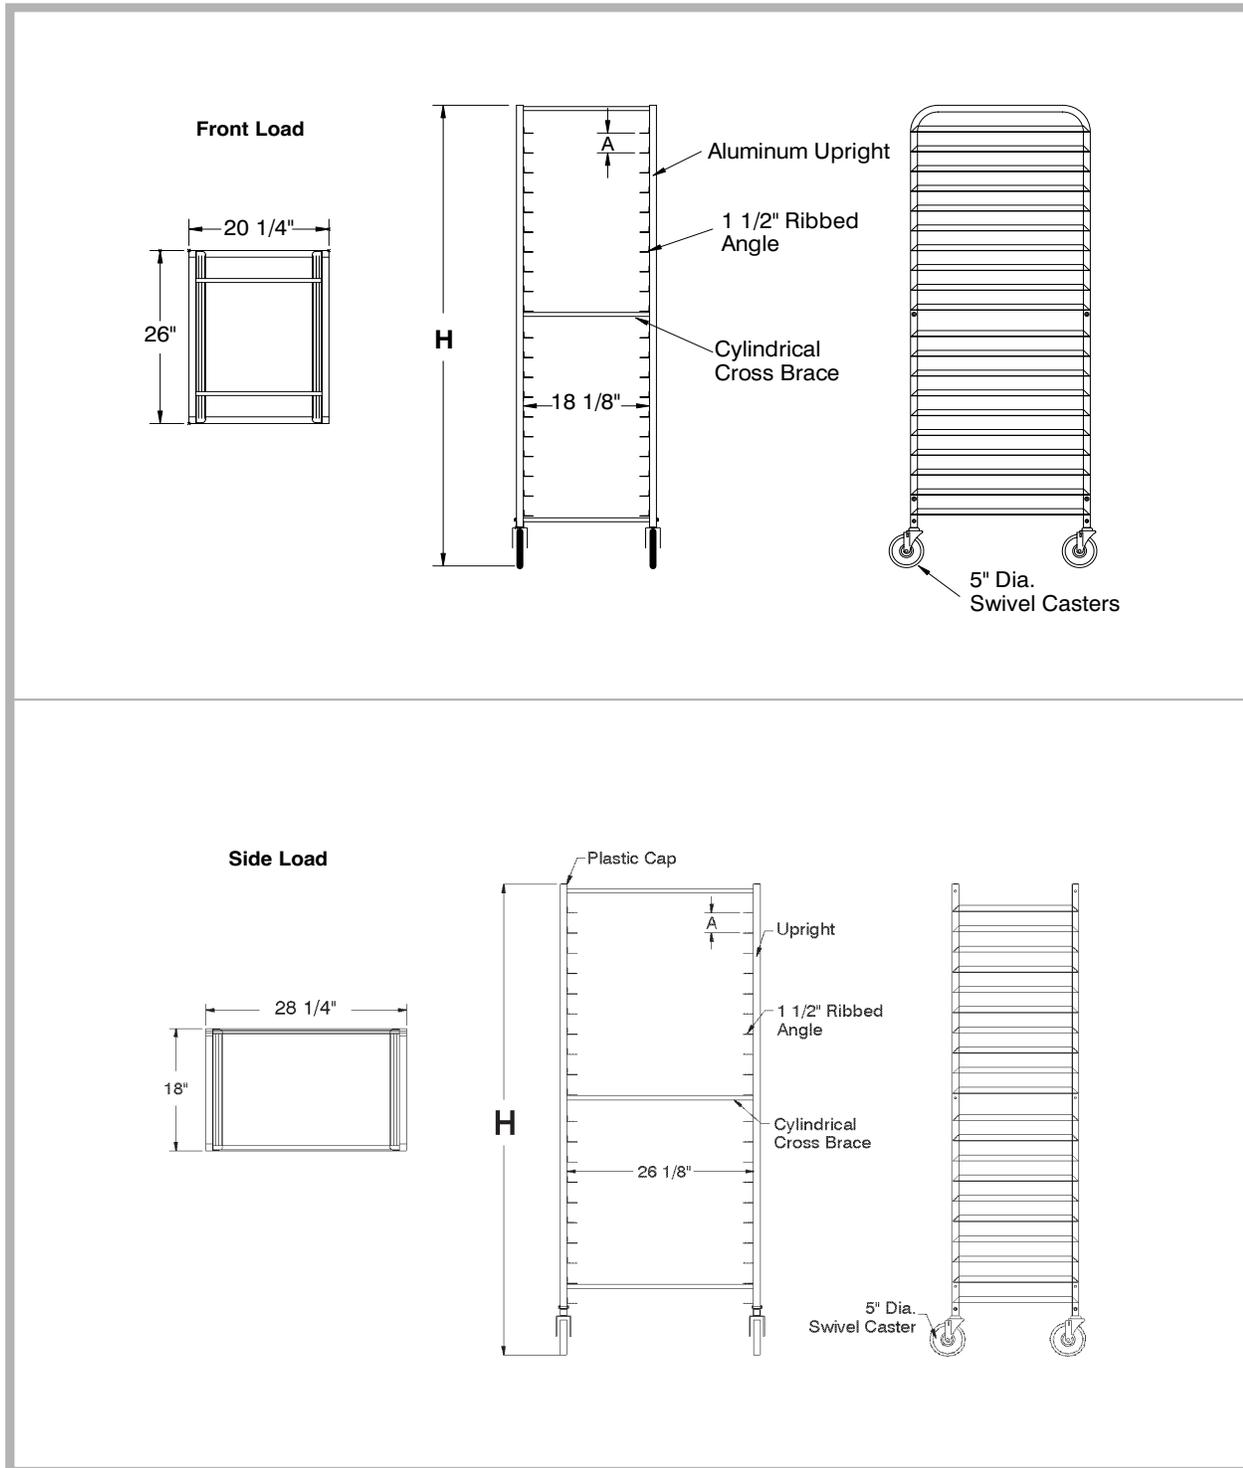

R-1a 200 Heartland Boulevard, Edgewood, NY 11717-8380

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, NOVEMBER 2006



ALUMINUM
BAKING PANS

Item #: _____ **Qty #:** _____
Model #: _____
Project #: _____



FEATURES:


Die formed from one sheet aluminum.
 Wire reinforced top perimeter edge for optimum strength.
 Pans "nest" to maximize storage.

MATERIAL:

Heavy gauge aluminum.

MODEL #	Size	Style	Gauge	Weight
18-A-26	18" x 26" x 1"	Heavy Duty	16	48 lbs.
18-8A-26	18" x 26" x 1"	Standard	18	40 lbs.
18-8P-26	18" x 26" x 1"	Perforated	18	33 lbs.
18-8A-13	18" x 13" x 1"	Half size	18	24 lbs.

Pan Rack Accessories

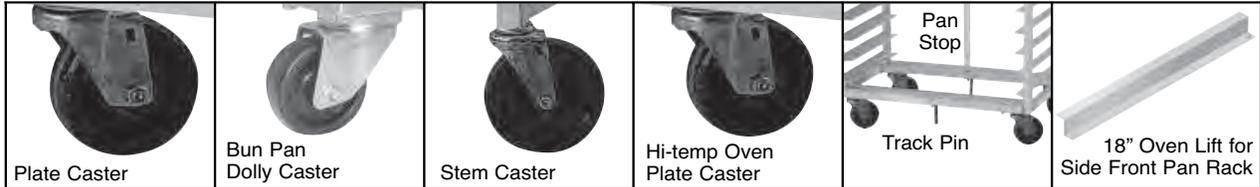

Bun Pan Rack Covers with 3 Zippers



RA-24

MODEL #	Description	Qty.
RA-10	Pan Stop	
RA-20	Track Pin	
RA-24	12" Tall Vertical Bumpers (Set of 4)	
ORL-B	Oven Lift for Front Load Pan Racks	
RA-40	4" Hi-temp Oven Plate Caster w/built-in Zerk Grease Fitting	
RA-45	4" Hi-temp Oven Plate Caster w/Brake	
RA-30	4" Plate Caster w/built-in Zerk Grease Fitting	
RA-35	4" Plate Caster w/brake	
RA-50	3" Bun Pan Dolly Caster	
RA-55	4" Set of Plate Casters, Factory Installed	
RA-60	5" Pan Truck Stem Caster	
RA-25	5" Stem Bolted Caster	
RA-26	5" Stem Bolted Caster w/Brake	
PRC-1	Enclosed Heavy Duty Plastic Cover with Clear Front	
PRC-2	Economy See-Thru Plastic Cover	



Customer Service Available To Assist You **1-800-645-3166 8:30 am - 8:00 pm E.S.T.**

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK
Fax: (631) 242-6900

GEORGIA
Fax: (770) 775-5625

TEXAS
Fax: (972) 932-4795

NEVADA
Fax: (775) 972-1578

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice. © ADVANCE TABCO, NOVEMBER 2006 **R-19**



ITEM# 17 - SERVING COUNTER, COLD PAN

Delfield Model SE-C2 (1 REQ'D)

Shelleybasic™ by Delfield, Cold Food Serving Counter, 2-pan size, 7" deep
Bloomington style pans recessed 3", drain w/valve, open base with stainless
steel undershelf, 5" casters, self-contained refig, 1/4 hp

ACCESSORIES:

MFR	Qty	Model	Spec
Delfield	1		115v/60/1-ph, 7 amps, NEMA 5-15P, standard
Delfield	1		5 year compressor warranty (net)
Delfield	1		1 Yr. Parts & labor warranty (net)
Delfield	1		Delrite 1/2 ABS covered modesty panels in front & ends
Delfield	1		Color of Delrite panels to be selected later
Delfield	1	SE-E-2	Work Shelf, 8", fold-down, stainless steel
Delfield	1	SE-KS-2	Buffet Shield, single service



Project _____
 Item Number _____
 Quantity _____ Date _____
 Approval _____

SE-C/SES-C

Mobile Self-Contained Cold Pan Serving Counters

Short Form Specifications

Exterior Body: Open frame construction with 16-gauge stainless steel corners: 18-gauge stainless steel full bottom shelf and stainless steel C channel front and sides for optional accent panels.

Exterior Top: Constructed of 16-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners.


Refrigeration: Cold pan is 9" (22.9cm) deep and constructed of stainless steel. The cold pan is separated from the exterior top by a thermal break. Copper refrigeration tubing is attached to the sides of the cold pan and is fully insulated with foamed in place polyurethane insulation. Cold pan is equipped with a drain, gate valve and garden hose hookup. Temperatures of 33°F (1C) to 41°F (5C) are maintained with pans recessed 2" (5cm) at 86°F ambient room temperature. Pans rest on a stainless steel ledge.

Refrigeration System: Uses R-134a refrigerant and has a self-contained 115 volt, 60 hertz, single phase hermetically sealed condensing unit with adjustable cold pan temperature control. Unit is wired with a 3-wire, grounded, maximum 10' (3m) cord and plug. Unit has an on/off switch mounted on the exterior of the compressor housing.

Casters: Units are mounted on 5" (12.7cm) diameter swivel casters with non-marking polyolefin tires and plate brakes. Overall height of caster assembly is 6" (15.2cm).

Optional Accessories and Modifications

SE-A	10" stainless steel fold-down tray slide
SE-D	8" polyethylene fold-down cutting board
SE-E	8" stainless steel fold-down work shelf
SE-F	Interlock device
SE-GF	Counter protector with full Plexiglas front
SE-HF	Two tier display with full Plexiglas front on each tier
SE-GS	Counter protector with short Plexiglas front (for self service)
SE-HS	Two tier display with short Plexiglas front on each tier (for self service)
SE-KS	Single service buffet shield
SE-KD	Double service buffet shield
SE-GD	Single tier dual display with sneeze guards
SE-HD	Double tier dual display with sneeze guards
SE-J	10" stainless steel overshelf
SE-J2	Two-tier 10" stainless steel overshelf
SE-LI	Light fixture (per tier)
SE-M	Radiant heat lamp with on/off switch
SE-Q	115/15A outlet
SE-U	14"x29" stainless steel end drop shelf
SE-V	Adjustable stainless steel leg

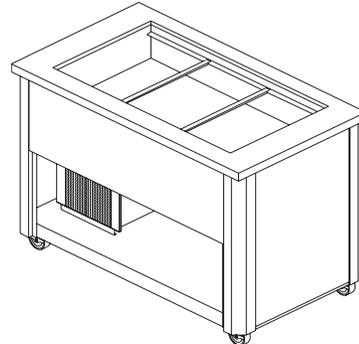


SE-C3




The Delfield Company, 980 S. Isabella Road, Mt. Pleasant, MI 48858, U.S.A. • (800) 733-8821 • Fax (800) 669-0619 • www.delfield.com
 Delfield reserves the right to make changes in design or specifications without prior notice. ©2004 The Delfield Company. All rights reserved. Printed in the U.S.A.

SE-C/SES-C


Mobile Self-Contained Cold Pan Serving Counters

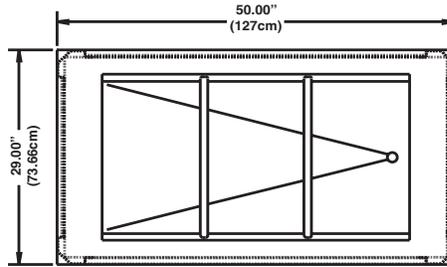

PLAN VIEW

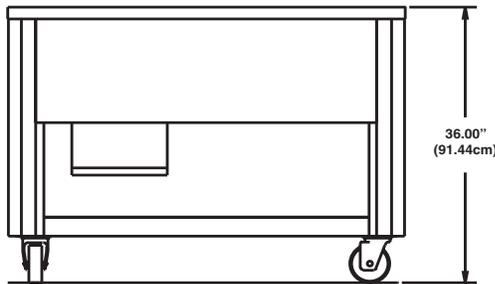

ELEVATION VIEW



END VIEW

Mechanical Data - Standard Unit

MODEL	12 X 20 NUMBER PANS HELD	L	D	H	NEMA PLUG	VOLTS	AMP	H.P.	SHIP WT	FRT. CLASS
REFRIGERATED COLD PAN SERVING COUNTERS										
SE-C2	2	39"	29"	36"	5-15P	115	7.0	1/4	340	100
SE-C3	3	50"	29"	36"	5-15P	115	7.0	1/4	415	100
SE-C4	4	64"	29"	36"	5-15P	115	7.0	1/4	490	100
SE-C5	5	78"	29"	36"	5-15P	115	7.0	1/4	565	100
SE-C6	6	92"	29"	36"	5-15P	115	7.0	1/4	640	100

Add S for 30" high models. (example SES-C)



The Delfield Company, 980 S. Isabella Road, Mt. Pleasant, MI 48858, U.S.A. • (800) 733-8821 • Fax (800) 669-0619 • www.delfield.com

Delfield reserves the right to make changes in design or specifications without prior notice. ©2004 The Delfield Company. All rights reserved. Printed in the U.S.A.
DSSEC 02/04



PROJECT	
ITEM #	
QUANTITY	DATE
APPROVAL	

ACCESSORIES AND MODIFICATIONS

Tray Slide, Cutting Board, Shelves, Heat Lamp and Light




SE-A
Stainless steel tray slide
 Tray slide shall be 10" (25.4 cm) wide, constructed of 18-gauge stainless steel, with three rows of raised "V" ridges. Mounted on stainless steel fold-down support brackets.
 29", 39", 50", 64", 78", 92" Lengths



SE-D
Fold down cutting board
 Cutting board to be 1/2" thick. Polyethylene board mounted on 18-gauge stainless steel workshelf on stainless steel fold down support brackets.
 29", 39", 50", 64", 78", 92" Lengths




SE-E
Fold down work shelf
 Work shelf shall be 8" (20.32 cm) wide, constructed of 18-gauge stainless steel, mounted flush with the top surface of the equipment. Work shelf shall be mounted on stainless steel fold-down support brackets.
 29", 39", 50", 64", 78", 92" Lengths



SE-U
Fold down end shelf
 End shelf shall be 14" (30.5 cm) x 29" (73.66 cm), constructed of 18-gauge stainless steel, mounted on either end of the equipment. End shelf shall be mounted on stainless steel fold-down support brackets.



SE-M Radiant Heat Lamp
 Housing shall be stainless steel. Lamp shall be infrared-style to provide radiant heat with on and off switch on fixture.



SE-LI
Light Fixture
 Housing shall be extruded anodized aluminum, and include bulb cover. Fluorescent light fixtures are used when fixture is not installed over a heat source or when heat lamps are not included. If heat lamps are used, incandescent lamps are used in lieu of fluorescent.

ACCESSORIES AND MODIFICATIONS

Counter Protector, Display Cases, Overshelf and Sneeze Guards



SE-GF
Counter protector
 Counter protector shall be constructed of 18-gauge stainless steel with either 6" wide acrylic guards or full fixed acrylic fronts. Acrylic ends are standard. Single (shown) or double tier available.
 37", 48", 62", 76", 90" Lengths



SE-HS
Two-tier display case
 Counter protector shall be constructed of 18-gauge stainless steel either 6" wide acrylic guards or full fixed acrylic fronts. Acrylic ends are standard. Single or double (shown) tier available.
 37", 48", 62", 76", 90" Lengths



SE-HD
Dual-service display case
 Display case shall be constructed of 18-gauge stainless steel. Display case shall have 6" wide acrylic guards on both sides. Single or double (shown) tier available. Acrylic ends are standard.
 37", 48", 62", 76", 90" Lengths



SE-J
Overshelf
 Overshelf shall be constructed of 18-gauge stainless steel. Overshelf will be 12" wide. Single or double tier available with first tier being 16" high and second tier being 14" high. Acrylic ends are standard.
 37", 48", 62", 76", 90" Lengths



SE-KS
Buffet shield
 Buffet shield shall be constructed of 18-gauge stainless steel. Buffet Shield shall have 12" wide sneeze guards on one side. Acrylic ends are standard.
 37", 48", 62", 76", 90" Lengths



SE-KD
Buffet shield
 Buffet shield shall be constructed of 18-gauge stainless steel. Buffet Shield shall have 12" wide sneeze guards on both sides. Acrylic ends are standard.
 37", 48", 62", 76", 90" Lengths



SE-V
Adjustable stainless steel legs
 Legs shall be constructed of stainless steel, 6" (15.2 cm) high.



SE-SL
Sliding doors for SE-H, SE-I and SE-V series.



SE-F
Interlock
 Alignment pin with spring loaded ball catch.



The Delfield Company, 980 S. Isabella Road, Mt. Pleasant, MI 48858, U.S.A. • (800) 733-8821 • Fax (800) 669-0619 • www.delfield.com
 Delfield reserves the right to make changes in design or specifications without prior notice. ©2004 The Delfield Company. All rights reserved. Printed in the U.S.A.
 DSSBACC 02/04



ITEM# 18 - SERVING COUNTER, HOT FOOD, ELECTRIC

Delfield Model SE-H3 (1 REQ'D)

Shelleybasic™ by Delfield, Hot Food Serving Counter, electric, (3) hot food wells, stainless steel wells, open base with undershelf, 5" casters

ACCESSORIES:

MFR	Qty	Model	Spec
Delfield	1		120/208-230v/60/1-ph, 15/16 amps, NEMA 14-20P, standard
Delfield	1		Delrite 1/2" ABS covered modesty panels in front & ends
Delfield	1		Color of Delrite panels to be selected later
Delfield	1	SE-E-3	Work Shelf, 8", fold-down, stainless steel
Delfield	1	SE-KS-3	Buffet Shield, single service



Project _____
 Item Number _____
 Quantity _____ Date _____
 Approval _____

SE-H/SES-H

Mobile Heated Serving Counters


Short Form Specifications

Exterior Body: Open frame construction with 16-gauge stainless steel corners: 18-gauge stainless steel full bottom shelf and stainless steel C channel front and sides for optional accent panels.

Exterior Top: Constructed of 16-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners.

Heated Food Warmers: Constructed of die-stamped stainless steel. Heated food warmers are insulated on bottom. Each heated food warmer is individually equipped with a heated element rated at 1000 watts for 120 volt or 208/230 volt, 60 hertz, single phase service and wired to an adjustable control switch and indicator light in the control panel. Heated food warmers are interwired to a maximum 10' (3m) long cord with a grounded plug for 120 volt or 208/230 volt, 60 hertz, single phase electrical service. Unit is equipped with a drain, manifold and gate valve with garden hose hookup.

Casters: Units are mounted on 5" (12.7cm) diameter swivel casters with non-marking polyolefin tires and plate brakes. Overall height of caster assembly is 6" (15.2cm).

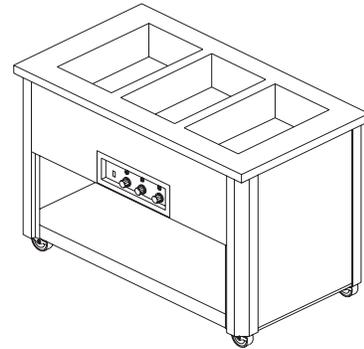

SE-H3

Optional Accessories and Modifications

SE-A	10" stainless steel fold-down tray slide
SE-D	8" polyethylene fold-down cutting board
SE-E	8" stainless steel fold-down work shelf
SE-F	Interlock device
SE-GF	Counter protector with full Plexiglas front
SE-HF	Two tier display with full Plexiglas front on each tier
SE-GS	Counter protector with short Plexiglas front (for self service)
SE-HS	Two tier display with short Plexiglas front on each tier (for self service)
SE-KS	Single service buffet shield
SE-KD	Double service buffet shield
SE-GD	Single tier dual display with sneeze guards
SE-HD	Double tier dual display with sneeze guards
SE-J	10" stainless steel overshelf
SE-J2	Two-tier 10" stainless steel overshelf
SE-LI	Light fixture (per tier)
SE-M	Radiant heat lamp with on/off switch
SE-Q	115/15A outlet
SE-U	14"x29" stainless steel end drop shelf
SE-V	Adjustable stainless steel leg
SE-SL	Sliding doors




The Delfield Company, 980 S. Isabella Road, Mt. Pleasant, MI 48858, U.S.A. • (800) 733-8821 • Fax (800) 669-0619 • www.delfield.com


Delfield reserves the right to make changes in design or specifications without prior notice. ©2004 The Delfield Company. All rights reserved. Printed in the U.S.A.

SE-H/SES-H


Mobile Heated Serving Counters

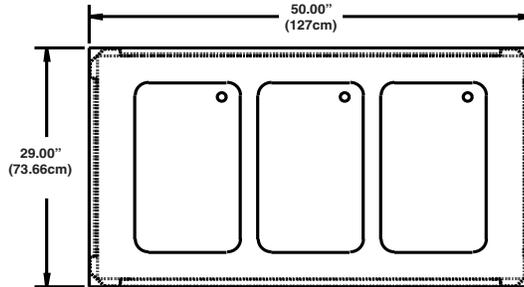

PLAN VIEW

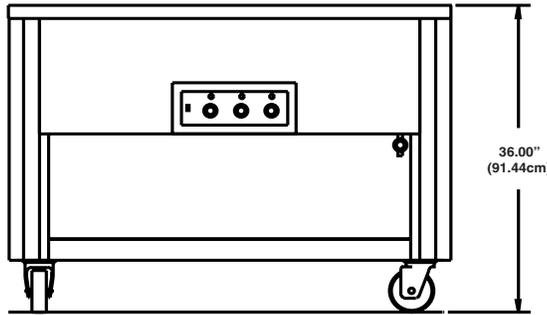

ELEVATION VIEW



END VIEW

Mechanical Data - Standard Unit

MODEL NUMBER	Description	L	D	H	NEMA PLUG	VOLTS	AMP	SHIP WT	FRT. CLASS
Heated Counters									
SE-H2	2 food wells	39"	29"	36"	14-20P	120/208-230	10.0/11.0	215	100
SE-H3	3 food wells	50"	29"	36"	14-20P	120/208-230	15.0/16.0	265	100
SE-H4	4 food wells	64"	29"	36"	14-30P	120/208-230	20.0/22.0	320	100
SE-H5	5 food wells	78"	29"	36"	14-50P	120/208-230	24.0/27.0	410	100
SE-H6	6 food wells	92"	29"	36"	14-50P	120/208-230	29.0/32.0	500	100

Add S for 30" high models. (example SES-H)



The Delfield Company, 980 S. Isabella Road, Mt. Pleasant, MI 48858, U.S.A. • (800) 733-8821 • Fax (800) 669-0619 • www.delfield.com

Delfield reserves the right to make changes in design or specifications without prior notice. ©2004 The Delfield Company. All rights reserved. Printed in the U.S.A.
DSSEH 02/04



PROJECT	
ITEM #	
QUANTITY	DATE
APPROVAL	

ACCESSORIES AND MODIFICATIONS

Tray Slide, Cutting Board, Shelves, Heat Lamp and Light




SE-A
Stainless steel tray slide
 Tray slide shall be 10" (25.4 cm) wide, constructed of 18-gauge stainless steel, with three rows of raised "V" ridges. Mounted on stainless steel fold-down support brackets.
 29", 39", 50", 64", 78", 92" Lengths



SE-D
Fold down cutting board
 Cutting board to be 1/2" thick. Polyethylene board mounted on 18-gauge stainless steel workshelf on stainless steel fold down support brackets.
 29", 39", 50", 64", 78", 92" Lengths




SE-E
Fold down work shelf
 Work shelf shall be 8" (20.32 cm) wide, constructed of 18-gauge stainless steel, mounted flush with the top surface of the equipment. Work shelf shall be mounted on stainless steel fold-down support brackets.
 29", 39", 50", 64", 78", 92" Lengths



SE-U
Fold down end shelf
 End shelf shall be 14" (30.5 cm) x 29" (73.66 cm), constructed of 18-gauge stainless steel, mounted on either end of the equipment. End shelf shall be mounted on stainless steel fold-down support brackets.



SE-M Radiant Heat Lamp
 Housing shall be stainless steel. Lamp shall be infrared-style to provide radiant heat with on and off switch on fixture.



SE-LI
Light Fixture
 Housing shall be extruded anodized aluminum, and include bulb cover. Fluorescent light fixtures are used when fixture is not installed over a heat source or when heat lamps are not included. If heat lamps are used, incandescent lamps are used in lieu of fluorescent.

ACCESSORIES AND MODIFICATIONS

Counter Protector, Display Cases, Overshelf and Sneeze Guards



SE-GF
Counter protector

Counter protector shall be constructed of 18-gauge stainless steel with either 6" wide acrylic guards or full fixed acrylic fronts. Acrylic ends are standard. Single (shown) or double tier available.

37", 48", 62", 76", 90" Lengths



SE-HS
Two-tier display case

Counter protector shall be constructed of 18-gauge stainless steel either 6" wide acrylic guards or full fixed acrylic fronts. Acrylic ends are standard. Single or double (shown) tier available.

37", 48", 62", 76", 90" Lengths



SE-HD
Dual-service display case

Display case shall be constructed of 18-gauge stainless steel. Display case shall have 6" wide acrylic guards on both sides. Single or double (shown) tier available. Acrylic ends are standard.

37", 48", 62", 76", 90" Lengths



SE-J
Overshelf

Overshelf shall be constructed of 18-gauge stainless steel. Overshelf will be 12" wide. Single or double tier available with first tier being 16" high and second tier being 14" high. Acrylic ends are standard.

37", 48", 62", 76", 90" Lengths



SE-KS

Buffet shield shall be constructed of 18-gauge stainless steel. Buffet Shield shall have 12" wide sneeze guards on one side. Acrylic ends are standard.

37", 48", 62", 76", 90" Lengths



SE-KD

Buffet shield shall be constructed of 18-gauge stainless steel. Buffet Shield shall have 12" wide sneeze guards on both sides. Acrylic ends are standard.

37", 48", 62", 76", 90" Lengths



SE-V
Adjustable stainless steel legs

Legs shall be constructed of stainless steel, 6" (15.2 cm) high.



SE-SL
Sliding doors for SE-H, SE-I and SE-V series.



SE-F
Interlock
Alignment pin with spring loaded ball catch.



The Delfield Company, 980 S. Isabella Road, Mt. Pleasant, MI 48858, U.S.A. • (800) 733-8821 • Fax (800) 669-0619 • www.delfield.com

Delfield reserves the right to make changes in design or specifications without prior notice. ©2004 The Delfield Company. All rights reserved. Printed in the U.S.A.

DSSBACC 02/04



ITEM# 19 - S/S SHELF

Custom Model SHELF (1 REQ'D)

Stainless Steel wall shelf -- to fit on top of short wall --
size:

**ITEM# 20 - WORK TABLE, 36" LONG**

Advance Tabco Model KMS-303 (1 REQ'D)

Work Table, 30" wide top, with splash at rear only, 36" long, with adjustable undershelf, s/s frame & shelf, 16 gauge, type 304 stainless steel top, 5" backsplash, s/s bullet feet

ACCESSORIES:

MFR	Qty	Model	Spec
Advance	1	SS-2015	Deluxe Drawer, 20" x 15" x 5", stainless steel, with drawer slides



STAINLESS STEEL
WORK TABLES
STANDARD Series - 5" Backsplash - Undershelf Style

Item #: _____ **Qty #:** _____
Model #: _____
Project #: _____

FEATURES:

Top is furnished with a 1 5/8" sanitary rolled rim edge on front, 1 5/8" square side edges, and a 5" splash with a 1" return on the rear side.

TWO hat channels stud welded to reinforce and maintain a level working surface. 30" and 36" wide tables supplied with THREE hat channels.

Pre-engineered welded angle adapters insure ease of future drawer installation.

Aluminum die cast "leg-to-shelf" clamp secures shelf to leg eliminating unsightly nuts and bolts. Undershelf is adjustable.

CONSTRUCTION:

All TIG welded. Exposed weld areas polished to match adjacent surfaces.

Entire top mechanically polished to a satin finish.

Top is sound deadened.

Roll formed embossed galvanized hat channels are secured to top by means of structural adhesive and weld studs.

Gussets welded to support hat sections.



NEW
Rolled Rim Edges on Front & Splash on Back and Square Side Edges



Featuring as Standard: **"THE PROVEN"** ORIGINAL ADVANCE TABCO Adjustable Undershelf with Die Cast Leg Clamp

MATERIAL:

KMS-SERIES: Stainless Steel Legs & Undershelf

TOP: 16 gauge stainless steel type "304" series.

SHELF: 18 gauge stainless steel.

LEGS: 1 5/8" diameter tubular stainless steel. 1" adjustable stainless steel bullet feet. Stainless steel gussets.

KMG-SERIES: Galvanized Legs & Undershelf

TOP: 16 gauge stainless steel type "304" series.

SHELF: 18 gauge galvanized steel.

LEGS: 1 5/8" diameter tubular galvanized steel. 1" adjustable plastic bullet feet. Galvanized steel gussets.

KMS-Series:
Stainless Steel Legs & Undershelf

L	24" Wide	30" Wide	36" Wide
30"	KMS-240	KMS-300	
24"	KMS-242	KMS-302	
36"	KMS-243	KMS-303	KMS-363
48"	KMS-244	KMS-304	KMS-364
60"	KMS-245	KMS-305	KMS-365
72"	KMS-246	KMS-306	KMS-366
84"	KMS-247	KMS-307	KMS-367
96"	KMS-248	KMS-308	KMS-368
108"	KMS-249	KMS-309	KMS-369
120"	KMS-2410	KMS-3010	KMS-3610
132"	KMS-2411	KMS-3011	KMS-3611
144"	KMS-2412	KMS-3012	KMS-3612

KMG-Series:
Galvanized Steel Legs & Undershelf

L	24" Wide	30" Wide	36" Wide
30"	KMG-240	KMG-300	
24"	KMG-242	KMG-302	
36"	KMG-243	KMG-303	KMG-363
48"	KMG-244	KMG-304	KMG-364
60"	KMG-245	KMG-305	KMG-365
72"	KMG-246	KMG-306	KMG-366
84"	KMG-247	KMG-307	KMG-367
96"	KMG-248	KMG-308	KMG-368
108"	KMG-249	KMG-309	KMG-369
120"	KMG-2410	KMG-3010	KMG-3610
132"	KMG-2411	KMG-3011	KMG-3611
144"	KMG-2412	KMG-3012	KMG-3612



Create Your Own Efficient Workstation with the Available Standard Accessories (Visit Section K)



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK
Fax: (631) 242-6900

GEORGIA
Fax: (770) 775-5625

TEXAS
Fax: (972) 932-4795

NEVADA
Fax: (775) 972-1578

DETAILS and SPECIFICATIONS

ALL DIMENSIONS ARE TYPICAL TOL ± .500"



All Units Shipped Unassembled (KD) for Reduced Shipping Costs.

KMS & KMG Series Undershelf Style 5" Backsplash

Finished size of undershelf = Length minus 5 3/4"
Width minus 5 3/4"



Units 8ft. and larger are furnished with six (6) legs

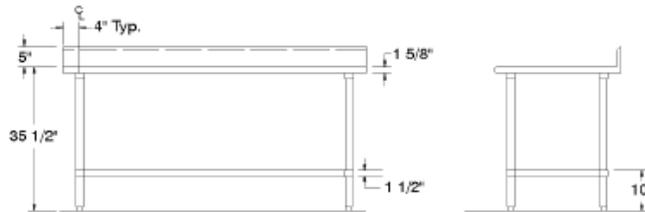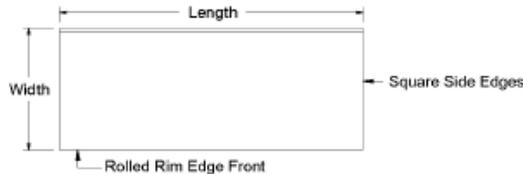

KMS-Series: Stainless Steel Legs & Undershelf

L	24" Wide	Wt.	30" Wide	Wt.	36" Wide	Wt.
30"	KMS-240	55 lbs.	KMS-300	70 lbs.		
24"	KMS-242	50 lbs.	KMS-302	56 lbs.		
36"	KMS-243	66 lbs.	KMS-303	77 lbs.	KMS-363	92 lbs.
48"	KMS-244	81 lbs.	KMS-304	92 lbs.	KMS-364	101 lbs.
60"	KMS-245	95 lbs.	KMS-305	111 lbs.	KMS-365	121 lbs.
72"	KMS-246	113 lbs.	KMS-306	129 lbs.	KMS-366	142 lbs.
84"	KMS-247	135 lbs.	KMS-307	153 lbs.	KMS-367	169 lbs.
96"	KMS-248	150 lbs.	KMS-308	171 lbs.	KMS-368	189 lbs.
108"	KMS-249	165 lbs.	KMS-309	195 lbs.	KMS-369	260 lbs.
120"	KMS-2410	268 lbs.	KMS-3010	294 lbs.	KMS-3610	315 lbs.
132"	KMS-2411	301 lbs.	KMS-3011	331 lbs.	KMS-3611	358 lbs.
144"	KMS-2412	316 lbs.	KMS-3012	346 lbs.	KMS-3612	373 lbs.

KMG-Series: Galvanized Steel Legs & Undershelf

L	24" Wide	Wt.	30" Wide	Wt.	36" Wide	Wt.
30"	KMG-240	55 lbs.	KMG-300	70 lbs.		
24"	KMG-242	50 lbs.	KMG-302	56 lbs.		
36"	KMG-243	66 lbs.	KMG-303	77 lbs.	KMG-363	92 lbs.
48"	KMG-244	81 lbs.	KMG-304	92 lbs.	KMG-364	101 lbs.
60"	KMG-245	95 lbs.	KMG-305	111 lbs.	KMG-365	121 lbs.
72"	KMG-246	113 lbs.	KMG-306	129 lbs.	KMG-366	142 lbs.
84"	KMG-247	135 lbs.	KMG-307	153 lbs.	KMG-367	169 lbs.
96"	KMG-248	150 lbs.	KMG-308	171 lbs.	KMG-368	189 lbs.
108"	KMG-249	165 lbs.	KMG-309	195 lbs.	KMG-369	260 lbs.
120"	KMG-2410	268 lbs.	KMG-3010	294 lbs.	KMG-3610	315 lbs.
132"	KMG-2411	301 lbs.	KMG-3011	331 lbs.	KMG-3611	358 lbs.
144"	KMG-2412	316 lbs.	KMG-3012	346 lbs.	KMG-3612	373 lbs.



J-3a

200 Heartland Boulevard, Edgewood, NY 11717-8380

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, SEPTEMBER 2005



DELUXE AND BUDGET DRAWERS

- Stainless Steel Front
- Ball Bearing Slides
- Removable Inset



MODEL #	Width	Description	Inset
SS-2015	17 3/4"	Stainless Steel	20" x 15" x 5"
GZ-2015	17 3/4"	Galvanized	20" x 15" x 5"
SS-2020	22 3/4"	Stainless Steel	20" x 20" x 5"
GZ-2020	22 3/4"	Galvanized	20" x 20" x 5"

DELUXE AND BUDGET DRAWER ACCESSORIES

Pad Lock Hasp TA-13

Drawer Lock TA-14
(Does not apply to Budget Drawers)

Drawers Modified to 15" L/R x 20" F/B* TA-50

Drawer Adapter/Non Catalog Tables (specify table width) TA-90

- Friction Slides
- Die Formed Handle



MODEL #	Width	Description	Inset
FS-2015	17 3/4"	Stainless Steel	20" x 15" x 5"
FG-2015	17 3/4"	Galvanized	20" x 15" x 5"
FS-2020	22 3/4"	Stainless Steel	20" x 20" x 5"
FG-2020	22 3/4"	Galvanized	20" x 20" x 5"

Item #: _____ **Qty #:** _____

Model #: _____


Project #: _____

DELUXE SERIES DRAWERS

DETAILS and SPECIFICATIONS

TOL ± .500"

ALL DIMENSIONS ARE TYPICAL

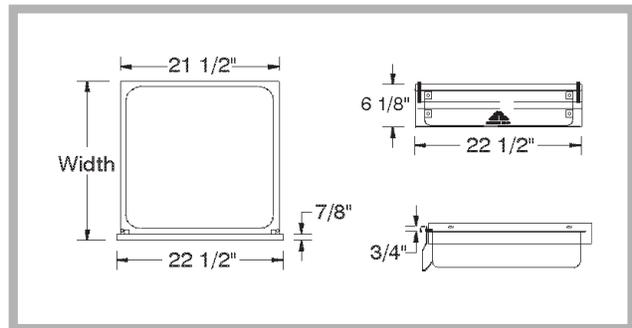


BUDGET SERIES DRAWERS

DETAILS and SPECIFICATIONS

TOL ± .500"

ALL DIMENSIONS ARE TYPICAL

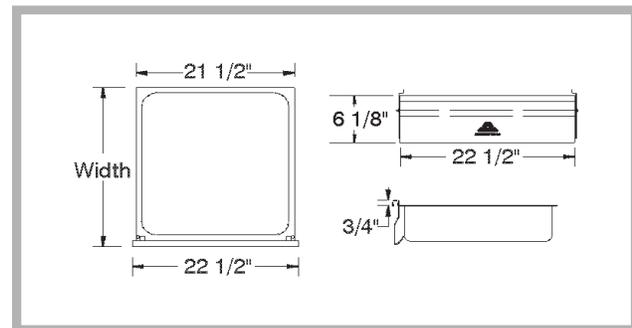

Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK
Fax: (631) 242-6900

GEORGIA
Fax: (770) 775-5625

TEXAS
Fax: (972) 932-4795

NEVADA
Fax: (775) 972-1578

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice. © ADVANCE TABCO, JUNE 2007

K-3A



ITEM# 21 - TOASTER, POP-UP

Hamilton Beach Model 24850 (1 REQ'D)

Proctor-Silex® Pop-Up Toaster, 4 slot, Smart Bagel function, 120v/60/1-ph, 1650 watts, UL, 1 year warranty



ITEM# 22 - SHELF, MICROWAVE

Advance Tabco Model MS-18-24 (1 REQ'D)

Microwave Shelf, wall-mounted, stainless steel, 18" wide, 2 feet long