


SIEMENS



A31008-M1729-R401-1-5819



Gigaset S185

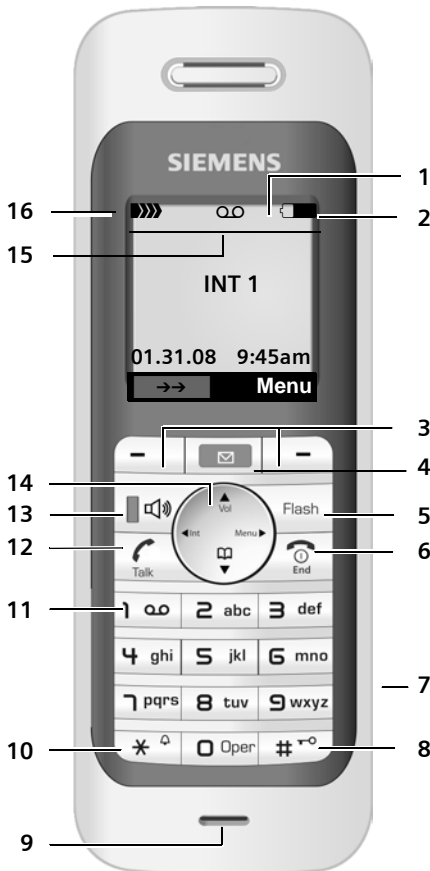
Issued by
Gigaset Communications GmbH
Schlavenhorst 66, D-46395 Bocholt
Gigaset Communications GmbH is a trademark licensee of Siemens AG



© Gigaset Communications GmbH 2008
All rights reserved.
Subject to availability. Rights of modifications reserved.

www.gigaset.com

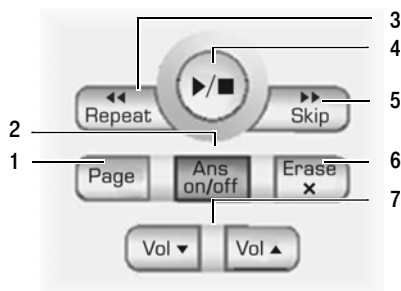
Gigaset

The handset at a glance



- 1 **Display in idle status**
- 2 **Charge status of the batteries**

 - (empty to full)
 - flashes: batteries almost empty
 - flashes: batteries charging
- 3 **Display keys** (page 16)
- 4 **Message key**
 Access to calls and message lists;
 Flashes: new message
- 5 **Flash key**
 - Confer (Flash)
 - Insert a dialing pause (press and hold)
- 6 **End call key, On/Off key**
 End call, cancel function, go back one menu level (press briefly), back to idle status (press and hold), activate/deactivate handset (press and hold in idle status)
- 7 **2.5 mm socket for headset** (mono)
- 8 **Pound (#) key**
 Key lock on/off (press and hold in idle status)
 Toggle between upper/lower case and digits
- 9 **Microphone**
- 10 **Star (*) key**
 Ringtones on/off (press and hold)
 Open table of special characters
- 11 **Key 1**
 Select answer machine/network mailbox (press and hold)
- 12 **Talk key**
 Answer a call, start dialing
- 13 **Handsfree key**
 Switch between earpiece and handsfree mode;
 Lights up: handsfree activated;
 Key flashes: incoming call
- 14 **Control key** (page 15)
- 15 **Answer machine symbol**
 Answer machine switched on.
 Flashes: answer machine is recording a message or is being operated by another caller.
- 16 **Signal strength**

 - (high to low)
 - flashes: Out of Range

Base station at a glance



Please remember:

- ◆ If the answer machine is being operated from a handset or if it is recording a message, it cannot be operated from the base station.
- ◆ If the On/Off key flashes although the answer machine is switched off, it means that there is still at least one new message that has not been played back yet.

You can use the keys on the base station to operate the integrated answer machine and register the handset to the base station.

- 1 Registration/paging key
Press briefly: search for handsets "Paging", see page 31.
Register handsets and DECT devices (press and hold), see page 30.
- 2 On/Off key: activate/deactivate answer machine.
Lights up: answer machine is activated.
Flashes: at least one new message is present.

During message playback:

- 3 Skip back to beginning of message (press once) or to previous message (press twice).
- 4 Play/stop key:
Play back new messages from the answer machine (see also page 23) or cancel the playback (press briefly).
Play back new and old messages (press and hold).
- 5 Skip to next message (press once) or next message but one (press twice).
- 6 Delete current message.
- 7 Adjust volume during message playback:
[-] = softer; [+] = louder.
While an external call is being signaled: adjust ringtone volume.

Contents

The handset at a glance	1
Base station at a glance	2
Safety precautions	5
Notes on the operating instructions	7
Symbols used	7
Example: menu input	7
Example: multiple line input	8
Gigaset S185 – more than just a telephone	9
First Steps	9
Pack contents	9
Installing the base station	9
Setting up the handset for use	10
Area codes	13
Making calls	14
Making an external call	14
Ending a call	14
Answering a call	14
Caller ID	14
Handsfree operation	15
Muting	15
Operating the handset	15
Control key	15
Display keys	16
Returning to idle status	16
Menu guidance	16
Correcting incorrect entries	17
CID 2.5 services (network services) ..	17
Using the directory and lists ...	18
Directory	18
Last number redial list	20
Opening lists with the message key	20
Writing and editing names	21
Operating the answering machine	23
Operation via the handset	23
Activating/deactivating listen in	26
Setting up the answer machine	26
Resetting fast access on the answer machine to Network Voice Mail	27
Operating when on the move (remote operation)	27
Using the network mailbox	29
Configuring the network mailbox for fast access	29
Viewing the network mailbox message	29
Using several handsets	30
Registering handsets	30
De-registering handsets	30
Locating a handset ("paging")	31
Changing the base station	31
Making internal calls	31
Linking internal callers to an external call	32
Changing the name of a handset	32
Changing a handset's internal number	33
Using a handset as a room monitor	33
Handset settings	34
Changing the display language	34
Setting the display	35
Setting the screen picture	35
Setting lighting	35
Activating/deactivating auto answer	35
Adjusting the loudspeaker volume ...	36
Changing ringtones	36
Activating/deactivating advisory tones	37
Setting the alarm clock	37
Restoring the handset default settings	38
Base station settings	38
Protecting against unauthorized access	38
Changing ringtones	38
Activating/deactivating the hold melody	38
Restoring default settings to base station	39

Shortcuts 40

**Connecting the base station
to the PABX 42**

Dialing modes and flash time 42

Setting pauses 42

Switching temporarily to
tone dialing (DTMF) 42

Appendix 43

Care 43

Contact with liquid 43

Questions and answers 43

Troubleshooting 43

Specifications 44

Industry Canada Certification 45

Safety precautions 45

Service (Customer Care) 47

End-user limited warranty 47

Index 51

Safety precautions^{*)}



Only use the power supply unit supplied as indicated on the underside of the device.

Power Outage:

In the event of a power outage, your cordless telephone will not operate. The cordless telephone requires electricity for operation. You should have a telephone that does not require electricity available for use during power outages.



Only insert **approved rechargeable batteries of the same type**.

Never use ordinary (non-rechargeable) batteries as they may pose a health hazard or cause injury.

Do not charge the handset in charging unit or base station while the headset is connected.



Make sure the rechargeable battery is inserted the right way round.



Use the battery specified in these operating instructions.



The phone may affect medical equipment so always switch your phone off before entering hospitals or doctors' practices.

To maintain compliance with the Industry Canada's RF exposure guideline, place the base station at least 20 cm from nearby persons.



Notice to Hearing Aid Wearers:

This phone system is compatible with inductively coupled hearing aids.



Do not operate the phone in places where there is a risk of explosion (such as paint workshops).



Do not install the base station in bathrooms or shower rooms. The handset and base station are not splash-proof (see page 43).



Drivers must not use the phone while driving.

^{*)} see also page 45

Safety precautions



The phone must be switched off at all times in an aircraft. Make sure it cannot be switched on accidentally.



If you give your Gigaset S185 to someone else you should also give them the operating instructions.



Dispose of batteries and the phone carefully. Do not pollute the environment.

Privacy of communications may not be ensured when using this telephone.

Emergency numbers cannot be dialed if the keypad lock is activated!

Notes on the operating instructions

This section explains the meaning of certain symbols and typographical conventions that are used in this user guide.

Symbols used

Copy Entry / Copy List (example)

Select one of the two menu functions specified.



Save

Enter digits or letters.

The display keys' current functions are shown reverse highlighted in the bottom display line. Press the display key below to launch the function.



Press the top or the bottom of the control key: scroll up or down.



Press the right or left of the control key: for example select setting.



/ 0 Open




etc.


Press the corresponding key on the handset.

Example: menu input

In the user guides, the steps you need to perform are shown in abbreviated form. This is illustrated below using the example of "Setting the contrast for the display". The things you need to do are explained in the boxes.



→  → Display

- ▶ With the handset in idle status, press on the right of the control key to open the main menu.
- ▶ Select the  icon using the control key – press the control key at the top or bottom.

In the display header, **Settings** is displayed.

- ▶ Press the **OK** display key to confirm the function **Settings**.

The **Settings** submenu is displayed.

- ▶ Press the bottom of the control key repeatedly until **Display** is selected.
- ▶ Press the **OK** display key to confirm the function.

Contrast Select and press **OK**.

- ▶ Press the bottom of the control key repeatedly until **Contrast** is selected.
- ▶ Press the **OK** display key to confirm the function.



Select contrast and press **OK**.

- ▶ Press on the right or left of the control key to select the contrast.
- ▶ Press the **Save** display key to confirm the function.



Press and **hold** (idle status).

- ▶ Press and hold the end call key until the handset returns to idle status.

Example: multiple line input

There are many situations in which you can change the settings of a display or enter data in several lines.

In this user guide symbols are used to guide you step by step through multiple line input. This is illustrated below using the example of "Setting the date and time". The things you need to do are explained in the boxes.

To change the time, open the input field with:

 →  → Date/Time

You will see the following display (example):

Date/Time	
Date:	12.23.08
Time:	[11:11]am
Time mode:	12 h
am/pm	Save

Date:


Enter month, day and year in 6-digit format.

The date in the first line is marked with [] to show it is active.

- ▶ Enter the date using the digit keys.

Time:

Enter hours/minutes in 4-digit format.


- ▶ Press the  key.

The time in the second line is marked with [] to show it is active.


- ▶ Enter the date using the digit keys.

Time mode:


Select 12-hour or 24-hour time format.


- ▶ Press the  key.

The time format is marked with [] to show it is active.

- ▶ Select time format.
- ▶ With 12-hour time format, use the display key  to switch between am and pm.

- ▶ Save changes.

- ▶ Press the  display key.

- ▶ Then press and **hold** the  key.

The handset changes to idle status.

Gigaset S185 – more than just a telephone

Your phone not only enables you to store up to 150 telephone numbers (page 18) – it can do a whole lot more:

- ◆ You can designate important people as VIPs so you can identify important calls from the ringtone (page 18).
- ◆ You can store anniversary dates (page 19) in your phone and it will remind you of them in advance.
- ◆ Select frequently used phone numbers at the press of a **single** key (page 18).
- ◆ View missed calls on your phone (page 21).
- ◆ Select 12 or 24-hour format for displaying the time (page 13).
- ◆ ECO DECT reduces power consumption by using a power supply with low power consumption. Your handset reduces the transmitting power depending on the distance to the base station (close-up range).

Note:

The transmitting power of the base station is reduced to almost zero when the handset is docked and only one handset is registered on the base station (not applicable for Gigaset S185 Duo).

Have fun using your new telephone!

First Steps

Pack contents

- ◆ one Gigaset S185 base station,
- ◆ one AC adapter for base station,
- ◆ one telephone line cord,
- ◆ one user guide.

For Gigaset S185:

- ◆ one Gigaset handset,
- ◆ two batteries,
- ◆ one battery cover,
- ◆ one belt clip.

For Gigaset S185 Duo:

- ◆ two Gigaset handsets and one charger,
- ◆ one AC adapter for charger,
- ◆ four batteries,
- ◆ two battery covers,
- ◆ two belt clips.

Installing the base station

The base is designed for use in closed, dry rooms with a temperature range of +5°C to +45°C.

Set up the base station at a central point in the apartment or house away from any appliance that may cause electrical interference to the phone.

Please note:

- ◆ Never expose the telephone to heat sources, direct sunlight, other electrical appliances.
- ◆ Protect your phone from moisture, dust, corrosive liquids and vapors.

Range and reception strength

Range:

- ◆ Up to 300 meters in the open
- ◆ Up to 50 meters in buildings

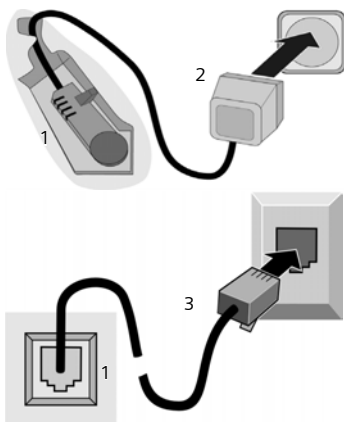
Reception strength:

The display shows the quality of the radio contact between the base station and handset:

- ◆ Good to poor: ▢▢▢ ▢▢▢ ▢▢▢ ▢▢▢
- ◆ No reception: ▢▢▢ flashes

Connecting the base station

- **First** connect the power adapter and **then** the phone jack as shown below and place the cables in the cable recesses.



- 1 Underside of the base station (detailed view)
- 2 Power adapter 110 V
- 3 Phone jack with phone cord

Please note:

- ◆ Minimum No. 26 AWG telecommunication line cord must be used with this phone.
- ◆ The power adapter must be **always connected**, as the phone will not operate without an electrical connection.

Setting up the handset for use

Inserting the batteries

Caution:

Use only rechargeable UL approved AAA batteries. Never use conventional (non-rechargeable) batteries or other battery types as this may cause significant damage to health and property. For example, the outer casing of the batteries could be destroyed or the batteries could explode. The phone could also malfunction or be damaged as a result of using batteries that are not of the recommended type.

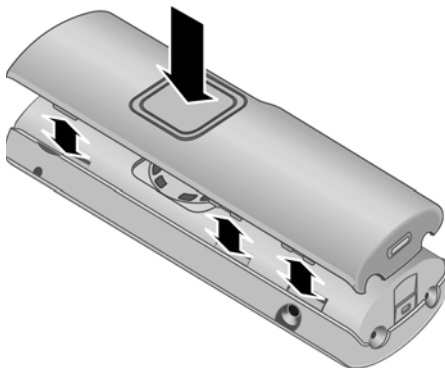
- Fit the batteries with the correct polarity (see diagram).

The polarity is indicated in/on the battery compartment.



Closing the battery cover

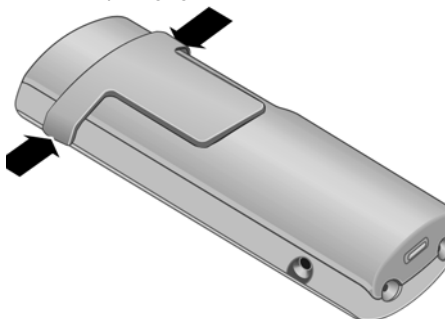
- ▶ First align the notches on the side of the battery cover with the clips on the inside of the casing.
- ▶ Then close the cover, press on the top so that it clicks into place.



Attaching the belt clip

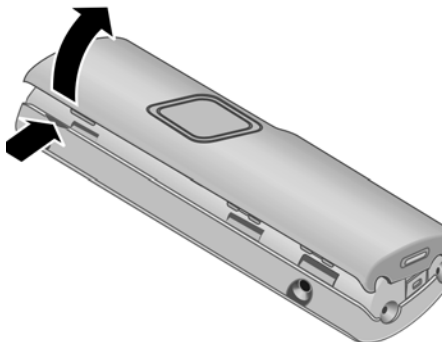
There are notches for attaching the belt clip on the side of the handset at the same height as the display.

- ▶ Press the belt clip onto the back of the handset so that the protrusions on the belt clip engage with the notches.



Opening the battery cover

- ▶ If fitted, remove belt clip.
- ▶ Insert your hand into the headset socket cavity and pull the battery cover upwards.



Placing the handset in the base station and registering




- ▶ To start the automatic registration of your handset, please place the handset in the base with the **display facing outwards**.

First Steps

- The handset registers automatically.
Please do NOT remove your handset from the base station during the registration procedure.

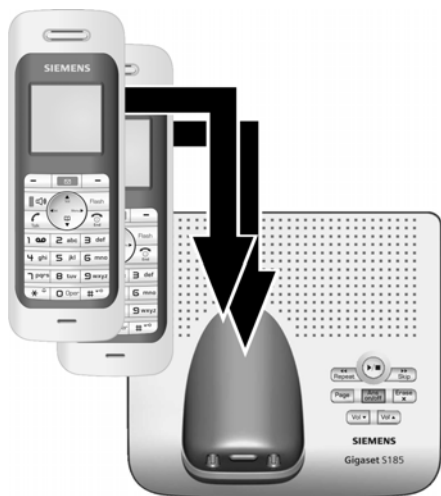
The registration can take up to 5 minutes. During this time **Regstr.Procedure** appears in the display and the name of the base station flashes, e.g. Base 1. The handset will be assigned the lowest unassigned internal intercom number (1–6).

This will appear in the display **when registration is complete**, for example INT 1.



This means that the number 1 has been assigned. If the internal numbers 1–6 are already assigned to other units, the number 6 is overwritten.

Please register each handset separately.



Note:

- Automatic registration is only possible if no one is making calls using the base station.
- Each key press interrupts the automatic registration.
- If automatic registration does not work the handset will need to be registered manually (page 30).
- You can change the name of the handset (page 33).

To charge the batteries, leave the handset in the base station.

Note:

- If the handset has switched itself off because the batteries have no charge and is then placed in the base station, it will switch itself on automatically.
- Only place the handset in the base or charging cradle that is intended for it.

For questions and problems see page 43.

Headset socket

Which headsets are compatible?

The following headsets have been tested with the Gigaset S185:


- ◆ Plantronics MX200
- ◆ Plantronics MX250
- ◆ Top-Nice EP-21-RS (C39453-Z5-C361)

Caution:

Do not charge the handset in charging unit or base station while the headset is connected.

Initial charging of batteries

- ▶ To charge the batteries, leave the handset in the base or charging cradle **continuously** for **ten** hours. Your handset need not be switched on for it to charge.

If the handset is activated, the flashing battery icon  in the top right of the display indicates that the batteries are being charged.

During handset operation, the battery icon indicates the charge status of the batteries (page 1).

Please remember:

- ◆ The batteries may feel warm as they are charging. This is normal.

Setting the date and time

- ▶ To set the date and time, press the display key **Time** to open the input menu.

To change the time, open the input field via:





 →  → Date/Time

- ▶ Change multiple line input:

Date:

Enter month, day and year in 6-digit format.

Time:

Enter hours and minutes with 4 digits, e.g.     for 7:15 am.

Save Press the display key.

Your answer machine is set with a standard announcement.



- ▶ Set the date and the time, for example to ensure the correct time of incoming calls is recorded.

Area codes

In order to call back a caller using the incoming caller ID list (page 21), your phone's **area code** ("local area code") must be stored. If your phone is in a "mul-

ti-ple area code" area, the **extra codes** for this area must also be stored.

Local Area Code

 →  → Base

Local Area Code

Select and press **OK**.



Enter local area code.

Save

Press the display key.



Press and **hold** (idle status).

Extra Codes

 →  → Base

Extra Codes

Select and press **OK**.



Enter extra code.

Save


Press the display key.




Press and **hold** (idle status).

Repeat the above steps until all extra codes for your area have been entered. A maximum of 5 extra codes can be stored.

Display in idle status

Once the phone is registered and the time set, the idle display looks as shown here (example). If the answer machine is activated, the answer machine symbol  will also be displayed in the header.



Your phone is now ready to use.

Making calls

Making an external call

External calls are calls using the public telephone network.




Enter the number and press the talk key.

Or:



Press **briefly** the talk key and then enter the number.

To cancel the dialing operation, press the end call key .

You are shown the duration of the call while the call is in progress.

Note:


- Dialing using the directory (page 18) or calls list (page 21) saves time re-entering numbers and network provider prefixes ("call-by-call numbers").

Ending a call






Press the end call key.

Answering a call

The handset indicates an incoming call in three ways: by ringing, by a display on the screen and by the flashing handsfree key .

You can accept the call by:

- ▶ Pressing the talk key .
- ▶ Pressing the handsfree key .
- ▶ Pressing the display key  to divert the call to the answer machine (page 25).

If the handset is in the base or charger and the **Auto Answer** function is activated (page 35), the call will be answered automatically when you lift the handset from the base or charger.

Press the display key **Silence** to mute the ringer without answering the call. You can


answer the call as long the call is displayed on the screen.

Caller ID

Caller ID (CID) and Caller Name ID (CNID) are optional subscription services provided by your telephone service provider. These features supply incoming caller identification information that will be displayed on your handset

Call display with Caller ID/ Name

If the number of the caller is stored in your directory, you will see their name.



1 Ring symbol

2 Number or name of caller

The following is displayed in place of the number:



- ◆ **External**, if no number is transmitted.
- ◆ **Unavailable**, if the caller has not arranged Caller ID.

Handsfree operation

You can activate the speakerphone at any time to provide handsfree operation during a call.


Activating/deactivating handsfree

Activating while dialing

  Enter the number and press the handsfree key.



- ▶ You should inform your caller before you use the handsfree function so that they know someone else is listening.

Switching between earpiece and handsfree mode

 Press the handsfree key.

During a call and when listening to the answer machine, switch handsfree on or off.

If you wish to place the handset in the charging cradle during a call:

- ▶ Press and hold the handsfree key  while placing the handset in the base station. If the handsfree key  does not light up, press the key again.

For how to adjust the volume, see page 36.

Muting

You can deactivate the microphone in your handset during an external call:

Mute Press the display key on the left to mute the handset.

Unmute Press the display key to reactivate the microphone.

Operating the handset

Activating/deactivating the handset




Press and **hold** the end call key. You will hear the confirmation beep.

Activating/deactivating the keypad lock




Press and **hold** the pound key.

You will hear the confirmation beep. The icon  appears in the display when the keypad lock is activated.

The keypad lock is deactivated automatically if someone calls you. It is re-activated when the call is finished.

Control key



In the description below, the side of the control key (up, down, right, left) which you have to press in the different operating situations is marked in black, for example  for "press right on the control key".

The control key has a number of different functions:

When the handset is in idle status



Open the directory.



Open main menu.







Open list of handsets.







Set the ringtones on the handset (page 36).

In the main menu and in input fields




You can use the control key to move the cursor up , down , right  or left .

Operating the handset

In lists and submenus

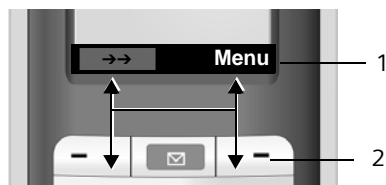
-  /  Scroll up/down line by line.
-  Open submenu or confirm selection.
-  Go back one menu level, or cancel.

During an external call

-  Open the directory.
-  Hold with simultaneous internal call.
-  Adjust loudspeaker volume for earpiece and handsfree mode.








Display keys

The function of the display keys changes depending on the particular operating situation. Example:




- 1 The display keys' current functions are shown in the bottom display line.
- 2 Display keys

The most important display symbols are:

-  **Menu** Open the main menu.
-  **Options** Open a context-dependent menu.
-  **<C** Delete key: deletes one character at a time from right to left.
-  Go back one menu level, or cancel.
-  **→ []** Copy number into directory.
-  **→ []** Divert external call to answer machine.
-  **→ →** Open the last number redial list.

Returning to idle status

You can go back to idle status from anywhere in the menu as follows:

- ▶ Press and **hold** the end call key .

Or:

- ▶ Do not press any key: after 2 minutes the display will **automatically** revert to idle status.


Changes that you have not confirmed or saved by pressing **OK**, **Yes**, **Save**, **Send** or **Save Entry OK** will be lost.

An example of the display in idle status is shown on page 13.

Menu guidance


Your telephone's functions are accessed using a menu that has a number of levels.

Main menu (first menu level)

- ▶ Press  with the handset in idle status to open the main menu.

The main menu functions are shown in the display as a list with icon and name.


To access a function, so that you open the corresponding submenu (next menu level):

- ▶ Navigate to the function using the control key . Press the display key **OK**.

Submenus


The functions in the submenus are displayed as lists.

To access a function:

- ▶ Scroll to the function with the control key  and press **OK**.

Or:

- ▶ Enter the corresponding digit combination (page 40).

Pressing **briefly** on the end call key  returns you to the previous menu level / cancels the operation.

Correcting incorrect entries

You can correct incorrect characters in the text by navigating to the incorrect entry using the control key. You can then:

- ◆ press **<C** to delete the character to the left of the cursor,
- ◆ insert characters to the left of the cursor,
- ◆ overwrite the (flashing) character when entering the time and date etc.


You will find examples of symbols used, menu entries and multiple line input in the appendix to this user guide, page 7.

CID 2.5 services (network services)

If CID is activated and a waiting call is displayed, 4 different CID 2.5 services (network services) are selected.

During a call:

Options Press the display key

Select with :

TAKE MSG

The waiting caller is forwarded to the central office mailbox.

HOLD MSG

The waiting caller is put on hold and hears a message to this effect from the central office.

CALL BACK

The waiting caller is prompted by the central office to call again at a later time.

ADD 2ND

The central office is prompted to initiate a conference call.

Note:

When the handset is muted and **ADD 2ND** selected, the microphone will be automatically reactivated.

Using the directory and lists

The options are:


- ◆ Directory,
- ◆ Last number redial list,
- ◆ Calls list,
- ◆ Answer machine list.

You can store a maximum of 150 entries in the directory (the actual number depends on the size of the individual entries).

You create the directory for your own individual handset. You can also send lists/entries to other handsets (page 19).

Directory

In the **directory**, you can store numbers and names associated with them.

- ▶ With the handset in idle status, open the directory by pressing the  key.

Length of entries

Number: max. 32 digits

Name: max. 16 characters

Note:

For one-touch quick access to a number from the directory, you can assign the number to a key.

Storing a number in the directory

 → New Entry

- ▶ Change multiple line input:

Number:

Enter number.

Name:

Enter name.

Annivers.:

Enter anniversary if required (page 19).

Speed Dial:

Select key for quick dial.



- ▶ Save changes.

Selecting entries in the directory



Open directory.

You have the following options:

- ◆ Use  to scroll through the entries until the required name is selected.
- ◆ Enter the first character of the name, or scroll to the entry with  if required.

Dialing with the directory



→  (select entry)



Press the talk key. The number is dialed.

Managing entries in the directory



→  (select entry)

Viewing an entry

View

Press the display key.
The entry is displayed.
Back with **OK**.

Editing entries

View


Edit

Press display keys one after the other.


- ▶ Carry out changes and save.

Using other functions





→  (select entry)

→ **Options** (open menu)

The following functions can be selected with :

Display Number

Edit or complete a stored number. Then dial or copy the number to the directory by pressing  .

Edit Entry

Edit selected entry.

Delete Entry

Delete selected entry.

VIP Entry (directory only)

Mark a directory entry as **VIP** (Very Important Person) and assign it a particular ringtone. You can then identify VIP calls by their ringtones.

Requirement: Caller ID (page 14).

Copy Entry

Send a single entry to a handset (page 19).

Delete List

Delete **all** entries in the directory.

Copy List

Send complete list to a handset (page 19).

Available Memory

Display the available entries in the directory (page 18).

Using quick dial keys

- ▶ Press and **hold** the required quick dial key (page 18).

Sending the directory to another handset

Requirements:

- ◆ The sending and receiving handsets must both be registered to the same base station.
- ◆ The other handset and base station can send and receive directory entries.



→ (select entry)

→ **Options** (open menu)

→ Copy Entry / Copy List



Enter the internal number of the receiver handset. You see Copying entry.

Yes / No Press the display key.

A successful transfer is confirmed by a message and confirmation tone on the receiver handset.

Please remember:

- ◆ Entries with identical numbers are not overwritten on the receiver handset.

- ◆ The transfer is canceled if the phone rings or if the memory of the receiver handset is full.

Adding a displayed number to the directory

Numbers that appear in a list such as the calls list or the last number redial list, or displayed during a call can be added to the directory.

Caller ID/NameA number is displayed:

Options → Copy to Directory

- ▶ Complete the entry, see page 18.

While the number is being transferred from the answer machine list, message playback is interrupted.

Copying a number from the directory

There are many operating situations in which you can open the directory, such as copying a number. Your handset need not be in idle status.

- ▶ Depending on the operating situation, open the directory with or .



Select an entry (page 18).

Storing anniversaries in the directory

You can store an anniversary for every number in the directory and specify a time when you will receive a reminder call on the anniversary.



→ (Select entry; page 18)

View

Edit

Press display keys one after the other.



Scroll to the Annivers.: line.

Edit

Press the display key.

- ▶ Change multiple line input:

Date:

Enter the month/day in 4-digit format.

Time:

Enter the hour/minute for the reminder call in 4-digit format.

Using the directory and lists

Prompt:

Select the type of signal for the reminder and press **OK**.

- ▶ Save changes (page 8).

Note:

Reminder calls require a time stamp. If you select a visual signal, then a time stamp is not required and is automatically set to 12:00 a.m.

Deleting anniversaries



(Select entry; page 18)



Press display keys one after the other.



Scroll to the Annivers.: line.



Press display keys one after the other.

Reminder call on an anniversary

A reminder call is signaled on the handset using the selected ring tone.



Press the display key to stop the reminder call.

Last number redial list

The last number redial list contains the ten numbers last dialed with the handset (max. 32 digits). If one of the numbers is in the directory, then the corresponding name will be displayed.

Manual last number redial



Press the display key.



Select entry.



Press the talk key.

The number is dialed.

When displaying a name, you can have the respective phone number displayed by using the display key **View**.

Managing entries in the last number redial list



Press the display key.



Select entry.



Open menu.

The following functions can be selected with

Display Number (as in the directory, page 18)

Copy to Directory

Copy an entry to the directory (page 19)

Delete Entry (as in the directory, page 18)

Delete List (as in the directory, page 19)

Opening lists with the message key

The message key will flash if a caller left a voice mail message. You can use the message key to open the following lists:

◆ Answer machine list

◆ Network mailbox

If your network provider supports this function and the network mailbox is configured for fast access (page 29).

◆ Calls list

An advisory tone sounds as soon as a **new entry** appears on a list. The key flashes (it will go off when the key is pressed). In idle status, the display shows an icon for the new entry.

Icon

New entry...



... in answer machine list or network mailbox



... in calls list

The number of new entries is shown beneath the corresponding icon.

Only the lists that contain messages are shown (exception: network mailbox). Lists with new messages are shown first and identified in bold. The number of new or old messages contained are each shown in brackets.

Select the list with . To open, press **OK**.

Calls list

Requirement: Caller ID Presentation (CIP, page 14)

The numbers of the last 30 incoming calls are stored.

Setting list type for calls list

→ → Base → Calls List Type

Missed Calls / All Calls

Select and press **OK** (= on).



Press and **hold** (idle status).

The entries in the calls list are retained when you change the list type.

List entry

New messages are at the top.

Example of list entries:

All Calls	
J. Smith	
555-555-1234	
01.29.08	11:15 AM
Delete	Options

- ◆ List type (in header)
- ◆ Status of entry
- ◆ Number and name of caller

You can add the number of the caller to the directory (page 19)
- ◆ Date and time of call (if set, page 13)
- ◆ Type of entry

according to list type **All Calls**:

 - accepted calls ()
 - missed calls
 - calls recorded by the answer machine (☎)

according to list type **Missed Calls**:

 - missed calls (if [3] is displayed: 3rd entry in the list)

Pressing the display key **Delete** deletes the marked entry.

After pressing the display key **Options** you can select more functions with :

Copy to Directory

Add a number to the directory.

Delete Calls List

Delete complete list.

When you leave the calls list all entries are set to the status "old", so that the next time you call up the list they will no longer be shown in bold.

Answer machine list

You can use the **answer machine list** to listen to the messages that are on the answer machine.

Writing and editing names

The following rules apply when creating an entry:

- ◆ Control the cursor with .
- ◆ Characters are added to the left of the cursor.
- ◆ Press the star key to show the table of special characters.
- ◆ Press and **hold** the pound key to switch from "Abc" mode to "123" and from "123" to "abc" and from "abc" to "Abc" (upper case: 1st letter upper case, all others lower case). Press the pound key **before** entering the letter.
- ◆ The first letter of the name of directory entries is automatically capitalized, followed by lower case letters.

Entering special characters

You can call up the table of special characters using the key. Select the required character and insert it with **Insert**.

Order of directory entries

Directory entries are usually sorted in alphabetical order. Spaces and digits take first priority. The sort order is as follows:

1. Space
2. Digits (0–9)
3. Letters (alphabetical)
4. Other characters

To get around the alphabetical ordering of the entries, insert a space or a digit in front of the name. These entries will then move to the beginning of the directory. Names which you have preceded with an asterisk will move to the end of the directory.

Operating the answering machine


You can operate the answer machine that is integrated in the base station via the handset, via the keypad of the base station (page 1) or via remote operation (from another phone/cell phone). You can also listen to messages via remote operation using voice commands (page 28).

Announcement mode

You can use the answer machine in two different modes.


- ◆ In **Ans. & Record** mode, the caller hears the announcement and can then leave a message.
- ◆ In **Announce Only** mode, the caller hears your announcement but cannot leave a message.

Operation via the handset

The handset loudspeaker activates **automatically** if you receive an acoustic prompt or message while operating. You can switch it off with the handsfree key .

Switching answer machine on/off

 →  → Voice Mail → Ans Machine
( = on)

After switching on, the remaining memory time is announced. If the time has not yet been set (page 13), an appropriate announcement is then made. The  icon is displayed on the screen.

The phone is supplied with a pre-recorded announcement for the answer and record mode or announce only mode. If a personal announcement has not been recorded, the corresponding pre-recorded announcement is used.

Recording a personal announcement/announce only

 →  → Voice Mail → Announcements
→ Record Announce / Record Anc Only

OK

Press the display key to start the recording.

You hear the ready tone (short tone).



- Now speak your announcement (must be at least 3 secs. long).

Note:

Announcements must be made speaking directly into the microphone of the handset as if making a call.

End

Press the display key to end the recording.

Cancel the recording with  or .
Restart the recording with **OK**.

After recording, the announcement is played back for you to check. You can re-record the announcement with **New**.

Please note:

- ◆ Recording ends automatically if the maximum recording time of 170 seconds is exceeded or there is a break in speech for more than 2 seconds.
- ◆ If you cancel the recording, the pre-recorded announcement is then used.
- ◆ The recording is canceled if the answer machine memory is full.
 - Delete old messages and repeat recording if required.

Playing back announcements

 →  → Voice Mail → Announcements
→ Play Announcement / Play Anc Only

If a personal announcement has not been recorded, the corresponding pre-recorded announcement is used.

Record a new announcement while playing back announcement:

New

Press the display key.

The recording is canceled if the answer machine memory is full.

Operating the answering machine

- ▶ Delete old messages and repeat recording if required.

Deleting announcements

 →  → Voice Mail → Announcements
→ Del Announce / Del Anc Only




Yes Press the display key to confirm the prompt.


 Press and **hold** (idle status).

After deletion, the corresponding pre-recorded announcement is then used.

Selecting announcement mode

You can choose between **Ans. & Record** and **Announce Only**.

 →  → Voice Mail → Announcements
→ Set Ans. Mode → Ans. & Record /
Announce Only ( = on)

 Press and **hold** (idle status).

The selected mode is saved even after the answer machine is deactivated.

If in **Ans. & Record** mode the memory for messages is full the selection is interrupted and you will receive an instruction to delete old messages.




- ▶ Delete old messages.

The answer machine **automatically** switches back to the set mode once deletion is complete, or you can reselect the required recording mode.

Setting 'answer and record' or 'announce only' by toggling

You can use the **Ans Mode Time** setting to change over the announcement mode for a specific period.

Example: The **Ans. & Record** mode is set. If you activate **Ans Mode Time** and set a period (e.g. 6:00 pm to 8:00 am) the answer machine switches to **Announce Only** mode for this period. Outside this period (8:01 am to 5:59 pm), the **Ans. & Record** is active.

 →  → Voice Mail → Announcements
→ Set Ans. Mode → Ans Mode Time 
(= on)

- ▶ Change multiple line input:

From:

Enter hours/minutes for the start of the period in 4-digit format/**24 hrs mode!**

Until:

Enter hours/minutes for the start of the period in 4-digit format/**24 hrs mode!**

Activation:

Select On or Off.

- ▶ Save changes with **Save**.

If the memory for messages is full and **Activation: On** has been selected, saving is interrupted and you will receive an instruction to delete old messages.



- ▶ Delete old messages and repeat the setting.


As soon as you change the announcement mode (page 24), the function **Ans Mode Time** is automatically deactivated.

Playing back messages

The date and time of each message is logged (provided this has been set, page 13) and displayed during the playback. If **Caller ID** is activated, then the caller's number is displayed. If the caller's number is stored in the directory, the respective name is displayed.

Playing back new messages

New messages that have not yet been heard are indicated by the  icon in the display and by the  key flashing on the handset.

 Press the message key.

Ans M.: Select and press **OK**.

An announcement informs you if there are new messages or just old ones or no messages.

If there are new messages playback then begins with the first new message. After the last new message you will hear the

end tone and an announcement about how much recording time remains.

If the message concerned has been saved with the date and time you will hear an appropriate announcement before playback begins.



Playing back old messages



You can listen to old messages if there are no more new messages. Start the playback as described under "Listening to new messages".



After the entry time and date have been played back (after approx. 3 seconds) a new message assumes the status "old".

Stopping and controlling playback

During message playback:

 Pause playback. Press  again to resume

 or  To previous message.


 or  To next message.

After an interruption of over one minute, the answer machine returns to idle status.

Marking a message as "new"


A previously played back "old" message is displayed as a "new" message again.

During message playback:


 Press the star key.

An announcement informs you of the message's new status.


Or:

 Open menu.

Mark as New

Select and press .

Playback of the current message is canceled. Playback of next message starts, if applicable.

The  key on the handset flashes.

Adding the telephone number of a message to the directory


See also "Adding a displayed number to the directory", page 19.

Deleting messages


You can delete old messages either all at once or individually.


Deleting all old messages

During playback or pause:

 Press the display key.


Del All Old Msgs

Select and press .

 Press the display key to confirm the prompt.

Deleting individual old messages

During playback or pause:

 Press the display key.


Picking up a call from the answer machine

You can pick up a call while the answer machine is recording it or being operated via remote operation:

 / 

Press the talk or display key.

Recording stops and you can speak to the caller.

If 2 seconds of the call have already been recorded when you pick it up, the call will be displayed as a new message. The  key on the handset flashes.

You can accept the call even if it is not signaled on the handset.


Diverting an external call to the answer machine

You can divert an incoming external call to the answer machine even if it is switched off.

Requirement: Sufficient storage space is available on the answer machine.

Operating the answering machine

An external call is signaled on the handset:

 Press the display key.

The answer machine starts immediately in recording mode and records the call. The set time for the call acceptance (page 26) is ignored.

Activating/deactivating two-way recording

You can record an **external** call with the answer machine.

- Inform the caller that the call is being recorded.

Options Open menu.

Two Way Record

Select and press **OK**.

The two-way recording is indicated on the display by an advisory text and is added to the answer machine list as a new message.




End Press the display key to stop the two-way recording.

The max. recording time depends on the available memory of the answer machine. If the memory is full you will hear an end tone, the recording is aborted, and the call recorded up to that point is listed in the answer machine list as a new message.

Activating/deactivating listen in

During recording of a message you can listen in via the loudspeaker of registered handsets and the base station.


Activating/deactivating listen in

 →  → Voice Mail → Call Screening
→ Handset and/or Base
( = on)

 Press and **hold** (idle status).

You can switch off the Call Screening function on the handset during the recording.

Switching off listen in for the current recording

 Press the end call key.

Setting up the answer machine

The answer machine has already been preset at the factory. Set up individual settings using the handset.

Toll-Saver Mode - Call acceptance/charge saving function for remote operation

You can set when you want the answer machine to accept a call.


The options are: 0 sec., after 10 sec., 20 sec. or 30 sec. and the cost-saving setting Auto.

On Auto the following applies for call acceptance:

- ◆ If no new messages are present, the answer machine accepts a call after **20 seconds**.
- ◆ If new messages are present, the answer machine accepts a call after **10 seconds**.

When operating remotely you then know after approx. 15 seconds that there are no new messages (otherwise the answer machine would already have accepted your call). There will be no call charges if you hang up now.

 →  → Voice Mail → Ring Delay

Select  Auto / 10 sec. / 20 sec. / 30 sec. / 0 sec..

Save Press the display key.

 Press and **hold** (idle status).

Setting the recording time

You can set the maximum recording time for a message. The options are: 30, 60, 120 seconds or Maximum.

 →  → Voice Mail → Message Length


Select recording time.


Save Press the display key.

Setting recording quality

Set the quality you require for your recordings. The options are: Standard, High, Excellent. If the quality is higher the max. recording time is reduced.

 →  → Voice Mail → Record Quality



 Select the recording quality.



 Press the display key.

Changing language for voice prompt and pre-recorded announcement

  5 jkl 5 jkl 9 wxyz 2 abc
Enter the digits.

  Set English.


  Set French.


  Set Spanish.


Resetting fast access on the answer machine to Network Voice Mail

The integrated answer machine is factory-set for fast access. However if you have set the network mailbox for fast access (page 29) you can reset this setting.

 →  → Voice Mail → Set Key 1
→ Answer Machine / Network Mailb.

Select and press .

 Press and **hold** (idle status).

After you have selected the network mailbox or the answer machine, press and **hold** key . You will be connected directly.

The setting for fast access applies to all handsets.

Operating when on the move (remote operation)

You can check or activate the answer machine from any other telephone (hotel, pay phone etc).

Requirements:


- ◆ You must set a system PIN to a 4-digit number other than factory default of 0000 (page 38).
- ◆ The phone you are using for remote operation has tone dialing (DTMF), such that you hear different tones when you press the keys. Alternatively, you can use a code transmitter (available from your cell phone retailer).

Calling the answer machine and playing back messages



Dial your own number.



While you listen to your announcement, press the  key and enter the system PIN.

You will be informed whether any new messages have been recorded. The messages are then played back. You can now operate the answer machine via the keypad or by voice prompts.

Operating the answer machine via the keypad

The following keys are used for operation:



Go to the start of the previous message.



Stop playback. Press 2 again to resume.



Go to the next message.



Mark message as "new".



Delete current message.


Note:

After message playback, the call will be terminated.


Operating the answering machine

Operating the answer machine with voice prompts

You can control message playback using the voice commands **"BACK"** and **"FORWARD"**. You can delete individual messages during playback using the voice command **"DELETE"**.

- ▶ Before each voice command, press  and then speak the command when you hear the 'ready' tone.

When deleting a message you are prompted to repeat the command.

- ▶ **Repeat "DELETE"**, without first pressing the .

Activating the answer machine

Phone home and allow the phone to ring until you hear: "Please enter PIN".



Enter system PIN.

Your answer machine is activated. It tells you how much memory time is left.

The messages are then played back.

The answer machine cannot be deactivated remotely.

Using the network mailbox

The network mailbox is your network provider's answer machine within the network. You cannot use the network mailbox unless you have **requested it** from your network provider.

Configuring the network mailbox for fast access


With fast access, you can dial either the network mailbox or your integrated answer machine directly.

The integrated answer machine is preconfigured for fast access. You can configure the network mailbox instead. Ask your network provider about this.

Configuring the network mailbox for fast access and entering the network mailbox number

 →  → Voice Mail → Set Key 1 →

Network Mailb.

Select and press **OK** ( = on).



Enter the number for the network mailbox.

Save

Press the display key to save the input.



Press and **hold** (idle status).

The setting for fast access applies to all Gigaset handsets.

If your network voice mail requires a password for access, it is possible to add a password by entering pauses immediately after entering the mailbox access number, then entering your password.

The Gigaset S185 will dial the mailbox number, wait a few seconds until the mailbox is accessed, then dial your PIN code. If more time is needed for your mailbox to answers before the PIN is entered, simply add an additional pause (P).


Calling the network mailbox



Press and **hold**.

You are connected directly to the network mailbox.



Press handsfree key  if required. You hear the network mailbox announcement.

Viewing the network mailbox message

If a message arrives for you, you receive a call from the network mailbox. If you have requested Caller ID, the display shows the network mailbox number. If you accept the call, the new messages are played back. If you do not accept the call, the network mailbox number will be stored in the missed calls list and the message key will flash (page 20).

Using several handsets

Registering handsets

You can register up to a total of six handsets on your base station.

A Gigaset handset can be registered on up to four base stations.

Automatic registration: Gigaset handset to Gigaset S185 base station

Important: The handset must not yet be registered to any base station.

Registering the handset to the Gigaset S185 base station occurs automatically.

- ▶ Place the handset in the base with its **display facing outwards**.

Registration takes around 1 minute. During this process, **Regstr.Procedure** appears in the display and the name of the base station flashes, for example **Base 1**. When the handset has been registered, its screen displays its internal number, for example **INT 2** for internal number 2. The handset is assigned the lowest available internal number (1-6). If all internal numbers 1-6 have been assigned, number 6 is overwritten, assuming that the handset with the internal number 6 is in idle status.

Note:

- Automatic registration is not possible when the base station on which you wish to register the handset is being used to make a call.
- Each key press interrupts the automatic registration.
- If automatic registration does not work, you will have to register the handset manually.
- You can change the name of the handset (page 33).

Manual registration: Gigaset handset to Gigaset S185 base station

You must activate manual registration of the handset at both the handset and the base station.

After it has been registered, the handset returns to idle status. The internal number of the handset appears in the display, for example **INT 1**. If it does not, repeat the procedure.

On the handset



→ → **Handset** → **Register H/Set**



Select base station, for example **Base 1** and press **OK**.



Enter the system PIN of the base station (the default is 0000) and press **OK**. The screen will display the number, for example **Base 1**.

On the base station

Within 60 secs. press and **hold** the registration/paging key on the base station (page 2) (approx. 3 secs.).

De-registering handsets

You can de-register any registered handset from any registered Gigaset handset.



Open list of internal users. The handset you are currently using is indicated by <.



Select the internal user you wish to de-register.

Options

Open menu.

De-reg. H/Set No.

Select and press **OK**.



Enter current System PIN and press **OK**.




Press the display key.

Locating a handset ("paging")

You can locate your handset using the base station.




- ▶ Press the registration/paging key on the base station **briefly**.
- ▶ All handsets will ring at the same time ("paging"), even if the ringers are switched off.

Ending paging

- ▶ **Briefly** press the registration/paging key on the base station or press the talk key  on the handset.

Changing the base station






If your handset is registered to more than one base station, you can set it to a particular base station or to the base station that has the best reception (Best Base).

-  →  → Handset → Select Base
-  Select one of the registered base stations or Best Base and press **OK**.



Making internal calls

Internal calls to other handsets registered on the same base station are free.

Calling a specific handset

-  Initiate internal call.
-  Enter the number of the handset.
- Or:
-  Initiate internal call.
-  Select handset.
-  Press the talk key.

Calling all handsets ("group call")

-  Initiate internal call.
-  Press the star key. All handsets are called.

Ending a call



Press the end call key.

Transferring a call to another handset

You can transfer an external call to another handset (connect).



Open list of handsets.

The external caller hears the hold melody if activated (see page 38).



Select a handset or **Call All** and press **OK**.

When the internal participant answers:


- ▶ If necessary announce the external call.



Press the end call key.

The external call is transferred to the other handset.

If the internal participant does **not** answer or is busy, press the display key **End**, to return to the external call.

When diverting a call you can also press the end call key  before the internal participant lifts the receiver.

Then, if the internal participant does not answer or is busy, the call will automatically return to you (the display will show Recall).

Hold with simultaneous internal call

When you are speaking to an **external** participant you can simultaneously call an **internal** participant for consultation.



Open list of handsets.

The external caller hears the hold melody if activated (see page 38).



Select handset and press **OK**.

Ending an inquiry call



Press the display key.

You are reconnected with the external caller.

Accepting/rejecting call waiting

If you get an **external** call while conducting an **internal** call, you will hear the call waiting tone (short tone). The caller's number will appear in the display if caller ID is enabled.

Ending an internal call, accepting an external call

Accept Press the display key.

The internal call is **ended**. You are connected to the external caller.

Rejecting external call

Reject Press the display key.



The call waiting tone is turned off. You remain connected with the internal participant. The ringtone can still be heard at other registered handsets.

Linking internal callers to an external call

Important: The **Listening In** function must be activated.

You are conducting an external call. An internal caller can listen in on this call and take part in the conversation. All the participants are made aware of the 'listening-in' by a signal tone.

Activating/deactivating internal listening in

 →  → **Base** → **Add. Features**
→ **Listening In**

 Press and **hold** (idle status).

Internal listening in

The line is engaged with an external call. Your screen will display information to that effect. You want to listen in to the existing external call.



Press **briefly** the talk key.


You are linked into the call. All participants hear a signal tone. During this time, this handset will not display any information or messages and no selection can be made from this handset.

Ending listening in



Press the end call key.

All participants hear a signal tone.

If the **first** internal participant presses the end call key , the handset that has 'listened-in' remains connected to the external caller.

Changing the name of a handset

The names "INT 1", "INT 2" etc. are assigned automatically at registration. You can change these names. The name must be no more than 10 characters. The changed name is displayed in every handset's list.



Open list of handsets. Your own handset is indicated by <.



Select handset.



Press the display key.



Enter name.



Press the display key.

Changing a handset's internal number

A handset is **automatically** assigned the lowest unassigned number when it is registered. If all the numbers have been assigned, number 6 is overwritten, assuming the handset is in idle status. You can change the internal number of all registered handsets (1–6).



Open list of handsets. Your own handset is indicated by <.

Options

Open menu.

Edit H/Set No.

Select and press **OK**. The list of handsets is displayed.



The current number flashes. Select a handset.



Enter the new internal number (1–6). The handset's old number is overwritten.

Save

Press the display key to save the input.



Press and **hold** (idle status).

You will hear the error tone (descending tone sequence) if you assign an internal number twice.

- Repeat the process with an unused number.

Using a handset as a room monitor

If the room monitor is activated, a previously stored destination number is called as soon as a set noise level is reached. You can store an internal or external number in your handset as the destination number.

The room monitor call to an external number stops after approx. 90 seconds. The room monitor call to an internal number (handset) stops after approx. 3 minutes (depending on the base station). While the room monitor is activated,

all keys are locked except the end call key. The handset's speaker is muted.

When the room monitor is activated, incoming calls to the handset are indicated **without a ringtone** and are only shown on the screen. The display and keypad are not illuminated and advisory tones are also turned off.

If you accept an incoming call, the room monitor mode is suspended for the duration of the call, but the function **remains** activated.

If you switch off the handset, the room monitor mode is deactivated. You will need to reactivate the function after switching on the handset again.

Caution:

- You should always check the operation of the room monitor before use. For example, test its sensitivity. Check the connection if you are diverting the room monitor to an outside number.
- When the function is switched on the handset's operating time is severely reduced. If necessary, place the handset in the base. This ensures that the batteries do not run down.
- Ideally the handset should be positioned 1 to 2 meters away from the sound being monitored. The microphone must be directed towards the monitored sound.
- The connection to which the room monitor is diverted must not be blocked by an activated answer machine.

Activating the room monitor and entering the number to be called



→ **Room Monitor**

- Change multiple line input:

Room M.:


Select On to activate.

Call to:

Press the display key **Edit** and enter destination number.

External number: select number from the directory or enter directly. Only the **last 4 digits** are displayed.

Handset settings

Internal number: delete any stored external number. **INT**  (select handset or Call All, if all registered handsets are to be called) **OK**.

Store number with **Save**.

Level:


Set noise level sensitivity (Low or High).

- ▶ Save changes (page 8).

The function is now activated. With **Options**, you can move directly to settings.

Changing previously set external destination number

 →  → Room Monitor

 Scroll to the Call to: line.


Edit Press the display key.

<C Delete existing number.

- ▶ Enter number as described in "Activating the room monitor and entering the number to be called" (page 33).
- ▶ Save changes (page 8).

Changing previously set internal destination number

 →  → Room Monitor

 Scroll to the Call to: line.

Edit Press the display key.

Yes Press the display key to confirm the prompt.

- ▶ Enter number as described in "Activating the room monitor and entering the number to be called" (page 33).
- ▶ Save changes (page 8).

Deactivating the room monitor remotely

Important: The destination phone must support touch tone dialing and the room monitor should be set for an external destination number.

- ▶ Take the call from the room monitor and press keys **9** **#**.

The room monitor function will deactivate after the call ends. There will be no further room monitor calls. But the other room monitor settings on the handset (such as no ringtone) will remain activated until you press the display key **OFF** on the handset.

To reactivate the room function with the same phone number:

- ▶ Turn on the activation again and save (page 33) with **Save**.

Handset settings


Your handset is preconfigured, but you can change these settings to suit your individual requirements.


Changing the display language

You can view the display texts in different languages.

 →  → Handset → Language

The current language is indicated by .


 Select a language and press **OK**.

 Press and **hold** (idle status).

If you accidentally choose a language you do not understand:








 **5** **ju** **4** **ju** **1** **ao**

Press display keys one after the other.

 Select the correct language and press **OK**.

Setting the display


You have a choice of four color schemes and several different contrasts.

-  →  → Display → Color Scheme
 - Select and press **OK**.
- 
 - Select a color scheme and press **OK** ( = current color).
- 
 - Press **briefly**.
- 
 - Scroll to the Contrast line.
- Contrast
 - Select and press **OK**.
 - Select contrast.
- Save**
 - Press the display key.
- 
 - Press and **hold** (idle status).

Setting the screen picture

You can display a screen picture (picture or digital clock) when the handset is in idle status. This will replace the idle status display. It may conceal the date, time and name.

The screen picture is not displayed in certain situations, e.g. during a call or when the handset has been de-registered.

If a screen picture has been activated, the menu item **Screen Saver** is marked with .

-  →  → Display → Screen Saver

The current setting is displayed.

- ▶ Change multiple line input:

Activation:

Select On (screen picture is displayed) or Off (no screen picture).





Selection:

Change screen picture if necessary (see below).

- ▶ Save changes.

If the screen picture conceals the display, press the end call key **briefly** to show the idle display with time and date.

Changing the screen picture

-  →  → Display → Screen Saver
- 
 - Scroll to the Selection line.
- View**
 - Press the display key.
 - The active screen picture is displayed
- 
 - Select picture/Clock.
- Save**
 - Press the display key.
- ▶ Save changes.

Setting lighting

Depending on whether or not the handset is in the base station you can set different levels of lighting. If it is switched on, the display is permanently dimmed.

-  →  → Display → Backlight

The current setting is displayed.

- ▶ Change multiple line input:

In Charger

Select On or Off.

without Charger

Select On or Off.


- Save**
 - Press the display key.



- 
 - Press and **hold** (idle status).

Note:


When the lighting is switched on, the standby time of the handset is reduced to approx. 30 hours.

Activating/deactivating auto answer

If you have activated this function, when you get a call you can simply lift the handset out of the base station without having to press the talk key .

-  →  → Handset

Auto Answer

Select and press **OK** ( = on).

- 
 - Press and **hold** (idle status).

Adjusting the loudspeaker volume

You can set the loudspeaker volume for handsfree speaking to five different levels and the earpiece volume to three different levels. You can only make these adjustments during a call.

The handsfree volume can only be adjusted when this function is set.

You are conducting an external call.



Open menu.



Select volume.



Press display key if necessary to save the setting permanently.

If is assigned a different function, e.g. when toggling (page 17):



Open menu.

Volume Select and press **OK**.

Configure setting (see above).

Changing ringtones

◆ Volume:

You can choose between five volumes (1–5; e.g. volume 2 =) and the "Crescendo" ring (6; volume increases with each ring =).

◆ Ringtones:

You can choose between 15 different melodies.

You can configure the following functions with different ringtones:

- ◆ Ext. Calls: for external calls
- ◆ Internal Calls: for internal calls
- ◆ All: the same for all functions

For how to set the ringtones for the base station, see page 38.

Settings for individual functions

Set the volume and melody depending on the type of signaling required.



→ → Audio Settings →

Ringer Settings



Set, for example select Ext. Calls and press **OK**.

► Change multiple line input:



Set volume (1–6).



Scroll to the next line.



Select melody.



Press the display key to confirm the prompt.

In idle status, you can also open the menu Ringer Settings by pressing briefly.

Settings for all functions to ring the same



→ → Audio Settings →

Ringer Settings → All

► Set volume and ringtone (see "Settings for individual functions").



Press the display key to confirm the prompt.



Press and **hold** (idle status).

Activating/deactivating the ringtone

You can deactivate the ringtone on your handset before you answer a call or when the handset is in idle status; the ringtone can be deactivated permanently or just for the current call. The ringtone cannot be re-activated while an external call is in progress.

Deactivating the ringtone permanently



Press the star key and hold until you can no longer hear the ringtone.

The icon appears in the display.

Re-activating the ringtone




Press and **hold** the star key.


Deactivating the ringtone for the current call

Silence Press the display key.

Activating/deactivating the alert tone

You can activate an alert tone in place of a ringtone. When you get a call, you will hear **a short tone** ("Beep") instead of the ringtone.



 Press and **hold** the star key and **within 3 seconds**:

Beep Press the display key. A call is now signaled by **one** brief alert tone. You will now see  in the display.

Activating/deactivating advisory tones

Your handset uses 'advisory tones' to tell you about different activities and statuses. The following advisory tones can be activated and deactivated independently of each other:

- ◆ **Key beep**: Each key press is acknowledged.
- ◆ **Acknowledge tones**:
 - **Confirmation tone** (ascending tone sequence): at the end of an entry/setting and when a new entry arrives in the answer machine list or calls list
 - **Error beep** (descending tone sequence): when you make an incorrect entry
 - **Menu end tone**: when scrolling at the end of a menu
- ◆ **Battery tone**: The batteries need to be charged.

 →  → **Audio Settings**
→ **Advisory Tones**

► Change multiple line input:

Key Tones:

Select On or Off.

Confirm.:

Select On or Off.

Battery:

Select On, Off or In Call. The battery warning tone is activated/deactivated or only sounds during a call.



► Save changes (page 8).

You cannot deactivate the confirmation tone for placing the handset in the base station.

Setting the alarm clock

Requirement: The date and time have already been set (page 13).

Activating/deactivating and setting the alarm clock

 → 

► Change multiple line input:

Activation:

Select On or Off.

Time:

Enter the wake-up time in 4-digit format/**24 hrs mode!**


Melody:

Select melody.

Volume:

Set the volume (1-6).

► Save changes (page 8).

You will see the icon .

A wake-up call with the selected ringer melody is signaled on the handset. The wake up call sounds for 60 seconds. The display shows **Alarm Clock**. If no key is pressed the wake-up call is repeated twice at five minute intervals and then switched off.

During a call, the wake-up call is signaled by a short tone.

Base station settings

Deactivating the wake-up call/ repeating after a pause (sleep mode)

Requirement: A wake-up call is sounding.

OFF Press the display key. The wake-up call is deactivated.

Or:

Snooze Press the display key or any key. The wake-up call is deactivated and then repeated after 5 minutes. After the second repetition the wake-up call is deactivated completely.

Restoring the handset default settings

You can reset any individual settings and changes you have made. This will not affect entries in the directory, calls list or the handset's registration to the base station.

→ → Handset → Reset Handset

Yes Press the display key.

Press and **hold** (idle status).

Cancel the restoring process by pressing or the display key **No**.

Base station settings

The base station settings are carried out using a registered Gigaset handset.

Protecting against unauthorized access

Protect the system settings of the base station with a PIN known only to yourself. The system PIN must now be entered when, for example, registering/de-registering a handset to/from the base station or when restoring the default settings.

Changing the system PIN

You can change the 4-digit system PIN set on the base station (default setting: 0000) to a 4-digit PIN known only to yourself.

Caution:

Memorize the new system PIN well! If you forget it, the phone will require specialist attention. If this happens, contact the Siemens Hotline (page 47).

Setting a system PIN facilitates remote operation of the answer machine (page 27).

→ → Base → System PIN

Enter current System PIN and press **OK**.

Enter new system PIN. For security the PIN is shown as four stars (****).

Scroll to the next line, re-enter new system PIN and press **OK**.

Press and **hold** (idle status).

Changing ringtones

◆ Volume:

You can choose between five volumes and the "crescendo" ring, see page 36. Select "0" to deactivate the ringtone of the base station.

◆ Ringtones:

You can set a ringtone melody for external calls, see page 36.

→ → Base → Ringer Settings

For how to adjust the settings, see page 36.

Activating/deactivating the hold melody

→ → Base → Music on hold


Press **OK** to activate or deactivate the hold melody (= on).

Restoring default settings to base station


When resetting, all handsets remain registered. The following settings are not reset:

- ◆ System PIN
- ◆ Setting "First ringtone suppressed"

 →  → Base → Base Reset

 Enter the system PIN and press **OK**.

Yes Press the display key.

Cancel the restoring process by pressing  or the display key **No**.

 Press and **hold** (idle status).

Shortcuts

Instead of scrolling to locate a menu function, you can select a menu function more quickly by opening the menu and keying in the digit combination ("shortcut").

Example: **5** **2** **1** **1** for "Set ringtone for external calls".

With the telephone in **idle status**, press (open main menu):

3 Alarm Clock

4 Add. Features

4-3	Room Monitor
-----	--------------

 (page 33)

5 Settings


5-1	Date/Time			
5-2	Audio Settings	5-2-1	Ringer Settings	(page 36)
		5-2-2	Advisory Tones	(page 37)
5-3	Display	5-3-1	Screen Saver	(page 35)
		5-3-2	Color Scheme	(page 35)
		5-3-3	Contrast	(page 35)
		5-3-4	Backlight	(page 35)
5-4	Handset	5-4-1	Language	(page 34)
		5-4-2	Auto Answer	(page 35)
		5-4-3	Register H/Set	(page 30)
		5-4-4	Select Base	(page 31)
		5-4-5	Reset Handset	(page 38)
5-5	Base	5-5-1	Ringer Settings	(page 38)
		5-5-2	Music on hold	(page 38)
		5-5-3	System PIN	(page 38)
		5-5-4	Base Reset	(page 39)
		5-5-5	Add. Features	(page 32, page 42)
		5-5-6	Local Area Code	(page 13)
		5-5-7	Extra Codes	(page 13)
		5-5-8	Calls List Type	(page 21)

5-6	Voice Mail	5-6-1	Set Key 1	(page 29)
		5-6-2	Ans Machine	(page 23)
		5-6-3	Call Screening	(page 26)
		5-6-4	Announcements	(page 23)
		5-6-5	Message Length	(page 26)
		5-6-6	Record Quality	(page 27)
		5-6-7	Ring Delay	(page 26)

Connecting the base station to the PABX

The following settings are only needed when your PABX requires them. Please refer to the user guide for your PABX.



Dialing modes and flash time



The current setting is indicated by .

Changing the dialing mode

The following dialing modes can be selected:



- ◆ Tone dialing (DTMF),
- ◆ Pulse dialing (DP).



 →  → Base → Add. Features
→ Dialing Mode

 Select dialing mode ( = on) and press **OK**.

 Press and **hold** (idle status).

Setting the flash time


 →  → Base → Add. Features
→ Flash


 Select flash time ( = on) and press **OK**.






 Press and **hold** (idle status).

Setting pauses


Changing pause after line seizure

You can change the length of pause that is inserted between pressing the talk key  and sending the number.

 Open menu.


    






Press keys.

 Enter digit for the pause length (1 = 1 sec.; 2 = 3 secs.; 3 = 7 secs.) and press **OK**.


Changing the pause after the flash key

You can change the length of the pause if your PABX requires this (refer to the user guide for your PABX).


 Open menu.






    

Press keys.


 Enter a digit for the length of the pause (1 = 800 ms; 2 = 1600 ms; 3 = 3200 ms) and press **OK**.


Changing the dialing pause

 Open menu.

Press keys.

 Enter a digit for the length of the pause (1 = 1 sec.; 2 = 2 secs.; 3 = 3 secs.; 4 = 6 secs.) and press **OK**.

To insert a dialing pause: press  for 2 seconds. A P appears in the display.

Switching temporarily to tone dialing (DTMF)

If your PABX still operates with dial pulsing (DP), but you need tone dialing (DTMF) for a connection (for example to listen to the network mailbox) you must switch to tone dialing for the call.

Requirement: You are conducting a call or have already dialed an external number.

Options Open menu.

Tone Dialing

Select and press **OK**.
Tone dialing is now activated
for this call only.

Appendix

Care

- ▶ Wipe the base station and handset with a **damp** cloth (do not use solvent) or an antistatic cloth.

Never use a dry cloth. This can cause static.

Contact with liquid

If the handset has come into contact with liquid:

1. **Switch the handset off and remove the batteries immediately.**
2. Allow the liquid to drain from the handset.
3. Pat all parts dry, then place the handset with the battery compartment open and the keypad facing down in a dry, warm place for **at least 72 hours** (not in a microwave, oven etc.).
4. **Do not switch on the handset again until it is completely dry.**

When it has fully dried out, you will normally be able to use it again.

Questions and answers


If you have any questions about the use of your telephone, you can contact us at any time at

www.gigaset.com/customercare

The table below (page 43) contains a list of common problems and possible solutions.


Troubleshooting

The display is blank.

1. The handset is not switched on.
 - ▶ Press  and hold the end call key.
2. The batteries are empty.
 - ▶ Charge or replace the batteries (page 13).

The handset does not respond to a key press.

The keypad lock is activated.

- ▶ Press and **hold** the pound key  (page 15).

"Base station x" is flashing in the display.

1. The handset is outside the range of the base station.
 - ▶ Reduce the distance between handset/ base station.
2. The handset has been de-registered.
 - ▶ Register the handset (page 30).
3. The base station is not switched on.
 - ▶ Check the base station mains adapter (page 10).

Base Search is flashing in the display.

The handset is set for **Best Base** and no base station is switched on or within range.

- ▶ Reduce the distance between handset/base station.
- ▶ Check the base station mains adapter (page 10).

Handset does not ring.

The ringtone is switched off.

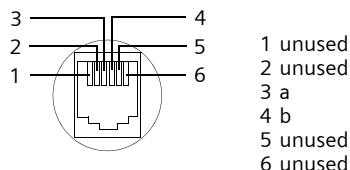
- ▶ Activate the ringtone (page 36).

You cannot hear a ringtone/dialing tone.


Base station's phone cord has been replaced.

- ▶ When purchasing a new cord, ensure that it has the correct pin connections.

Correct phone jack assignment



The other party cannot hear you.

You have pressed the  (INT) key. The handset is muted.

- ▶ Switch on the microphone again (page 15).

The incoming call number is not displayed although CIP is set.

Caller ID is not enabled.

- ▶ **Caller** should ask network provider to activate Caller ID (CI).

You hear an error tone when keying an input

(a descending sequence of tones).

Action has failed/invalid input.

- ▶ Repeat the operation.
Watch the display and refer to the operating instructions if necessary.

You cannot listen to messages on the network mailbox.

Your phone system is set for pulse dialing.

- ▶ Set your phone system to tone dialing.

The calls list does not indicate a time for a message.

Date/time are not set.

- ▶ Set the date/time (page 13).

The answer machine reports "PIN is incorrect" during remote operation.

1. System PIN entered is incorrect
 - ▶ Repeat input of system PIN,
2. System PIN is still set to 0000.
 - ▶ Change system PIN to a number other than 0000 (page 38).

The answer machine does not record any messages/has switched over to 'announce only'.

Its memory is full.

- ▶ Delete old messages.
- ▶ Play back new messages and delete.

Specifications

Recommended batteries

Nickel-metal-hydride (NiMH):

The handset is supplied with UL approved AAA batteries.

Handset operating times/charging times

Capacity	650 mAh
Standby time	Approx. 170 hours (7 days)
Calling time	Approx. 13 hours
Charging time	approx. 6 hours

The operating and charging times apply only when using the recommended batteries.

Note:

When the lighting is switched on, the standby time of the handset is reduced to approx. 30 hours.

Base station power consumption

In standby mode: approx. 2 watts

During a call: approx. 3 watts.

General specifications

DECT 6.0	is supported
No. of channels	30 duplex channels
Radio frequency range	1920 – 1930 MHz
Duplex method	Time multiplex, 10 ms frame length
Channel grid	1728 kHz
Bit rate	1152 kbit/s
Modulation	GFSK
Language code	32 kbit/s
Transmission power	10 mW, average power per channel
Range	up to 300 m outdoors, up to 50 m indoors
Base station power supply	110 V ~/60 Hz
Environmental conditions for operation	+5°C to +45°C; 20 % to 75 % relative humidity
Dialing mode	DTMF (tone dialing)/ DP (dial pulsing)

Industry Canada Certification

Operation is subject to the following two conditions (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

NOTICE: The Industry Canada label identifies certified equipment. This certification means that the equipment meets certain telecommunications network, protective, operational and safety requirements as prescribed in the appropriate Terminal Equipment Technical Requirements document(s). The Department does not guarantee the equipment will operate to the user's satisfaction.

Before installing this equipment, users should ensure that it is permissible to be connected to the facilities of the local telecommunications company. The equipment must also be installed using an acceptable method of connection. The customer should be aware that compliance with the above conditions may not prevent degradation of service in some situations.

Repairs to certified equipment should be coordinated by a representative designated by the supplier. Any repairs or alterations made by the user to this equipment, or equipment malfunctions, may give the telecommunications company cause to request the user to disconnect the equipment.

Users should ensure for their own protection that the electrical ground connections of the power utility, telephone lines and internal metallic water pipe system, if present, are connected together.

This precaution may be particularly important in rural areas

NOTE: Users should not attempt to make such connections themselves, but should contact the appropriate electric inspection authority, or electrician, as appropriate.

This product meets the applicable Industry Canada technical specifications.

The Ringer Equivalence Number is an indication of the maximum number of devices allowed to be connected to a telephone interface. The termination of an interface may consist of any combination of devices subject only to the requirement that the sum of the RENs of all devices does not exceed five.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Safety precautions

Before using your telephone equipment, basic safety instructions should always be followed to reduce the risk of fire, electric shock and injury to persons.

1. Read and understand all instructions.
2. Follow all warnings and instructions marked on the product.
3. Unplug this product from the wall telephone jack and power outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Use damp cloth for cleaning.
4. Do not use this product near water, for example, near a bathtub, wash bowl, kitchen sink, or laundry tub, in a wet basement or near a swimming pool.
5. Place this product securely on a stable surface. Serious damage and/or injury may result if the unit falls.
6. Slots or openings in the cabinet and the back and bottom are provided for ventilation, to protect it from overheating. These openings must not be blocked or covered. This product should never be placed near or over a radiator or heat register, or in a place where proper ventilation is not provided.
7. This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply to your home, consult your dealer or local power company.
8. Do not place objects on the power cord. Install the unit where no one can step or trip on the cord.
9. Do not overload wall outlets and extension cords as this can result in the risk of fire or electric shock.
10. Never push objects of any kind into this product through cabinet slots as they may touch dangerous voltage points or short out parts that could result in the risk of fire or electric shock. Never spill liquid of any kind on this product.
11. To reduce the risk of electric shock or burns, do not disassemble this product. Take it to a qualified service center when service is required. Opening or removing covers may expose you to dangerous voltages, dangerous electrical current or other risks. Incorrect reassembly can cause electric shock when the appliance is subsequently used.
12. Unplug the product from the wall outlet and refer servicing to qualified service personnel under the following conditions:
 - a.) When the power cord is damaged or frayed.
 - b.) If liquid has been spilled into the product.
 - c.) If the product has been exposed to rain or water.

d.) If the product does not operate normally by following the operating instructions. Adjust only those controls that are covered by the operating instructions because improper adjustment of other controls may result in damage and may require extensive work by a qualified technician to restore the product to normal operation.

e.) If the product has been dropped or physically has been damaged.

f.) If the product exhibits a distinct change in performance.

13. Avoid using a telephone (other than a cordless type) during a thunderstorm. There may be a remote risk of electrical shock from lightning. Therefore we suggest a surge arrestor.

14. Do not use the telephone to report a gas leak in the vicinity of the leak.

15. Emergency/911 numbers may not be dialed if the keypad is locked.

BATTERY SAFETY PRECAUTIONS

To reduce the risk of fire, injury or electric shock, and to properly dispose of batteries, please read and understand the following instructions.

CONTAINS ALKALINE NICKEL METAL HYDRIDE BATTERY. BATTERY MUST BE RECYCLED OR DISPOSED OF PROPERLY. DO NOT DISPOSE OF IN MUNICIPAL WASTE.

1. Only use the batteries specified for use with this product.

2. DO NOT USE ALKALINE NICKEL CADMIUM OR ALKALINE LITHIUM BATTERIES, or mix batteries of different sizes or from different manufacturers in this product. DO NOT USE NONRECHARGEABLE BATTERIES.

3. Do not dispose of the batteries in a fire; the cells may explode. Do not expose batteries to water. Check with local codes for special disposal instructions.

4. Do not open or mutilate the batteries.

Released electrolyte is corrosive and may cause damage to the eyes or skin. The electrolyte may be toxic if swallowed.

5. Exercise care in handling the batteries in order not to short the batteries with conducting materials such as rings, bracelets, and keys. The batteries or conducting material may overheat and cause burns or fire.

6. Charge the batteries provided with, or identified for use with, this product only in accordance with the instructions and limitations specified in the user's manual. Do not attempt to charge the batteries with any means other than that specified in the users manual.

7. Periodically clean the charge contacts on both the charger and handset.

Service (Customer Care)

Customer Care Warranty for Cordless Products

To obtain Customer Care Warranty service,
product operation information, or for problem resolution, call:

Toll Free: 1-866-247-8758

8:00 a.m. - 8:00 p.m. EST Monday-Sunday (English)

7:00 a.m. - 12:00 p.m. (noon) EST Monday-Saturday (French)

www.gigaset.com/customer-care

End-user limited warranty

This product is covered by a one year limited warranty. Any repair replacement or warranty service, and all questions about this product should be directed to: 1-866-247-8758.

This limited, non-transferable warranty is provided to the original buyer/end-consumer ("you") for systems, handsets and accessories (collectively, "Product") provided by Lenbrook Industries Limited ("Distributor"). Distributor warrants to you that at the date of purchase, the product is free of defects in workmanship and materials and the software included in the Product will perform in substantial compliance to its program specifications.

1. WARRANTY PERIOD

The Product warranty period is one (1) year from the original date of purchase by you. Proof of purchase (e.g., sales slip or invoice) must be provided with any Product returned during the warranty period. Batteries supplied with the Products are warranted to be free from defects at the time of purchase only.

2. EXCLUSIVE REMEDY

Distributor's entire liability and your exclusive remedy if the Product is defective in materials or workmanship during the warranty period and is returned shall be that the Product will be repaired or replaced as set forth in Section 4 below. Reconditioned replacement components, parts or materials may be used in the replacement or repair. Data in the memory of the Product may be lost during repair. Gigaset Communications and its parent company and affiliates shall have no liability whatsoever under this End-User limited warranty.

3. THIS LIMITED WARRANTY DOES NOT COVER AND IS VOID WITH RESPECT TO THE FOLLOWING:

- Cosmetic damage, physical damage to the surface of the Product, including, without limitation, breakage, cracks, dents, scratches or adhesive marks on the LCD screen or outside casing of the Product.
- Products which have been repaired, maintained or modified (including the antenna) by anyone other than Distributor or a Distributor-approved repair facility, or that have been improperly installed.
- Cost of installation, removal or reinstallation.
- Damage due to any telephone, electronic, hardware or software program, network, Internet or computer malfunctions, failures, or difficulties of any kind, including without limitation, server failure or incomplete, incorrect, garbled or delayed computer transmissions.
- Equipment and components not manufactured, supplied or authorized by Gigaset Communications or Distributor.
- Modification of the Product's components, or operation of the Product in an unsuitable environment or in a manner for which it is not intended, including but not limited to failures or defects caused by misuse, abuse, accidents, physical damage, abnormal operation, improper handling or storage, neglect, alterations, unauthorized installation, removal or repairs, failure to follow instructions, problems caused by the carrier's network coverage, exposure to fire, water or excessive moisture or dampness, floods, or extreme changes in climate or temperature, acts of God, riots, acts of terrorism, spills of food or liquids, viruses or other software flaws introduced into the

Product, or other acts which are not the fault of Distributor and which the Product is not specified to tolerate, including damage caused by mishandling or blown fuses.

- Products which have had warranty stickers, electronic serial number and/or serial number label removed, altered, rendered illegible or fraudulently applied to other equipment.
- Signal reception problems (unless caused by defect in material or workmanship in the Product).
- Products operated outside published maximum ratings.
- Performance of the Products when used in combination with other products or equipment not manufactured, supplied or authorized by Distributor.
- Consumables (such as batteries and fuses).
- Payments for labor or service to representatives or service centers not authorized to perform product maintenance by Distributor.
- Loss of data.
- Testing and examination discloses that the alleged defect or malfunction in the Product does not exist.

This warranty does not cover customer education, instruction, installation or removal, set up adjustments, problems related to service(s) provided by a carrier or other service provider, and/or signal reception problems. Distributor or Gigaset Communications shall not be responsible for software, firmware, information, or memory data contained in, stored on, or integrated with any Products returned for repair, whether under warranty or not.

This warranty is valid only in Canada.

USE WITH ACCESSORIES NOT SUPPLIED BY DISTRIBUTOR OR NOT OTHERWISE EXPRESSLY AUTHORIZED BY DISTRIBUTOR MAY VOID WARRANTY.

4. WARRANTY CLAIM PROCEDURE

All warranty claims must be made by notifying Distributor prior to the expiration of the warranty period. Distributor's obligation to provide warranty support shall not extend past the end of the warranty period, except that any product repaired or replaced during the warranty period shall continue to be warranted for the balance of such warranty period or thirty (30) days, whichever is greater.

Throughout the warranty period, Support will be available Monday through Sunday from 8:00 a.m. to 8:00 p.m. EST (English) and Monday through Saturday from 7:00 a.m. to 12:00 p.m. (noon) EST (French), excluding National holidays. Support service will be provided for you by accessing the toll free customer service number:

1-866-247-8758

5. LIMITATION OF WARRANTY

Distributor or Gigaset Communications makes no warranty or representation that the software in the Products will meet your requirements or will work in combination with any hardware or applications software products provided by third parties, that the operation of the software will be uninterrupted or error free, or that all defects in the software products will be corrected.

6. LIMITATION ON REMEDIES; NO CONSEQUENTIAL OR OTHER DAMAGES

Your exclusive remedy for any breach of this limited warranty is as set forth above. Except for any refund elected by Distributor, **YOU ARE NOT ENTITLED TO ANY DAMAGES, INCLUDING BUT NOT LIMITED TO CONSEQUENTIAL DAMAGES**, if the Product does not meet the limited warranty, and, to the maximum extent allowed by applicable law, even if any remedy fails of its essential purpose. The terms below ("Exclusion of Incidental, Consequential and Certain Other Damages") are also incorporated into this limited warranty. Some provinces/jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This limited warranty gives you specific legal rights. You may have others which vary from province/jurisdiction to province/jurisdiction.

7. DISCLAIMER OF WARRANTIES

DISTRIBUTOR AND ITS SUPPLIERS (INCLUDING GIGASET COMMUNICATIONS) PROVIDE THE PRODUCT AND SUPPORT SERVICES (IF ANY) AS IS AND WITH ALL FAULTS. THE LIMITED WARRANTIES OR CONDITIONS ARE IN LIEU OF ANY OTHER EXPRESS WARRANTIES OR CONDITIONS (IF ANY) CREATED BY ANY DOCUMENTATION OR PACKAGING EXCEPT FOR THE LIMITED WARRANTY OR CONDITION, AND TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW IS IN LIEU OF ANY IMPLIED OR STATUTORY WARRANTIES OR CONDITIONS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, OF ACCURACY OR COMPLETENESS OR RESPONSES, OF RESULTS, OF WORKMANLIKE EFFORT, OF LACK OF VIRUSES AND OF LACK OF NEGLIGENCE, ALL WITH REGARD TO THE PRODUCT, AND THE PROVISION OF OR FAILURE TO PROVIDE SUPPORT SERVICES. ALSO, THERE IS NO WARRANTY OR CONDITION OF TITLE, QUIET ENJOYMENT, QUIET POSSESSION, OR CORRESPONDENCE TO DESCRIPTION OR NON-INFRINGEMENT WITH REGARD TO THE PRODUCT. Some provinces do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above exclusions or limitations may not apply to you. If an implied warranty or condition is created by your province and federal or provincial law prohibits disclaimer of it, you also have an implied warranty or condition, BUT ONLY AS TO DEFECTS DISCOVERED DURING THE PERIOD OF THIS LIMITED WARRANTY (ONE YEAR). AS TO ANY DEFECTS DISCOVERED AFTER THE ONE YEAR PERIOD, THERE IS NO WARRANTY OR CONDITION OF ANY KIND. This limited warranty gives you specific legal rights, and you may also have other rights which vary from province to province. In no event shall Distributor's and any of its suppliers' (including Gigaset Communications) liability exceed the cost of repairing or replacing defective Products as provided herein, and any such liabilities will terminate upon expiration of the warranty period.

Any supplements or updates to the Product or the software in the Product, including without limitation, any (if any) software fixes or upgrades or bug fixes provided to you after the expiration of the one year limited warranty period are not covered by any warranty or condition, express, implied or statutory.

8. EXCLUSION OF INCIDENTAL, CONSEQUENTIAL AND CERTAIN OTHER DAMAGES

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL DISTRIBUTOR OR ITS SUPPLIERS (INCLUDING GIGASET COMMUNICATIONS), BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES WHATSOEVER (INCLUDING, BUT NOT LIMITED TO, DAMAGES FOR LOSS OF PROFITS OR CONFIDENTIAL OR OTHER INFORMATION, FOR BUSINESS INTERRUPTION, FOR PERSONAL INJURY, FOR LOSS OF PRIVACY, FOR FAILURE TO MEET ANY DUTY INCLUDING OF GOOD FAITH OR OF REASONABLE CARE, FOR NEGLIGENCE, AND FOR ANY OTHER PECUNIARY OR OTHER LOSS WHATSOEVER) ARISING OUT OF OR IN ANY WAY RELATED TO THE USE OF OR INABILITY TO USE THE PRODUCT, THE PROVISION OF OR FAILURE TO PROVIDE SUPPORT SERVICES, OR OTHERWISE UNDER OR IN CONNECTION WITH ANY PROVISION OF THIS LIMITED WARRANTY, EVEN IN THE EVENT OF THE FAULT, TORT (INCLUDING NEGLIGENCE), STRICT LIABILITY, BREACH OF CONTRACT OR BREACH OF WARRANTY OF DISTRIBUTOR OR ANY OF ITS SUPPLIERS (INCLUDING GIGASET COMMUNICATIONS) HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. REPAIR OR REPLACEMENT, AS PROVIDED UNDER THE WARRANTY, IS YOUR SOLE AND EXCLUSIVE REMEDY FOR BREACH OF THE LIMITED WARRANTY.

9. LIMITATION OF LIABILITY AND REMEDIES

NOTWITHSTANDING ANY DAMAGES THAT YOU MIGHT INCUR FOR ANY REASON WHATSOEVER (INCLUDING, WITHOUT LIMITATION, ALL DAMAGES REFERENCED ABOVE AND ALL DIRECT OR GENERAL DAMAGES), THE ENTIRE LIABILITY OF DISTRIBUTOR OR ANY OF ITS SUPPLIERS (INCLUDING GIGASET COMMUNICATIONS) UNDER ANY PROVISION OF THIS LIMITED WARRANTY AND YOUR EXCLUSIVE REMEDY FOR ALL OF THE FOREGOING (EXCEPT FOR ANY REMEDY OF REPAIR OR REPLACEMENT ELECTED BY DISTRIBUTOR OR ANY OF ITS SUPPLIERS (INCLUDING GIGASET COMMUNICATIONS) WITH RESPECT TO ANY BREACH OF THE LIMITED WARRANTY) SHALL BE LIMITED TO THE GREATER OF THE AMOUNT ACTUALLY PAID BY YOU FOR THE PRODUCT OR FIVE DOLLARS (\$5.00 USD). THE FOREGOING LIMITATIONS, EXCLUSIONS AND DISCLAIMERS SHALL APPLY TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, EVEN IF ANY REMEDY FAILS ITS ESSENTIAL PURPOSE.

10. GOVERNING LAW

This limited warranty will be governed by the laws of the Province of Ontario and the federal laws of Canada applicable therein and excluding the United Nations Convention on Contracts for the International Sale of Goods.

If you want to learn more about Gigaset Service or for Support on your Gigaset phone, visit our web site at www.gigaset.com/customer-care or please call 1-866-247-8758.

Issued by
Gigaset Communications GmbH
Schlavenhorst 66, D-46395 Bocholt
Gigaset Communications GmbH is a trademark licensee of Siemens AG
© Gigaset Communications GmbH 2008
All rights reserved.
Subject to availability. Rights of modifications reserved.
www.gigaset.com

Part Number: A31008-M1729-R401-1-5819

Index

A

- Access protection 38
- Acknowledge tones 37
- Activating
 - advisory tones 37
 - answer machine 23
 - answer machine
 - (remote operation) 28
 - auto answer 35
 - handset 15
 - internal listening in 32
 - keypad lock 15
 - room monitor 33
 - two-way recording of call 26
- Adjusting
 - loud speaker volume 36
- Advisory tones 37
- Alarm clock 37
- Alert tone 37
- Anniversary 19
 - storing in directory 19
- Announcement (answering machine) 23, 24
- Answer machine 23
 - activating/deactivation 23
 - deleting messages 25
 - playing back messages 24
 - recording a personal announcement/
 - announce only 23
 - remote operation 27
 - scrolling back 25
 - scrolling forwards 25
- Answer machine list 21
- Answer machine, see
 - Network mailbox
- Area codes 13
 - extra codes 13
 - local area code 13
- Auto answer 14, 35

B

- Base station
 - changing 31
 - connecting and setting up 9
 - connecting the device 10
 - connecting to PABX 42
 - range 10

- restoring to factory settings 39
- setting 38
- system PIN 38

Battery

- charging 13
- display 13
- fitting 10
- icon 13
- recommended batteries 44
- tone 37

Best base station 31

Birthday, see Anniversary

C

Call

- answering 14
- caller listening in 32
- ending 14
- external 14
- forwarding (connecting) 31
- internal 31
- picking up from answering
 - machine 25
- transferring (connecting) 31
- two-way recording 26

Call acceptance 26, 35

Call duration 14

Call history 20

Call waiting

internal call 32

Caller ID 14

Calling

external 14

Canceling (operation) 16

Care of the telephone 43

Changing

- destination number 34
- dialing mode 42
- display language 34
- internal number of a handset 33
- name of handset 32
- pause time 42
- ringtone 36

Changing PIN 38

Character set table, see

Special characters

Charge saving function 26

Charge status display 1

CID 2.5 services (network services) 17

Confirmation beep 37

Index

Connecting, base station to PABX. . . .	42
Control key	1, 15
Correcting incorrect input	17
Customer Care	47

D

Deactivating	
advisory tones	37
answer machine.	23
auto answer.	35
handset.	15
internal listening in	32
keypad lock	15
room monitor	34
Delete key.	16
Deleting	
announcement for answering	
machine	24
characters	17
message	25
De-registering (handset)	30
Dialing	
directory	18
with quick dial	19
Dialing mode	42
Dialing pause	42
entering	1
Directory.	18
copying number from text	19
managing entries.	18
opening.	15, 16
order of entries	22
saving entry.	18
sending entry/list to handset	19
storing anniversary	19
using to enter numbers	19
Display	
changing display language	34
contrast.	35
in idle status	16
keys.	1, 16
lighting	35
memory	19
network mailbox message	29
number (CID/CNID)	14
screen picture	35
setting.	35
wrong language.	34
DP (pulse dialing)	42

E

Earpiece mode	15
Earpiece volume.	36
End call key	1, 14
Ending, call	14
Ending, see Deactivate	
Entry	
selecting (menu).	7
selecting from directory.	18
Error beep	37
Example	
menu input.	7
multiple line entry.	8
External call	
diverting to answer machine	25
Extra codes	13

F

Fast access	
answer machine	27
assigning key 1	1
network mailbox.	29
Flash key	1
pause after	42
Flash time	42

G

Group call	31
----------------------	----

H

Handset	
activating/deactivating	15
advisory tones	37
changing internal number.	33
changing name.	32
changing number	33
changing to best reception	31
changing to different base	
station	31
contact with liquid	43
de-registering	30
display language.	34
forwarding call	31
idle status.	13, 16
lighting.	35
list	15, 16
loudspeaker volume	36
muting	15
paging	31
placing on hold.	15

reception strength 10
 registering 30
 registering on another
 base station 31
 restoring to factory settings 38
 screen picture 35
 setup 10
 using room monitor 33
 using several handsets 30
 Handset charging times 44
 Handset operating time 44
 in room monitor mode 33
 Handset settings 34
 Handsfree
 key 1
 Handsfree talking 15
 Headset socket 12
 Hold 15
 with simultaneous internal call 31
 Hold melody 38

I

Icon
 alarm clock 37
 answer machine 23
 battery 13
 display 16
 for new messages 25
 keypad lock 15
 new message 24
 ringtone 36
 Idle status (display) 13
 Idle status, returning to 16
 Incorrect input (correction) 17
 Internal
 listening in 32
 making calls 31
 Internal call 31
 call waiting 32

K

Key 1 (fast access) 1, 27
 Keypad lock 15
 Keys
 assigning directory entry 18
 cancel key 16
 control key 1, 15
 delete key 16
 display keys 1, 16
 end call key 1, 14

fast access 1, 27
 flash key 1
 handsfree key 1
 last number redial key 20
 menu key 16
 message key 1
 On/Off key 1
 pound key 1, 15
 quick dial 18, 19
 star key 1, 36
 talk key 1, 14

L

Language, display 34
 Last number redial 20
 Lighting 35
 Liquid 43
 List
 answer machine list 21
 call history 20
 handsets 15, 16
 missed calls 21
 Listening in during recording 26
 Listening in to call 32
 Local area code 13
 Lock
 activating/deactivating keypad
 lock 15
 Loudspeaker volume 36

M

Making calls
 answering a call 14
 external 14
 internal 31
 Manual last number redial 20
 Medical equipment 5
 Memory 19
 Menu
 back one menu level 16
 end tone 37
 key 16
 menu guidance 16
 menu input 7
 opening 15, 16
 overview 40
 Message key
 opening lists 20

Index

Messages	23
deleting	25
icon for new message.	24
key	1
marking as "new".	25
playing back	24
Microphone	1
Missed call	21
Multiple line entry	8
Muting	15

N

Name	
of a handset.	32
Network mailbox.	29
Network services (CID 2.5 services) . .	17
Number	
adding to directory.	19
as destination for room monitor . .	33
copying from directory	19
display calling number (CIP)	14
entry using directory	19
saving in directory	18

O

On/Off key	1
Order of entries in directory	22

P

PABX	
connecting base station	42
pause times	42
setting dialing mode	42
setting flash time	42
switching to touch tone dialing. . .	42
Pack contents	9
Paging	31
Paging, handset	31
Pause	42
Placing the handset on hold.	15
Play back	
announcement (answering	
machine)	23, 24
Pound key.	1, 15
Power consumption.	44
Power supply unit	5
Protecting phone from access	38
Pulse dialing	42

Q

Questions and answers.	43
Quick dial.	18

R

Range	10
Reception strength	10
Recording	
two-way recording of call	26
Recording quality	27
Recording time.	26
Redial	
key	20
Registering (handset)	30
Reminder call	20
Remote control.	27
Ringtone	
changing	36
setting	36
setting melody	36, 38
setting volume	36, 38
Room monitor	33

S

Safety precautions	5
Screen picture	35
Searching in directory.	18
Sending	
directory entry to handset	19
Sensitivity (room monitor)	34
Setting	
date	13
lighting.	35
screen picture	35
time	13
Setting melody.	36, 38
Setting up, base station	9
Setup	
handset	10
Shortcut.	40
Sleep mode	38
Sound, see Ringtone	
Special characters.	21
Specifications.	44
Star key	1, 36
System settings	38

T

- Talk key. 1, 14
- Touch tone dialing. 42
- Troubleshooting 43

V

- Viewing network mailbox message . . 29
- VIP (directory entry) 19
- Volume
 - earpiece 36
 - handset loudspeaker 36
 - loudspeaker 36
 - ringtone 36, 38
 - setting. 36

W

- Warning beep, see Advisory tones
- Writing, editing names 21