


## Overview

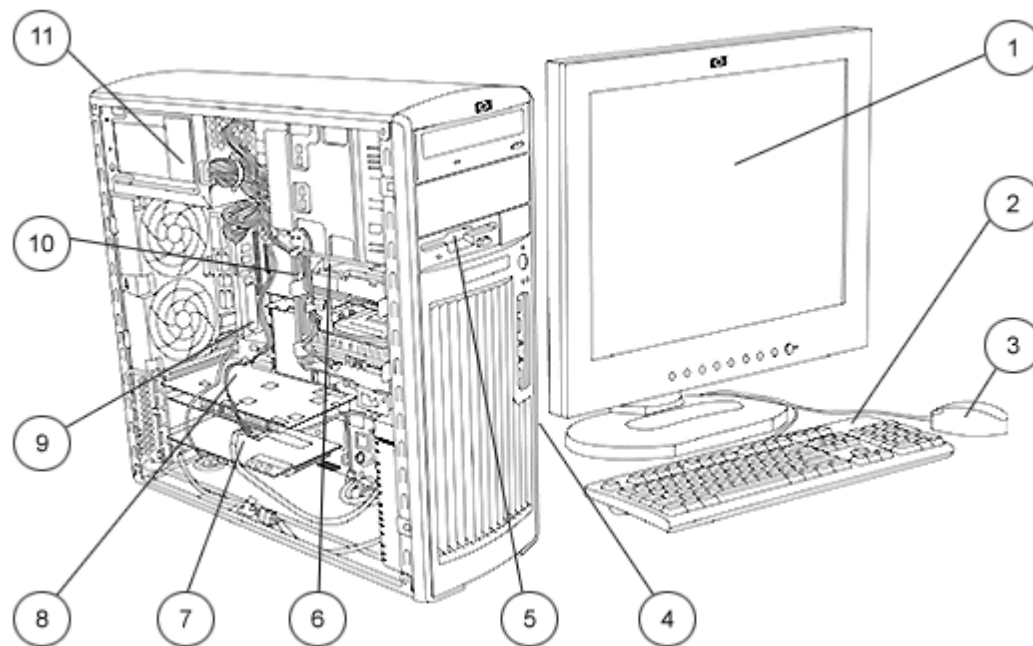

1. Monitor (sold separately)
2. 2004 Standard Keyboard
3. 2-Button Scroll Mouse
4. Front IO: 2 USB 2.0, IEEE-1394 (requires optional PCI card to enable), headphone and microphone
5. 3.5" external bay for optional diskette drive or other 3.5" device
6. 2 internal 3.5" bays, 2 external 5.25" bays
7. 4 PCI, 1 PCI Express 8x prime slots
8. 1 PCI Express x16 Graphics Bus
9. 6 USB 2.0, 1 standard serial port, 1 parallel port, 2 PS/2, 1 RJ-45, audio in/out
10. Dual 64-bit Intel® Xeon® processors
11. 500 watt power supply

## At A Glance

- 64-bit Intel® Xeon® processors
- Choice of operating systems:  
Microsoft Windows XP Professional,  
XP Professional x64 Edition,  
Red Hat Enterprise Linux Workstation 3,  
HP Linux Installer Kit (see <http://www.hp.com/workstations/software/linux/> for details)
- Up to 8 GB of DDR-2 memory
- PCI-Express I/O and graphics
- Integrated Broadcom NetXtreme Gigabit ethernet
- 800 MHz processor front side bus support
- Intel Hyper-Threading technology support
- SATA and Ultra 320 SCSI drives
- Digital AC97 integrated audio with internal speaker
- Pre-loaded Manageability tools
- Energy Star compliance with energy-saving features
- Protected by HP Services, including a 3-3-3 standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.

## Overview

Processor and Speed – One of the following	<b>64-bit Intel Xeon Processor with 800 MHz Front Side Bus</b>
	2.80 GHz (2 MB L2 cache) 3.00 GHz (2 MB L2 cache) 3.20 GHz (2 MB L2 cache) 3.40 GHz (2 MB L2 cache) 3.60 GHz (2 MB L2 cache) 3.80 GHz (2 MB L2 cache)
	<b>2nd 64-bit Intel Xeon Processor with 800 MHz Front Side Bus (optional – speed must match processor 1)</b>
	2.80 GHz (2 MB L2 cache) 3.00 GHz (2 MB L2 cache) 3.20 GHz (2 MB L2 cache) 3.40 GHz (2 MB L2 cache) 3.60 GHz (2 MB L2 cache) 3.80 GHz (2 MB L2 cache)

Operating System – One of the following	Microsoft Windows XP Professional
	Microsoft Windows XP Professional x64 Edition ( <a href="http://www.hp.com/workstations/pws/windowsxp64/">http://www.hp.com/workstations/pws/windowsxp64/</a> )
	Red Hat Enterprise Linux Workstation 3 64-bit version (Update 2 in 32- and 64-bit available as aftermarket option)
	HP Installer Kit for Linux (includes drivers for both 32-bit & 64-bit OS versions)

**NOTE:** Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix ([http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)) for details, and to the Linux User Manual ([http://www.hp.com/support/linux\\_user\\_manual](http://www.hp.com/support/linux_user_manual)) for tips on user-enablement of the IEEE 1394 Card.

1st Hard Disk Drive – One of the following		Windows XP	Red Hat Linux
	<b>Serial ATA 3.0-Gb/s Hard Drives</b> (Currently supported only at 1.5-Gb/s. To get 3Gb/s performance, a SATA 3.0Gb/s controller must be added)		
	80 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	160 GB 7200 rpm Serial ATA NCQ drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	250 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	500 GB 7200 rpm Serial ATA NCQ drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	<b>Serial ATA 1.5Gb/s Hard Drives</b>		
	74 GB 10K rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
	<b>Ultra320 SCSI Hard Drives (SCSI Controller required)</b>		
	73 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	146 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	300 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	36 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4

## Standard Features - Custom Components

73 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
-------------------------------	----------------	--------------------

### 2nd Hard Disk Drive – One of the following

#### Serial ATA 3Gb/s Hard Drives \*\*

2nd hard drive, 80 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
2nd hard drive, 160 GB 7200 rpm Serial ATA NCQ drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
2nd hard drive, 250 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
2nd hard drive, 500 GB 7200 rpm Serial ATA NCQ drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4

#### Serial ATA 1.5Gb/s Hard Drives \*\*

2nd hard drive, 74 GB 10K rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
---	----------------	----------

#### Ultra320 SCSI Hard Drives \*\*\*

2nd hard drive, 73 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
2nd hard drive, 146 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
2nd hard drive, 300 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
2nd hard drive, 36 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
2nd hard drive, 73 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4

#### NOTE:

\*\*May mix hard drive types. First hard drive must be a Serial ATA drive.

\*\*\* May mix hard drive types. SCSI Controller required. Mixed drive types not supported with Linux.

### 3rd Hard Disk Drive – One of the following

#### Serial ATA 3Gb/s Hard Drives \*\*

3rd hard drive, 80 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
3rd hard drive, 160 GB 7200 rpm Serial ATA NCQ drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
3rd hard drive, 250 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4
3rd hard drive, 500 GB 7200 rpm Serial ATA NCQ drive (8 MB cache)	32-Bit, 64-Bit	WS3, WS4

#### Ultra320 SCSI Hard Drives \*\*\*

3rd hard drive, 73 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
3rd hard drive, 146 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
3rd hard drive, 300 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
3rd hard drive, 36 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
3rd hard drive, 73 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4

## Standard Features - Custom Components

**NOTE:**

\*\*May mix hard drive types. First hard drive must be a Serial ATA drive.

\*\*\* May mix hard drive types. SCSI Controller required. Mixed drive types not supported with Linux.

Factory Integrated RAID****	RAID 0 Configuration – Striped Array	32-Bit
	RAID 1 Configuration – Mirrored Array	32-Bit
****NOTE: Requires 2 identical hard drives (speeds, capacity, interface). SATA controller does not support RAID. No Linux support. 64-Bit not supported with Serial ATA Drives.		

Drive controllers			
	Integrated serial ATA controller	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	Optional Ultra 320 SCSI controller (required if HDs are SCSI) - basic	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	Optional U320 SCSI Controller - LSI 20320AR RAID 0,1 (required with SCSI HDDs)and external connector	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
*NOTE: Can be sold and used with 1 or 2 SATA drives as a stand alone controller (no SCSI HDD).			

Memory -		Windows XP	Red Hat Linux
One of the following	256 MB DDR-2 PC2-3200 (400 MHz) ECC Registered (1 x 256 MB)	32-Bit, 64-Bit	7.2, 7.3
	512 MB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 256 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	1 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 512 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	2 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 1 GB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	2 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (4 x 512 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	3 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 1 GB + 2 x 512 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	4 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 2 GB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	4 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (4 x 1 GB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	6 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 2 GB + 2 x 1 GB)	64-Bit	7.2, 7.3, WS3, WS4
	8 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (4 x 2 GB)	64-Bit	7.2, 7.3, WS3, WS4

## Standard Features - Custom Components

Removable Storage		Windows XP	Red Hat Linux
	1.44 MB Diskette Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	48X CD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	48X CD-RW Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	16X DVD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	48X Combo CD-RW/DVD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	16X DVD+/-RW, Dual-Layer LightScribe	32-Bit	
	HP No Optical Drive Option	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4

2nd Removable Storage*		Windows XP	Red Hat Linux
	48X CD-RW Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	16X DVD-ROM Drive**	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	48X Combo CD-RW/DVD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	16X DVD+/-RW, Dual-Layer LightScribe***	32-Bit	

**NOTES:** \*Can not order with No Optical Option. \*\*Can not have two of the same in one workstation.

\*\*\* LightScribe software works with Windows only.

Keyboard*** -		Windows XP	Red Hat Linux
One of the following	PS/2 Standard Keyboard	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	USB Standard Keyboard	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4

**\*\*\*NOTE:** Not supported in configurations which include both USB mouse and Linux nor PS/2 mouse and Linux.

Mouse -		Windows XP	Red Hat Linux
One of the following	PS/2 2-Button Scroll Mouse	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	USB 2-Button Optical Scroll Mouse	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	USB 3-Button Optical Mouse	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4

## Standard Features - Custom Components

<b>Audio</b>	Integrated Digital AC97 audio with internal speaker		
	Sound Blaster® X-Fi™ XtremeMusic PCI	32-Bit, 64-Bit	
	HP Optical Drive Internal Audio Cable*	32-Bit, 64-Bit	
	*NOTE: Not available with No Optical Option nor with the Sound Blaster X-Fi card.		
<b>NIC</b>	Broadcom BCM5751 NetXtreme™ Gigabit Ethernet Controller (PCI-E)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
<b>Graphics</b>		<b>Windows XP</b>	<b>Red Hat Linux</b>
	NVIDIA Quadro NVS 285 PCI Express (128 MB, VGA & DVI) (Two of these graphics cards can be integrated in the factory or in addition to an NVIDIA Quadro NVS 440).	32-Bit, 64-Bit	WS3, WS4
	ATI FireGL V3100 PCI Express (128 MB)	32-Bit, 64-Bit	
	NVIDIA Quadro FX 540 PCI Express (128 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	NVIDIA Quadro FX 1400 PCI Express (128 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	ATI FireGL V5100 PCI Express (128 MB)	32-Bit, 64-Bit	
	NVIDIA Quadro NVS 440 PCI Express (256 MB) (Two of these graphics cards can be integrated in the factory or in addition to an NVIDIA Quadro NVS 285).	32-Bit, 64-Bit	
	NVIDIA Quadro FX 3450 PCI Express (256 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
<b>Miscellaneous</b>	Solenoid lock and hood sensor	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4
	HP FireWire IEEE 1394a 3-Port PCI Card	32-Bit, 64-Bit	
	Trusted Platform Module	32-Bit	
	HP 64-bit Transition Tool Kit	32-Bit, 64-Bit	
<b>Software</b>	Symantec Norton AntiVirus (optional)*	32-Bit	
	CA eTrust 64-bit Anti-Virus Software	64-Bit	
	HP Performance Tuning Framework*	32-Bit, 64-Bit	
	Altiris Recovery*	32-Bit	
	HP Client Manager Software v6.0*	32-Bit	
	* Not available with Linux Operating System		

## Standard Features - Specs

Operating System (choice)	Microsoft Windows XP Professional	
	Windows XP Professional x64 Edition ( <a href="http://www.hp.com/workstations/pws/windowsxp64/">http://www.hp.com/workstations/pws/windowsxp64/</a> )	
	OR Red Hat Enterprise Linux Workstation 3 Update 5 (64-bit only)	
	OR HP Installer Kit for Linux (includes drivers for both 32-bit & 64-bit OS versions on HP xw8200, xw6200 and xw4200)	
Form factor	Minitower	
Colour	Carbonite/Alloy metallic	
System Board Form Factor	Non-standard ATX	
Processor	Single or dual 64-bit Intel Xeon processors (Nocona) with Hyper-Threading Technology	
CPU Bus Speed Supported	800 MHz FSB	
Standard L2 Cache	2 MB L2 cache	
Chipset	Intel E7525	
Memory Expansion Slots	4 DIMM's	
Memory Type Supported	DDR-2 (ECC registered)	
Memory Speed Supported	DDR-2 Synch DRAM PC2-3200 (400 MHz) Registered ECC	
Maximum Memory	8 GB (4 DIMMs slots, 2 GB DIMMs required to meet maximum configurations)	
Network controller	Integrated Broadcom 5751 10/100/1000 for HP	
Audio	Integrated AC'97 digital audio with S/PDif 6-channel pass-through, stereo microphone, and Yamaha XG Lite Softsynth support	
PCI slots	4 PCI slots (full-height) 1 PCI Express (x8 mechanically, x4 electrically) 1 PCI Express x16 graphics	
AGP slot	none	
Bays	Total Bays = 5	
Internal Bays	<ul style="list-style-type: none"> <li>Two 3.5 inch bays with acoustic dampening rail assemblies</li> </ul>	
External Bays	<ul style="list-style-type: none"> <li>Two 5.25 inch full length 2003 mm maximum device depth (top bay is limited to 198 mm depth when optional smart cover solenoid lock is installed). Bottom bay can be converted to an internal 3.5 inch 3rd Hard Drive bay using optional bracket</li> <li>One 3.5 inch bay for optional floppy drive</li> </ul>	
Parallel Port	1	
Serial Port	1	
Front I/O	2 USB 2.0, Headphone, Microphone, optional IEEE 1394 <b>NOTE:</b> Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix ( <a href="http://www.hp.com/support/linux_hardware_matrix">http://www.hp.com/support/linux_hardware_matrix</a> ) for details, and to the Linux User Manual ( <a href="http://www.hp.com/support/linux_user_manual">http://www.hp.com/support/linux_user_manual</a> ) for tips on user-enablement of the IEEE 1394 Card.	
Rear I/O	6 USB 2.0, 1 standard serial port, 1 parallel port, PS/2 keyboard and mouse, 1 RJ-45 to integrated Gigabit LAN, Audio In, Audio Out, Mic In	
USB Keyboard	Optional	
USB Mouse	Optional	
PS/2 Keyboard	1	
PS/2 Mouse	1	
Chassis Dimensions (H x W x D)	17.3 x 6.5 X 17.3 in (44.1 x 16.5 x 44.0 cm)	
System weight	Standard config – 35 lb	
Shipping weight	Varies by region	
Temperature	Operating	40° to 95° F (5° to 35° C)
	Non-operating	-40° to 140° F (-40° to 60° C)

## Standard Features - Specs

Humidity	Operating	8% to 85%
	Non-operating	8% to 90%
Maximum Altitude (nonpressurized)	Operating	10,000 ft (3,000 m)
	Non-operating	30,000 ft (9,100 m)
Power Supply	500W wide-ranging, active Power Factor Correction	
Interfaces Supported	1 SATA interface (2 serial-ATA connectors), 1 EIDE interface (2 EIDE connectors) for optical drives, optional multi-bay interface	
Hard Drive Controller (PCI) Supported	Ultra160 or Ultra320, or SATA RAID, or Ultra320 RAID	
<b>Preinstalled Software</b>		
HP Client Manager Software v6.0*		
Altiris Local Recovery*		
Alert Standard Format specification*		
Norton AntiVirus 2004 (optional preinstall)*		
CD/DVD software dependent on optical drive choices		
* <a href="#">Not available on Linux</a>		



## Standard Features - PreConfigured Regional Models

<b>Smart Buy Promotion Model</b> xw6200X/XD3.20/B74/ H512/XvF/s English: PS046UA#ABA French: PS046UA#ABC	<b>Processor</b>	2 x 64-bit Intel Xeon processor 3.20 GHz 1 MB/800
	<b>OS</b>	Windows XP Professional 32-bit
	<b>Cache Memory</b>	1 MB L2
	<b>Memory</b>	1 GB (2x512) DDR2-400 ECC Registered
	<b>Optical Drive</b>	48X DVD-ROM/CDRW Combo
	<b>Hard Drive</b>	74 GB 10,200 SATA
	<b>Graphics</b>	NVIDIA Quadro NVS 280 PCI Express included in base configuration.
	<b>Mouse</b>	PS/2 scroll mouse
	<b>Other</b>	Includes Floppy Drive and Standard PS/2 Keyboard

<b>xw6200X/XD3.20/B80/ H1.0/XvF/s</b> English: PE344UA#ABA French: PE344UA#ABC	<b>Processor</b>	64-bit Intel Xeon processor 3.20 GHz 1 MB/800
	<b>OS</b>	Windows XP Professional 32-bit
	<b>Cache Memory</b>	1 MB L2
	<b>Memory</b>	1 GB (2x512) DDR2-400 ECC Registered
	<b>Optical Drive</b>	48X DVD-ROM/CDRW Combo
	<b>Hard Drive</b>	80 GB 7200 SATA
	<b>Graphics</b>	Not included in base configuration – Please Choose a graphics card option below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI) NVIDIA Quadro NVS 280 PCI Express (64 MB, VGA & DVI) NVIDIA Quadro NVS 285 PCI Express (128 MB, VGA & DVI) NVIDIA Quadro NVS 400 PCI (64 MB, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3450 PCI Express (256 MB) <b>NOTE:</b> Please see <a href="#">Part Numbers in After market options/Standalone accessories section.</a>
	<b>Mouse</b>	PS/2 scroll mouse
	<b>Other</b>	Includes Floppy Drive and Standard PS/2 Keyboard

## Standard Features - PreConfigured Regional Models

<b>xw6200X/XE3.20/D80/ H1.0/Xv/p</b> <b>English: PZ004UA#ABA</b> <b>French: PZ004UA#ABC</b>	<b>Processor</b>	64-bit Intel Xeon processor 3.20 GHz 2 MB/80
	<b>OS</b>	Windows XP Professional 32-bit
	<b>Cache Memory</b>	2 MB L2
	<b>Memory</b>	1 GB (2x512) DDR2-400 ECC Registered
	<b>Optical Drive</b>	48X DVD-ROM/CDRW Combo
	<b>Hard Drive</b>	80 GB SATA/300 7200 rpm (1st)** <b>*** NOTE:</b> Disk drive will run at SATA/150 unless an additional SATA/300 controller card is added to the system.
	<b>Graphics</b>	Not included in base configuration — Please Choose a graphics card option below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI) NVIDIA Quadro NVS 280 PCI Express (64 MB, VGA & DVI) NVIDIA Quadro NVS 285 PCI Express (128 MB, VGA & DVI) NVIDIA Quadro NVS 400 PCI (64 MB, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3450 PCI Express (256 MB) <b>NOTE:</b> Please see Part Numbers in After market options/Standalone accessories section.
	<b>Mouse</b>	USB Optical scroll mouse
	<b>Other</b>	Includes Standard PS/2 Keyboard

<b>xw6200X/XD3.40/B160/ H1.0/XvF/s</b> <b>English: PE345UA#ABA</b> <b>French: PE345UA#ABC</b>	<b>Processor</b>	64-bit Intel Xeon processor 3.40 GHz 1 MB/800
	<b>OS</b>	Windows XP Professional 32-bit
	<b>Cache Memory</b>	1 MB L2
	<b>Memory</b>	1 GB (2x512) DDR2-400 ECC Registered
	<b>Optical Drive</b>	48X DVD-ROM/CDRW Combo
	<b>Hard Drive</b>	160 GB SATA/150 7200 (1st)
	<b>Graphics</b>	Not included in base configuration — Please Choose a graphics card option below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI) NVIDIA Quadro NVS 280 PCI Express (64 MB, VGA & DVI) NVIDIA Quadro NVS 285 PCI Express (128 MB, VGA & DVI) NVIDIA Quadro NVS 400 PCI (64 MB, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3450 PCI Express (256 MB) <b>NOTE:</b> Please see Part Numbers in After market options/Standalone accessories section.
	<b>Mouse</b>	PS/2 scroll mouse
	<b>Other</b>	Includes Floppy Drive and Standard PS/2 Keyboard

## Standard Features - PreConfigured Regional Models

<b>xw6200X/XE3.40/F160/ H1.0/Xv/p</b> <b>English: PZ005UA#ABA</b> <b>French: PZ005UA#ABC</b>	<b>Processor</b>	64-bit Intel Xeon processor 3.40 GHz 2 MB/800
	<b>OS</b>	Windows XP Professional 32-bit
	<b>Cache Memory</b>	2 MB L2
	<b>Memory</b>	1 GB (2x512) DDR2-400 ECC Registered
	<b>Optical Drive</b>	48X DVD-ROM/CDRW Combo
	<b>Hard Drive</b>	160 GB SATA/300 NCQ 7200 rpm (1st)** <b>*** NOTE:</b> Disk drive will run at SATA/150 unless an additional SATA/300 controller card is added to the system.
	<b>Graphics</b>	Not included in base configuration – Please Choose a graphics card option below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI) NVIDIA Quadro NVS 280 PCI Express (64 MB, VGA & DVI) NVIDIA Quadro NVS 285 PCI Express (128 MB, VGA & DVI) NVIDIA Quadro NVS 400 PCI (64 MB, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3450 PCI Express (256 MB) <b>NOTE:</b> Please see Part Numbers in After market options/Standalone accessories section.
	<b>Mouse</b>	USB Optical scroll mouse
	<b>Other</b>	Includes Standard PS/2 Keyboard

<b>xw6200X/XD3.60/B250/ H1.0/XvF/Ss</b> <b>English: PE346UA#ABA</b> <b>French: PE346UA#ABC</b>	<b>Processor</b>	64-bit Intel Xeon processor 3.60 GHz 1 MB/800
	<b>OS</b>	Windows XP Professional 32-bit
	<b>Cache Memory</b>	1 MB L2
	<b>Memory</b>	1 GB (2x512) DDR2-400 ECC Registered
	<b>Optical Drive</b>	48X DVD-ROM/CDRW Combo
	<b>Hard Drive</b>	250 GB SATA/150 7200 (1st)
	<b>Graphics</b>	Not included in base configuration – Please Choose a graphics card option below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI) NVIDIA Quadro NVS 280 PCI Express (64 MB, VGA & DVI) NVIDIA Quadro NVS 285 PCI Express (128 MB, VGA & DVI) NVIDIA Quadro NVS 400 PCI (64 MB, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3450 PCI Express (256 MB) <b>NOTE:</b> Please see Part Numbers in After market options/Standalone accessories section.
	<b>Mouse</b>	PS/2 scroll mouse
	<b>Other</b>	Includes Floppy Drive and Standard PS/2 Keyboard

## Standard Features - PreConfigured Regional Models

xw6200X/XE3.60/D250/ H1.0/Xv/p English: PZ006UA#ABA French: PZ006UA#ABC	Processor	64-bit Intel Xeon processor 3.60 GHz 2 MB/800
	OS	Windows XP Professional 32-bit
	Cache Memory	2 MB L2
	Memory	1 GB (2x512) DDR2-400 ECC Registered
	Optical Drive	48X DVD-ROM/CDRW Combo
	Hard Drive	250GB SATA/300 7200 rpm (1st)** *** <b>NOTE:</b> Disk drive will run at SATA/150 unless an additional SATA/300 controller card is added to the system.
	Graphics	Not included in base configuration – Please Choose a graphics card option below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI) NVIDIA Quadro NVS 280 PCI Express (64 MB, VGA & DVI) NVIDIA Quadro NVS 285 PCI Express (128 MB, VGA & DVI) NVIDIA Quadro NVS 400 PCI (64 MB, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3450 PCI Express (256 MB) <b>NOTE:</b> Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	USB Optical scroll mouse
	Other	Includes Standard PS/2 Keyboard

## After-Market Options

Processors	2nd 64-bit Intel Xeon® processor with Hyper-Threading	Part Number
	64-bit Intel Xeon processor at 2.80 GHz with 800 MHz FSB & 1 MB of L2 cache	DY665A
	64-bit Intel Xeon processor at 2.80 GHz with 800 MHz FSB & 2 MB of L2 cache	EC421AA
	64-bit Intel Xeon processor at 3.00 GHz with 800 MHz FSB & 1 MB of L2 cache	DY666A
	64-bit Intel Xeon processor at 3.00 GHz with 800 MHz FSB & 2 MB of L2 cache	PQ903A
	64-bit Intel Xeon processor at 3.20 GHz with 800 MHz FSB & 1 MB of L2 cache	DY667A
	64-bit Intel Xeon processor at 3.20 GHz with 800 MHz FSB & 2 MB of L2 cache	PQ904A
	64-bit Intel Xeon processor at 3.40 GHz with 800 MHz FSB & 1 MB of L2 cache	DY668A
	64-bit Intel Xeon processor at 3.40 GHz with 800 MHz FSB & 2 MB of L2 cache	PQ905A
	64-bit Intel Xeon processor at 3.60 GHz with 800 MHz FSB & 1 MB of L2 cache	DY669A
	64-bit Intel Xeon processor at 3.60 GHz with 800 MHz FSB & 2 MB of L2 cache	PQ906A
	64-bit Intel Xeon processor at 3.80 GHz with 800 MHz FSB & 2 MB of L2 cache	PH202A

Graphics	Multi display solutions	PCI	PCI-Express	Windows XP	Red Hat Linux	Part Number
	NVIDIA Quadro NVS 280 (64 MB, VGA & DVI)	X		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	AA932A
	NVIDIA Quadro NVS 400 (64 MB, quad head, VGA & DVI)	X		32-Bit, 64-Bit		AA605A
	NVIDIA Quadro NVS 285 PCI Express (128 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	EE061AA
	NVIDIA DVI Dual-head Connector Cablefor NVS cards	X	X	32-Bit, 64-Bit		DL139A
	NVIDIA Quadro FX 330 (64 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	PB332A
	ATI FireGL V3100 (128 MB)		X	32-Bit, 64-Bit		PE949A
	NVIDIA Quadro FX 540 (128 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	PH791A
	NVIDIA Quadro FX 1400 (128 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	PM979A
	ATI FireGL V5100 (128 MB)		X	32-Bit, 64-Bit		PB330A
	NVIDIA Quadro NVS 440 PCI Express (256 MB)		X	32-Bit, 64-Bit		PT453A
	NVIDIA Quadro FX 3450 PCI Express (256 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	PY640AA

## After-Market Options

Hard Drives	Serial ATA 3.0Gb/s Hard Drives (Currently supported only at 1.5Gb/s. To get 3Gb/s performance, a SATA 3.0Gb/s controller must be added)	Windows XP	Red Hat Linux	Part Number
	80 GB SATA 3.0Gb/s Hard Drive (7200 rpm)	32-Bit, 64-Bit	WS3, WS4	PY276AA
	160 GB SATA 3.0Gb/s NCQ Hard Drive (7200 rpm)	32-Bit, 64-Bit	WS3, WS4	PV944A
	250 GB SATA 3.0Gb/s Hard Drive (7200 rpm)	32-Bit, 64-Bit	WS3, WS4	PY278AA
	500 GB SATA 3.0Gb/s NCQ Hard Drive (7200 rpm)	32-Bit, 64-Bit	WS3, WS4	PV943A
	<b>Serial ATA 1.5Gb/s Hard Drives</b>			
	74 GB SATA 1.5GB/S Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3, WS4	DX760A
	<b>SCSI Hard Drives</b>			
	73 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	AA613A
	146 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	AA614A
	300 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY672A
	36 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	AA616A
	73 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	AA617A
	146 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY671A
	Bracket HDD 3.5to5.25 xw6200			DY659A
	Cable, 3 port SCSI xw4200/6200			DY661A

Controllers	SCSI Controllers	PCI	PCI-X	Windows XP	Red Hat Linux	Part Number
	Adaptec Serial ATA 3Gb/s RAID 1420SA card		X	32-Bit, 64-Bit	WS3	ED090AA
	U320 SCSI Controller - LSI 20320AR RAID 0,1& external connector	X		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DZ554A
	Ultra320 SCSI RAID Adaptec 2120S (Windows only, includes external connector)	X		32-Bit, 64-Bit		AA850A

## After-Market Options

### Input Devices

	Windows XP	Red Hat Linux	Part Number
<b>Keyboards</b>			
HP PS/2 Standard Keyboard (Carbonite/Silver)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DT527A
HP USB Standard Keyboard (Carbonite/Silver)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DT528A
HP USB Smart Card Keyboard	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	ED707AA
Smartcard Adapter for Modular Keyboard	32-Bit, 64-Bit		DT531A
<b>Pointing Devices</b>			
HP PS/2 2-Button Scroll Mouse (Carbonite)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DD440B
HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DC172B
HP USB Optical 3-Button Mouse	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY651A
HP USB Optical 3-button 2.9M OEM Mouse		7.2, 7.3, WS3, WS4	ET424AA
USB Spaceball 5000	32-Bit, 64-Bit		DV675A
USB SpaceMouse	32-Bit, 64-Bit		DZ203A
HP SpacePilot 3D USB Intelligent Controller	32-Bit, 64-Bit		EF390AA

### Networking

NICs	PCI	PCI-Express	Windows XP	Red Hat Linux	Part Number
Intel Pro 1000 PT Gigabit PCI Express NIC		X	32-Bit	WS3	EH352AA
Intel Pro 1000 MT PCI Gigabit NIC	X		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DC193A
Broadcom NetXtreme Gigabit Ethernet PCI Adapter (BCM5782)	X		32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DC194A
Broadcom NetXtreme Gigabit Ethernet PCIe Adapter		X	32-Bit, 64-Bit	WS3, WS4	EA833AA

### Memory (DIMMs)

400 MHz DDR-2 PC2-3200 ECC Registered DIMMs	Windows XP	Red Hat Linux	Part Number
256 MB DDR-2 PC2-3200 (400 MHz) ECC Registered	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY656A
512 MB DDR-2 PC2-3200 (400 MHz) ECC Registered	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY658A
1 GB DDR-2 PC2-3200 (400 MHz) ECC Registered	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY655A
2 GB DDR-2 PC2-3200 (400 MHz) ECC Registered	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DY657A

## After-Market Options

### Monitors (Supported by all TFTs

Operating Systems offered by HP)	HP TFT L2335 (23-inch)	P9615W#
	HP TFT LP2065 (20.1-inch) TCO03 Two Tone (Carbonate/Silver)	EF227A5#
	HP TFT L2035 (20.1-inch)	P9614W#
	HP TFT L1955 2T Top (19.1-inch)	PH466AT
	HP TFT L1755 (17-inch)	PL777AA

### Multimedia

	PCI	PCI-Express	Part Number
Adaptec Fireconnect 2100 Firewire (1394) PCI Card (Windows only)	X		PA997A

**NOTE:** Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix ([http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)) for details, and to the Linux User Manual ([http://www.hp.com/support/linux\\_user\\_manual](http://www.hp.com/support/linux_user_manual)) for tips on user-enablement of the IEEE 1394 Card.

### Audio

	Part Number
SoundBlaster X-Fi XtremeMusic Audio Card	EA326AA
Sound Blaster Audigy 2 ZS PCI Audio Card	DV440A
HP Satellite Speakers	ZD929AA

### Optical Drives

	Windows XP	Red Hat Linux	Part Number
<b>DVD-ROM Drive</b> 16X DVD-ROM w/ +R read	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	AA620B
<b>CD-ROM Drive</b> 48X Max CD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DC143B
<b>CD-RW Drive</b> 48X CD-RW Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DE205B
<b>Combo Drive</b> 48X Combo DVD-ROM/CD-RW Drive	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DE206B
<b>DVD+/-RW Drive</b> 16X DVD+/-RW, Dual-Layer LightScribe (LightScribe labeling functionality not supported on Linux)	32-Bit, 64-Bit	7.2, 7.3, WS3, WS4	DZ555B



## After-Market Options

Removable Storage	Windows XP	Red Hat Linux	Part Number
HP 256-MB Drive Key II Flash Drive	32-Bit, 64-Bit	WS3, WS4	PH657A
512 MB USB 2.0 Drive Key II	32-Bit, 64-Bit	WS3, WS4	ED516AA
1.44 MB Internal Floppy Drive	32-Bit, 64-Bit	WS3	DY670A
HP StorageWorks DAT 24 USB external tape drive	32-Bit, 64-Bit	WS3, WS4	DW070A
HP StorageWorks DAT 24 USB internal tape drive	32-Bit, 64-Bit	WS3, WS4	DW069A
HP StorageWorks DAT 40 USB external tape drive	32-Bit, 64-Bit	WS3, WS4	DW023A
HP StorageWorks DAT 40 USB internal tape drive	32-Bit, 64-Bit	WS3, WS4	DW022A
HP StorageWorks DAT 72 USB external tape drive	32-Bit, 64-Bit	WS3, WS4	DW027A
HP StorageWorks DAT 72 USB internal tape drive	32-Bit, 64-Bit	WS3, WS4	DW026A
HP StorageWorks DAT 72 SCSI external tape drive	32-Bit, 64-Bit	WS3, WS4, 7.2, 7.3	Q1523B
HP StorageWorks DAT 72 SCSI internal tape drive	32-Bit, 64-Bit	WS3, WS4, 7.2, 7.3	Q1522B

The following Removable Drive Enclosure products are available from and supported by 3rd party:  
 StorCase Rhino Jr. SATA 1.5Gb/s Removable Disk Enclosure  
 (For NA, use: HP P/N A466720, for WW, use: vendor P/N S21J111)

Security		Part Number
	Chassis clamp lock, universal, no cable	DE817A
	Chassis clamp lock, universal, with cable	DE818A

Brackets/Standards		Part Number
	HP xw6200 sliding rack kit	DY663A
	<ul style="list-style-type: none"> <li>Exclusively designed for the xw6200</li> <li>Standard-width, ball bearing sliding rails</li> <li>Includes hardware to work with IT racks only (not broadcast)</li> </ul>	
	Depth Adjustable Rails (stationary)	332558-B21
	Sliding Shelf kit	234672-B21
	Fixed shelf kit	253449-B21

Other Devices		Part Number
	Front Card Guide and Fan Kit	DY648A

Operating Systems		Part Number
	Red Hat Enterprise Linux Workstation 3 Update 5 (32-bit version)	EA698AA
	Red Hat Enterprise Linux Workstation 3 Update 5 (64-bit version)	EA699AA
	Red Hat Enterprise Linux Workstation 4 Update 1 (32/64-bit version)	EA700AA

## After-Market Options

Software	Windows XP	Red Hat Linux	Part Number
HP Remote Graphics V3LTU for HP WS	32-Bit	7.2, 7.3, WS3, WS4	PY682AA
HP Remote Graphics V3 Receiver LTU	32-Bit	7.2, 7.3, WS3, WS4	PY684AA
HP Remote Graphics V3 software media	32-Bit	7.2, 7.3, WS3, WS4	PY685AA
HP Remote SW for HP 1 year Update Subscription	32-Bit	7.2, 7.3, WS3, WS4	PN681A
HP Remote SW Receiver 1 year Update Subscription	32-Bit	7.2, 7.3, WS3, WS4	PN680A
<b>HP Care Pack Services</b>			
Next Business Day Onsite, HW Support, CPU Only- 4 yrs			U7942E
Next Business Day Onsite, HW Support, CPU Only - 5 yrs			U7944E
Next Day Onsite Response- 4 yrs			U7941E
Next Day Onsite Response - 5 yrs			U7943E
4-Hour, 9x5 Onsite, HW Support, CPU only - 3 yrs			U4873E
4-Hour, 9x5 Onsite, HW Support, CPU only, 4 yrs			U7946E
4-Hour, 9x5 Onsite, HW Support, CPU only, 5 yrs			U7948E
Basic 8-5, 4-Hour Onsite Response - 3 yrs			U4874E
Basic 8-5, 4-Hour Onsite Response - 4 yrs			U7945E
Basic 8-5, 4-Hour Onsite Response - 5 yrs			U7947E
4-Hour Onsite Response, 24x7, CPU Only - 4 yrs			U7950E
4-Hour Onsite Response, 24x7, CPU Only - 5 yrs			U7952E
4-Hour Onsite Response, 24x7 - 4 yrs			U7949E
4-Hour Onsite Response, 24x7 - 5 yrs			U7951E
Software Technical Support, Unlimited, 9x5 - 1 yr			U4381E
4-Hour Onsite, Extended Hours Response, CPU Only - 5 yrs			U7940E
Software Technical Support, Unlimited, 24x7 - 1 yr			U4382E
4-Hour Onsite, Extended Hours Response - 5 yrs			U7939E
Software Technical Support, 10 incidents, 9x5 - 1yr			UA382E
Software Technical Support, 10 incidents, 24x7- 1yr			UA383E
Software Technical Support, 25 incidents, 9x5- 1yr			UA396E
Software Technical Support, 25 incidents, 24x7			UA385E
Software Technical Support, 50 incidents, 9x5- 1yr			UA398E
Software Technical Support, 50 incidents, 24x7- 1yr			UA387E
Post Warranty Service, Next Day Onsite, CPU Only			U4867PE
Post Warranty Service, 4-Hour, 9x5 Onsite, HW Support, CPU only			U4877PE
Post Warranty Service, Next Day Onsite			U4868PE
Post Warranty Service, 4-Hour, 9x5 Onsite, HW Support			U4878PE
Installation for 2+ IA 32 Workstation; Basic - 1yr			U4879E
Installation for 1 IA 32 Workstation; Basic - 1yr			U4876E

## Memory

### E7525 chipset

#### DDR-2 SDRAM ECC REGISTERED MEMORY

If only using one DIMM, install it in socket 1. For more than one DIMM, install memory in pairs (a pair would be considered to be the DIMMs in sockets 1 & 2, 3 & 4) and do not mix speeds. It is always best to load the memory in pairs rather than a single DIMM (two 512 MB DIMMs will have better performance than a single 1 GB DIMM). Each pair of DIMMs must be the same size and same DRAM technology. The Intel E7525 chipset supports ECC Registered 400 MHz (PC2-3200) DDR-2 memory only.

#### MAXIMUM MEMORY


Supports up to 8 GB of DDR SDRAM

#### POSSIBLE MEMORY CONFIGURATIONS

*Not all memory configurations possible are represented below.*

DIMM Size	Slot			
	1	2	3	4
256 MB	256 MB			
512 MB	512 MB			
512 MB	256 MB	256 MB		
1 GB	1 GB			
1 GB	256 MB	256 MB	256 MB	256 MB
2 GB	1 GB	1 GB		
2 GB	512 MB	512 MB	512 MB	512 MB
4 GB	1 GB	1 GB	1 GB	1 GB
8 GB	2 GB	2 GB	2 GB	2 GB

## Storage

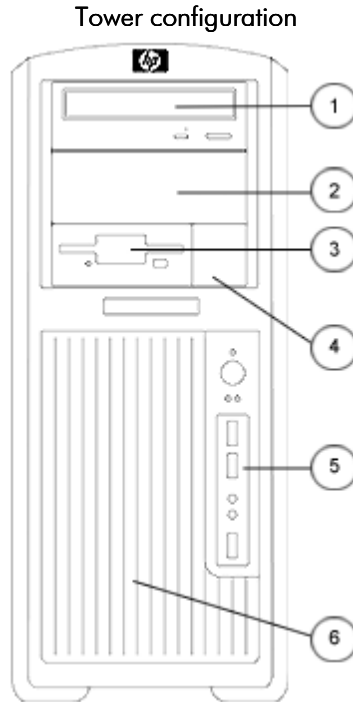

### Convertible Minitower

Optional Diskette Drive  
 5.25" Storage Drive Bays  
 (position 1 drive bay is limited to 198 mm depth when optional smart cover solenoid lock is installed; position 2 drive bay can be converted to an internal 3.5" 3rd hard drive bay with optional bracket)  
 3.5" Storage Drive Bays with acoustic dampening rail assemblies

	Quantity Supported	Position Supported	Controller
Optional Diskette Drive	1	3	Diskette
5.25" Storage Drive Bays (position 1 drive bay is limited to 198 mm depth when optional smart cover solenoid lock is installed; position 2 drive bay can be converted to an internal 3.5" 3rd hard drive bay with optional bracket)	2	1, 2	IDE
3.5" Storage Drive Bays with acoustic dampening rail assemblies	2 (3)	4, 5 (and 2, for 3rd drive using optical bay)	SATA or optional SCSI Factory Integrated RAID*

\* **NOTE:** Factory Integrated RAID 0 Configuration (Striped Array) and RAID 1 Configuration (Mirrored Array) requires 2 hard drives with identical speeds, capacity and interface.

## Additional Technical Specifications

<b>System Board</b>	
Architecture	Xeon 64-bit/PCI-E
Chipset	Intel E7525/ICH5R Chipset
Super I/O Controller	SMSC LPC47B397
System Board Form Factor	ATX (slightly larger than standard ATX)
Processor Socket	Dual 604 Pin ZIF
DIMM Connectors (DDR2, 1.8V)	4
AGP Connector (1.5V)	None
Integrated Graphics	None
PCI Connectors (5.0V)	4 full length 33 MHz 32-bit
PCI Express Connectors	1 x16 1 x8 (with x4 electricals)
PCI card guide	Optional, tool-free support for all full-length cards with PCI extender
Flash ROM	Yes
AC97 integrated audio	Yes
CD ROM IN (Audio)	Yes
AUX IN (Audio)	Yes
Clear CMOS Button	Yes
CPU Fan Header	Yes
Chassis Fan Header	Yes
Chassis Speaker Header	Yes
CMOS Battery Holder – Lithium	Yes
Hood Lock Header	Yes
Hood Sensor Header	Yes
Multibay Header	Yes
Hard drive acoustic dampening rails	Standard in 2 internal 3.5" bays, tool-free
Integrated SATA RAID	<ul style="list-style-type: none"> <li>• RAID 0 and RAID 1</li> <li>• Supports one RAID array on 2 ports</li> <li>• Creation of 2 drive HDD array</li> <li>• RAID 0 Configuration - Striped Array</li> <li>• RAID 1 Configuration - Mirrored Array</li> </ul>
Integrated Broadcom	Yes
NetXtreme Gigabit Ethernet for HP	Yes
Wake-On-Lan®	Yes
ASF 1.0 (Alert Standard Format)	Yes
Power Supply Header	Yes
Power Switch, Power LED & Hard Drive LED Header	Yes
Password Clear Header	Yes
Riser Connector	None

## Additional Technical Specifications

HDD activity LED Header	Yes, 2 & 4 pin
PCI extender that connects to System Board	None

## Technical Specifications

<b>Cooling</b>	
Cooling Solutions Supported	Yes
Power Supply Fan (Variable Speed)	92 x 25 mm
Processor Fan-Heatsink (Variable Speed)	70 x 15 mm
Chassis Fan (front)	One 92 x 25 mm (optional)
Chassis Fan (rear)	Two 92 x 25 mm (standard)
Internal Speaker	Standard

<b>Power Supply</b>	
Full Ranging Input	Yes
Active Power Factor Correction (APFC) (Input Current is nearly 1/2 a non-APFC PS)	Yes
Passive Power Factor Correction (PFC)	No
Operating Voltage Range	90 - 264 VAC/118 VAC
Rated Voltage Range	100 - 240 VAC
Rated Line Frequency	50-60 Hz/400Hz
Operating Line Frequency Range	47 - 66 Hz/393 - 407Hz
Rated Input Current	9A/9A
Maximum Rated Power	500 W
Heat Dissipation	Typical 1228.9 btu/hr Maximum 1706 btu/hr
PS Size (wide x high x deep)	150 mm x 98 mm x 168 mm
Energy Star Compliant	Yes
FEMP Standby Power Compliant (<2W in S5 - Power Off)	No
Surge Tolerant Full Ranging Power Supply	Withstands power surges up to 2000V
Typical configuration power consumption	2 processors (2x3.6GHz Xeon), 1 GB memory (2x 512 MB) Two hard drives (2xSATA 40 GB), DVD-ROM drive PCI-Express Graphics Card (FX 1300) Floppy, Monitor
	<b>Input Power consumption @ 120Vac/60Hz</b>
Typical operating mode (system busy)	360 W = 1228.9 btu/hr
Windows XP Idle	201 W = 685.9 btu/hr
Hibernate mode (S4)	6.4 W = 21.84 btu/hr
Power Off (S5)	6.4 W = 21.84 btu/hr

<b>ROM Features</b>	<b>Description</b>
Instantly Available PC	Allows for very low power consumption with quick resume time

## Technical Specifications

ROM Based F10 Setup and diagnostics	Review and customize BIOS settings
Remote System Installation via F12 (PXE) (Remote Boot from Server)	Allows a new or existing system to boot over the network and download software, including the operating system
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS
ROM revision levels	<ul style="list-style-type: none"> <li>Identifies system ROM revision levels and reports in ROM-based F10 setup. Version is stored in an industry standard memory location (SMBIOS) so that management SW applications can use and report this information</li> </ul>
System board revision level	<ul style="list-style-type: none"> <li>Allows management SW to read the revision level of the system board. Revision level is digitally encoded into the hardware and cannot be modified</li> </ul>
Auto Setup when New Hardware Installed	System automatically detects addition of new hardware
Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control	Enable or disables serial, parallel, USB, audio, and network ports
Removable Media Write/Boot Control	Prevents ability to boot from removable media on supported devices (and can disable writes to media)
Power-On Password	Prevents an unauthorized person from booting up the computer
Setup Password	Prevents an unauthorized person from changing the system configuration
Replicated Setup	Saves BIOS settings to diskette or USB disk-on-key in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering ROM-based F10 setup
Memory Change Alert (Requires HP Client Manager Software)	Alerts management console if memory is removed or changed
Thermal Alert (Requires HP Client Manager Software)	<p>Monitors the temperature state within the chassis. Three modes:</p> <ul style="list-style-type: none"> <li>NORMAL – normal temperature ranges</li> <li>ALERTED – excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown</li> <li>SHUTDOWN – excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs</li> </ul>
Master Boot Record Security	Detects changes to MBR and optional restoration, useful in protecting from viruses
Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console
Remote Wakeup/shutdown	<ul style="list-style-type: none"> <li>System administrators can power on, restart, and power off a client computer from a remote location.</li> <li>Enables cost-effective power consumption when the administrator needs to distribute software, perform security management, or update the ROM</li> </ul>
ACPI (Advanced Configuration and Power Management Interface)	<ul style="list-style-type: none"> <li>Allows the system to wake from a low power mode</li> <li>Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system. Supports ACPI 2.0 for full compatibility with 64-bit operating systems</li> </ul>
Keyboard-less Operation	The system can be operated without a keyboard
SMBIOS	System Management BIOS 2.3.5, previously known as DMI BIOS, for system management information
Localized ROM Setup	Common BIOS image supports configuration (Setup) in 11 languages, with local keyboard mappings
Asset tag	Allows user or MIS to set unique tag string in ROM
Ownership tag	Allows user or MIS to set unique tag string in ROM
Memory Scrubbing	Allows memory controller to transparently correct transient ECC errors in the background



## Technical Specifications

Memory Remapping	Allows system memory lost to PCI devices to be reclaimed above 4 GB, for use with operating systems that support more than 4 GB (Windows XP 64-bit edition, Linux)
Per-slot control	Allows individual slot configuration (option ROM., latency)
Adaptive cooling	Fan control parameters are set according to detected hardware configuration for optimal acoustics
Pre-boot diagnostics	Early (pre-video) critical errors are reported via beeps and blinks on the power LED

<b>Other deployment &amp; management features</b>	
HP Client Management Solutions	<p>HP Client Management Solutions help simplify management of Workstations and significantly reduce total ownership costs. These solutions share a common design and are highly integrated due to the extensive work between HP and its partner Altiris.</p> <p>HP Client Manager Software is included free with all HP business PCs and Workstations. It enables central tracking, monitoring, and management of the hardware aspects of HP client systems:</p> <ul style="list-style-type: none"> <li>• Get valuable hardware information such as CPU, memory, video, and security settings</li> <li>• Monitor system health to fix problems before they occur</li> <li>• Install drivers and BIOS updates without visiting each PC</li> <li>• Remotely configure BIOS and security settings</li> <li>• Automate processes to quickly resolve hardware problems</li> </ul> <p>Additional Altiris solutions (fee-based) are available to address Workstation management challenges through the entire IT lifecycle including:</p> <ul style="list-style-type: none"> <li>• Inventory assessment</li> <li>• Software license compliance</li> <li>• Personality migration</li> <li>• Software image deployment</li> <li>• Software distribution</li> <li>• Asset management</li> <li>• Client backup and recovery</li> <li>• Problem resolution</li> </ul> <p>Visit <a href="http://www.hp.com/go/easydeploy">http://www.hp.com/go/easydeploy</a> for more information, to download HP Client Manager Software, and to evaluate the Altiris solutions.</p>
System Software Manager (free)	A free utility that detects and updates BIOS, device drivers, and management agent versions on your networked PCs and workstations
Altiris Local Recovery	Provides data and system file protection for HP business PCs to enable fast recovery of information that is accidentally deleted or if the system becomes corrupted. Designed for disconnected or seldom-connected users, Local Recovery protects your HP computer's data and system state by taking scheduled snapshots, which are then stored in a protected area on the local hard disk. System backup and disaster recovery is now simple and fast for all users, regardless of connectivity
Replicated Setup	Saves BIOS settings to diskette or USB disk-on-key in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering ROM-based F10 setup
Software Restore CD	Restores computer to its original factory shipping image
Asset Tag	<ul style="list-style-type: none"> <li>• Repository for storing company-specific property asset numbers for easy tracking</li> <li>• Initially set equal to the system serial number</li> <li>• Stored in a protected section of non-volatile memory that can be accessed and modified with the F10 Setup program</li> </ul>
DIMM Serial Presence Detect	Detects whether or not memory DIMMs are present and their type
Hard drive serial number, model, and manufacturer	Hard drive manufacturer, model, and serial number is stored in the hard drive firmware and reported in ROM-based F10 setup

## Technical Specifications

System serial number, model, & manufacturer	System serial number, model, & manufacturer stored in a non-volatile memory and can be retrieved with management SW or viewed in ROM-based F10 setup
ROM revision levels	Identifies system ROM revision levels and reports in ROM-based F10 setup Version is stored in an industry standard memory location (SMBIOS) so that management SW applications can use and report this information
Memory Change Alert (Requires HP Client Manager Software)	Alerts management console if memory is removed or changed
Ownership Tag	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen
Hard drive interface Integrity Monitoring (CRC Checking)	A feature of SATA and SCSI, Cyclic Redundancy Checking provides data transfer verification and proactive notification of hard drive data transmission problems with recommendations for enhancing system performance. It detects all the following errors' types: <ul style="list-style-type: none"> <li>• single bit errors</li> <li>• double bit errors</li> <li>• an odd number of errors</li> <li>• error bursts up to 32-bits long</li> </ul>
Drive Self Tests (DPS)	<ul style="list-style-type: none"> <li>• Drive Protection System (Adaptec and LSI SCSI controllers do not offer DPS)</li> <li>• A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user.</li> <li>• Running independently of the operating system, it can be accessed through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced.</li> </ul> <p>The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures DPS Access through F10 Setup during Boot (F10 diagnostic access not available with SCSI drives)</p>
SMART Technology (Self-Monitoring, Analysis and Reporting Technology)	Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure SMART I – Drive Failure Prediction SMART II – Off-Line Data Collection SMART III – Off-Line Read Scanning with Defect Reallocation

<b>Security Features</b>	
Access panel key lock (standard)	Prevents removal of the access panel and all internal components including optical and floppy drives
Smart Cover solenoid lock (optional)	Prevents removal of the access panel and all internal components including optical and floppy drives. Eliminates the need for a physical key by enabling password-protected locking & unlocking by a local or remote user.
Padlock (optional)	Prevents entire system theft and discourages access panel removal. 7mm diameter padlock loop at rear of system.
Kensington Cable Lock (optional)	Prevents entire system theft only. 3mm x 7mm slot at rear of system.
Universal chassis clamp lock (optional)	The version without a cable discourages access panel removal and prevents theft of IO devices. The version with a cable additionally prevents entire system theft and allows multiple systems to be secured with a single cable.
Intrusion Sensor (optional)	Notifies a local or remote user when the chassis access panel has been opened.

## Technical Specifications

Serviceability Features of System	
Access panel	Tool-less, one-handed
Optical drives	Tool-less
Floppy drive	Tool-less
Hard drives	Tool-less
Expansion cards	Tool-less
Chassis fan removal	Tool-less
Green user touch points	Yes, on tool-free internal chassis mechanisms
Colour-coordinated cables and connectors	Yes
Memory	Tool-less, can be upgraded without removing any internal components
CPUs	Tool-less, can be upgraded without removing any internal components
Power supply diagnostic LED	Yes, dual function: AC OK & power OK
Power Button	Yes, ACPI multi-function
Power LED	Yes, dual colour LED indicates normal operation and faults.
Hard drive activity LED	Yes
Internal speaker	Yes, used for pre-boot diagnostic beep codes
Dual Colour Power and HD LED on Front of Computer (Indicates Normal Operations and Fault Conditions)	green – normal red – fault
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS.
Configuration Record SW	Yes
Over-Temp Warning on Screen (Requires IM Agents)	Yes
OS CD (Restore OS CD)	Restores computer to its original factory shipping image
Restore CD	Restores the computer to its original factory shipping image
Flash ROM	Yes
3.3V Aux Power LED on System PCA	Yes
Dual Function 5V Aux Power LED (ON)/PS_ON LED (OFF) on System PCA	Yes
Diagnostic Power Switch LED on board	Yes
Clear Password Jumper	Yes
Clear CMOS Button	Yes
CMOS Battery Holder for easy Replacement	Yes
Processor ZIF Socket for easy Upgrade	Yes
DIMM Connectors for easy Upgrade	Yes

## Technical Specifications

NIC LEDs (integrated) (Green & Amber)	Used to determine NIC status
ASF 1.0 support (Alert Standard Format)	Industry-standard specification for network alerting in operating system-absent environments
Dual function front power switch	Also acts as a reset switch when held for 4 seconds

<b>Service and Support</b>	On-site Warranty and Service ( <a href="#">Note 1</a> ): This three-year, limited warranty and service offering delivers three years of on-site, next business-day ( <a href="#">Note 2</a> ) service for parts and labour and includes free telephone support ( <a href="#">Note 3</a> ) 24 x 7. Global coverage ( <a href="#">Note 2</a> ) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering.
	<a href="#">NOTE 1</a> : Terms and conditions may vary by country. Certain restrictions and exclusions apply.
	<a href="#">NOTE 2</a> : On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.
	<a href="#">NOTE 3</a> : Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

## Technical Specifications - Audio

AC97 Integrated ADI 1981B Audio	Type	Integrated
	AC '97 Stereo Codec	Yes
	FM Synthesis Support	Yes – Yamaha XG Lite
	OPL3 FM Synthesis Support	Yes
	Sound Blaster Compatibility	Yes
	Audio Jacks	Microphone-In (20-K ohm Input Impedance); rear stereo and front analog microphone ports Line-In (12-K ohm Input Impedance) Line-Out * (less than 800 ohms Output Impedance, expects at least a 10-K ohm load) Headphone-Out (2.5 Ohms Output Impedance, expects at least a 32 ohm load)
	<b>NOTE:</b> *Internal Speaker Amplifier is for Internal Speaker only. External Speakers need to be powered externally.	
	Sampling	7 kHz – 48 kHz
	Wavetable Syntheses (software)	Yes – GM and FM Midi Support, Direct Music and Down Loadable Soundset (4 Meg DLS Level 1 and 2 Support)
	3D Positional Sound	No
	Digital Audio	Yes
	Analog Audio	Yes
	Number of Channels on Line-Out (mono/stereo)	Stereo (Left & Right channels)
	Internal Audio Speaker Power Rating	3W
Internal Speaker	Yes	
Hardware Equalizer for Internal Speaker	Fixed 7 Band ParametricEQ	
External Speaker Jack (Line-Out)	Yes	
Sound Blaster X-Fi XtremeMusic Audio Card	Audio Quality	Total Harmonic Distortion + Noise at 1kHz (20kHz Low-pass filter) = 0.004%
	Signal to Noise Ratio (SNR)	Signal-to-Noise Ratio (20kHz Low-pass filter, A-Weighted) <ul style="list-style-type: none"> <li>• Stereo Output: 109dB</li> <li>• Front and Rear Channels: 109dB</li> <li>• Centre, Subwoofer and Side Channels: 109dB</li> </ul>
	Sound Conversion	24-bit Analog-to-Digital conversion of analog inputs at 96kHz sample rate 24-bit Digital-to-Analog conversion of digital sources at 96kHz to analog 7.1 speaker output 24-bit Digital-to-Analog conversion of stereo digital sources at 192kHz to stereo output
	Recording/Sampling Rate	44.1, 48 and 96kHz

## Technical Specifications - Audio

<b>ASIO 2.0 support</b>	16-bit/44.1kHz, 16-bit/48kHz, 24-bit/44.1kHz 24-bit/48kHz and 24-bit/96kHz with direct monitoring	
<b>Enhanced SoundFont support</b>	up to 24-bit resolution 24-bit/96kHz	
<b>DACs</b>	24-bit/192kHz	
<b>Voice Support</b>	128 voices	
<b>Max. Channels in 3D Positional Audio</b>	7.1	
<b>EAX® ADVANCED HD™ 5.0 support</b>	Yes including EAX® MacroFX™, EAX® PurePath™ and Environment FlexiFX™	
<b>Connectors</b>	FlexiJack (Performing a 3-in-1 function, Digital In / Line In / Microphone) via 3.50 mm minijack Line level out (Front / Rear / Centre / Subwoofer / Rear Centre) via 3.50 mm minijacks AUX_IN line-level analog input via 4-pin Molex connector on card One AD_Link (26 pin) connector for linking to the X-Fi I/O Console (upgrade option)	
<b>Dimensions</b>	7.25" x5" x .9" ( x x )	
<b>Additional product features</b>	<b>Movies</b>	THX Certification Dolby Digital EX 6.1 Playback DTS-ES 6.1 Playback
	<b>Music</b>	X-Fi 24-bit Crystalizer CMSS-3D SuperRip
	<b>Audio Creation</b>	Pristine audio playback quality with a near transparent SRC engine Up to eight 24 bit hardware effects ASIO recording with latency as low as one millisecond 24-bit SoundFont® sampling 3D MIDI
	<b>Gaming</b>	EAX ADVANCED HD 5.0
	<b>Software Bundle</b>	Doom 3 Sound Blaster EAX patch Entertainment Mode Audio Creation Mode Game Mode Mode Switcher Audio Console Creative MediaSource Creative MediaSource DVD-Audio Player DTS Neo:6 Settings Karaoke Player Entertainment Centre Smart Recorder SoundFont Bank Manager Speaker Connection Wizard THX Setup Console Vienna SoundFont Studio Volume Panel WaveStudio

## Technical Specifications - Audio

Minimum system requirements	System RAM	Console Launcher Creative Media Toolbox Creative Diagnostics
	Hard disk	256MB 600MB free space Available PCI 2.1 slot for the audio card CD-ROM/CD-RW or CD/DVD-ROM required for software installation
	Operating System	Microsoft® Windows® XP Service Pack 2 (SP2)

---

## Technical Specifications - Communications

<b>Broadcom BCM5751 NetXtreme Gigabit Ethernet Controller (PCI-E)</b>	<b>Connector</b>	RJ-45	
	<b>Controller</b>	Broadcom 5751 PCI-E 1.0a LAN Controller	
	<b>Memory</b>	Integrated 96Kb frame buffer memory	
	<b>Data rates supported</b>	10/100/1000 Mbps	
	<b>Compliance</b>	IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control	
	<b>Bus architecture</b>	PCI-E 1.0a	
	<b>Data path width</b>	X1	
	<b>Data path speed</b>	2.5Gbit per sec per direction transfer rate	
	<b>Data transfer mode</b>	Bus-master DMA	
	<b>Hardware certifications</b>	FCC class B, NRTL Mark Canada and United States, C-Tick for Australia, BSMI for Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia	
	<b>Power requirement</b>	3.1 watts @ +3.3V AUX supply	
	<b>Boot ROM support</b>	Yes	
	<b>Network transfer rate</b>	10BASE-T (half-duplex)	10 Mbps
		10BASE-T (full-duplex)	20 Mbps
		100BASE-TX (half-duplex)	100 Mbps
		100BASE-TX (full-duplex)	200 Mbps
		1000BASE-T	1000 Mbps
	<b>Environmental</b>	<b>Operating temperature</b>	32° to 131° F (0° to 55° C)
		<b>Operating humidity</b>	85% at 131° F (55° C)
	<b>Dimensions</b>	4.4 x 2.2 x 0.08 in (11.2 x 5.5 x .2 cm)	
<b>Operating system driver support</b>	Microsoft Windows 2000 and XP, Red Hat Linux 7.2, 7.3 and Red Hat Enterprise Linux 3		
<b>Management capabilities</b>	WOL, PXE , Remote cable management		
<b>Alerting</b>	ASF 2.0		
<b>Kit contents</b>	Broadcom 5751, CD, Broadcom NetXtreme Gigabit Ethernet PCI NIC, drivers, quick install guide, product warranty statement		

<b>Intel Pro/1000 MT Gigabit PCI NIC</b>	<b>Connector</b>	RJ-45
	<b>Controller</b>	Intel 82540EM Gigabit Controller
	<b>Memory</b>	Integrated 96Kb frame buffer memory
	<b>Data rates supported</b>	10/100/1000 Mbps
	<b>Compliance</b>	IEEE 802.1A, 802.1P, 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	<b>Bus architecture</b>	PCI 2.2
	<b>Data path width</b>	32-bit, 33/66 MHz bus interface
	<b>Data transfer mode</b>	Bus-master DMA
	<b>Hardware certifications</b>	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
	<b>Power requirement</b>	1.48 watts @ +3.3V AUX supply with 5V tolerance
	<b>Boot ROM support</b>	Yes



## Technical Specifications - Communications

<b>Network transfer rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T, 1000 Mbps
<b>Environmental</b>	<b>Operating temperature</b> 32° to 131° F (0° to 55° C) <b>Operating humidity</b> 85% at 131° F (55° C)
<b>Dimensions</b>	6.4 x 4.8 x 0.8 in (16.3 x 12.1 x 1.9 cm)
<b>Operating system driver support</b>	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux
<b>Management capabilities</b>	ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Intel PROset II utility
<b>Kit contents</b>	The Intel Pro 1000 MT NIC, CD containing Intel PROset II NIC drivers, quick install guide, product warranty statement

## Technical Specifications - Controllers

<b>U320 SCSI Controller - LSI 20320AR RAID 0,1 including external connector</b> (required with SCSI HDDs)	<b>Bus architecture</b>	PCI-X (backward compatible with PCI)
	<b>Number of supported devices</b>	Up to 15 SCSI devices
	<b>Interface protocol</b>	64 bit, 133MHz PCI-X
	<b>Host bus transfer rate</b>	Up to 1MB/s
	<b>SCSI data transfer rate</b>	Up to 320 MB/s per channel
	<b>SCSI Bus</b>	Wide Ultra320, Low Voltage Differential, and Ultra Wide Single-Ended
	<b>Internal connector</b>	68-pin HD
	<b>External connector</b>	68 pin
	<b>Total connectors</b>	2
	<b>Plug and Play Support</b>	No
	<b>Dimensions (H x L)</b>	6.6 x 2.5 in (16.9 x 6.4 cm)
	<b>Approvals</b>	CE, VCCI, Canada, C-Tick, FCC class B, UL 94VO
	<b>Operating system support</b>	Microsoft Windows XP Professional Windows XP Professional x64 Edition
	<b>Kit contents</b>	Controller card, driver CD, LED cables, user documentation and warranty card.

<b>Adaptec SCSI RAID 2120S Card</b>	<b>Dimensions (H x D)</b>	2.5 x 6.6 in (6.4 x 16.8 cm) Low profile card
	<b>RAID level</b>	0, 1, 10, 5, 50, JBOD
	<b>Data Transfer Rate</b>	Up to 320 MB/s
	<b>Cache Memory</b>	64 MB (onboard)
	<b>Device Support</b>	Up to 15 SCSI devices
	<b>Bus Type</b>	64-bit/66 MHz PCI (Also support 32-bit/33 MHz PCI)
	<b>Internal Connectors</b>	One 68-pin high-density
	<b>External Connectors</b>	One 68-pin VHDCI
	<b>System Requirements</b>	Intel PC or equivalent with available PCI slot
	<b>Operating Temperature</b>	32° to 131° F (0° to 55° C)
	<b>Power Requirements</b>	4 amps @ +5V
	<b>Operating System Support</b>	Windows 2000 Professional, Windows XP Professional, Windows XP Professional x64 Edition
	<b>Other</b>	Optimized disk utilization Online RAID Level Migration Online capacity expansion Immediate RAID availability (background initialization) S.M.A.R.T. support
	<b>Kit Contents</b>	Controller card, driver CD, LED cables, user documentation and warranty card.

## Technical Specifications - Hard Drives

### Serial ATA 3.0-Gb/s Hard 500 GB Drives

<b>Capacity</b>	500,107,862,016 bytes	
<b>Height</b>	1.0 in (2.54 cm)	
<b>Width</b>	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
<b>Interface</b>	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 3 Gb/s	
<b>Buffer</b>	16 MB	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	1.3 ms
	<b>Average</b>	20.0 ms
	<b>Full-Stroke</b>	30 ms
<b>Rotational Speed</b>	7,200 rpm	
<b>Logical Blocks</b>	976,773,168	
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	

### 250 GB

<b>Capacity</b>	250,059,350,016 bytes	
<b>Height</b>	1 in (2.54 cm)	
<b>Width</b>	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
<b>Interface</b>	Serial ATA (3.0 Gb/s)	
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 3 Gb/s	
<b>Buffer</b>	8 Mbytes	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	1.0 ms
	<b>Average</b>	8.5 ms
	<b>Full-Stroke</b>	18 ms
<b>Rotational Speed</b>	7,200 rpm	
<b>Logical Blocks</b>	488,397,168	
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	

## Technical Specifications - Hard Drives

160 GB	<b>Capacity</b>	163,928,604,672 bytes	
	<b>Height</b>	1.0 in (2.54 cm)	
	<b>Width</b>	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
	<b>Interface</b>	Serial ATA (3.0 Gb/s)	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 3 Gb/s	
	<b>Buffer</b>	8 Mbytes	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.9 ms
		<b>Average</b>	9.3 ms
		<b>Full-Stroke</b>	18 ms
	<b>Rotational Speed</b>	7,200 rpm	
	<b>Logical Blocks</b>	320,173,056	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
	80 GB	<b>Capacity</b>	80,026,361,856 bytes
<b>Height</b>		1.0 in (2.54 cm)	
<b>Width</b>		Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
<b>Interface</b>		Serial ATA (3.0 Gb/s)	
<b>Synchronous Transfer Rate (Maximum)</b>		Up to 3 Gb/s	
<b>Buffer</b>		8 MB	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)		<b>Single Track</b>	2 ms
		<b>Average</b>	9.3 ms
		<b>Full-Stroke</b>	21 ms
<b>Rotational Speed</b>		7,200 rpm	
<b>Logical Blocks</b>		156,301,488	
<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)	

## Technical Specifications - Hard Drives

**Serial ATA 1.5-Gb/s Hard 74 GB Drives (10,000 rpm)**

<b>Capacity</b>	74,355,769,344 bytes	
<b>Height</b>	1.0 in (2.54 mm)	
<b>Width</b>	Media diameter: 3.3 in (84mm) Physical size: 4 in (10.2 cm)	
<b>Interface</b>	Serial ATA	
<b>Synchronous Transfer Rate (Maximum)</b>	150 MB/s	
<b>Buffer</b>	8 MB	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.3 ms
	<b>Average</b>	4.5 ms
	<b>Full-Stroke</b>	10.2 ms
<b>Rotational Speed</b>	10,000 rpm	
<b>Logical Blocks</b>	145,226,112	
<b>Operating Temperature</b>	41° to 140° F (5 to 60° C)	

**Ultra320 SCSI Hard 73 GB Drives (10,000 rpm)**

<b>Capacity</b>	73,407,865,856 bytes	
<b>Height</b>	1.0 in (2.54 cm)	
<b>Width</b>	3.5 in (8.9 cm)	
<b>Interface</b>	68 pin LVD SCSI	
<b>Synchronous Transfer Rate (Maximum)</b>	320 MB/s	
<b>Buffer</b>	8 Mbytes	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.3 msec
	<b>Average</b>	<4.5 msec
	<b>Full-Stroke</b>	<11.0 msec
<b>Rotational Speed</b>	10,000 rpm	
<b>Logical Blocks</b>	143,374,738	
<b>Operating Temperature</b>	40° to 130° F (5° to 55° C)	

## Technical Specifications - Hard Drives

146 GB	<b>Capacity</b>	146,815,737,856 bytes		
	<b>Height</b>	1.0 in (2.54 cm)		
	<b>Width</b>	3.5 in (8.9 cm)		
	<b>Interface</b>	68 pin LVD SCSI		
	<b>Synchronous Transfer Rate (Maximum)</b>	320 MB/s		
	<b>Buffer</b>	8 Mbytes		
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.3 msec	
		<b>Average</b>	<4.5 msec	
		<b>Full-Stroke</b>	<11.0 msec	
	<b>Rotational Speed</b>	10,000 rpm		
	<b>Logical Blocks</b>	286,749,488		
	<b>Operating Temperature</b>	40° to 130° F (5° to 55° C)		
	300 GB	<b>Capacity</b>	300,000,000,000 bytes	
<b>Height</b>		1.0 in (2.54 cm)		
<b>Width</b>		3.5 in (8.9 cm)		
<b>Interface</b>		68 pin LVD SCSI		
<b>Synchronous Transfer Rate (Maximum)</b>		320 MB/s		
<b>Buffer</b>		8 Mbytes		
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)		<b>Single Track</b>	0.3 msec	
		<b>Average</b>	<4.5 msec	
		<b>Full-Stroke</b>	<11.0 msec	
<b>Rotational Speed</b>		10,000 rpm		
<b>Logical Blocks</b>		585,937,500		
<b>Operating Temperature</b>		40° to 130° F (5° to 55° C)		

## Technical Specifications - Hard Drives

Ultra320 SCSI Hard Drives (15,000 rpm)	36 GB	Capacity	36,420,075,520 bytes		
		Height	1.0 in (2.54 cm)		
		Width	3.5 in (8.9 cm)		
		Interface	68 pin LVD SCSI		
		Synchronous Transfer Rate (Maximum)	320 MB/s		
		Buffer	8 Mbytes		
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 msec	
			Average	<4.5 msec	
			Full-Stroke	<11.0 msec	
		Rotational Speed	15,000 rpm		
		Logical Blocks	71,132,960		
		Operating Temperature	40° to 130°F (5° to 55°C)		
			73 GB	Capacity	73,407,865,856 bytes
Height	1.0 in (2.54 cm)				
Width	3.5 in (8.9 cm)				
Interface	68 pin LVD SCSI				
Synchronous Transfer Rate (Maximum)	320 MB/s				
Buffer	8 Mbytes				
Seek Time (typical reads, includes controller overhead, including settling)	Single Track			0.3 msec	
	Average			<4.5 msec	
	Full-Stroke			<11.0 msec	
Rotational Speed	15,000 rpm				
Logical Blocks	143,374,738				
Operating Temperature	40° to 130°F (5° to 55° C)				
	146 GB			Capacity	146,815,737,856 bytes
		Height	1.0 in (2.5 cm)		
		Width	3.5 in (8.9 cm)		
		Interface	68 pin LVD SCSI		
		Synchronous Transfer Rate (Maximum)	320 MB/s		
		Buffer	8 Mbytes		
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 msec	
			Average	<4.5 msec	
			Full-Stroke	<11.0 msec	
		Rotational Speed	15,000 rpm		
		Logical Blocks	143,374,738		
		Operating Temperature	40° to 130°F (5° to 55°C)		

## Technical Specifications - Removable Storage

<b>USB Disk on Key</b>	<b>Dimensions (HxWxD)</b>	0.9 x 0.7 x 3.9 in (2.3 x 1.8 x 9.8 cm)
	<b>Weight</b>	0.05 lb (0.02 kg)
	<b>USB Specification</b>	2.0
	<b>Transfer Rate</b>	Read-1023 KB/Sec; Write-850 KB/Sec
	<b>Storage Media</b>	Solid state flash memory, no moving parts
	<b>Power Supply</b>	USB Bus-powered, no external power required
	<b>Capacity</b>	256 MB



## Technical Specifications - Input/Output Devices

PS/2 OR USB '04 Standard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
	Electrical	Weight	2 lb (0.9 kg) minimum
		Operating voltage	+ 5VDC $\pm$ 5%
		Power consumption	50-mA maximum (with three LEDs ON)
		ESD	CE level 4, 15-kV air discharge
		EMI - RFI	Conforms to FCC rules for a Class B computing device
	Mechanical	MicrosoftPC 99 - 2001	Functionally compliant
		Languages	38 available
		Keycaps	Low-profile design
		Switch actuation	55-g nominal peak force with tactile feedback
		Switch life	20 million keystrokes (using Hasco modified tester)
		Switch type	Contamination-resistant switch membrane
		Key-leveling mechanisms	For all double-wide and greater-length keys
		Cable length	6 ft (1.8 m)
	Environmental	Microsoft PC 99 - 2001	Mechanically compliant
		Acoustics	43-dBA maximum sound pressure level
		Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, six surfaces
		Non-operating shock	80 g, six surfaces
		Operating vibration	2-g peak acceleration
		Non-operating vibration	4-g peak acceleration
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
		Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Operating system support	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4	
	Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
	Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	
	Kit contents	Keyboard, keyboard software media, installation guide, warranty card, safety and comfort	

HP USB Smart Card Keyboard (ED707AA)	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Form factor	USB basic Smart Card keyboard
		Colors	Carbonite/Silver
		Dimensions (L x W x H)	18.2 x 6.3 x 1.3 in (46.3 x 16.1 x 3.3 cm)

## Technical Specifications - Input/Output Devices

Electrical	Weight	2 lb (0.9 kg) minimum
	Operating voltage	+ 5VDC $\pm$ 5%
	Power consumption	100-mA maximum (with four LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
Mechanical	Microsoft PC 99 - 2001	Functionally compliant
	Languages	30+ available
	Keycaps	Low-profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
Environmental	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
SMARTCARD function	Support	All ISO 7816 smart cards
	Interface	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)
	Chipset	SCM STCII
	Standard APIs supported	PC/SC, EMV2000, SET
	Power	USB Port
		Short circuit detection (protects smart card and reader)
		Power supply compliant with ISO7816 and EMV (5V, 60 mA)
		Supports 3-V and 5-V cards
	Power consumption	250-mA maximum draw (50 mA for the keyboard with three LEDs ON and 200-mA maximum startup current using a high-current, 60-mA smart card)

## Technical Specifications - Input/Output Devices

	<b>Communication</b>	<b>From card</b>	Programmable from 9,600 baud to 115,200 baud
		<b>From computer</b>	Up to 38,400 baud
	<b>Landing mechanism</b>	<b>Contact device</b>	Friction contact
		<b>Card insertions rating</b>	Up to 100,000 insertion cycles
	<b>Interface modes</b>	USB communications through USB port SCM protocol Automatic card insertion/removal detection	
	<b>Reader performance interface</b>	USB connection	
	<b>Electro-magnetic standards</b>	<b>Europe</b>	89/336/CEE guideline
		<b>USA</b>	USAFCC part 15
<b>Operating system support</b>	Microsoft® Windows® 2000, Windows XP Home, Windows XP Professional, xpe, ce.net, Linux, XP-64		
<b>Approvals</b>	CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, JITC, EMV2000, USB-IF		
<b>Ergonomic compliance</b>	ANSI HFS 100, ISO 9241-4, TUVGS		
<b>Kit contents</b>	Keyboard, I/O Security and Documentation CD, , warranty card		
<b>Smart card compatibility</b>	<b>HP</b>	HP ProtectTools Smart Card	
	<b>American Express</b>	Amex Blue	
	<b>Axalto (Schlumberger)</b>	Cryptoflex 8K Cryptoflex 16K Cryptoflex 32K Cryptoflex 32K e-gate Cyberflex Access 64K Cyberflex Access 32K Cyberflex 32K e-gate Cyberflex 64K Cyberflex Palmera Payflex-S Payflex 1K Payflex 2K Payflex 4K Payflex 8K Prismera US DoD CAC	
	<b>Cardlogix</b>	CLXSU004KK4 CLXSU008KK5	
	<b>Datakey</b>	Model 300 Model 330	
	<b>De La Rue</b>	VisaCash	

## Technical Specifications - Input/Output Devices

<b>Gemplus</b>	Gem Expresso GKK32K Gemclub Memo GemClub Micro GemXplore GemSafe
<b>Infineon</b>	SLE66C322P
<b>SafLink (Litronic)</b>	Forte
<b>Sharp</b>	Java Card
<b>Oberthur</b>	CosmopolIIC v4 CosmopolIIC v4.1 Cosmo ID-One GalatIIC v2.1 US DoD CAC
<b>Memory Cards</b>	
<b>Atmel</b>	AT24C01ASC AT24C02SC AT24C04SC AT24C08SC AT24C16SC AT24C32SC AT24C64SC AT24C128SC AT24C256SC AT24C512SC AT88SC153 AT88SC1608
<b>Axalto (Schlumberger)</b>	PrimeFlex Store 8K PrimeFlex Store 2K
<b>nfineon</b>	SLE4406 SLE4406E SLE4406E SE SLE4418 SLE4428 SLE4432 SLE4436E SLE4442 SLE5536
<b>ISSI</b>	IS23SC4418 IS23SC4428
<b>ST</b>	14C02
<b>Telefonkarte</b>	SLE4406 SLE4436 SLE5536
<b>XICOR</b>	X24026

## Technical Specifications - Input/Output Devices

HP PS/2 Scroll Mouse	Dimensions	3.8 x 6.3 x 11.6 cm (1.5 x 2.5 x 4.6 in)	
	Weight	4.44 oz (126 g)	
	Environmental	Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, 6 surfaces
		Non-operating shock	80 g, 6 surfaces
		Operating vibration	2 g peak acceleration
		Non-operating vibration	4 g peak acceleration
		Drop (out-of-box)	26 in (66 cm) on carpet, 6-drop sequence
		Drop (out-of-box)	1 m on asphalt tile over concrete, 6-drop sequence
	Electrical	Operating voltage	5 VDC $\pm$ 10%
		Power consumption	15 mA
		System consumption	PS/2 mini-din connector
ESD		CE level 4, 15 kV air discharge	
EMI-RFI		Conforms to FCC rules for a Class B computing device	
Mechanical	Microsoft PC99 - 2001	Functionally compliant	
	Resolution	400 $\pm$ 20% DPI	
	Tracking speed	10 in/s maximum	
	Acceleration	100 in/s	
	Switch actuation	65 g nominal peak force	
	Switch life	1,000,000 operations (using Hasco modified tester)	
	Switch type	Low force micro-switches	
	Tracking mechanism life	155 mi (250 km) at average speed of 10 in/s	
	Cable length	6 ft (1.8 m)	
	Microsoft PC99 - 2001	Mechanically compliant	
Scroll wheel	Width	8 mm	
	Diameter	0.99 in (25.2 mm)	
	Maximum rotation speed	30 mm/s	
	Switch type	Light force micro-switch	
	Switch life	1 million operations	
Regulatory approvals	Mechanical life	Minimum 200,000 revolutions	
	Compliant	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
	Operating system support	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4	

## Technical Specifications - Input/Output Devices

HP 2-button Optical Scroll Mouse (USB)	<b>Dimensions (H x L x W)</b>	1.5 x 4.5 x 2.5 in (3.8 x 11.6 x 6.3 cm)
	<b>Weight</b>	0.27 lb (0.12 kg)
	<b>Cable length</b>	72.8 in (185 cm)
	<b>System requirements</b>	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4

SpaceBall 5000 (USB)	<b>Physical characteristics</b>	<b>Dimensions (H x W x D)</b>	3.0 x 6.0 x 8.4 in (7.6 x 15.2 x 21.3 cm)
		<b>Ball Diameter</b>	2.2 in (5.6 cm)
		<b>Weight</b>	2.1 lb (9.94 kg)
		<b>Features</b>	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw) Certified for leading CAD and DCC applications
	<b>Environmental</b>	<b>Operating temperature</b>	50° to 104° F (10° to 40° C)
		<b>Non-operating temperature</b>	43° to 140° F (6° to 60° C)
		<b>Operating humidity</b>	8% to 80% (non-condensing at ambient)
		<b>Non-operating humidity</b>	5% to 80% (non-condensing at ambient)
	<b>Mechanical</b>	<b>Buttons</b>	12 programmable (unshifted)
		<b>Ball Force Range</b>	0.5 - 8.2N/1.8 - 29.5 oz
		<b>Ball Torque Range</b>	0.085 – 0.33 oz-in. (6.91 Nmm)
		<b>Resolution</b>	10 bits
	<b>Serial Specifications</b>	<b>Connector</b>	USB 1.1 or greater
		<b>Cable Length</b>	12.8 ft. (3.9 m)
		<b>Data Rate</b>	USB model – 16 msec
		<b>Flow Control</b>	Xon/Xoff (on PS/2 model only)
	<b>Software Drivers Available</b>	<b>USB model</b>	Microsoft Windows XP Professional
	<b>System Requirements</b>	<b>Disk Space</b>	10 MB free disk space
	<b>Regulatory Approvals</b>	UL, cUL, EN 950, EN 60950, CSA, FCC, CE Mark, TUV, CISPR 22, EN 50082, IEC 1000 4-2, IEC 1000-4-3, AS/NZS, VCCI, BSMI, C-Tick	

## Technical Specifications - Input/Output Devices

HP SpaceMouse Plus USB	Physical characteristics	Dimensions (H x W x D)	7.4 x 4.72 x 1.73 in (18.8 x 12.0 x 4.4 cm)
		Cap Diameter	2 x 6.5 x 6.6 mm
		Weight	1.5 lb (0.68 kg)
		Features	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw) Certified for leading CAD and DCC applications
	Environmental	Operating temperature	41° to 140° F (5° to 60° C)
		Non-operating temperature	-13° to 158° F (-25° to 70° C)
		Operating humidity	10 to 98 % RH (non-condensing)
		Non-operating humidity	10 to 98 % RH (non-condensing)
	Mechanical	Buttons	11 programmable (unshifted)
		Cap Force Range	0.2 N – 4.5 N
Cap Torque Range		4 Nmm to 100 Nmm	
Resolution		8 bit	
USB Specifications	Connector	USB 1.1 or greater	
	Cable Length	6.56 ft (2 m)	
	Data Rate	16 msec	
Software Drivers Available	Microsoft Windows XP Professional		
System Requirements	Disk Space	10 MB free disk space	
Regulatory Approvals	UL, cUL, EN 950, EN 60950, CSA, FCC, CE Mark, TUV, CISPR 22, EN 50082, IEC 1000 4-2, IEC 1000-4-3, AS/NZS, VCCI, BSMI, C-Tick		

1394 FireWire PCI card	Device Interface Protocol	IEEE-1394a	
	Data Rate	400 Mbps	
	Devices Supported	IEEE-1394 compliant devices	
	Bus Interface	PCI	
	Physical	Low profile PCI card with a full height bracket	
	Environmental	Operating temperature	41° to 95° F (5° to 35° C)
		Non-operating temperature	158° F (70° C) and above
		Relative humidity	10% to 90%
		Ports	2 rear and 2 front (depends on model of PC)
	Minimum System Requirements	Windows XP Professional, Windows XP Professional x64 Edition, Linux support with the HP Installer Kit for Linux Pentium II 266 or faster 32-MB RAM 1-GB Hard Drive CD-ROM drive Built in sound system	

## Technical Specifications - Input/Output Devices

HP SpacePilot 3D USB Intelligent Controller (model EF390AA)	Physical Characteristics	Dimensions (L x W x H)	9.3 x 5.6 x 2.0 in (236 x 143 x 53 mm)
		Weight	1.875 lb (0.85 kg)
	Mechanical	Palmrest	Sculpted
		Buttons	21+ programmable speed keys 15 reprogrammable
		LCD Viewing Area	(W x H) 4.1 x 1.2 in (102 x 30 mm)
		Active Area	(W x H) 3.9 x 1.0 in (98 x 26 mm)
		Display Format	240 x 64
		Motion Controller	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw)
	System Requirements	Device Sensitivity	Adjustable to preference
		Intel Pentium 4 or AMD Athlon processor based system	
20 megabytes free disk space for driver and plug-in installation (CD-ROM device required)			
Operating System Supported	USB 1.1 or 2.0		
	Microsoft Windows 2000 and XP		
Regulatory Approvals	FCC, CE		



## Technical Specifications - Optical Devices

<b>48X CD-ROM Drive</b>	<b>Form Factor</b>	5.25-in, half-height, tray load	
	<b>Mounting Orientation</b>	Horizontal or vertical	
	<b>Interface</b>	ATAPI/EIDE	
	<b>Dimensions (HxWxD)</b>	1.63 x 5.83 x 7.27 in (4.13 x 14.6 x 18.5 cm)	
	<b>Weight</b>	1.76 lb (0.8 kg)	
	<b>Data Transfer Rates - Read</b>	Digital audio extraction (minimum) – 1,200 KB/s (8X) CD read – up to 7,200 KB/s (48X)	
	<b>Media and Formats - Read</b>	<b>CD Media</b>	stamped, CD-R, CD-RW (LS, HS, US)
		<b>CD Capacities</b>	180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)
		<b>CD Formats</b>	CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD
		<b>Access Times (typical reads, including settling)</b>	<b>CD-ROM Mode 1</b> < 125 ms <b>Full Stroke CD</b> < 210 ms <b>Start-up Time (typical)</b> < 7 s (single session), < 30 s (multi-session) <b>Stop Time (typical)</b> < 4 s <b>Write Buffer Size</b> 128 KB (minimum) <b>Data Transfer Modes</b> PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 0 (16.7 MB/s); UltraDMA Mode 2 (33.3 MB/s)
	<b>Power</b>	<b>Source</b>	Four-pin, DC power receptacle
		<b>DC Power Requirement</b>	5 VDC ± 5% - 100 mV ripple p-p 12 VDC ± 5% - 200 mV ripple p-p
		<b>DC Current</b>	5 VDC - < 1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum
		<b>Total Drive Power (standby mode)</b>	< 2.5 Watt
	<b>Audio Output</b>	<b>Line-Out</b>	0.7 VRMS
		<b>Signal-to-Noise Ratio</b>	74 dB
		<b>Channel Separation</b>	65 dB
	<b>Configuration Jumper Block</b>	Master, slave, and cable select modes	
	<b>Operating Conditions (all conditions non-condensing)</b>	<b>Temperature</b>	41° to 122° F (5° to 50° C)
<b>Humidity</b>		10% to 80%	
<b>Certifications, Approvals</b>	MMC-3 support, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B)		

## Technical Specifications - Optical Devices

<b>Operating Systems Supported</b>	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3
<b>Supplied Software</b>	None

<b>16X/48X DVD-ROM Drive Height with +R Read Support</b>	5.25-in, half-height, tray load	
<b>Interface Type</b>	ATAPI/EIDE	
<b>Dimensions (W x H x D)</b>	5.88 x 1.71 x 7.87 [max] in (149.5 x 43.25 x 200.0 [max] mm) (external, excluding bezel)	
<b>Disc Formats</b>	DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0; DVD-RW version 1.0 and 1.1; DVD-R multi-border; DVD+RW; DVD+R ; CD-ROM Mode 1 and 2; CD-DA; CD-ROM XA Mode 2, Form 1 and 2; CD-extra; CD-text; CD-I Mode 2, Form 1 and 2; CD-I ready; video CD, CD-bridge; PhotoCD (single and multi-session); CD-R; CD-RW	
<b>Disc Capacity</b>	<b>DVD-ROM</b>	4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R)
	<b>CD-ROM</b>	540 MB (Mode 1, 12 cm), 640 MB (Mode 2, 12 cm), 700 MB (80 minimum CD-R and CD-RW), 180 MB (8 cm)
<b>Access Times (typical reads, including settling)</b>	<b>DVD-ROM Single Layer</b>	120 ms
	<b>CD-ROM Mode 1</b>	90 ms
	<b>Full Stroke DVD</b>	240 ms (seek)
	<b>Full Stroke CD</b>	160 ms (seek)
	<b>Startup Time</b>	< 10 seconds (typical)
	<b>Stop Time</b>	< 4 seconds
	<b>Data Transfer Modes</b>	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 3 (44.4 MB/s)
<b>Maximum Data Transfer Rates</b>	<b>CD-ROM Read</b>	6000 KB/s (40X) Max
	<b>DVD-ROM Read</b>	21,600 KB/s (16X) Max
	<b>Digital Audio Extraction</b>	6000 KB/s (40X) Max
<b>Power</b>	<b>Source</b>	Four-pin, DC power receptacle
	<b>DC Power Requirement</b>	5 VDC $\pm$ 5% – 100 mV ripple p-p 12 VDC $\pm$ 5% – 200 mV ripple p-p
	<b>DC Current</b>	5 VDC – <800 mA typical, < 1000 mA maximum 12 VDC – < 870 mA typical, <1800 mA maximum
<b>Audio Output</b>	<b>Line-Out</b>	0.7 VRMS
	<b>Signal-to-Noise Ratio</b>	85 dB
	<b>Channel Separation</b>	65 dB
<b>Configuration Jumper Block</b>	Master, slave, and cable select modes	
<b>Data Interface Connector</b>	40-pin, shrouded and keyed, flat ribbon	

## Technical Specifications - Optical Devices

<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature</b> (operating)	41° to 122° F (5° to 50° C)
	<b>Relative Humidity</b> (operating)	10% to 85%
	<b>Maximum Wet Bulb Temperature</b> (operating)	86° F (30° C)
<b>Certifications, Approvals</b>	MMC II support, multi-read certification, Microsoft WHQL certification, ACA AS/NZS 3548 class B, CNS 13438, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992	
<b>Operating Systems Supported</b>	Windows 2000, XP Professional, and XP Professional x64 Edition Red Hat Linux 7.2, 7.3 WS3 and WS4 Versions	
<b>Kit Contents</b>	16X/40X DVD-ROM Drive, InterVideo WinDVD MPEG Movie Playback software, audio cable, and installation guide.	

### HP 48X CD-RW

<b>Form Factor</b>	5.25-inch, half-height, tray-load	
<b>Mounting Orientation</b>	Horizontal or vertical	
<b>Interface</b>	ATAPI/EIDE	
<b>Dimensions</b> (HxWxD)	1.63 x 5.75 x 7.27 [max] in (4.13 x 14.6 x 18.5 [max] cm) (external, excluding bezel)	
<b>Weight</b> (max)	2.0 lb (0.9 kg)	
<b>Read Only Disc Parameters</b>	<b>Data Transfer Rates - Read</b>	<b>Digital audio extraction</b> (minimum) - 1,800 KB/s (12X) <b>CD read</b> - up to 7,200 KB/s (48X)
	<b>Media and Formats - Read</b>	<b>CD Media:</b> stamped; CD-R; CD-RW (LS, HS, US) <b>CD Capacities:</b> 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute) <b>CD Formats:</b> CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD

## Technical Specifications - Optical Devices

Writeable Disc Parameters	Data Transfer Rates - Write	CD-R write - 2100 KB/s (14X) to 7200 KB/s (48X) CD-RW write - 600 KB/s (4X) CD-RW write (high speed) - 1500 KB/s (10X) to 1800 KB/s (12X) CD-RW write (ultra high speed) - 2400 KB/s (16X) to 4800 KB/s (32X)
	Media and Formats - Write	CD Media: CD-R; CD-RW (LS, HS, US) CD Capacities: 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute) CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD
	Write Methods	Disc-at-once, session-at-once, track-at-once, incremental fixed and variable packet, multi-session
	Access Times (typical reads, including settling)	CD-ROM Mode 1 < 125 ms Full Stroke CD < 210 ms Start-up Time (typical) < 7 s (single session), < 30 s (multi-session) Stop Time (typical) < 4 s Write Buffer Size 2 MB Data Transfer Modes PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 2 (33.3 MB/s)
Power	Source	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p
	DC Current	5 VDC (< 1000 mA typical, < 1600 mA maximum) 12 VDC (< 600 mA typical, < 1400 mA maximum)
	Total Drive Power (standby mode)	< 2.5 Watt
Audio Output	Line-Out	0.7 VRMS
	Signal-to-Noise Ratio	74 dB
	Channel Separation	65 dB
Configuration Jumper Block	Master, slave, and cable select modes	
Operating Conditions	Temperature	41° to 122° F (5° to 50° C)
	Humidity	10% to 90% 10% to 90%

## Technical Specifications - Optical Devices

<b>Certifications, Approvals</b>	MMC-3 support, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B)
<b>Operating Systems Supported</b>	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3
<b>Supplied Software</b> (for Windows XP)	Roxio Digital Media Plus: Create or copy CDs and DVDs, including music and data CDs, and data DVDs Dantz Retrospect Express: Back up systems to CD, DVD, or tape media.

### 48X Combo CD-RW/DVD-ROM

<b>Form Factor</b>	5.25-inch, half-height, tray-load
<b>Mounting Orientation</b>	Horizontal or vertical
<b>Interface</b>	ATAPI/EIDE
<b>Dimensions</b> (HxWxD)	5.77 x 1.71 x 7.87 [max] in (14.66 x 4.34 x 20.0 [max] cm) (external, excluding bezel)
<b>Weight</b> (max)	2.6 lb (1.2 kg)
<b>Read Only Disc Parameters</b>	<p><b>Data Transfer Rates - Read</b></p> <p>CD read - 7200 KB/s (48X) Max Digital audio extraction (minimum) - 1,800 KB/s (12X)</p> <p>DVD ROM read - 21,632 KB/s (16X) Max</p> <p><b>Media and Formats - Read</b></p> <p>CD Media: stamped; CD-R; CD-RW (LS, HS, US) CD Capacities: 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute) CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD DVD Media: stamped (single and double layer); DVD+R; DVD+RW; DVD+R DL; DVD-R; DVD-RW DVD Capacities: 4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R) DVD Formats: DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0; DVD-RW version 1.0 and 1.1; DVD-R multi-border ; DVD+R version 1.2 (including multi-session); DVD+R DL version 1.0; DVD+RW version 1.2</p>

## Technical Specifications - Optical Devices

<b>Writeable Disc Parameters</b>	<b>Data Transfer Rates - Write</b>	<p>CD-R write - 2100 KB/s (14X) to 7200 KB/s (48X)</p> <p>CD-RW write - 600 KB/s (4X)</p> <p>CD-RW write (high speed) - 1500 KB/s (10X) to 1800 KB/s (12X)</p> <p>CD-RW write (ultra high speed) - 2400 KB/s (16X) to 4800 KB/s (32X)</p>
	<b>Media and Formats - Write</b>	<p>CD Media: CD-R; CD-RW (LS, HS, US)</p> <p>CD Capacities: 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)</p> <p>CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD</p>
	<b>Write Methods</b>	Disc-at-once, session-at-once, track-at-once, incremental fixed and variable packet, multi-session
	<b>Access Times</b> (typical reads, including settling)	<p>Random DVD &lt; 140 ms</p> <p>Random CD &lt; 125 ms, (typical)</p> <p>Full Stroke DVD &lt; 250 ms</p> <p>Full Stroke CD &lt; 210 ms</p> <p>Startup Time (single) &lt; 7 seconds (typical)</p> <p>Startup Time (multi-session) &lt; 30 seconds (typical)</p> <p>Stop Time (typical) &lt; 4 s</p> <p>Cache Buffer 2 MB (minimum)</p> <p>Data Transfer Modes ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44 Mbytes/s)</p>
<b>Power</b>	<p>Source Four-pin, DC power receptacle</p> <p>DC Power Requirement 5 VDC <math>\pm</math> 5%-100 mV ripple p-p 12 VDC <math>\pm</math> 5%-200 mV ripple p-p</p> <p>DC Current 5 VDC (&lt; 1000 mA typical, &lt; 1600 mA maximum) 12 VDC (&lt; 600 mA typical, &lt; 1400 mA maximum)</p> <p>Total Drive Power (standby mode) &lt; 2.5 Watt</p>	
<b>Audio Output</b>	<p>Line-Out 0.7 VRMS</p> <p>Signal-to-Noise Ratio 74 dB</p> <p>Channel Separation 65 dB</p>	
<b>Configuration Jumper Block</b>	Master, slave, and cable select modes	
<b>Data Interface Connector</b>	40-pin, shrouded and keyed, flat ribbon	

## Technical Specifications - Optical Devices

<b>Operating Conditions</b> (all conditions non-condensing)	<b>Temperature</b>	41° to 122° F (5° to 50° C)
	<b>Relative humidity</b>	10% to 90%
	<b>Maximum wet bulb temperature</b>	86° F (30° C)
<b>Certifications, Approvals</b>	MMC-3 support, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B)	
<b>Operating Systems Supported</b>	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat WS3 and WS4 Versions	
<b>Supplied Software</b> (for Windows XP)	Roxio Cineplayer Movie Playback Roxio Digital Media Plus: Create or copy CDs and DVDs, including music and data CDs, and data DVDs Dantz Retrospect Express: Back up systems to CD, DVD, or tape media.	

<b>16X DVD+/-RW, Dual-Layer</b> (Win and RHWS3)	<b>Height</b>	5.25-inch, half-height, tray-load	
	<b>Orientation</b>	Either horizontal or vertical	
	<b>Interface Type</b>	ATAPI/EIDE	
	<b>Disc Recording Capacity</b>	4.7 GB (single-layer), 8.5 GB (double-layer)	
	<b>Dimensions</b> (W x H x D)	5.9 x 1.7 x 7.9 in (15.0 x 4.4 x 20.0 cm)	
	<b>Weight</b> (maximum)	2.6 lb (1.2 kg)	
	<b>Recording Method</b>	Disc-at-once, Track-at-once, and Session-at-once; Variable Packet and Fixed Packet	
	<b>Write Support</b>	DVD+R (1.3), DVD+R DL (1.0), DVD+RW (1.2), DVD-R (2.0), DVD-RW (1.1), CD-R (OBII Vol2.0 Rev 1.2), CD-RW (LS, HS, US)	
	<b>Read Support</b>	DVD-ROM (single- and dual-layer), DVD-Video, DVD+R (include multisection), DVD+RW, DVD-R (incl. multiborder), DVD-RW, DVD-MRW; CD-ROM Mode 1, CD-ROM XA (Mode 2, forms 1 and 2), CD-TEXT, Photo CD single- and multi-session), CD-DA (Audio CD), CD-Extra, CD-R, CD-RW (supports AM2), VCD, CD-I, UDF (1.02 and 1.50), CD-MRW	
	<b>Write Speed</b> (maximum)	<b>DVD+R</b>	16X CAV (21,600 KB/s), 8x ZCLV (10,800 KB/s), 2.4-8x CLV (3250-10,800 KB/s)
		<b>DVD+RW</b>	2.4-4X CLV (3250-5400 KB/s)
		<b>DVD-R</b>	2-4X CLV (2700-5400 KB/s), 8X ZCLV (10,800 KB/s)
		<b>DVD-RW</b>	2-4X CLV (2700-5400 KB/s)
	<b>Read Speed</b> (maximum)	<b>CD-R</b>	16-40X CAV (2400-6000 KB/s)
<b>CD-RW (US)</b>		4-24X CLV (600-3600 KB/s)	
<b>DVD-ROM</b>		5-16X CAV (6750 - 21,600 KB/s)	
<b>Access Time</b> (typical reads, including settling)	<b>DVD+R, DVD+RW, DVD-R, DVD-RW</b>	4-8X CAV (5400 - 10,800 KB/s)	
	<b>CD-ROM, CD-R, CD-RW, CD-Audio</b>	16-40X CAV (2400 to 6000 KB/s)	
	<b>Random DVD</b>	< 130 ms (typical)	
	<b>Random CD</b>	< 120 ms, (typical)	
	<b>Full Stroke DVD</b>	< 240 ms (seek)	

## Technical Specifications - Optical Devices

	<b>Full Stroke CD</b>	< 200 ms (seek)
	<b>Startup Time (single)</b>	< 7 seconds (typical)
	<b>Startup Time (multi-session)</b>	< 30 seconds (typical)
	<b>Stop Timex</b>	< 4 seconds
	<b>Cache Buffer</b>	2 MB (minimum)
	<b>Data Transfer Modes</b>	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s) (default on most HP xw workstations)
<b>Power</b>	<b>Source</b>	Four-pin, DC power receptacle
	<b>DC Power Requirement</b>	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 10%-200 mV ripple p-p
	<b>DC Current</b>	5 VDC (< 2000 mA typical, < 2500 mA maximum) 12 VDC (< 700 mA typical, < 2000 mA maximum)
	<b>Total Drive Power (standby mode)</b>	< 2.5 Watt
<b>Audio Output</b>	<b>Line-Out</b>	0.7 VRMS
	<b>Signal-to-Noise Ratio</b>	74 dB
	<b>Channel Separation</b>	65 dB
<b>Operating Environmental (all conditions non-condensing)</b>	<b>Temperature</b>	41° to 122° F (5° to 50° C)
	<b>Relative humidity</b>	10% to 90%
	<b>Maximum wet bulb temperature</b>	86° F (30° C)
<b>System Configuration</b>	Intel Pentium IV Processor or later with 128 MB of memory (required); 256 MB recommended 2-D or 3-D graphics cards on primary disk drive for operating system and application software; second disk drive for audio and video data	
<b>Operating Systems Support</b>	Windows 2000, XP Professional, and XP Professional x64 Edition Red Hat Linux 7.2, 7.3 WS3 and WS4 Versions (Red Hat Linux 7.2, 7.3, 8, 9.0 may require additional third party software to make full use of this device)	
<b>Regulatory Approvals</b>	MPC-3 and MMC-4 compliant, multi-read certified, ATA Spec X3T9.2, ATAPI Spec T13.1153D, ANSI C63.4-1992, UL 60950, ACA AS/NZS 3548, CB Bulletin No. 96A, CSA C22.2 No. 60950, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, EMKO-TSE 07/94, TUV EN60950, EN60825-1, MIC Class B, BSMI-CNS 13438, CE EN60950, EN55022:1998 and EN55024, Microsoft Logo for Windows XP, relevant parts of IEC 61000-4.	
<b>Option Kit contents</b>	16X DVD $\pm$ R/ $\pm$ RW Drive, InterVideo WinDVD, InterVideo WinDVD Creator, Roxio Easy Media Creator, Dantz Retrospect Express Backup Software, installation guide, and DVD+R media. <b>NOTE:</b> This DVD writer kit does not include any software for burning DVDs on Linux. DVD burning is supported with the 'growisofs' command. CD burning is supported with the 'cdrecord' command. Red Hat Enterprise Linux WS 3 distribution includes both 'cdrecord' and 'growisofs'. Red Hat Linux 7.2, 7.3, 8, 9.0 distributions only include 'cdrecord'. Therefore DVD burning is only supported on WS 3.	



## Technical Specifications - Optical Devices

<p>16X DVD+/-RW, Dual-Layer, with LightScribe Direct Disc Labeling</p>	<p><b>Form Factor</b></p> <p><b>Orientation</b></p> <p><b>Interface</b></p> <p><b>Dimensions (HxWxD)</b></p> <p><b>Weight (maximum)</b></p> <p><b>Read Only Disc Parameters</b></p>	<p>5.25-inch, half-height, tray-load</p> <p>Horizontal or vertical</p> <p>ATAPI/EIDE</p> <p>5.9 x 1.7 x 7.9 in (15.0 x 4.4 x 20.0 cm)</p> <p>2.6 lb (1.2 kg)</p>	<p><b>Data Transfer Rates - Read</b></p> <p><b>DVD-ROM, DVD-video read</b> - 5-16X (6750 - 21,600 KB/s CAV)</p> <p><b>DVD-video playback, DVD+R, DVD+RW, DVD-R, DVD-RW</b> - 4-8X (5400 - 10,800 KB/s CAV)</p> <p><b>CD-audio playback</b> - 8x (1200 KB/s CLV)</p> <p><b>Digital audio extraction (minimum)</b> - 12X (1,800 KB/s CAV)</p> <p><b>CD-ROM, CD-R, CD-RW, CD-Audio read</b> - 16-40X (2400 to 6000 KB/s CAV)</p> <p><b>Media and Formats - Read</b></p> <p><b>CD Media:</b> stamped; CD-R; CD-RW (supports AM2) (LS, HS, US)</p> <p><b>CD Capacities:</b> 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)</p> <p><b>CD Formats:</b> CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD, UDF (1.02 and 1.50)</p> <p><b>DVD Media:</b> stamped (single and double layer); DVD+R; DVD+RW; DVD+R DL; DVD-R; DVD-RW</p> <p><b>DVD Capacities:</b> 4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 14.1 GB (DVD-14), 17.0 GB (DVD-18), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R), 1.46 GB (DVD+R, 8cm), 1.46 GB (DVD+RW, 8cm)</p> <p><b>DVD Formats:</b> DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0 (including multi-border); DVD-RW version 1.0 and 1.1; DVD+R version 1.3 (including multi-session); DVD+R DL version 1.0; DVD+RW version 1.2</p>
--	---	--	---

## Technical Specifications - Optical Devices

Writeable Disc Parameters	Data Transfer Rates - Write	<p>CD-R write - 16-40X (2400-6000 KB/s CAV)          CD-RW write - 4X (600 KB/s CLV)          CD-RW write (high speed) - 10X (1500 KB/s CLV)          CD-RW write (ultra high speed) - 16-24X (2400-3600 KB/s ZCLV)          DVD+R - 6-16X (8100-21,600 KB/s CAV), 8x (10,800 KB/s ZCLV), 2.4-4x (3250-5400 KB/s CLV)          DVD+R DL - 2.4 (3250 KB/s CLV)          DVD+RW - 2.4-4X (3250-5400 KB/s CLV)          DVD-R - 2-4X (2700-5400 KB/s CLV), 8X (10,800 KB/s ZCLV)          DVD-RW - 2-4X (2700-5400 KB/s CLV)</p>
	Media and Formats - Write	<p>CD Media: CD-R (OBII Vol2.0 Rev 1.2), CD-RW (LS, HS, US)          CD Capacities: 180 MB (mode 1, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)          CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD, UDF (1.02 and 1.50)          DVD Media: DVD+R, DVD+R DL, DVD+RW, DVD-R, DVD-RW          DVD Capacities: 4.7 GB (DVD-5), 8.54 GB (DVD-9), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.1), 4.7 GB (DVD+RW version 1.3), 4.7G (DVD+R version 1.2) ), 1.46 GB (DVD+R, 8cm), 1.46 GB (DVD+RW, 8cm)          DVD Formats: DVD-R version 1.0 and 2.0 (including multi-border); DVD-RW version 1.0 and 1.1; DVD+R version 1.3 (including multi-session); DVD+R DL version 1.0; DVD+RW version 1.2</p>
	Write Methods	<p>Disc-at-once, session-at-once, track-at-once, incremental fixed and variable packet, multi-session</p>
LightScribe Direct Disc Labeling Parameters	Media Supported	<p>CD-R: LightScribe Version 1.0          DVD+R: LightScribe Version 1.0</p>
	Resolution	<p>Dots per inch: 600          Tracks per inch: 500-1600 (mode dependent)</p>
	Labeling Times	<p>Draft quality: &lt; 20 min          Normal quality: &lt; 28 min          Best quality: &lt; 36 min</p>

## Technical Specifications - Optical Devices

<b>Access Times</b> (typical reads, including settling)	<b>Random DVD</b>	< 130 ms (typical)
	<b>Random CD</b>	< 120 ms (typical)
	<b>Full Stroke DVD</b>	< 240 ms
	<b>Full Stroke CD</b>	< 200 ms
	<b>Startup Time (single)</b>	< 7 seconds (typical)
	<b>Startup Time (multi-session)</b>	< 30 seconds (typical)
	<b>Stop Time (typical)</b>	< 4 s
	<b>Cache Buffer</b>	2 MB
	<b>Data Transfer Modes</b>	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s) (default on most HP xw series workstations)
	<b>Power</b>	<b>Source</b>
<b>DC Power Requirement</b>		5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p
<b>DC Current</b>		5 VDC (< 1000 mA typical, < 1600 mA maximum) 12 VDC (< 600 mA typical, < 1400 mA maximum)
<b>Total Drive Power (standby mode)</b>		< 2.5 Watt
<b>Audio Output</b>	<b>Line-Out</b>	0.7 VRMS
	<b>Signal-to-Noise Ratio</b>	74 dB
	<b>Channel Separation</b>	65 dB
<b>Operating Conditions</b> (all conditions non-condensing)	<b>Temperature</b>	41° to 122° F (5° to 50° C)
	<b>Relative humidity</b>	10% to 90%
	<b>Maximum wet bulb temperature</b>	86° F (30° C)
<b>Certifications, Approvals</b>	MMC-4 compliant, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B), relevant parts of IEC 61000-4.	
<b>Operating Systems Supported</b>	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition Red Hat Linux 7.3 WS3 and WS4 Versions (LightScribe labeling functionality not supported on Linux)	

## Technical Specifications - Optical Devices

### Supplied Software (for Windows XP)

Roxio Cineplayer Movie Playback

Roxio Digital Media Plus: Create or copy CDs and DVDs, including music and data CDs, and data DVDs

Roxio MyDVD for DVD authoring

Dantz Retrospect Express: Back up systems to CD, DVD, or tape media

**NOTE:** LightScribe Direct Disc Labeling is supported only on 32-bit Windows XP in the launch timeframe for the xw4300. Support for Windows XP

Professional x64 Edition is anticipated to be available some time after the launch, and will require software updates. There is no support for LightScribe

labeling under Linux. The drive will operate as a DVD writer under these other operating systems, but will not be available in software applications as

a LightScribe "printer".

**NOTE:** This DVD writer kit does not include any software for burning DVDs on Linux. DVD burning is supported with the 'growisofs' command. CD burning is supported with the 'cdrecord' command. Red Hat Enterprise Linux WS 3 distribution includes both 'cdrecord' and 'growisofs'. Red Hat Linux 8, 9.0 distributions only include 'cdrecord'. Therefore DVD burning is only supported on WS 3.

## Technical Specifications - Graphics

<b>NVIDIA Quadro NVS 280 (PCI)</b>	<b>Form Factor</b>	ATX
	<b>Graphic Controller</b>	Integrated Quadro 280 2-D graphics processor unit (GPU)
	<b>VGA controller</b>	Integrated into the Quadro GPU
	<b>Bus type</b>	PCI
	<b>RAMDAC</b>	Dual 350 MHz
	<b>Memory</b>	64 MB DDR with frame buffer and Texture storage
	<b>Connector</b>	Single High-density Flex Connector
	<b>Dimensions</b>	Low-profile, 2.586 x 6.6 in (6.57 x 16.76 cm)
	<b>Controller clock speed</b>	275 MHz
	<b>Colour planes</b>	32-bit colour buffer
	<b>Overlay planes</b>	1 16-bit Video overlay plane
	<b>Maximum vertical refresh rate</b>	120 Hz
	<b>Maximum pixel clock</b>	350 MHz
	<b>Multi-monitor support</b>	Dual analog or digital monitors
	<b>Single DVI Support</b>	Yes
	<b>Dual DVI Support</b>	Yes
	<b>High-definition Video Processor (HDVP)</b>	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware colour controls for video overlay Hardware colour-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
	<b>Available graphics drivers</b>	Microsoft Windows 2000 and Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode) Red Hat Linux HP qualified drivers may be preloaded or available from the HP support web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .

## Technical Specifications - Graphics

<p>NVIDIA Quadro NVS 285 Form Factor PCIe Graphics with TC Technology</p>	<p>Graphics Controller Bus Type Memory</p>	<p>Nvidia Quadro NVS 285 128MB PCIe Dual Head Low profile, both ATX and low profile brackets included Integrated Quadro 285 2D graphics processor unit (GPU) PCI-Express 128 MB DDR (64 MB local frame buffer plus 64 MB of shared system memory via TurboCache technology) <b>NOTE:</b> The graphics card uses part of the total system memory (RAM) for graphics performance. System memory dedicated to graphics performance is not available for other use by other programs.</p>
	<p>Connectors Dimensions Overlay planes Multi-monitor support Maximum pixel clock RAMDAC High-definition Video Processor (HDVP)</p>	<p>DMS-59 to dual-DVI Y-cable or dual-VGA Y-cable Low-profile, 2.586 x 6.6 in (6.57 x 16.76 cm) One 16-bit Video overlay plane Dual analog or digital monitors 350 MHz Dual 350 MHz (integrated) Full screen, full frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware colour controls for video overlay Hardware colour-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling</p>
	<p>Available graphics drivers</p>	<p>Microsoft Windows 2000 and Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode) HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://www.hp.com/country/us/en/support.html?pageDisplay=drivers">http://www.hp.com/country/us/en/support.html?pageDisplay=drivers</a></p>

<p>ATI FireGL V3100 Graphics Card (PCI Express)</p>	<p>Form factor Graphics controller Bus type Memory Connectors Multi-monitor support RAMDAC</p>	<p>ATX RV370 PCI-Express x16 128MB 200MHz DDR unified frame buffer, Z-buffer and Texture storage 1 DVI-I analog/digital and 1 VGA analog monitor output Dual integrated display controllers supporting up to 2048x1536 @ 85Hz on both displays Dual 400 MHz integrated</p>
---	--	--

## Technical Specifications - Graphics

<b>Architecture features</b>	<ul style="list-style-type: none"> <li>128-bit memory interface</li> <li>128-bit IEEE floating-point precision</li> <li>24-bits per RGBA colour precision</li> <li>4-bit sub-pixel precision</li> <li>2 parallel geometry engines</li> <li>4 parallel pixel pipelines</li> <li>2x/4x/6x FSAA</li> <li>Hardware accelerated antialiased points and lines</li> <li>Hardware OpenGL overlay planes</li> <li>Hardware accelerated two-sided lighting</li> <li>Hardware accelerated clipping planes</li> <li>Hardware accelerated occlusion culling</li> <li>Hardware accelerated clip planes</li> </ul>
<b>Shading architecture</b>	<ul style="list-style-type: none"> <li>Smartshader™ technology</li> <li>Programmable pixel and vertex shaders</li> <li>16 textures per pass</li> <li>Pixel shaders up to 160 instructions with 32-bit floating point precision for each RGBA component</li> <li>Multiple render target support</li> <li>Shadow volume rendering acceleration</li> <li>High precision 10-bit per channel frame buffer support</li> </ul>
<b>Supported graphics APIs</b>	<ul style="list-style-type: none"> <li>OpenGL 1.5</li> <li>DirectX 9.0</li> </ul>
<b>Available graphics drivers</b>	<ul style="list-style-type: none"> <li>Windows XP Professional, Windows XP Professional x64 Edition, Linux Xfree86HP qualified drivers may be preloaded or available from the HP support Web site:</li> <li><a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a>.</li> </ul>
<b>Maximum resolution</b>	<ul style="list-style-type: none"> <li>DVI-I output – drives digital display at resolutions up to 1600x1200</li> <li>Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 85Hz each</li> </ul>

---

<b>NVIDIA Quadro FX 540 PCI-Express Graphics Card</b>	<b>Form Factor</b>	<ul style="list-style-type: none"> <li>ATX, 4.376" x 7.0"</li> <li>Single slot</li> </ul>
	<b>Graphics Controller</b>	NVIDIA NV43GL
	<b>Bus Type</b>	PCI-Express x16, <75W power consumption
	<b>RAMDAC</b>	Dual 400 MHz integrated
	<b>Memory</b>	<ul style="list-style-type: none"> <li>128 MB 275 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage</li> <li>8.8 GB/sec graphics memory bandwidth</li> </ul>
	<b>Connectors</b>	DVI-I + VGA + 10-pin HDTV Out (HD cable purchased separately)
	<b>Multi-monitor support</b>	Integrated analog display controller supporting a single analog display at 2048x1536 @ 75Hz, one digital display at 1600x1200 @ 60Hz.

## Technical Specifications - Graphics

<b>Additional product features</b>	<p>128 KB BIOS 3.3V Flash ROM reprogrammable by SW</p> <p>Hardware accelerated Overlay Planes</p> <p>Hardware accelerated two-sided lighting</p> <p>Hardware accelerated antialiased points and lines</p> <p>3D Volumetric Texture support</p> <p>Hardware accelerated Occlusion Culling</p> <p>Compliant with Microsoft/Intel PC2001 Workstation requirements</p> <p>Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications</p> <p>DDC2B+ Monitor support on all OS platforms</p> <p>ACPI Version 1.0b Power Management support (all modes)</p>
<b>Shading architecture</b>	<p>Fully programmable GPU (OpenGL 1.5/DirectX 9.0c class)</p> <p>Long fragment programs (up to 65,536 instructions)</p> <p>Long vertex programs (up to 65,536 instructions)</p> <p>Looping and subroutines (up to 256 loops per vertex program)</p> <p>Dynamic flow control</p> <p>Conditional execution</p> <p>Optimized compilers for Cg, OpenGL shading language, and Microsoft HLSL</p>
<b>Supported graphics APIs</b>	<p>OpenGL 1.5 ICD with immediate mode support for all OGL primitive types</p> <p>DirectX 9.0c</p>
<b>Available graphics drivers</b>	<p>HP-tested: Microsoft Windows XP, Windows 2000, and Linux</p> <p>HP qualified drivers may be preloaded or available from the HP support Web site:</p> <p><a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a>.</p>
<b>Maximum Resolution</b>	<p>DVI-I output - drives digital display at resolutions up to 1600x1200 @ 60Hz</p> <p>Internal 400MHz RAMDACs – drives dual analog display up to 2048x1536 @ 75Hz each</p>

---

<b>NVIDIA Quadro FX 1400 PCI-Express Graphics Controller</b>	<b>Form Factor</b>	<p>ATX, 4.376" x 8.5"</p> <p>Single slot</p>
	<b>Graphics Controller</b>	NVIDIA NV41GL
	<b>Bus Type</b>	PCI-Express x16, <75W power consumption
	<b>RAMDAC</b>	Dual 400 MHz integrated
	<b>Memory</b>	<p>128 MB 300 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage</p> <p>19.2 GB/s graphics memory bandwidth</p>
	<b>Connectors</b>	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	<b>Multi-monitor support</b>	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays.



## Technical Specifications - Graphics

<b>Additional product features</b>	<p>128 KB BIOS 3.3V Flash ROM reprogrammable by SW</p> <p>Hardware accelerated Overlay Planes</p> <p>Hardware accelerated two-sided lighting</p> <p>Hardware accelerated antialiased points and lines</p> <p>Quad-buffered Stereo</p> <p>3D Volumetric Texture support</p> <p>Hardware accelerated Occlusion Culling</p> <p>Scalable Link Interface (SLI) technology</p> <p>Compliant with Microsoft/Intel PC2001 Workstation requirements</p> <p>Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications</p> <p>DDC2B+ Monitor support on all OS platforms</p> <p>ACPI Version 1.0b Power Management support (all modes)</p>
<b>Shading architecture</b>	<p>Fully programmable GPU (OpenGL 1.5/DirectX 9.0c class)</p> <p>Long fragment programs (up to 65,536 instructions)</p> <p>Long vertex programs (up to 65,536 instructions)</p> <p>Looping and subroutines (up to 256 loops per vertex program)</p> <p>Dynamic flow control</p> <p>Conditional execution</p> <p>Optimized compilers for Cg, OpenGL shading language, and Microsoft HLSL</p>
<b>Supported graphics APIs</b>	<p>OpenGL 1.5 ICD with immediate mode support for all OGL primitive types</p> <p>DirectX 9.0c</p>
<b>Available graphics drivers</b>	<p>HP-tested: Microsoft Windows XP, Windows 2000 and Linux</p> <p>HP qualified drivers may be preloaded or available from the HP support Web site:</p> <p><a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a>.</p>
<b>Maximum Resolution</b>	<p>Dual DVI-I output – drives dual digital displays at resolutions up to 1900x1200 @ 60Hz</p> <p>Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 85Hz each</p>

<b>NVIDIA Quadro NVS 440</b>	<b>Form Factor</b>	ATX
<b>256 MB Graphics Controller</b>	<b>Graphics Controller</b>	2 nv43 2D graphics processor units (GPUs)
	<b>VGA controller</b>	Integrated into the Quadro GPU
	<b>Bus Type</b>	PCI-E x16
	<b>RAMDAC</b>	Dual 350 MHz
	<b>Memory</b>	256 MB DDR frame buffer and Texture storage (128MB per GPU)
	<b>Connector</b>	Two DMS-59
	<b>Controller clock speed</b>	250 MHz
	<b>Colour planes</b>	32-bit colour buffer
	<b>Overlay planes</b>	1 16-bit Video overlay plane
	<b>Maximum pixel clock</b>	350 MHz
	<b>Multi-Monitor Support</b>	Up to 4 analog or digital monitors
	<b>Single DVI Support</b>	Yes
	<b>Dual DVI Support</b>	Yes

## Technical Specifications - Graphics

<b>High-definition Video Processor (HDVP)</b>	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware colour controls for video overlay Hardware colour-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
<b>Available graphics drivers</b>	Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode ) HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .

<b>NVIDIA Quadro FX 3400 Graphics Card</b>	<b>Form Factor</b>	ATX
	<b>Graphics Controller</b>	NVIDIA NV45GL
	<b>Bus Type</b>	PCI-Express x16
	<b>Memory</b>	256 MB 450 MHz GDDR3 SDRAM unified frame buffer, Z-buffer and Texture storage
	<b>Connectors</b>	2 DVI-I (one dual-link/one single-link) analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	<b>Multi-monitor support</b>	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1600x1200 (single-link) and 3840x2400 (dual-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft Windows
	<b>RAMDAC</b>	Dual 400 MHz integrated
	<b>Architecture features</b>	256-bit memory interface 128-bit IEEE floating-point precision graphics pipeline 128-bit colour precision 12-bit sub-pixel precision 8x FSAA at 1920x1200, 4x at 2048x1536, rotated grid FSAA sampling algorithm Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes 3rd generation occlusion culling 3D volumetric texture support Quad-buffered stereo Dual Link DVI enabling driving digital displays up to 3840x2400 (24Hz)
	<b>Shading architecture</b>	Fully programmable GPU Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
	<b>Supported graphics APIs</b>	OpenGL 1.5 DirectX 9.0

## Technical Specifications - Graphics

<b>Available graphics drivers</b>	HP-tested: Microsoft Windows® XP, Windows 2000, and Linux HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .
<b>Maximum Resolution</b>	Dual DVI-I output – drives dual digital displays at resolutions up to 1600x1200 @ 60Hz (single-link) and 3840x2400 @ 24Hz (dual-link). Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 75Hz each

<b>NVIDIA Quadro FX 3450 Graphics Controller</b>	<b>Form Factor</b>	ATX
	<b>Graphics Controller</b>	NVIDIA Quadro FX 3450 Workstation GPU
	<b>Bus Type</b>	PCI-Express x16
	<b>Memory</b>	256 MB 450 MHz GDDR3 SDRAM unified graphics memory
	<b>Connectors</b>	2 DVI-I (one dual-link/one single-link) analog/digital monitor outputs, 1 3-pin Mini DIN stereo output, DVI-I to VGA adapters included
	<b>Multi-Monitor Support</b>	Dual integrated display controllers supporting up to two analog displays at 2048 x 1536 @ 75 Hz on both displays or dual digital displays at 1920 x 1200 (single-link) and 3840 x 2400 (dual-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft Windows
	<b>Architecture Features</b>	256-bit memory interface 128-bit IEEE floating-point colour precision 12-bit sub-pixel precision 65,536 fragment instruction 65,536 vertex instruction 3D volumetric textures Single-system powerwall 12 pixels per clock rendering engine Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes 3rd generation occlusion culling 16 textures per pixel in fragment programs Window ID clipping functionality Hardware accelerated line stippling OpenGL Quad-buffered stereo
	<b>Shading Architecture</b>	Fully programmable GPU (OpenGL 2.0/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
	<b>High Level Shader Languages</b>	Optimized compiler for Cg and Microsoft® HLSL OpenGL 2.0 and DirectX 9.0c support Open source compiler
	<b>High-Resolution Antialiasing</b>	12-bit subpixel sampling precision enhances AA quality Rotated-grid full-scene antialiasing (RG FSAA) 8x FSAA dramatically reduces visual aliasing artifacts or "jaggies" at resolution up to 1920x1200

## Technical Specifications - Graphics

<b>Display Resolution Support</b>	Dual Link DVI- I output-drives digital displays at resolutions up to 3840 x 2400 @ 24 Hz Single Link DVI-I output drives digital displays at resolutions up to 1920 x 1200 @ 75 Hz Internal 400 MHz DACs - Two analog displays up to 2048 x 1536 @ 75 Hz each
<b>nView Architecture</b>	Advanced multi-display desktop & application management seamlessly integrated into Microsoft Windows.
<b>Supported Graphics APIs</b>	OpenGL 2.0 ICD with immediate mode support for all OGL primitive types DirectX 9.0c
<b>Available Graphics Drivers</b>	Microsoft Windows XP, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .

<b>ATI FireGL V5100 PCI-Express Graphics Controller</b>	<b>Form Factor</b>	ATX
	<b>Graphics Controller</b>	RV423
	<b>Bus Type</b>	PCI-Express x16
	<b>Memory</b>	128 MB 350MHz DDR unified frame buffer, Z-buffer and Texture storage
	<b>Connectors</b>	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	<b>Multi-monitor support</b>	Dual integrated display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays.
	<b>RAMDAC</b>	Dual 400 MHz integrated
	<b>Architecture features</b>	256-bit memory interface 128-bit IEEE floating-point precision 24-bits per RGBA colour precision 8-bit sub-pixel precision 6 parallel geometry engines 12 parallel pixel pipelines 2x/4x/6x FSAA Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware accelerated occlusion culling Hardware accelerated clip planes Quad-buffered stereo
	<b>Shading architecture</b>	Smartshader™ technology Programmable pixel and vertex shaders 16 textures per pass Pixel shaders up to 160 instructions with 32-bit floating point precision for each RGBA component Multiple render target support Shadow volume rendering acceleration High precision 10-bit per channel frame buffer support
	<b>Supported graphics APIs</b>	OpenGL 1.5 DirectX 9.0

## Technical Specifications - Graphics

<b>Available graphics drivers</b>	HP-tested: Microsoft Windows XP, Windows 2000, and Linux HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .
<b>Maximum Resolution</b>	DVI-I output – drives digital displays at resolutions up to 1600x1200 Internal 400MHz RAMDAC – drives dual analog displays up to 2048x1536 @ 85Hz each

## Technical Specifications - Monitors

HP L1755 Flat Panel Monitor	Panel	<b>Type</b>	Active matrix, thin film transistor (TFT)
		<b>Viewable Image Area</b> (diagonal)	17 in (43.2 cm) maximum viewable
		<b>Screen Opening</b> (WxH)	13.4 x 10.7 in (33.9 x 27.2 cm)
		<b>Viewing Angle</b> (typical)	176 degrees horizontal/176 degrees vertical (10:1 minimum contrast ratio)
		<b>Brightness</b> (typical)	Up to 250 nits (cd/m <sup>2</sup> )
		<b>Contrast Ratio</b> (typical)	Up to 1000:1 (typical)
		<b>Response Rate</b> (typical)	25 ms (typical rise + fall)
		<b>Pixel Pitch</b>	0.264 mm
	Video/Other Inputs	<b>Colour Depth Support</b>	16.7 million colors
		<b>Plug and Play</b>	Yes (supports VESA DDC2B; PC2001 compliant)
		<b>Self Powered USB 2.0 Hub</b>	One upstream, four downstream ports (cable included)
		<b>Input Signal</b>	Two connectors: one 15-pin mini D-sub analog VGA; and one DVI-I (VGA analog or digital)
		<b>Input Impedance</b>	75 ohms ± 2%
		<b>Sync Input</b>	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green (activated through on-screen display)
	Signal Interface/ Performance	<b>Video Cable</b>	VGA to VGA, DVI-D to DVI-D, and DVI-I to VGA
		<b>Video Cable Length</b>	78 in (2.0 m)
		<b>Horizontal Frequency</b>	30 to 82 kHz
		<b>Vertical Frequency</b>	56 to 75 Hz
		<b>Native Resolution</b>	1280 x 1024 @ 60 Hz analog
			1280 x 1024 @ 60 Hz digital
		<b>Maximum Resolution</b> (Analog)	1280 x 1024 @ 75 Hz analog
		<b>Maximum Resolution</b> (Digital)	1280 x 1024 @ 75 Hz digital
		<b>Preset VESA Graphic Modes</b> (non-interlaced)	640 x 480 @ 60 Hz, 72 Hz, 75 Hz
			720 x 400 @ 70 Hz
			800 x 600 @ 60 Hz, 72 Hz, 75 Hz
			1024 x 768 @ 60 Hz, 70 Hz, 75 Hz
			1280 x 1024 @ 60 Hz, 75 Hz
		<b>Preset MAC Mode</b>	832 x 624 @ 75 Hz
		1152 x 870 @ 75 Hz	
	<b>Preset VGA Mode</b>	640 x 480 @ 60 Hz, 72 Hz	
	<b>Preset SUN Mode</b>	1152 x 900 @ 76 Hz	
	<b>Fail Safe Mode</b>	Yes (limits out of range signal messages)	
	<b>Maximum Pixel Clock Speed</b>	140 MHz	
	<b>User Programmable Modes</b>	Yes, 15	
	<b>Anti-Glare</b>	Yes	

## Technical Specifications - Monitors

	Anti-Static	Yes
	AssetControl	Yes (accessible on HP Compaq Business Desktops featuring Intelligent Manageability)
	Default Colour Temperature	Yes (6500k, 9300k, SRGB, Custom User)
On Screen Display (OSD) Controls	Buttons or Switches	Power on/off; 3-button OSD; second level OSD buttons include dual-input switch, dedicated auto adjust switch
	Languages	English, Spanish, French, German, Italian, Japanese, Simplified Chinese
	User Controls	Size and positioning, contrast, brightness, clock, clock phase, selectable colour temperature, serial number, mode displayed, sleep timer, input selection, factory reset, individual colour contrast, full-screen resolution
	Power	
	Power Supply	Auto-ranging, 90 to 265 VAC; internal power supply
	Input Power	100 ~ 240 VAC
	Nominal Current	1.5 A maximum
	Frequency	50 ~ 60 Hz
	Average	33 watts when displaying standard office software
	Typical Power Consumption	< 40 watts
	Maximum	< 60 watts
	Power Saving	< 2 W
	Off Mode	0 watts (when master power switch is in the off position)
	Power Cable Length	70 in (1.8 m); non-captive
Mechanical	Dimensions (H x W x D)	<b>Unpacked with stand</b> 16.1 (minimum) to 21.2 (maximum) x 14.4 x 8.3 in (40.9 (minimum) to 42.2 (maximum) x 36.5 x 21.1 cm)
		<b>Base Area</b> (Footprint D x W) 8.3 x 12.2 in (21.1 x 30.9 cm)
		<b>Panel only</b> (without stand) (H x W x D) 11.8 x 14.4 x 2.9 in (30.1 x 40.9 x 7.3 cm)
		<b>Weight</b>
		<b>Unpacked with stand</b> 14.7 lb (6.7 kg)
		<b>Unpacked without stand</b> 8.1 lb (3.7 kg)
		<b>Packaged</b> 20.2 lb (9.2 kg)
		<b>Bezel Width</b> 13 mm left and right, 14 mm top, and 15 mm bottom
		<b>Tilt Range</b> -5° to +35°
		<b>Swivel Range</b> ± 50° horizontal swivel
	<b>Height Adjustable</b> Yes (5.1 in/13 cm adjustment range)	

## Technical Specifications - Monitors

	<b>Pivot Rotation</b>	Yes, 90 °
	<b>Base</b>	Ships detached and is removable after installation
<b>Environmental</b>	<b>Temperature – Operating</b>	41° to 95° F (5° to 35° C)
	<b>Temperature – Non-operating</b>	-4° to 140° F (-20° to 60° C)
	<b>Humidity – Operating</b>	20% to 80%
	<b>Humidity – Non-operating</b>	5% to 95%
	<b>Altitude – Operating</b>	0 to 13,000 ft (0 to 4,000 m)
	<b>Altitude – Non-operating</b>	0 to 40,000 ft (0 to 12,192 m)
<b>Options</b>	<b>HP Desktop Access Centre – Part number: DK985A</b>	Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions. Sold separately. For more information, refer to the HP Desktop Access Centre QuickSpec document.
	<b>HP Flat Panel Speaker Bar – Part number: PF804AA</b>	Powered directly by the monitor, seamlessly attaches to the monitor's bezel to bring full multimedia support to select HP flat panel monitors. Features dual speakers with full sound range and external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec document.
	<b>HP Compaq 7000 Series Ultra-slim Desktop Integrated Work Centre Stand – Part number: DL641B</b>	Allows mounting of a 15-, 17- or 19-inch HP flat panel monitor and an HP Compaq dc7100 Ultra-slim Desktop PC on a single stand for the convenience of an "all-in-one" form factor. Sold separately. For more information, refer to this product's QuickSpec document
<b>Other</b>	<b>Accessories Included</b>	VGA to VGA cable, DVI-D to DVI-D cable, DVI-I to VGA cable, USB cable, user CD-ROM with Pivot Pro software
	<b>Software</b>	Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
	<b>Software</b>	HP Display LiteSaver feature lets you schedule Sleep mode at preset times to help protect the display against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.



## Technical Specifications - Monitors

	<b>User Guide Languages</b>	English, Latin America Spanish, Brazilian Portuguese, Danish, Dutch, Finnish, French, German, Italian, Norwegian, Swedish, Greek, Polish, Russian, Slovenian, Turkish, Simplified Chinese, Traditional Chinese, Korean, and Japanese
	<b>Warranty Languages</b>	English, Canadian French, Latin America Spanish, Brazilian Portuguese, Danish, Dutch, Finnish, French, German, Italian, Norwegian, Spanish, Swedish, Bahasa Indonesian, Simplified Chinese, Traditional Chinese, and Korean
	<b>Colour</b>	Carbonite, two-tone carbonite and silver (EMEA only)
	<b>VESA Mounting</b>	Yes (swing arm/wall mount not included); base must be removed for mounting options)
	<b>VESA External Mounting</b>	Yes (standard 4 hole pattern, 100 mm)
	<b>Kensington Lock-ready</b>	Yes
<b>Certification and Compliance</b>		Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCC Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MPR-II Compliant, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification
<b>Compatibility</b>		VESA Video Signal Standard (VSI) Compliant video cards have been tested and proven compatible for use with the HP L1755 Flat Panel Monitor. Recommended for use with HP products.
<b>Service and Warranty</b>		Limited three-year parts and repair labour, service provider labour, and on-site service. Next business day advanced exchange direct replacement service available during warranty period. Certain restrictions and exclusions apply. For details, contact HP Customer Support.

<b>HP L1955 Flat Panel Monitor</b>	<b>Panel</b>	<b>Type</b>	Active matrix, thin film transistor (TFT)
		<b>Viewable Image Area</b>	19 in (48.25 cm) maximum viewable (diagonal)
		<b>Screen Opening (WxH)</b>	14.9 x 12.0 in (38.0 x 30.5 cm)
		<b>Viewing Angle (typical)</b>	176 degrees horizontal/176 degrees vertical (10:1 minimum contrast ratio)
		<b>Brightness (typical)</b>	Up to 250 nits (cd/m <sup>2</sup> )
		<b>Contrast Ratio (typical)</b>	Up to 1000:1 (typical)
		<b>Response Rate (typical)</b>	<16 ms (typical rise + fall)
		<b>Pixel Pitch</b>	0.294 mm
		<b>Colour Depth Support</b>	16.7 million colors

## Technical Specifications - Monitors

Video/Other Inputs	Plug and Play	Yes (supports VESA DDC2B; PC2001 compliant)	
	Self Powered USB 2.0 Hub	One upstream, four downstream ports (cable included)	
	Input Signal	Two connectors: one 15-pin mini D-sub analog VGA; and one DVI-I (VGA analog or digital)	
	Input Impedance	75 ohms $\pm$ 2%	
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green (activated through on-screen display)	
	Video Cable	VGA to VGA, DVI-D to DVI-D, and DVI-I to VGA	
	Video Cable Length	78 in (2.0 m)	
	Signal Interface/ Performance	Horizontal Frequency	30 to 82 kHz
		Vertical Frequency	56 to 75 Hz
		Native Resolution	1280 x 1024 @ 75 Hz analog 1280 x 1024 @ 60 Hz digital
		Maximum Resolution (Analog)	1280 x 1024 @ 75 Hz analog
		Maximum Resolution (Digital)	1280 x 1024 @ 75 Hz digital
		Preset VESA Graphic Modes (non-interlaced)	640 x 480 @ 60 Hz, 72 Hz, 75 Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz, 72 Hz, 75 Hz 1024 x 768 @ 60 Hz, 70 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75 Hz
		Preset MAC Mode	832 x 624 @ 75 Hz 1152 x 870 @ 75 Hz
Preset VGA Mode		640 x 480 @ 60 Hz, 72 Hz	
Preset SUN Mode		1152 x 900 @ 76 Hz	
Fail Safe Mode		Yes (limits out of range signal messages)	
Maximum Pixel Clock Speed		140 MHz	
User Programmable Modes		Yes, 15	
Anti-Glare		Yes	
Anti-Static		Yes	
AssetControl	Yes (accessible on HP Compaq Business Desktops featuring Intelligent Manageability)		
Default Colour Temperature	Yes (6500k, 9300k, SRGB, Custom User)		
On Screen Display (OSD) Controls	Buttons or Switches	Power on/off; 3-button OSD; second level OSD buttons include dual-input switch, dedicated auto adjust switch	
	Languages	English, Spanish, French, German, Italian, Japanese, Simplified Chinese	
	User Controls	Size and Positioning Contrast	

		Brightness	
		Clock, Clock Phase	
		Selectable Colour Temperature	
		Serial Number	
		Mode Displayed	
		Sleep Timer	
		Input Selection	
		Factory Reset	
		Individual Colour Contrast	
		Full-screen Resolution	
<b>Power</b>	<b>Power Supply</b>	Auto-ranging, 90 to 265 VAC; internal power supply	
	<b>Input Power</b>	100 ~ 240 VAC	
	<b>Nominal Current</b>	1.5 A maximum	
	<b>Frequency</b>	50 ~ 60 Hz	
	<b>Average</b>	33 watts when displaying standard office software	
	<b>Typical Power Consumption</b>	< 40 watts	
	<b>Maximum</b>	< 60 watts	
	<b>Power Saving Off Mode</b>	< 2 watts	
		0 watts (when master power switch is in the off position)	
	<b>Power Cable Length</b>	70 in (1.8 m); non-captive	
<b>Mechanical</b>	<b>Dimensions (H x W x D)</b>	<b>Unpacked with stand</b>	16.8 (minimum) to 22.3 (maximum) x 15.9 x 8.3 in (42.7 (minimum) to 56.6 (maximum) x 40.4 x 21.1 cm)
		<b>Base Area (Footprint D x W)</b>	8.3 x 12.2 in (21.1 x 30.9 cm)
		<b>Panel only (without stand) (H x W x D)</b>	13.2 x 15.9 x 3.1 in (33.5 x 40.4 x 7.9 cm)
	<b>Weight</b>	<b>Unpacked with stand</b>	16.5 lb (7.5 kg)
		<b>Unpacked without stand</b>	10.5 lb (4.75 kg)
		<b>Packaged</b>	23.5 lb (10.7 kg)
	<b>Bezel Width</b>	13 mm left and right, 14 mm top, and 15 mm bottom	
	<b>Tilt Range</b>	-5° to +35°	
	<b>Swivel Range</b>	± 50° horizontal swivel	
	<b>Height Adjustable</b>	Yes (5.1 in/13 cm adjustment range)	
	<b>Pivot Rotation</b>	Yes, 90 °	
	<b>Base</b>	Ships detached and is removable after installation	

## Technical Specifications - Monitors

<b>Environmental</b>	<b>Temperature – Operating</b>	41° to 95° F (5° to 35° C)
	<b>Temperature – Non-operating</b>	-4° to 140° F (-20° to 60° C)
	<b>Humidity – Operating</b>	20% to 80%
	<b>Humidity – Non-operating</b>	5% to 95%
	<b>Altitude – Operating</b>	0 to 13,000 ft (0 to 4,000 m)
	<b>Altitude – Non-operating</b>	0 to 40,000 ft (0 to 12,192 m)
<b>Options</b>	<b>Desktop Access Centre</b>	Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions. Sold separately; part number DK985A. For more information, refer to the HP Desktop Access Centre QuickSpecs.
	<b>HP Flat Panel Speaker Bar</b>	Powered directly by the monitor, seamlessly attaches to the monitor's bezel to bring full multimedia support to select HP flat panel monitors. Features dual speakers with full sound range and external jack for headphones. Sold separately, part number PF804AA. For more information, refer to the HP Flat Panel Speaker Bar QuickSpecs.
<b>Other</b>	<b>Accessories Included</b>	VGA to VGA cable, DVI-D to DVI-D cable, DVI-I to VGA cable, USB cable, user CD-ROM with Pivot Pro software
	<b>Software</b>	Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
	<b>Software</b>	HP Display LiteSaver feature lets you schedule Sleep mode at preset times to help protect the display against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.
	<b>User Guide Languages</b>	English
	<b>Warranty Languages</b>	English
	<b>Colour</b>	Carbonite, two-tone carbonite and silver (EMEA only)
	<b>VESA Mounting</b>	Yes (swing arm/wall mount not included); base must be removed for mounting options)
	<b>VESA External Mounting</b>	Yes (standard 4 hole pattern, 100 mm)
	<b>Kensington Lock-ready</b>	Yes

## Technical Specifications - Monitors

<b>Certification and Compliance</b>	Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MPR-II Compliant, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft® Windows® Certification
<b>Compatibility</b>	VESA Video Signal Standard (VSI) Compliant video cards have been tested and proven compatible for use with the HP L1955 Flat Panel Monitor. Recommended for use with HP products.
<b>Service and Warranty</b>	Limited three-year parts and repair labour, service provider labour, and on-site service. Next Business Day advanced exchange direct replacement service available during warranty period. Certain restrictions and exclusions apply. For details, contact HP Customer Support.

HP Flat Panel Monitor L2035	Panel	<b>Type</b>	20-inch Active Matrix TFT (thin film transistor)
		<b>Viewable Image Area</b> (diagonal)	20.1 in (51 cm)
		<b>Screen Opening</b> (W x H)	16.2 x 12.17 in (41.1 x 30.9 cm)
		<b>Viewing Angle</b> (typical)*	Up to 170° H/170° V (10:1 minimum contrast ratio)
		<b>Brightness</b> (typical*)	Up to 250 nits (cd/m <sup>2</sup> )
		<b>Contrast Ratio</b> (typical)*	Up to 400:1
		<b>Response Rate</b> (typical)*	16 ms (typical, rise + fall)
		<b>Pixel Pitch</b>	0.255 mm
		<b>Colour Depth Support</b>	16.7 million colors
On Screen Display (OSD) Controls	<b>Buttons or Switches</b>	PiP (Picture in Picture), Input select, auto adjust, OSD up, OSD down, OSD menu select, power	
	<b>Languages</b>	English, French, German, Spanish, Italian	
	<b>User Controls</b>	Brightness, contrast, positioning, colour temperature, individual colour control, serial number display, full screen resolutions, clock, clock phase, video picture-in-picture (size and position), input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset	

## Technical Specifications - Monitors

Signal Interface/ Performance	Horizontal Frequency	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	Vertical Frequency	48 to 85 Hz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	Graphics Controller	Pixelworks PW171	
	Native Resolution	1600 x 1200 @ 60 Hz (recommended)	
	Preset VESA Graphic Modes (non-interlaced)	1600 x 1200 @ 60 Hz, 75 Hz (VGA input)	
		1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz	
		1280 x 960 @ 60 Hz	
		1152 x 900 @ 66 Hz	
		1024 x 768 @ 60 Hz, 75 Hz, 85 Hz	
		800 x 600 @ 60 Hz, 85 Hz	
		640 x 480 @ 60 Hz, 75 Hz, 85 Hz	
		Text Mode	720 x 400 @ 70 Hz
		Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
		Sun Mode	1152 x 900 @ 66 Hz
	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)	
	User Programmable Modes	Yes, 10	
	Anti-Glare	Yes	
	Anti-Static	Yes	
	Default Colour Temperature	6500 K	
	Video Input	Plug and Play	Yes
Input Signal		Four connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, and one s-video	
Input Impedance		75 ohms $\pm$ 10%	
Sync Input		Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	
Video Cable		VGA to VGA; VGA to DVI-I; DVI-D to DVI-I	
Power	Video Cable Length	5.9 ft (1.8 m)	
	Input Power	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz	
	Frequency	47.5 to 63 Hz	
	Maximum	< 75 W	
	Power Saving	< 5 W	
	Power Cable Length	5.9 ft (1.8 m)	

## Technical Specifications - Monitors

Mechanical	Dimensions (H x W x D)	Unpacked with stand	17.36 to 20.9 x 17.8 x 8.27 in (44.1 to 53.1 x 45.2 x 21.0 cm)
		Unpacked without stand (head only)	14.29 x 17.8 x 3.19 in (36.3 x 45.2 x 8.1 cm)
		Packaged	11.5 x 21.9 x 23.9 in (29.2 x 55.6 x 60.6 cm)
	Weight	Unpacked	With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)
		Packaged	26.9 lb (12.2 kg)
		Tilt Range	-5° to + 25° vertical
	Swivel Range	-35° to + 35°	
	Height Adjustable	Yes, range 3.54 in (9.0 cm)	
	Pivot Rotation	Yes	
	Base	Attached	
Environmental	Temperature – Operating	46° to 95° F (10° to 35° C)	
	Temperature – Non-operating	6° to 140° F (-10° to 60° C)	
	Humidity – Operating	20% to 80% non-condensing	
	Humidity – Non-operating	5% to 85%	
	Altitude – Operating	+ 12,000 ft (+3,657.6 m)	
	Altitude – Non-operating	+ 40,000 ft (+12,192 m)	
Options	HP Desktop Access Centre	Sold separately, the HP Desktop Access Centre features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions; part number DK985A. For more information, refer to the HP Desktop Access Centre QuickSpecs.	

## Technical Specifications - Monitors

<b>Other</b>	<b>Accessories Included</b>	VGA to VGA cable – connects the graphic card's VGA analog connector to the monitor's input #1 (VGA analog) connector VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector
	<b>User Guide Languages</b>	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	<b>Warranty Languages</b>	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	<b>Colour</b>	Carbonite/Silver
	<b>VESA External Mounting</b>	Yes (Standard 4 hole pattern, 100 mm)
	<b>Kensington Lock-Ready</b>	Yes
<b>Certification and Compliance</b>		Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, *Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Windows Certification (Microsoft® Windows® 98, Microsoft Windows 2000, and Microsoft Windows XP) <a href="#">* Energy Star Compliant available summer 2004.</a>
<b>Compatibility</b>		Compatible with platforms using the VESA standard video modes and HP Compaq Business Desktops d500, d300, and d200 Series, Compaq Evo Desktops, and HP Workstations
<b>Service and Warranty</b>		Limited three years parts, labour, and on-site service, including backlight. Availability varies by region. Certain restrictions and exclusions apply. Consult HP Customer Service for details.

<b>HP Flat Panel Monitor LP2065</b>	<b>Panel</b>	<b>Type</b>	20-inch Active Matrix TFT (thin film transistor)
		<b>Viewable Image Area</b>	20.1 in (51 cm) (diagonal)
		<b>Screen Opening</b>	16.2 x 12.17 in (41.1 x 30.9 cm) (W x H)
		<b>Viewing Angle</b> (typical)*	Up to 178° horizontal/178° vertical (10:1 minimum contrast ratio)
		<b>Brightness</b> (typical)*	Up to 300 nits (cd/m2)
		<b>Contrast Ratio</b> (typical)*	Up to 800:1



## Technical Specifications - Monitors

	<b>Response Rate (typical)*</b>	8 ms (gray to gray), 16 ms (rise + fall)
	<b>Pixel Pitch</b>	0.255 mm
	<b>Colour Depth Support</b>	16.7 million colors
	<b>Backlight Lamp Life</b> (to half brightness)	45K hours
<b>On Screen Display (OSD) Controls</b>	<b>Buttons or Switches</b>	Input select, auto adjust/OSD up, OSD down, OSD menu select, power
	<b>Languages</b>	English, French, German, Spanish, Italian, Dutch, and Japanese
	<b>User Controls</b>	Brightness, contrast, positioning, colour temperature, individual colour control, serial number display, full screen resolutions, clock, clock phase, input selection, image control (including scaling), and factory reset
<b>Signal Interface/ Performance</b>	<b>Horizontal Frequency</b>	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input for modes with pixel clock less than 157 MHz)
	<b>Vertical Frequency</b>	48 to 85 Hz (VGA input); 30 to 92 KHz (DVI input for modes with pixel clock less than 157 MHz)
	<b>Native Resolution</b>	1600 x 1200 @ 60 Hz (recommended)
	<b>Preset VESA Graphic Modes (non-interlaced)</b>	1600 x 1200 @ 60 Hz, 75 Hz (VGA input) 1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz 1280 x 960 @ 60 Hz 1152 x 900 @ 66 Hz 1024 x 768 @ 60 Hz, 75 Hz, 85 Hz 800 x 600 @ 60 Hz, 85 Hz 640 x 480 @ 60 Hz, 75 Hz, 85 Hz
	<b>Text Mode</b>	720 x 400 @ 70 Hz
	<b>Mac Mode</b>	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
	<b>Sun Mode</b>	1152 x 900 @ 66 Hz
	<b>Maximum Pixel Clock Speed</b>	202 MHz (VGA input); 162 MHz (DVI input)
	<b>User Programmable Modes</b>	Yes, 10
	<b>Anti-Glare</b>	Yes
	<b>Anti-Static</b>	Yes
	<b>Default Colour Temperature</b>	6500 K

## Technical Specifications - Monitors

Video Input	Plug and Play	Yes		
	Input Signal	Four connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, and one s-video		
	Self Powered USB 2.0 Hub	One upstream, four downstream ports (cable included)		
	Input Signal	Two DVI-I connectors (dual VGA analog or dual digital input possible)		
	Input Impedance	75 ohms $\pm$ 10%		
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green		
	Video Cable	Two VGA to DVI-I; two DVI-D to DVI-I		
	Video Cable Length	5.9 ft (1.8 m)		
	Power	Input Power	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz	
		Frequency	47.5 to 63 Hz	
Typical Power Consumption		55 watts (without USB ports); 70 watts (USB ports fully loaded)		
Maximum		< 75 W		
Power Saving		< 2 watts		
Power Cable Length		5.9 ft (1.8 m)		
Mechanical	Dimensions (H x W x D)	Unpacked with stand	16.7 to 21.8 x 17.4 x 8.67 in (42.5 to 55.5 x 44.3 x 22.0 cm)	
		Unpacked w/o stand (head only)	13.58 x 17.4 x 3.42 in (34.5 x 44.3 x 8.7 cm)	
		Packaged	11.77 x 22.2 x 16.77 in (29.9 x 56.4 x 42.6 cm)	
	Weight	Unpacked	With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)	
		Packaged	26.3 lb (11.95 kg)	
	Tilt Range	-5° to + 25° vertical tilt		
	Swivel Range	-45° to + 45°		
	Height Adjustable	Yes, range 5.1 in (13.0 cm)		
	Pivot Rotation	Yes		
	Base	Detachable, ships attached		

## Technical Specifications - Monitors

<b>Environmental</b>	<b>Temperature – Operating</b>	46° to 95° F (10° to 35° C)
	<b>Temperature – Non-operating</b>	6° to 140° F (-10° to 60° C)
	<b>Humidity – Operating</b>	20% to 80% non-condensing
	<b>Humidity – Non-operating</b>	5% to 85%
	<b>Altitude – Operating</b>	+12,000 ft (+3,657.6 m)
	<b>Altitude – Non-operating</b>	+40,000 ft (+12,192 m)
<b>Options</b>	<b>HP Silver Flat Panel Speaker Bar - Part number: EE418AA</b>	Powered directly by the monitor or the PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and external jack for headphones. Sold separately. For more information, refer to the HP Silver Flat Panel Speaker Bar QuickSpec.
<b>Other</b>	<b>Accessories Included</b>	VGA to DVI-I cable - connects the graphic card's VGA connector to the monitor's input #1 or 2 (DVI-I analog) connector.
		DVI-D to DVI-I cable - connects the graphic card's DVI-D digital connector to the monitor's input #1 or #2 (DVI-I digital) connector.
	<b>User Guide Languages</b>	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	<b>Software</b>	HP Display Assistant Utility makes it possible to adjust displays settings through the PC using two-way communication via DDCI.
		HP Display Lite Saver allows ability to power up and down display at predetermined hours of the day to save power and backlight life.
		Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
	<b>User Guide Languages</b>	English
	<b>Warranty Languages</b>	English
	<b>Colour</b>	Carbonite/Silver
<b>VESA External Mounting</b>	Yes (Standard 4 hole pattern, 100 mm)	
<b>Kensington Lock-Ready</b>	Yes	

## Technical Specifications - Monitors

<b>Certification and Compliance</b>	Canadian Requirements/CSA, CE Marking, CISPR Requirements, , Energy Star Compliant, FCC Approval, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval,, MPR-II Compliant, PC2001 Compliant, PC99 Certified, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft® Windows® Certification (Microsoft® Windows® 98, Microsoft Windows 2000, and Microsoft Windows XP)
<b>Compatibility</b>	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
<b>Service and Warranty</b>	Three years parts, labour, and on-site service. 24-hour 365-day 1-800 technical support. Replacement options include 2nd business day on-site service or next business day direct replacement. With direct replacement, HP will ship a replacement display product directly to you. Using the shipping labels provided, return your failed display to HP. Certain restrictions and exclusions apply. For details, contact HP Customer Support.

<b>HP Flat Panel Monitor L2335</b>	<b>Panel</b>	<b>Type</b>	23-inch Active Matrix TFT (thin film transistor)
		<b>Viewable Image Area</b> (diagonal)	23 in (58.4 cm)
		<b>Screen Opening</b> (W x H)	19.53 x 12.24 in (49.6 x 31.1 cm)
		<b>Viewing Angle</b> (typical)*	Up to 170° H/170° V (10:1 minimum contrast ratio)
		<b>Brightness</b> (typical)*	Up to 250 nits (cd/m <sup>2</sup> )
		<b>Contrast Ratio</b> (typical)*	Up to 500:1
		<b>Response Rate</b> (typical)*	16 ms (typical, rise + fall)
		<b>Pixel Pitch</b>	0.258 mm
		<b>Colour Depth Support</b>	16.7 million colors
		* All specifications are provided by the component manufacturers. Performance specifications represent the highest specification of all HP's component manufacturers' typical level specifications for performance. Actual performance may vary either higher or lower.	
	<b>On Screen Display (OSD) Controls</b>	<b>Buttons or Switches</b>	PiP (Picture in Picture), Input Select, Auto Adjust, OSD Up, OSD Down, OSD Menu Select, Power
		<b>Languages</b>	English, French, German, Spanish, Italian
		<b>User Controls</b>	Brightness, contrast, positioning, colour temperature, individual colour control, serial number display, full screen resolutions, clock, clock phase, video picture-in-picture (size and position), input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset

## Technical Specifications - Monitors

Signal Interface/ Performance	Horizontal Frequency	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	Vertical Frequency	48 to 85 Hz (VGA and DVI input)	
	Graphics Controller	Pixelworks PW172	
	Native Resolution	1920 x 1200 @ 60 Hz (recommended)	
	Preset VESA Graphic Modes (non-interlaced)		1920 x 1200 @ 60Hz
			1600 x 1200 @ 60 Hz, 75 Hz
			1280 x 1024 @ 60 Hz, 75Hz, 85 Hz
			1280 x 960 @ 60 Hz
			1152 x 900 @ 66 Hz
			1024 x 768 @ 60 Hz, 75 Hz, 85 Hz
			800 x 600 @ 60 Hz, 75Hz
			640 x 480 @ 60 Hz, 75 Hz
		Text Mode	720 x 400 @ 70 Hz
		Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
	Sun Mode	1152 x 900 @ 66 Hz	
	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)	
	User Programmable Modes	Yes, 10	
	Anti-Glare	Yes	
	Anti-Static	Yes	
	Default Colour Temperature	6500 K	
Video Input	Plug and Play	Yes	
	Input Signal	Five connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, one s-video, component video	
	Input Impedance	75 ohms $\pm$ 10%	
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	
	Video Cable	VGA to VGA; VGA to DVI-I; DVI-D to DVI-I	
Power	Video Cable Length	5.9 ft (1.8 m)	
	Input Power	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz	
	Frequency	47.5 to 63 Hz	
	Maximum	< 100 W	
	Power Saving	< 5 W	
	Power Cable Length	5.9 ft (1.8 m)	

## Technical Specifications - Monitors

Mechanical	Dimensions (H x W x D)	Unpacked	17.36 (min) to 20.9 (max) x 21.46 x 8.27 in (44.1 (min) to 53.1 (max) x 54.5 x 21.0 cm)
		Unpacked without stand (head only)	14.57 x 21.46 x 3.35 in (37.0 x 54.5 x 8.5 cm)
		Packaged	11.5 x 25.75 x 23.86 in (29.2 x 65.4 x 60.6 cm)
	Weight	Unpacked	22.27 lb (10.1 kg)
		Packaged	30.87 lb (14.0 kg)
	Tilt Range	-5° to + 25° vertical	
	Swivel Range	-35° to + 35°	
	Height Adjustable	Yes, range 3.54 in (9.0 cm)	
	Pivot Rotation	Yes	
	Base	Attached	
Environmental	Temperature – Operating	46° to 95° F (10° to 35° C)	
	Temperature – Non-operating	6° to 140° F (-10° to 60° C)	
	Humidity – Operating	20% to 80% non-condensing	
	Humidity – Non-operating	5% to 85%	
	Altitude – Operating	+ 12,000 ft (+3,657.6 m)	
	Altitude – Non-operating	+ 40,000 ft (+12,192 m)	
Options	HP Desktop Access Centre	Sold separately, the HP Desktop Access Centre Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions; part number DK985A. For more information, refer to the HP Desktop Access Centre QuickSpecs.	

## Technical Specifications - Monitors

<b>Other</b>	<b>Accessories Included</b>	<p>VGA to VGA cable – connects the graphic card's VGA analog connector to the monitor's input #1 (VGA analog) connector</p> <p>VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector</p> <p>DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector</p>
	<b>User Guide Languages</b>	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	<b>Warranty Languages</b>	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	<b>Colour</b>	Carbonite/silver
	<b>VESA External Mounting</b>	Yes (Standard 4 hole pattern, 100 mm)
	<b>Kensington Lock-Ready</b>	Yes
<b>Certification and Compliance</b>		<p>Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, *Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Windows Certification (Microsoft® Windows® 98, Microsoft Windows 2000, and Microsoft Windows XP).</p> <p>* <a href="#">Energy Star Compliant available summer 2004.</a></p>
<b>Compatibility</b>		Compatible with platforms using the VESA standard video modes and HP Compaq Business Desktops d500, d300, and d200 Series, Compaq Evo Desktops, and HP Business Desktops d300 series.
<b>Service and Warranty</b>		Limited three years parts, labour, and on-site service, including backlight. Availability varies by region. Certain restrictions and exclusions apply. Consult HP Customer Service for details.

© Copyright 2006 Hewlett-Packard Development Company, L.P.

All rights reserved. HP and the HP logo are trademarks of the Hewlett Packard Company in the U.S. and/or other countries.

Microsoft and Windows are trademarks of Microsoft Corporation in the U.S. and/or other countries. NVIDIA and Quadro are trademarks of NVIDIA Corporation. All other product names mentioned herein may be trademarks of their respective companies.

HP shall not be liable for technical or editorial errors or omissions contained herein. The information is provided as is without warranty of any kind and is subject to change without notice. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty

