

Camera IP LAN - Wireless - USB

BOSSC55

User's Manual

The information in this document is subject to change without notice.

This document contains materials protected by copyright. All rights are reserved. No part of this manual may be reproduced or transmitted in any form, by any means or for purpose without express written consent.

Federal Communications Radio Frequency Interference Statement.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, Pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instruction manual may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio of television reception, which can be determined by turning the equipment off or on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio TV technician for help.

Notice :

- (1) The changes or modifications not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.
- (2) Shielded interface cables and AC power adapter, if any must be used in order to comply with the emission limits.

CE DECLARATION

This device complies with CE class B.

*EN55024		EN61000-4-5
EN55022	EN61000-4-2	EN61000-4-6
EN61000-3-2	EN61000-4-3	EN61000-4-8
EN61000-3-3	EN61000-4-4	EN61000-4-11

Printed in Taiwan R.O.C.

All contents are subject to change without notice.

All trademarks are the property of their respective owner.

Table of the contents

Chapter 1 Welcome to Wi-Fi Camera Pro/IP Camera Pro	3
1.1 Introduction	3
1.2 Product Features	4
1.3 System and network environment	4
1.4 Package Contents	4
Chapter 2 Hardware Description and Connection	5
2.1 Hardware description	5
2.2 Quick Start: IP Camera Auto Detection	6
2.3 Access the IP Camera via Internet Explorer	10
2.4 WEB Browser Configuration	11
2.5 IP Address Configuration	13
2.6 Administrator Configuration	14
2.7 How to Connect to Internet with ADSL	15
2.8 WEB Camera (USB Camera) Configuration	16
2.9 Use the virtual IP to connect with Internet	20
Chapter 3 Basic Configuration	22
3.1 Image control	22
3.2 Basic LAN configuration	25
3.3 Wireless Setup	26
3.4 Network Status	28
3.5 System / Client Log	28
Chapter 4 Advance Configuration	29
4.1 Device administrator Setup	29
4.2 PPPoE Setup	30
4.3 Dynamic DNS Setup	31
4.4 FTP Service Setup	32
4.5 E-Mail Service Setup	33
4.6 NTP Timer Service Setup	34
4.7 User Management	35
Chapter 5 TROUBLESHOOTING	37


Issue:08/30/2006

Version: A

P/N: 34408000

CHAPTER 1

Welcome to Wi-Fi Camera Pro/IP Camera Pro

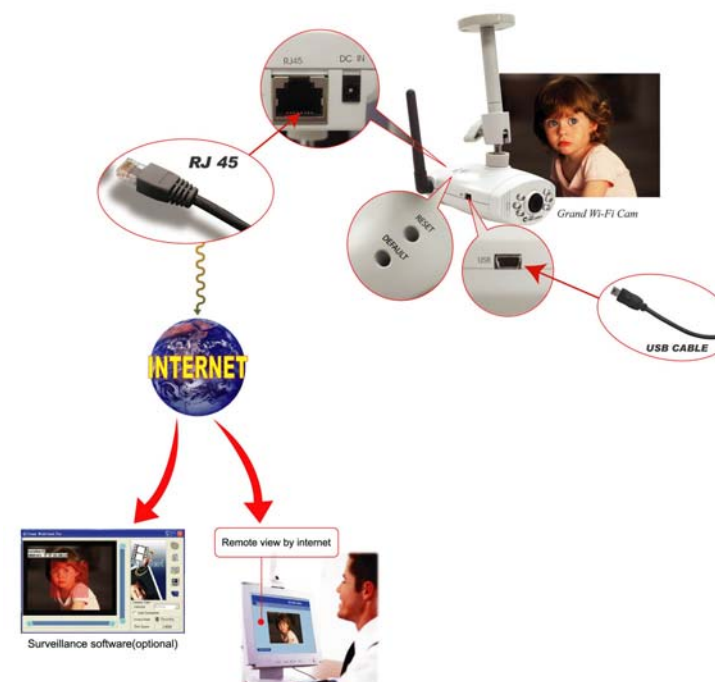

1.1 Introduction

Today, more people are aware of their personal, home and office security and are finding solutions to protect themselves. Our **Wi-Fi Camera Pro** provides the ideal solution by operating easily with your Internet Explorer web browser.

Wi-Fi Camera Pro has a built-in high-speed image and network processor, providing you with a powerful embedded device with many Internet services such as Email, FTP, DDNS, PPPoE, NTP, User Manager, and Image Control. The **Wi-Fi Camera Pro** includes a high quality CMOS sensor with 6 infrared LEDs that provide excellent imaging in dark and low light situations.

1.2 Product Features

1. High Resolution Image Processor (640*480/320x240/176*144) with built-in MJPEG encoder.
2. Ethernet RJ-45,10/100 Base-T with auto-sensing.
3. Remote view through the IE browser, simply type in the IP address.
4. 6 infrared LEDs provide imaging in the dark.(**Night Version only**)
5. Many Valuable Internet services: **Email, FTP, PPPoE, Dynamic DNS, NTP service, User Management, and Image quality Control.**
6. USB 1.1 Interface making it useful as a web cam.
7. Compatible with Microsoft **MSN Messenger** and **NetMeeting**.
8. 802.11g wireless (Compatible with 802.11b Access Point) (**Wi-Fi Camera Pro only**).

1.3 System and network environment

1. LAN: 10Base-T Ethernet or 100Base TX Fast Ethernet.
2. More than one fixed IP address is recommended.
3. A 10/100Base-T switch HUB is required.
4. Microsoft Internet Explorer 5.0 or above.
5. Pentium III 1G CPU or above.
6. 64MB RAM or above.
7. VGA card with 8MB Memory or above (800x600 or above).
8. Windows 2000/XP is recommended.

Important: A fixed IP address is not required to access camera from the Internet. However if your IP address is dynamic, you need to ask your Internet service provider for the Dynamic DNS service.

1.4 Package Contents

1. Wi-Fi Camera Pro or IP camera Pro
2. Mount
3. Quick start
4. Driver CD (**Surveillance software is optional**)
5. USB Cable
6. RJ-45 Cable (cross over wire)
7. Switching Adapter, DC 5V/2A (-) ← (●→ (+)

CHAPTER 2

Hardware Description and Connection

2.1 Hardware description



1. Camera switch: Change the mode between PC Camera (USB),IP Camera Pro and Wi-Fi Camera Pro
2. Connections and Interface: USB 1.1, RJ45 and Power adapter
3. Reset and Default:
 - a. Reset: When you change the mode between PC Cam, IP Camera ,Wi-Fi Camera or set the Camera, you must reset (reboot) the system.
 - b. If you forget the IP address or ID Password, you can restore the original default parameters.
 - c. Default IP address: <http://192.168.1.100>.
Default User ID: root ,
Default User Password: admin
4. Connections and Interface: USB 1.1, RJ45 and Power adapter
5. A Ready LED: **In IP or Wi-Fi Camera mode, when the ready LED is on (takes about 30 ~ 40 seconds to light) then the IP Camera can be operated.**
5. 6 infrared LEDs with night-vision lens
6. The indicator LED:
 - a. Link LED : When IP Camera is connected to the network, this light will be turned on
 - b. 10/100 T Base LED: Indicates the network status, as well as indicating


whether the connection is high speed or not.

2.2 Quick Start: IP Camera Auto Detection


Please connect the IP Camera with your Gateway or Ethernet Hub. The following figure suggests the recommended set-up:



Internet Camera Auto Detection

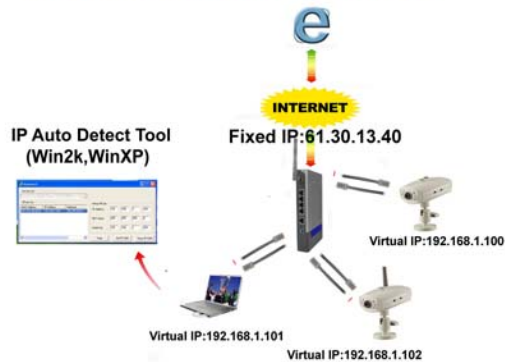


Step1: Please Install the IP Auto Detect Tool (Only supports WinXP and Win2000).

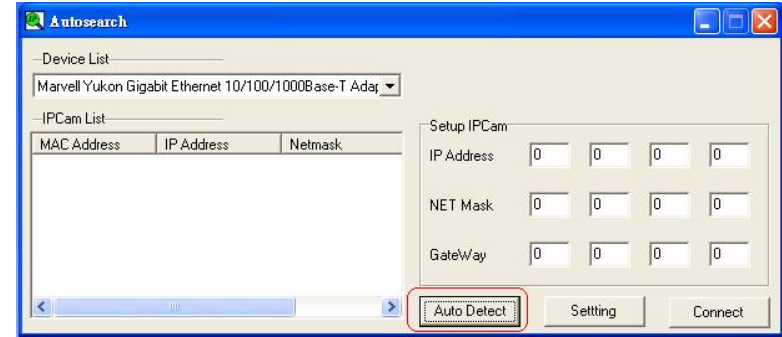

Step2: Execute the software "IPDetect.exe" on the Desktop

Step3: Select a LAN Device :Network Adapter (It can not support wireless Network Adapter), Click the button "Auto Detect"

Step4: Find the Internet Camera by highlighting it in the "IPCam List" and assign the IP address by clicking the button "Setting"

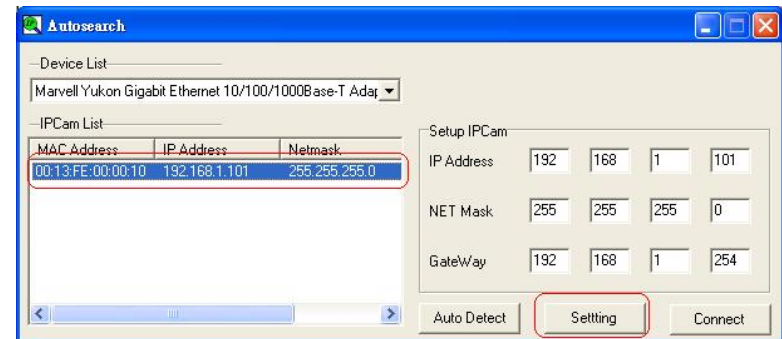

Then you must follow the next steps to get Network information (Sub Net, Net Mask and Default Gateway Address):

Step5: Click Start->All Programs->Accessories->Command Prompt




Default Gateway (Gate Way) to the IP Camera

Step8: You must use the same Subnet Mask” 255.255.255.0 “and GateWay”192.168.2.254”


Step9: You can use any IP Address between 192.168.2.1-254, but please make sure that the IP Address has never been used or is being used by any other IP addressable device.

Step10: For Example: Type the following parameters and click “setting”

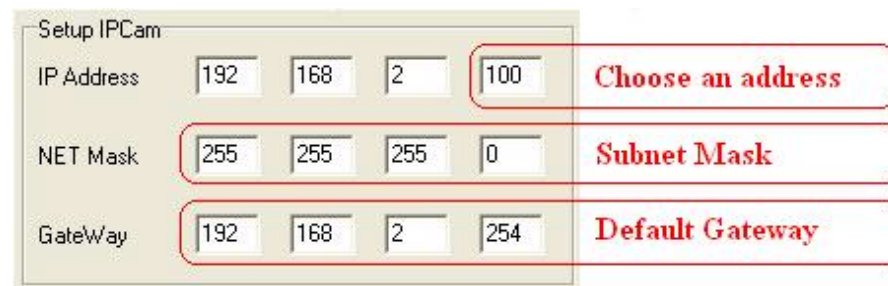

Step11 Click the button “Connect”, then you can connect to Camera

Step6 Type the command “ipconfig” to get the network information

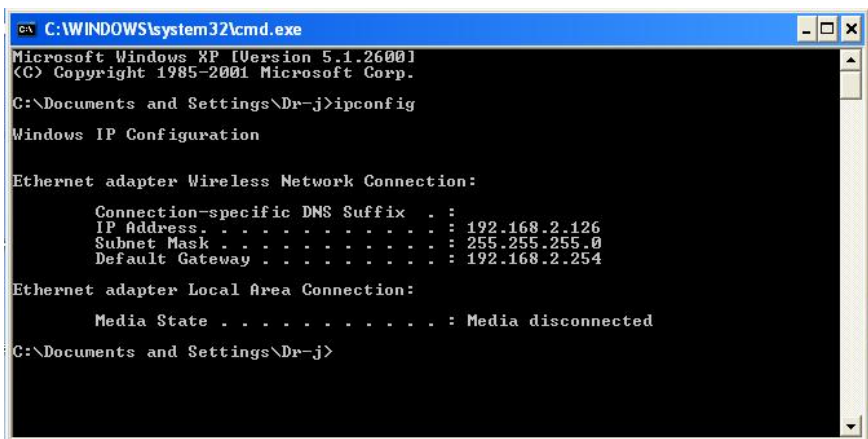

Step7: Then you can assign the IP Address, Subnet Mask(NET Mask) and

2.3 Access the IP Camera via Internet Explorer

Default IP Camera's IP address is 192.168.1.100. To open IP Camera's Home page, please type the <http://192.168.1.100> then click the "Enter" button on your keyboard.

Then Login with User name: **root**, Password: **admin**.



Login Screen

Default User Name: root

Default Password: admin

Default IP address: 192.168.1.100


If it can't get connected, then you have to modify your network setting. The IP Camera can be used to manually configure the camera's network settings. Please use command "Ping" (**Appendix A**) to check the connection for more detail.

Important: If you forget the IP address or ID Password, please click the "Default" button(Appendix D) on the body of IP Camera until the ready light has been turned off.



2.4 WEB Browser Configuration

1. From any PC on the local network, start Internet Explorer and enter the camera's IP address in the address bar, as pictured below:

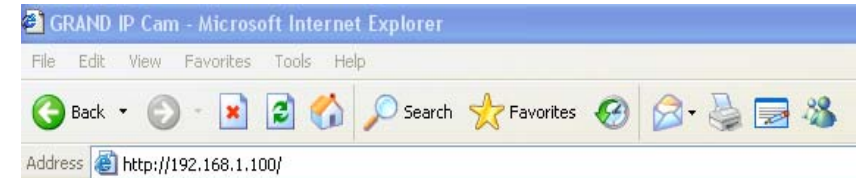


IP Camera's IP Address in Internet Explorer


2. When accessing the web server for the first time, you will need to install an ActiveX component for your Internet Explorer. This can be changed in your **Internet Explorer Security**.

Internet Explorer Security Setting: (Appendix B)

Step1 : Click "Tool" => "Internet Options" => "Security" => "Custom Level".

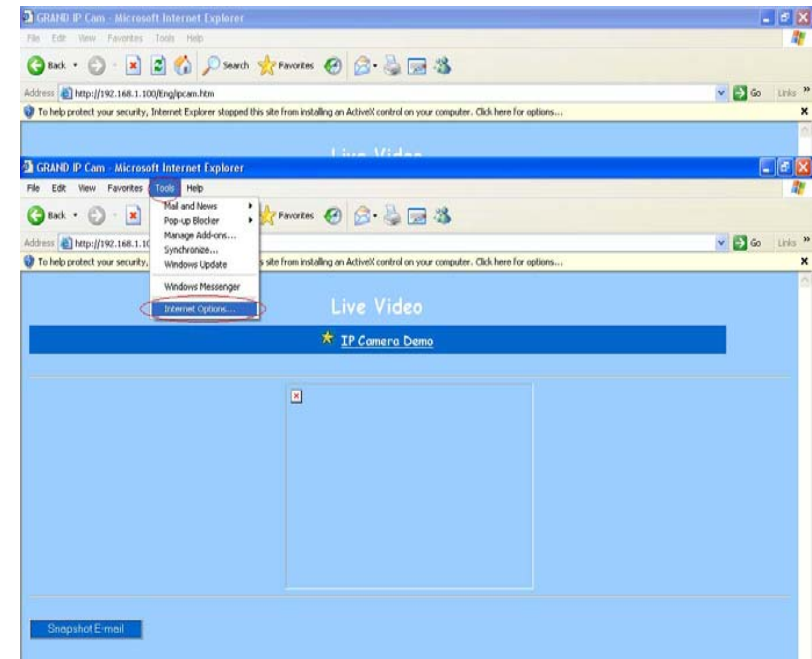


Internet Explorer Internet Options

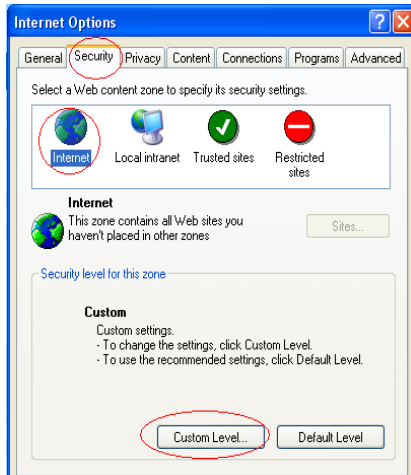

Internet Explorer Security Modify

Step2 : Then, please click “**Custom Level**” and set the parameters as follows:

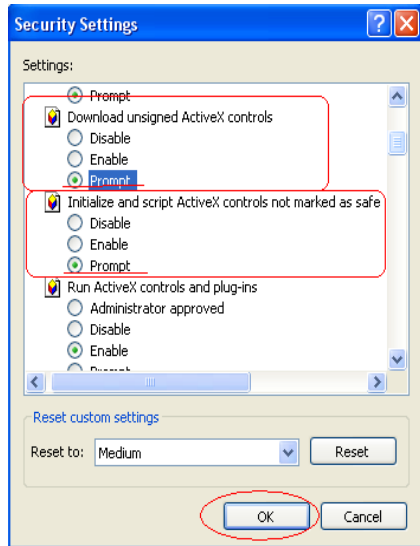

ActiveX Security Settings

3. Please remember these two features must be active “**Download unsigned ActiveX controls**” and “**Initialize and script controls not marked as safe**” If you want to learn more, please refer to the troubleshooting section In Chapter 5 : **Frequency Ask Questions**.
4. Snapshot E-mail: Send the Live Video Screen capture via E-mail, please refer to the settings about [**Configuration**] => [**Advanced Configuration**] => [**E-mail service Setup**].

2.5 IP Address Configuration:

Please click **Basic Setup** to Link to the Page:

<http://192.168.1.100/Eng/BasicSetup.htm>



Depending on your network setup, you should see the following figures:

If there is a fixed IP Address: please set the following parameters (including Subnet Mask, Gateway IP Address, Domain Name Service), about the detail, you can ask for more information from your Broadband/Cable Internet Service Provider.

Basic Setup				
Host Name:	<input type="text"/>			
Domain Name:	<input type="text"/>			
IP Address	(MAC Address: 00-00-00-00-00-01)			
<input type="radio"/> Get an IP address by PPPoE <input type="radio"/> Get an IP address by DHCP <input checked="" type="radio"/> Specify an IP address				
Subnet Mask Address::	61	30	13	40
Default Gateway IP Address:	255	255	255	0
Domain Name Server 1:	61	30	13	254
Domain Name Server 2:	1	172	255	30
Domain Name Server 3:	18	0	247	226
Domain Name Server 4:	209	119	184	55

2.6 Administrator Configuration

Click **Device Admin** to Link to the Page: _


<http://192.168.1.100/Eng/Admin.htm>



Important: We use the same default Password with each IP Camera, so we suggest that you change the password.


Important: Each IP Camera has his own unique Mac Address, so we suggest you do not change the item "MAC Address".

2.7 How to Connect to Internet with ADSL

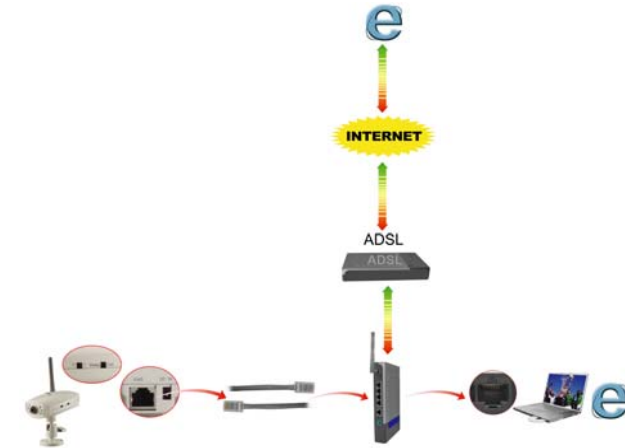


If you want to connect the IP Camera with Internet and Ethernet at the same time, you must use the function "ADSL PPPoE"

Step1 : Link to this page: <http://192.168.1.100/Eng/BasicSetup.htm>, and select "Get an IP Address by PPPoE"

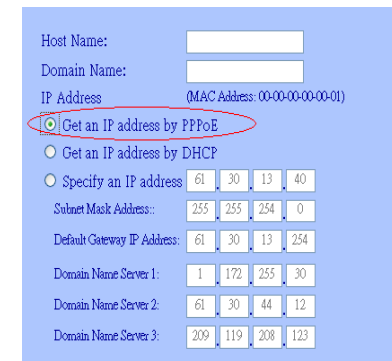

Step2 : Link to <http://192.168.1.100/Eng/PPPoE.htm> check the enable feature and type the ID and Password for your ADSL modem

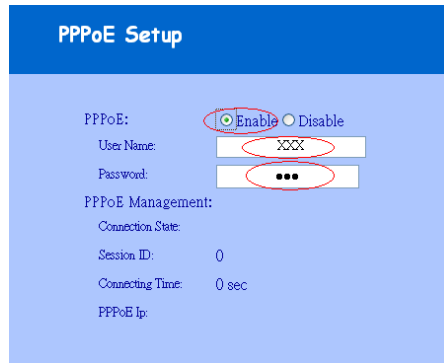

2.8 WEB Camera (USB Camera) Configuration

Step1 : Install the USB driver on the software CD and click "SETUP.EXE"



Step2 : Please click "Next" to install the USB driver



Step3 : Change the switch on the camera to the mode "Web Camera" and reset the camera.




Step4 : Connect the IP Camera directly to the computer with USB cable included. Then click the option "Install the software automatically (Recommended)"

Step5 : Select "No, not this time" and click "Next".






Step6 : Select “install the software automatically [Recommended]”and click “Next”.

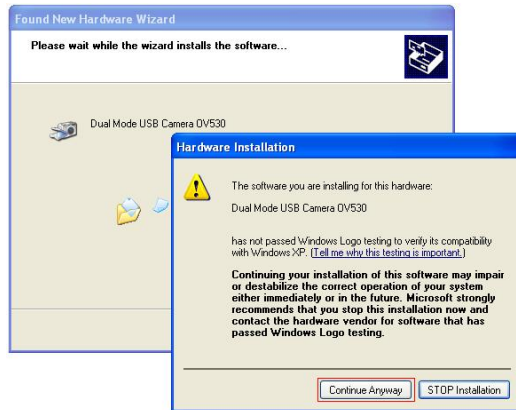


Step7 : Click “Continue Anyway”

Step8 : Then you can see the following message:

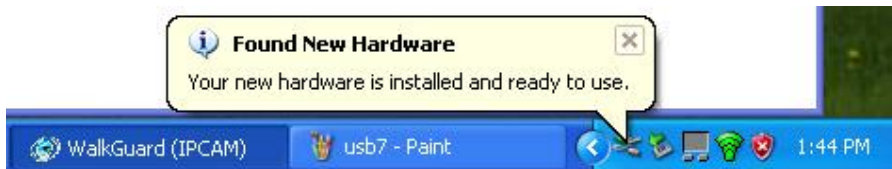


Step9 : Open Microsoft NetMeeting(c:\program Files\NetMeeting) or MSN Messenger, then you can control the Image with MSN Messenger or NetMeeting.

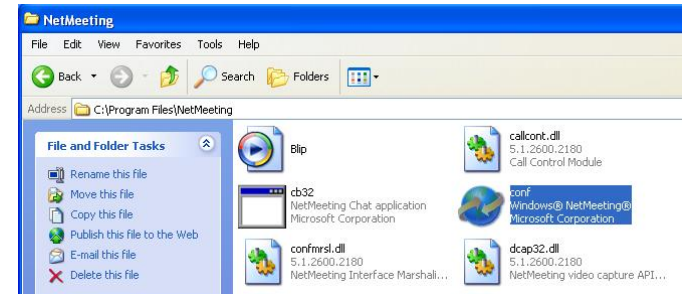

2.9: How to use the virtual IP to connect IP Camera and Internet.

If your network Architecture supports the following figure, You will need to do port and local virtual IP forwarding in the firewall or gateway setup

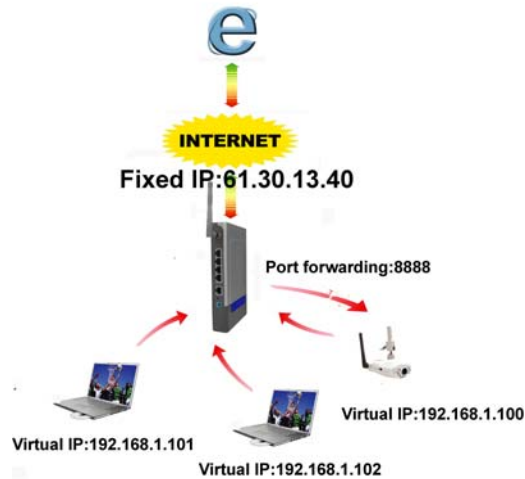

Step1 : In this Page “Device administrator Setup”, please enable the function “Multiport Defaults” and assign a port number for the IP Cam

The screenshot shows the 'Administration Setup' page for an IP Cam. The page includes fields for Product Name (IPCam), Version (Build Feb 17 2005 17:51:36), and Administrator Password. There are radio buttons for 'Reset Device' and 'Factory Defaults', both set to 'No'. The 'Multiport Defaults' option is set to 'Yes', and the 'port number' is set to '8888'. The 'MAC Address' field is set to '00 00 00 00 00 01'.

Step2 : Setup your firewall or gateway, and assign a Local Virtual IP: 192.168.1.100 and open a port 8888 for the IP Cam, the

following figure is just a example, you need to ask your Internet Service Provider

The screenshot shows the 'OfficeConnect Wireless 11g Cable/DSL Router' Firewall settings page. The 'Virtual DMZ' section is active, showing 'Block request' selected and 'Virtual Server IP Address' set to 192.168.1.100 with 'Service Ports' set to 'ip cam' and '8888'. The page also includes a 'Virtual Servers' table with columns for 'Virtual Server IP Address' and 'Service Ports'.

Virtual Server IP Address	Service Ports
delete	192.168.1.100 ip cam 8888

Step3 : In the Remote Computer, please open the Internet Explorer, and input the IP address: <http://61.30.13.40:8888>

The screenshot shows the Microsoft Internet Explorer browser with the address bar containing the URL <http://61.30.13.40:8888>. The browser title is 'GRAND IP Cam - Microsoft Internet Explorer'.

Chapter 3 Basic Configuration

3.1 Image control

In this chapter, we will introduce some basic configuration for the WiFi Camera.

Image Control

Video Resolution : 176x144 320x240 640x480

Background Light: Normal(Indoor) Special(Outdoor or Dark)

Quality : Worst Medium Best

Auto Exposure : Enable Disable

Auto White Balance : Enable Disable

Sharpness: -low-- 1 2 3 --high--

Hue:

Brightness :

Contrast :

Saturation :

Light Frequency : 50Hz 60Hz

Mirror: Enable Disable

Rotate: Enable Disable

Image Control

Here you'll find the following control items:

- 1. Video Resolution: 176*144 / 320*240 / 640*480:** Select the IP Camera output Video Resolution of your choice. The higher resolution will be clearer than the smaller, but it will occupy a larger bandwidth.
- 2. Background Light: Normal(indoor) / Special(Outdoor or Dark):**
Select the IP Camera output Video quality of your choice. The better resolutions
- 3. Quality: Worst / Medium / Best:** Select the IP Camera output Video quality of your choice. The better resolutions will be clearer than the lowest settings, but it will occupy a larger bandwidth.

Quality : Worst Medium Best

- 4. Auto Exposure: Enable / Disable:** Switch the IP Camera Auto Exposure function between Enable / Disable. By enabling it, the IP Camera will automatically modulate the lighting conditions.

Auto Exposure : Enable Disable

- 5. Auto White Balance: Enable / Disable:** Switch the IP Camera Auto White Balance function between Enable / Disable. By enabling it, the IP Camera will automatically modulate white color for optimal picture quality in any lighting condition.

Auto White Balance : Enable Disable

- 6. Sharpness: Switch the IP Camera Auto White Balance function between Enable / Disable. By enabling it, the IP Camera will automatically modulate white color for optimal picture quality in any lighting condition.**

Sharpness: -low-- 1 2 3 --high--

- 7. Hue / Brightness / Contrast / Saturation:** Modulate the IP Camera's Image performance.

Hue:

Brightness :

Contrast :

Saturation :

NOTE: In the dark, we suggest you raise the “**brightness**”.

- 7. Light Frequency:** Adjust the light frequency to suit your country. 60Hz is the standard for the USA and 50Hz is the European standard.

Light Frequency : 50Hz 60Hz

8. **Mirror:** Adjust the light frequency to suit your country. 60Hz is the standard for the USA and 50Hz is the European standard.

Mirror: Enable Disable

9. **Rotate:** Adjust the light frequency to suit your country. 60Hz is the standard for the USA and 50Hz is the European standard.

Rotate: Enable Disable

NOTE: After adjusting these parameters, please click the "Apply" button to save your new settings. If you don't want to keep the new settings, click the "Undo" button to give up those modifications.

3.2 Basic LAN configuration



IP Camera Setting – Basic LAN Setup

1. Host Name & Domain Name: If you do not know this one, you can ignore this item

Host Name:
Domain Name:

2. MAC Address: Shows the current MAC address used by the IP Camera.

IP Address (MAC Address: 00-13-FE-00-00-00)

3. Get an IP address by PPPoE: If "Get an IP Address by PPPoE" is selected, you must setup the PPPoE configuration. (In order to login to the ADSL Modem).

Get an IP address by PPPoE

4. Get an IP address by DHCP: If your Network is defined with DHCP assigning the IP address. Then you won't need to assign the IP address by yourself manually.

Get an IP address by DHCP

5. Specify an IP address: Please specify your IP Camera II's IP address by manually assigning one yourself. Don't assign the same IP address as

other Network devices.

Specify an IP address 192 . 168 . 1 . 100

6. Subnet Mask Address: Default Subnet Mask Address is: 255.255.255.0

Subnet Mask Address:: 255 . 255 . 255 . 0


7. Default Gateway IP Address: Depends on your Internet Service Provider. Please contact them for further assistance.

Default Gateway IP Address: 192 . 168 . 1 . 254

8~10. Domain Name Server: Your Internet Service provider will provide you with at least one DNS IP Address.

Domain Name Server 1: 168 . 95 . 1 . 1

3.3 Wireless Setup

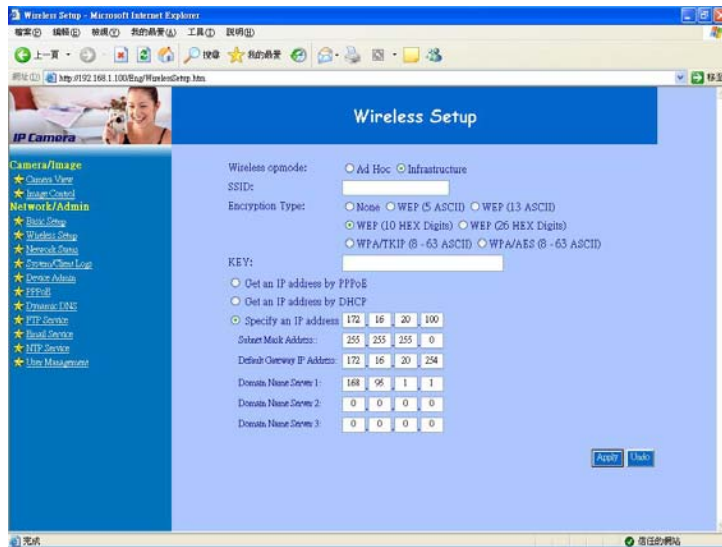

Wireless LAN Setup

Note:This function only used by Wi-Fi Camera Pro.

1. Wireless opmode: Ad Hoc / Infrastructure: Switch the Wi-Fi Camera wireless mode between the Ad Hoc mode (point to point), or Infrastructure mode (Broadcast).

Wireless opmode: Ad Hoc Infrastructure

Ad Hoc : If you want to connect the Wi-Fi camera and PC or notebook directly, please select this mode. But you must make sure your notebook includes the Wireless LAN Card (802.11b/g) and you must set the parameter for 802.11b/g and Ad Hoc.

Infrastructure: If there is a wireless AP (Access Point), please select this mode.

2. SSID: SSID works best with the User ID which is used by the WLAN.

SSID:

3. Encryption Type : Switch Encryption Type.

Encryption Type: None WEP (5 ASCII) WEP (13 ASCII) WEP (10 HEX Digits) WEP (26 HEX Digits) WPA/TKIP (8 - 63 ASCII) WPA/AES (8 - 63 ASCII)

6. Key: Assign WEP digital Number Key. The digital numbers must be the same as the WEP Key which was used by the Wireless AP (Access Point).

KEY:

7. IP setup: you can use the same parameter, prefers the **Basic Setup**

Get an IP address by PPPoE Get an IP address by DHCP Specify an IP address 192 . 168 . 1 . 100
Subnet Mask Address:: 255 . 255 . 255 . 0
Default Gateway IP Address: 192 . 168 . 1 . 254
Domain Name Server 1: 168 . 95 . 1 . 1
Domain Name Server 2: 168 . 95 . 192 . 1
Domain Name Server 3: 192 . 168 . 1 . 1

3.4 Network Status

Shows the current Ethernet information, we suggest the following figure:

Network Status

Use ethernet/wireless: ethernet

IP Address: 192, 168, 1, 99

Network Mask: 255, 255, 255, 0

Default Gateway: 192, 168, 1, 254

Domain Name Server 1: 168, 95, 1, 1

Domain Name Server 2: 0, 0, 115, 221

Domain Name Server 3: 18, 0, 116, 221

Reload

Network Status

3.5 System / Client Log

System/Client Logs

Reload

Main Info	IP Address	MAC Address	Time
System Boot			11/29/2004 15:43
New client	172.16.20.8	00:40:F4:3A:BD:E4	11/29/2004 15:52
New client	192.168.1.8	00:40:F4:3A:BD:E4	11/29/2004 16:7

System / Client Log

Shows the System / Client Logs, please click the “Reload” button to load the newest logs. Displays the details of the [Client Login Time] [IP address] [MAC Address] information.

Chapter 4

Advance Configuration

This chapter introduces you to the advanced configuration.

4.1 Device administrator Setup

Administration Setup

Product Name: IPCam

Version: Build Feb 17 2005 17:51:36

Administrator Password

Password Change:

Password Confirm:

MAC Address: 00, 00, 00, 00, 00, 01

Reset Device: Yes No

Factory Defaults: Yes No

Multiport Defaults: Yes No

port number: 0

Administrator Setup

1. Administrator Password: Allows you to modify the Administrator’s login password. Remember to click the “Apply” button to update and save.

Administrator Password

Password Change:

Password Confirm:

Default User ID: root

Default User Password: admin

Caution: Please remember your Administrator password. If forget your administrator password, please refer to chapter5 Q/A.

4. MAC Address: Allows you to modify the WiFi Camera’s MAC address. Please input the unique MAC address.(refer to Chapter 2.6). Then click the “Apply” button to update the setting.

Please use the MAC address which was printed in the case.

5. Reset Device: Yes / No: Allows you to reset your Wi-Fi Camera and restart without losing any stored information and settings. To enable this feature, please select “Yes”, and then click the “Apply” button.

Reset Device: Yes No


6. Factory Defaults: Yes / No: Allows you to reset your Wi-Fi Camera and restart with factory default information and settings. All stored information and settings will clear. To enable, please select “Yes”, and then click the “Apply” button. It is the same with the Hardware factory reset.

Factory Defaults: Yes No

3. **Multipoint Defaults: Yes / No:** Check “Enable” to allow you to configure the broadband router from WAN side. To access the setting page from external side, enter “http://<WAN IP Address>: 8080” in the web browser

Multipoint Defaults: Yes No
port number:

4.2 PPPoE Setup

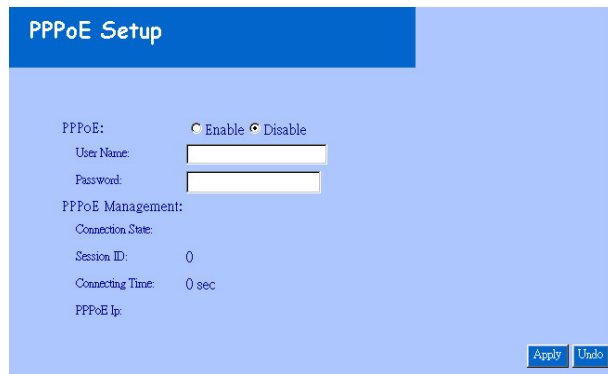

IP Camera Setting – PPPoE Setup

1. PPPoE: Enable / Disable: Click “Enable” to enable the PPPoE function.

Then you can connect the IP Camera with an ADSL modem.

PPPoE: Enable Disable

2. User Name / Password: Input PPPoE User Name and Password for automatic login PPPoE then click “Apply” button to update.


User Name:
Password:

3. PPPoE Management: Shows current PPPoE status.

PPPoE Management:
Connection State:
Session ID: 0
Connecting Time: 0 sec
PPPoE Ip:

4.3 Dynamic DNS Setup

NOTE: You will have to contact your Internet Service Provider (ISP) to activate a Dynamic DNS program.

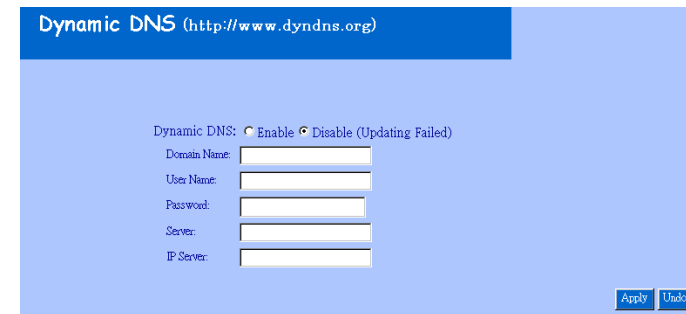

IP Camera Setting – Dynamic DNS Setup

1. Dynamic DNS: Enable / Disable (Not Update): Select “Enable” or “Disable (Not Update)” to use or not to use the Dynamic DNS mechanism. The ISP will dynamically allocate an IP address to your router, if you dial up to Internet by ADSL/Cable modem. If you want the

dynamic IP address to map to a static Domain Name, you can set the Dynamic DNS Settings by enabling this feature.

Dynamic DNS: Enable Disable (Not Update)

2. Domain Name: Input a domain name in this field you want to map to the IP address of your broadband/cable router.

Domain Name:

3. User Name: Input the “Web Address” of your Dynamic DNS Service

User Name:


4. Password: Input a password to access the dynamic DNS.

Password:

5. Server: Input the server address to access the dynamic DNS server.

Server:

4.4 FTP Service Setup

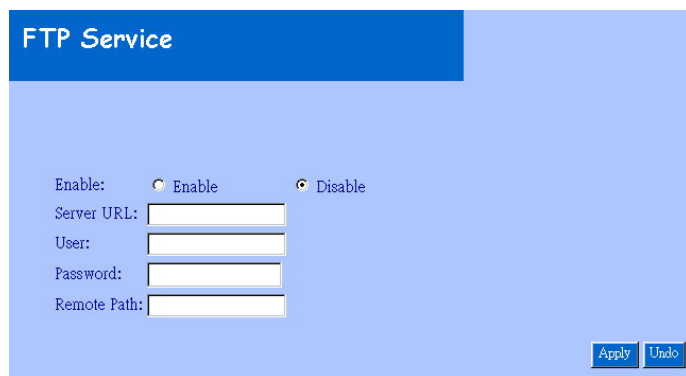

IP Camera Setting – FTP Service Setup

1. FTP service: Enable / Disable: Select “Enable” or “Disable” to use or not use image capturing for uploading to an FTP server. The WiFi Camera will automatically capture the image and upload to an FTP Server

Enable: Enable Disable

2. Server URL: Define the upload FTP URL address. (Without the path of the FTP server)

Server URL:

3. User & Password: The user name and the password to login to the FTP server.

User:

Password:

4. Remote Path: The file and folder path to store those images.

Remote Path:

4.5 E-Mail Service Setup



IP Camera Setting – E-Mail Service Setup

1. E-Mail service: Enable / Disable: Select “Enable” or “Disable” to use or not use image capturing to be sent via E-mail service.

Enable: Enable Disable

2. Mail Server: Input your mail server to send this e-mail (POP3 Server)

Mail Server:

3. Sender's Address: Input the e-Mail address to send this e-Mail.

Sender's Address:

4. E-mail address To: Enter the e-Mail address to receive this e-Mail.

Recipient's Address:


5. Subject: Enter the E-mail Subject for the mail receiver recognize.

Subject:

6. Interval In Minute: Set the interval, the E-mail will be sent the set interval time period.

Interval In Minute:

4.6 NTP Timer Service Setup

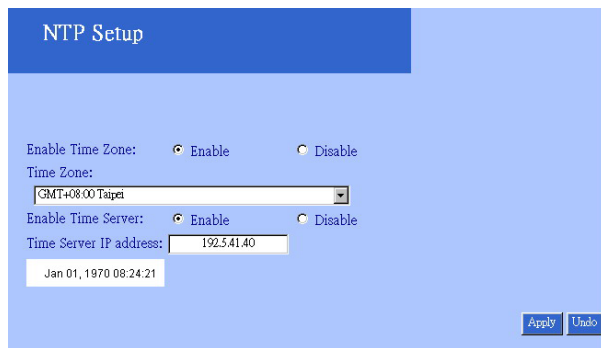

IP Camera Setting – NTP Time Service Setup

1. Enable Time Zone: Enable / Disable: Enable / Disable Time Zone reference

Enable Time Zone: Enable Disable

2. Time Zone: Select your local Time Zone area. It will reference the GMT location time for your WiFi Camera.

Time Zone:

3. Enable Time Server:

Enable / Disable: Enable / Disable reference time from the Time Server. This allows you to set your local time zone, this feature is

recommended for Internet use.

Enable Time Server: Enable Disable

4. Time Server IP address: Input reference Time Server IP address. Enter the IP Address of the Time Server in this field. The IP address will be listed with the time server information on the web.


Time Server IP address:

5. Current time: Displays current time.

Sep 01, 2004 13:30:42

6. Apply/Cancel: After making sure all settings are correct, click the "Apply" button to store the settings.

4.7 User Management

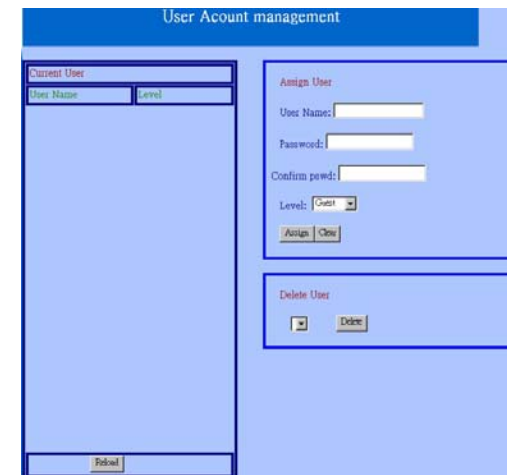

User Account Setup

1. Current User: List of the currently stored User Names and information.

2. Assign User: Allows you to add a new user and assign a password and Level (Guest / User / Admin).

Level : There are 3 different levels you can select, Guest / User and Admin.

Assign User

User Name:

Password:

Confirm passwd:

Level:

3. Delete User: Deletes a previously added User account.

Delete User

4. Reload: Reloads the list of current registered users.

CHAPTER 5 TROUBLESHOOTING

Please check the following chart for a possible solution to a problem. If you are experiencing a problem, a minor adjustment may eliminate the problem.

Frequently Asked Questions

IP Camera Installation

Q: What username and password can I use the first time accessing the IP Camera or after a factory default reset?

A: default User Name = root (all lowercase)
 default password = admin (all lowercase)
 default IP Address 192.168.1.100

Q: What should I do if I forget my username and password?

A: Restore the factory default settings by pressing the **DEFAULT** button until the ready LED is turned off.



default User Name = root (all lowercase)
 default password = admin (all lowercase)
 default IP Address 192.168.1.100

Q: Can the IP Camera also work behind the firewall?

A: Yes, you'll need to do perform port and local virtual IP forwarding in the setup settings of the firewall. Please refer to your firewall's user manual or help files.

Q: I cannot access the IP Camera from a web browser.

A1: Please use the run command “Ping” (**Appendix A**) to check the connection, if the response shown is “Request timed out”, it may be caused by the setting of the IP Address. Please refer to chapter **2.2**.

A2: Check the Ethernet LED of the IP camera. It should blink green and orange lights. If not, check that both ends of the Ethernet cable are securely and properly attached..

A3: Our RJ-45 Cable is a cross over wire. Meaning this cable only can be connected with a switch Hub or connected with the IP Camera being directly connected to the computer. If you want to connect with an older Hub, please remember to use a standard RJ-45 Cable.

A4: Confirm that the virtual/local IP address or port [which was used by the camera (default = 80)] has been forwarded to the camera. Please refer to your gateway / router’s user manual.

Q: Internet Explorer displays the following message: “Your current security settings prohibit downloading ActiveX controls”.

A1: Restore the default IE security settings (Medium) or configure the individual settings to allow downloading and scripts of signed ActiveX controls. Refer to **Appendix B: Internet Explorer Security Settings for more details**.

Q: There are no images available through the web browser?

A1: The ActiveX may be disabled. Please make sure ActiveX has been enabled in the Internet Options menu. Please see **Appendix B: Internet Explorer Security Settings** to correctly configure your Internet Explorer.

Appendix A: Check the Network Connection

Microsoft Windows includes various network information utilities to determine various network configurations. To determine your IP address and network settings, please follow the procedures.

1. Click on **”Start” => ”Run”** and type in: **cmd** and then press **”ENTER”**
2. Type command: **ipconfig** and then press **”ENTER”**.
3. This will display your network card’s IP address, Subnet Mask, and Default Gateway. Please remember it, we will use it later.
4. Use the command **”Ping”** to get the status of the network connection, the default IP is 192.168.1.100. Please type in the same command windows: **ping XXX.XXX.XXX.XXX**. The XXX.XXX.XXX.XXX is your IP Camera’s IP address. For example: **ping 192.168.1.100**.
5. If you can see the following report, the connection is successful.

Pinging 192.168.1.100 with 32 bytes of data:

Reply from 192.168.1.100: bytes=32 time<1ms TTL=128

Reply from 192.168.1.100: bytes=32 time<1ms TTL=128

Reply from 192.168.1.100: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.100:

Packets: Sent = 4, Received =4, Lost = 0 (0% loss),

Approximate round trip times in mini-second:

Minimum = 0ms, Maximum = 0ms, Average = 0ms

6. If there is no response on this address you’ll see

Pinging 192.168.1.100 with 32 bytes of data:

Request timed out.

Request timed out.

Request timed out.

Ping statistics for 192.168.1.100:

Packets: Sent = 4, Received =0, Lost = 4 (100% loss),


This indicates that the connection is not successful

Appendix B: Internet Explorer Security Settings


The IP Camera's web environment Communications using both JavaScript and ActiveX control technologies. The ActiveX control must be downloaded from the camera and installed on your PC. There are four things that your Internet Explorer security settings must allow for the web page to work correctly.

1. Download signed ActiveX controls
2. Run ActiveX control and Plug-ins
3. Script ActiveX controls marked safe for scripting
4. Active Scripting (Java Scripts)

All these things are enabled by the default Internet Explorer Security settings. You can restore the default settings in Internet Explorer by clicking **"Tool" => "Internet Options" => "Security" => "Default Level"**.

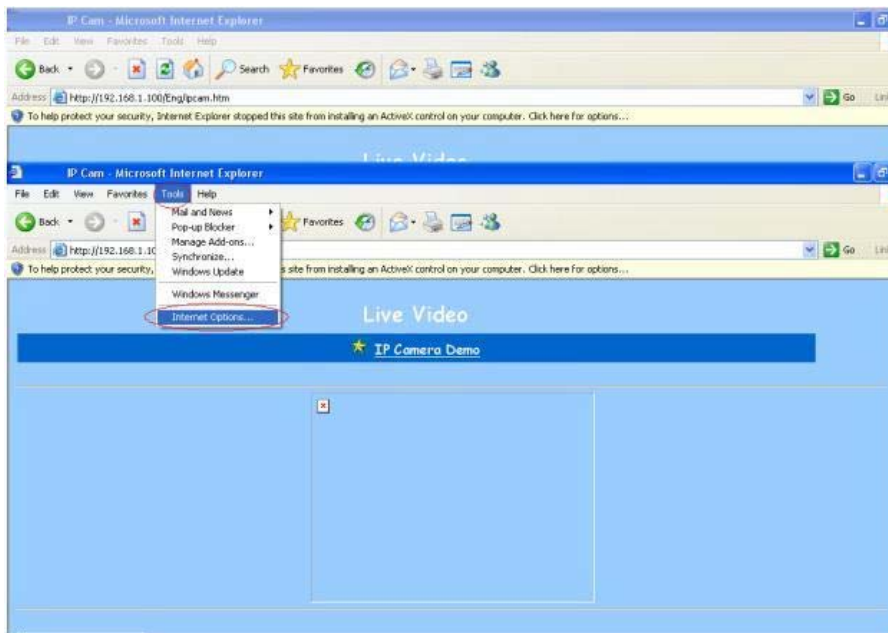


Internet Explorer Internet Options

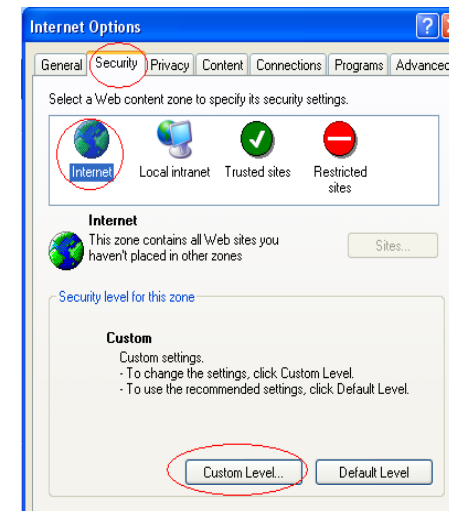

Internet Explorer Security Modify

You can also click **"Custom Level"** and set the parameter for the following settings:

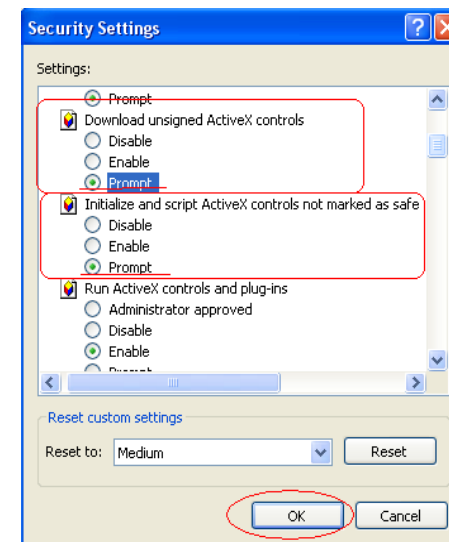


ActiveX Security Settings


Appendix C: Internet Explorer display error

message or crashes sometime

1. Please remove the Microsoft MSN Tool or MSN Tool Bar
2. Click start->control panel->Add or Remove Programs

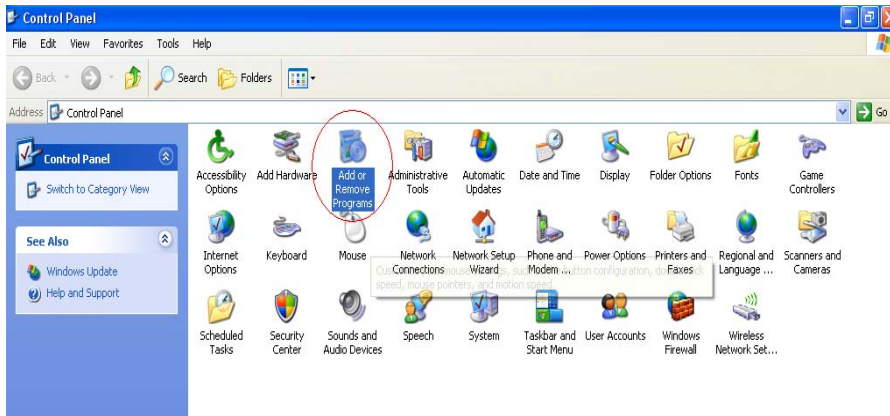

3. Remove the MSN Tool Bar

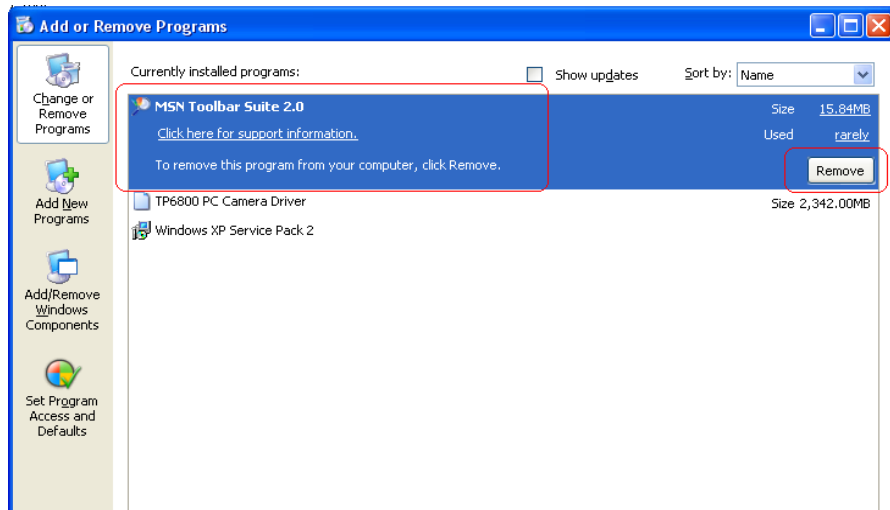


Appendix D: Step by step to restore the default

Step by step to restore the default parameter(Wi-Fi Camera and IPCamera3)
Step1: Reboot the Wi-Fi Camera and wait that the indicate Ready LEDs been turned on



Step2: Even the LED had been turned on, you also need to wait 20 seconds.
Step3: After 20 seconds, you can start to push the Default bottom until the "READY" LED been turned off

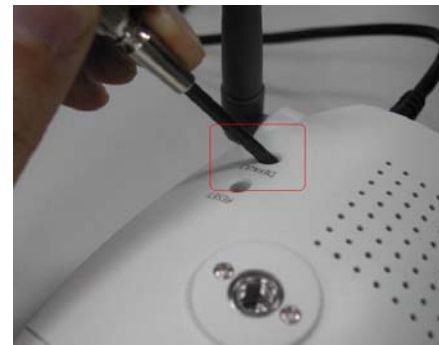

Default IP address: 192.168.1.100
Default User Name: root
Default Password: admin

When you need RMA or advanced technical service, please fill in this form as detailed as possible and FAX or Email it to your dealer or service representative.

Product S/N:	
Name:	
TEL No.:	FAX No.:
E-mail address:	
Full Address:	
Other add-on cards:	
Problem description:	