



“Comfort” is a concept many of us notice most when we’re uncomfortable. And comfort is our #1 priority at Mitsubishi Cooling and Heating Solutions.

Our innovative split zoned cooling and heating systems are designed to improve the quality of life for you and your family with personalized comfort control. Their cutting edge, environmentally sensitive technologies

also make them some of the most efficient HVAC systems in the world.

Perhaps your home has a room that’s always too hot or too cold. Or, perhaps you’re looking for a way to precisely control the climate in several rooms in your home, or in a new addition. No matter what your cooling and heating needs may be, Mitsubishi systems are the perfect way to transform your home into a comfortable oasis.



 **MITSUBISHI
ELECTRIC**
Cooling and Heating Solutions

Mitsubishi Electric Cooling and Heating Solutions

Split zoning technology is a primary source of year-round comfort control world wide. Mitsubishi has been available in the U.S. for almost 30 years, but is increasing in popularity because it provides comfort and is efficient.



Mitsubishi Electric's split zoning systems use refrigerant lines to connect an outdoor unit to one or multiple indoor air handlers, increasing the energy efficiency within a home or building. Advanced technologies are used to help you precisely control the temperature of each room that has an indoor unit and allows you to condition only the rooms in use.



Using a wireless remote or wall-mounted controller for each space, your Mitsubishi Electric system allows a truly personal level of comfort control. Environmentally friendly refrigerants, advanced filtration systems and high SEER ratings come standard on the full product line.

This synergy of application, technique and advanced technology delivers true eco-comfort for your home or work space.



How environmentally friendly are Mitsubishi Electric systems?

15 systems ENERGY STAR rated

9 systems qualify for the Federal Tax Credit offered through the American Reinvestment and Recovery Act. The tax credit is for 30 percent of total system and installation costs, up to \$1,500, and can be used for a qualified cooling-only, heat pump, H2i® heat pump or 2-to-1 multi-room heat pump system.

For details on qualifying for the Tax Credit, visit www.mitsubishicomfort.com/taxcredit or ask your contractor.

For information on available local rebate opportunities from state or utility companies, visit www.dsireusa.org.

Bedrooms, living rooms, dining rooms, basements, sunrooms, new additions and renovations are applications that can take full advantage of the single and multi-room Mitsubishi systems.

| | |
|---|---|
| M-SERIES: 9,000-36,000 Btu/h Residential and Light Commercial Applications | |
| | System Overview and Technology..... 04 - 07 |
| | System Showcase..... 08 - 09 |
| SINGLE-ROOM | MS/MSY WALL-MOUNTED: Air Conditioners..... 10 - 11 |
| | MSZ WALL-MOUNTED: Air Conditioners and Heat Pumps..... 12 - 13 |
| MULTI-ROOM | Overview of Multi-Room Systems..... 14 - 15 |
| | MSZ-A WALL-MOUNTED and SEZ DUCTED INDOOR UNITS WITH MXZ MULTI-ROOM SYSTEMS Air Conditioners and Heat Pumps..... 16 - 17 |
| | MXZ-2B20NA MULTI-ROOM Systems..... 18 - 19 |
| | SEZ Indoor Unit Performance Curves..... 20 |
| | MXZ Multi-Room System Combination Options. 21 - 23 |
| P-SERIES: 12,000-42,000 Btu/h Commercial, Institutional and Large Residential | |
| | System Overview and Technology..... 24 - 27 |
| | System Showcase..... 28 - 29 |
| | H2i® HYPER-HEATING INVERTER Technology Overview..... 30 - 31 |
| | PKA WALL-MOUNTED: Air Conditioners and Heat Pumps..... 32 - 33 |
| | PLA CEILING-RECESSED CASSETTE: Air Conditioners and Heat Pumps..... 34 - 35 |
| | PCA CEILING-SUSPENDED: Air Conditioners and Heat Pumps..... 36 - 37 |
| | PEA & PEAD HORIZONTAL DUCTED: Air Conditioners and Heat Pumps..... 38 - 41 |
| | H2i® HYPER-HEATING INVERTER: Heat Pump System..... 42 - 43 |
| | Rating Conditions, Refrigerant Tubing and Line Lengths..... 44 |
| | Accessories..... 45 |
| | LINE-HIDE™ 46 |
| | DIAMONDBACK™ Ball Valves and Platform Stand.... 47 |

Mitsubishi System Technologies:

a user-friendly zoned residential and light commercial personalized comfort solution (M-Series wall-mounted and ducted systems)

Comfort is a home that's cool and dry in the summer and cozy and warm in the winter. This environment is what you get with the Mitsubishi Electric system: perfect year-round comfort.

Mitsubishi Electric indoor units are easy to install practically anywhere:

- High on the wall, to blend into a room without taking up window space
- In the ceiling or below the floor and totally out of sight (on ducted systems)

Heat pump systems feature auto mode cooling/heating changeover, which automatically switches the system between cooling and heating to compensate for fluctuating temperatures. They're nearly silent – their fans deliver air quietly and continuously with only a gentle whoosh for constant circulation and filtration. For this reason, Mitsubishi ductless systems have long been the choice of thousands of homes, churches, schools and libraries across the U.S.

Our systems are the perfect way to cool or heat any single room or multiple rooms in your home or office to attain personal comfort.

Technology Benefits of Mitsubishi Systems

| Features | Benefits |
|--|--|
| INVERTER TECHNOLOGY IN THE COMPRESSOR | Maximizes energy savings by making sure only the energy needed to cool or heat an area is used. |
| EASY INSTALLATION FOR YOUR CONTRACTOR | Installs quickly and easily, having no need for major construction and remodeling. |
| COMPLETE ZONE CONTROL | Realizes maximum control and energy efficiency by cooling and heating only those spaces in use. |
| ADVANCED MICROPROCESSOR TECHNOLOGY | Creates a comfortable environment no matter what conditions are outside with our advanced self-monitoring controls. |
| PERSONAL COMFORT CONTROL | Convenient comfort control of temperature, fan speed and air direction in the specific zone with our remote or wired controller. |
| WASHABLE LONG-LIFE ANTI-ALLERGEN FILTERS | Improves air quality and saves money by being washable rather than having to replace the filter. |
| AUTO COOL/HEAT CHANGEOVER | Heat pump switches automatically from cooling to heating (MUZ Systems). |
| ENVIRONMENTALLY FRIENDLY REFRIGERANT | Uses R410A, an environmentally friendly refrigerant and a high percentage is recycleable. |



Cutting-edge Technology

In every aspect of a Mitsubishi Electric system, advanced technology is used to increase energy efficiency and eco-friendliness while providing innovative comfort control.


Our technology includes:

- INVERTER-driven compressors
- tremendous heating performance in Hyper-Heating INVERTER (H2i®) systems
- expanded filter systems
- i-see™ sensor accessory (select models)

Innovative Compressor Technology

INVERTER-driven compressor systems in the outdoor unit detect subtle changes in temperature and, like a car's cruise control, automatically adjust compressor speed – unlike conventional units, which start and stop repetitively. Special components within the compressor increase the magnetic flux and reduce its weight, allowing the compressor to generate higher energy efficiencies with better performance than ever before – at low levels of sound during start-up and running.

INVERTER

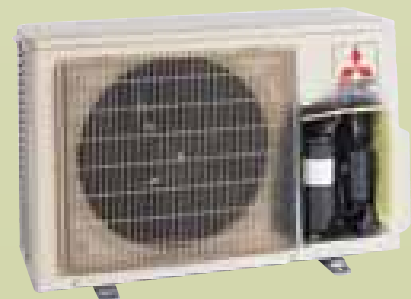

COMFORT CONTROL ENERGY EFFICIENT



ZONING EASY INSTALLATION


Heat, and Lots of It

With the advanced technology added to the already innovative INVERTER compressor the MSZ-FE high-efficiency systems are not only ENERGY STAR[®] rated and Tax Credit qualified, providing up to 26 SEER, they can provide exceptional heating performance.



These systems provide heating to -13° F and produce up to 100% heating capacity at 5° F (MSZ-FE09; 92% capacity at 5° F for MSZ-FE12). That is year-round comfort in extreme climates while being extremely energy-efficient.

MSZ-FE Hyper-Heating INVERTER
% Heating Capacity vs. Outdoor Temperature

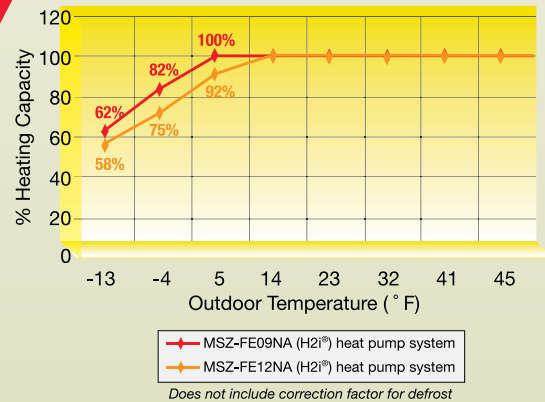

Energy Efficiency Recognized

Mitsubishi Electric ductless cooling-only and heat pump systems are so energy efficient that **nine systems** – 45 percent of our residential INVERTER-driven systems – are ENERGY STAR rated.

Extra Energy Savings

Eight (8) Mitsubishi Electric residential M-Series systems qualify for the Economic Stimulus Tax Credit. By investing in your home's energy efficiency, you could qualify for up to \$1,500 in federal tax credits.

For details on how to qualify, visit www.mitsubishicomfort.com/taxcredit or ask your contractor.

For information on available local rebate opportunities from state or utility companies, visit www.dsireusa.org.



i-see™ Sensor (MSZ-FE09/12NA models only)

The i-see sensor detects temperature variations in hard-to-control ceiling and floor areas while controlling the airflow up to a wide 150° lateral angle for ultimate comfort (90° angle in cooling mode).

By scanning the room and making adjustments based on ambient temperature readings, MSZ-FE systems achieve superior cooling/heating performance with extremely efficient operation.



Superior Operation

Advanced Control Technology

Through Mitsubishi's advanced controls technology the indoor unit is powered by the outdoor unit. Three polarity sensitive wires plus a ground conductor run from the outdoor to the indoor unit, providing both power and communication. An advanced wireless remote control is standard on all ductless models. An optional wired on-the-wall controller is available for wall-mounted indoor units on INVERTER systems (also requires MAC-397 adapter) while standard on ducted units.



Quiet Operation

Do you hear that? No? You barely hear our systems because Mitsubishi indoor units operate with barely a whisper. For example:

| | |
|---|-------------------------|
| Police siren | 118 decibels |
| Circular saw | 107 decibels |
| Vacuum cleaner | 74 decibels |
| Library reading room | 33 decibels |
| Whisper-tone voice | 35 decibels |
| Our Indoor Units (at low speed) | 19 - 34 decibels |

Did you hear that? We hope you did.

Warm Air, No Drafts

Our hot-start heat pump technology provides warmth from the beginning. The fan increases in speed as the coil is warmed, reducing drafts so when you want warm air, you'll get it.

System Control in the Palm of Your Hand

Mitsubishi Electric offers a comprehensive remote controller that controls temperature, fan speed and more. Choose from four modes: COOL, HEAT, AUTO and DRY. The controller also has a 12-hour ON/OFF timer for one-button control of your personal comfort.

Auto Changeover on Heat Pump Systems (MUZ outdoor units)

Our heat pump systems sense whether a space needs cooling or heating and automatically switch modes as needed to maintain a consistent temperature within the selected range of a single zone.

Easy to Maintain


With easily accessible filters, little or no ductwork to clean, and uncomplicated wiring connection points between the indoor and outdoor units, Mitsubishi systems rely on minimal maintenance, providing another level of comfort.



Total Comfort

Additional Air Circulation

With the WIDE VANE or SWING mode, available on the MSY(Z)-GA24/D30/36NA, there is an option for seven horizontal airflow directions that provide 150° of airflow for greater conditioned air circulation.

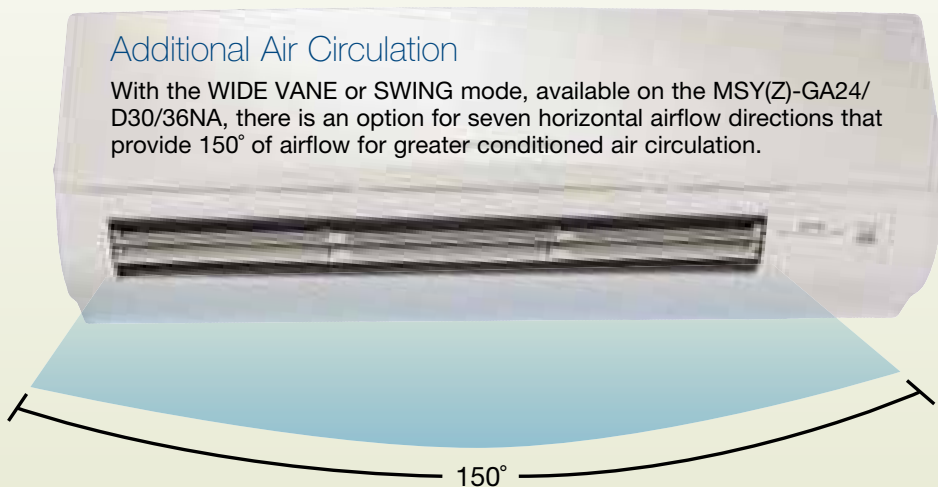

Programmable Comfort

Smart Set featured on MSZ-GE systems provides the option to program multiple settings into one 'quick' press feature providing an additional level of comfort control.

The POWERFUL mode (found on select systems) is available to cool or heat any desired space quickly by lowering the set temperature in cooling mode or raising the set temperature in heating mode, both by 7° F. In Powerful Mode, the fan speed increases for 15 minutes then resumes standard operation.

Multiple Filters for Cleaner, Healthier Air


Mitsubishi indoor units use a sophisticated multi-part filter system to remove contaminants such as allergens, viruses and bacteria from the air as it circulates.

The hybrid catechin pre-filter absorbs odor-causing gases. A Blue-Enzyme anti-allergen filter reduces germs, bacteria and viruses and helps trap dust, pollens, mites and other particles; the filter uses an enzyme catalyst to help break down the sulfur atom bonds in allergen proteins, transforming them into non-allergen proteins.


A hybrid-coating process makes the catechin filter washable and, if properly maintained with monthly cleanings, effective for more than 10 years.

The high-efficiency MSZ-FE09/12NA indoor units incorporate the standard Catechin filter plus two more filters for triple filtration. The second filter, a Blue-Enzyme filter made of a fibrous material, also render allergens harmless using enzymes. The third filter, a Platinum Catalyst Deodorizing filter, has a ceramic surface absorption element and uses nanotechnology for high power odor absorption. This combination of filter types provides a complete air purifying system along with the ultimate comfort solution.

STANDARD FILTER SYSTEM (USED IN MSY/MSZ-GE/GA/D MODELS)

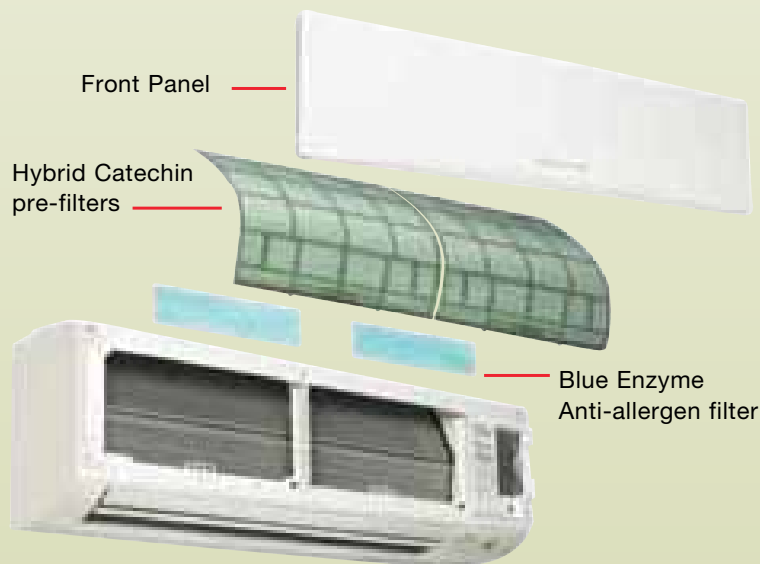

ENHANCED FILTER SYSTEM (USED IN MSZ-FE09/12NA MODELS)

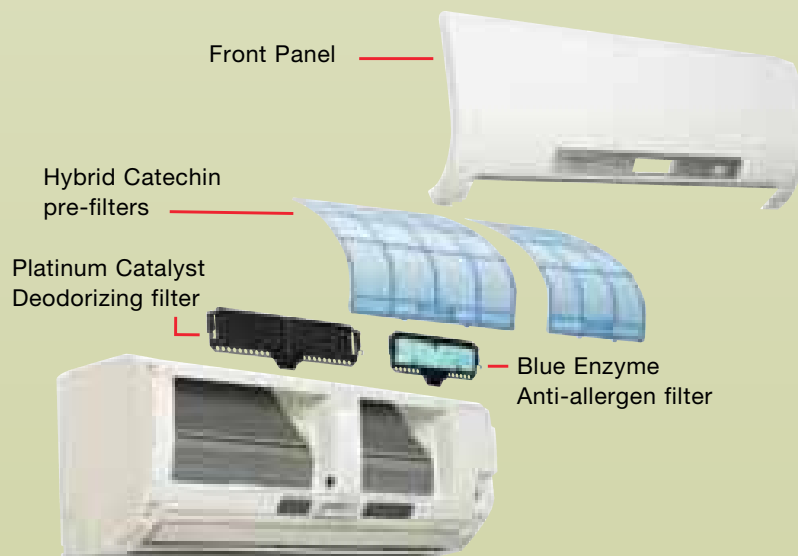


Product Line-Up Showcase

SYSTEM MODELS AND CONTROLLERS


SINGLE-ROOM, WALL-MOUNTED A/C (cooling only)

MS/MU
Air Conditioners
9,500 to 12,000 Btu/h
13 SEER

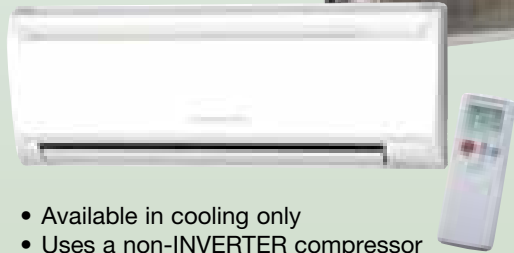

- Available in cooling only
- Uses a non-INVERTER compressor
- Wireless remote controller
- Ideal for applications such as
 - Bedrooms, garages and bonus rooms in warm climates
 - Video monitoring room

MSY/MUY
Air Conditioners
9,000 to 34,600 Btu/h
15.1 - 21 SEER

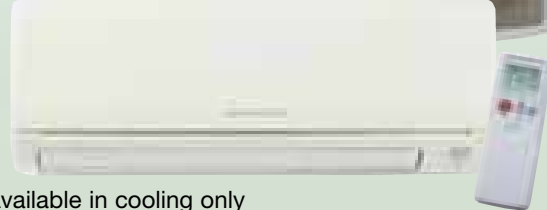


- Available in cooling only
- INVERTER-driven compressor
- Wireless remote controller
- WIDE Vane bottom for a wider angle of air flow, 150° from left to right (on GA24/D30/D36 models)
- Ideal for applications such as
 - Bedrooms, garages and bonus rooms in warm climates

SINGLE-ROOM, WALL-MOUNTED HEAT PUMPS (cooling and heating)



MSZ/MUZ
Heat Pumps
9,000 to 33,200 Btu/h
14.5 - 21 SEER
8.2 - 10 HSPF

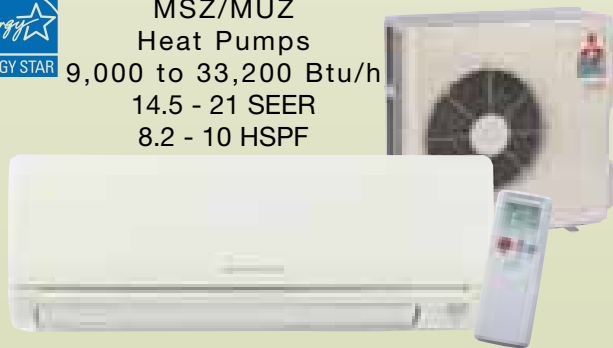


- INVERTER-driven compressor
- Provides cooling and heating in a wide range of capacities
- Wireless remote controller
- WIDE Vane bottom for a wider angle of air flow, 150° from left to right (on GA24/D30/D36 models)
- Ideal for applications such as:
 - Bedrooms, home offices, living rooms, dining rooms, bonus rooms, basements, kitchens, guard houses and more

The following is a quick reference list of the residential cooling-only, heat pump and multi-room heat pump systems that are ENERGY STAR® and Tax Credit qualified.

Visit www.mitsubishicomfort.com/taxcredit for additional information on how to apply for the tax credit.

| | <u>Energy Star</u> | <u>Tax Credit</u> |
|----------------------|---------------------------------|---------------------------------|
| Cooling-only | MSY/MUY-GE09NA | MSY/MUY-GE09NA |
| | MSY/MUY-GE12NA | MSY/MUY-GE15NA |
| | MSY/MUY-GE15NA | |
| Heat Pump | MSZ/MUZ-GE09NA | MSZ/MUZ-GE09NA |
| | MSZ/MUZ-GE12NA | MSZ/MUZ-GE12NA |
| | MSZ/MUZ-GE15NA | MSZ/MUZ-GE15NA |
| | MSZ/MUZ-FE09NA | MSZ/MUZ-FE09NA |
| | MSZ/MUZ-FE12NA | MSZ/MUZ-FE12NA |
| Multi-room Heat Pump | MXZ-2B20NA (with 2-MSZ-GE09) | MXZ-2B20NA (with 2-MSZ-GE09) |


Up to 26 SEER!

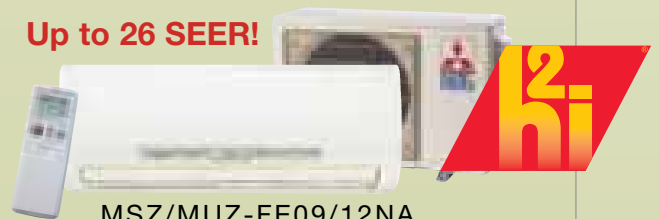

MSZ/MUZ-FE09/12NA
High-Efficiency Heat Pumps
9,000 and 12,000 Btu/h
23 - 26 SEER
10 - 10.6 HSPF

- INVERTER-driven compressor
- Quiet operation as low as 19dB(A)
- i-see™ sensor technology
- Enhanced filtration system
- H2i® high heat capabilities (see page 12)
 - MSZ-FE09 is 100 percent @ 5° F
 - MSZ-FE12 is 92 percent @ 5° F

MULTI-ROOM HEAT PUMP with WALL-MOUNTED and DUCTED INDOOR UNITS (cooling and heating)

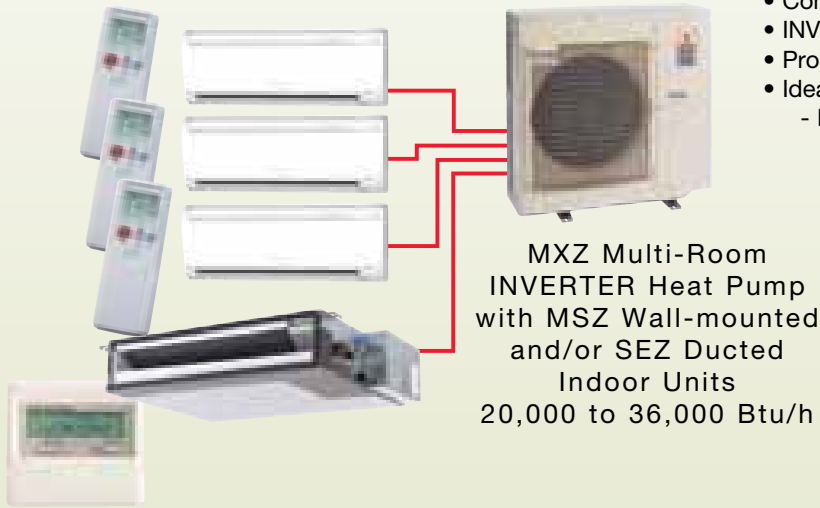

- Connect multiple indoor units (wall-mounted and/or ducted)
- INVERTER-driven compressor
- Provides cooling and heating in a wide range of capacities
- Ideal for applications such as:
 - Bedrooms, home offices, living rooms, dining rooms, bonus rooms, basements, kitchens and more

For more information on multi-room systems refer to pages 14-23.



ALL NEW MXZ-2B20NA IS CERTIFIED ENERGY STAR AND FEDERAL TAX CREDIT QUALIFIED!!
(WHEN USED WITH TWO-MSZ-GE09NA INDOOR UNITS)

Ducted Personal Comfort (SEZ for MXZ systems only)

If you are looking for discrete zoned comfort control, then a ducted unit is right for you. When connected to a MXZ multi-room system, the SEZ ducted units provide you with energy efficiency, quiet operation, and a compact design for quick, easy installation either hidden in the ceiling or beneath the floor.



These models offer the added flexibility of working in tandem with ductless models on the same system, providing a wide array of installation options to best fit your application needs.


For more information, see our MXZ multi-room section on pages 14 - 23.

WIRELESS and WIRED REMOTE CONTROLLERS



Wireless remote controller for wall-mounted systems

- Operation Select (Heat, Cool, Auto, Dry)
- Econo Cool
- Wide Vane MSY(Z)-A24/D30/D36NA (only)
- Reset
- Clock Set
- Sliding Cover
- Fan Speed
- Timer
- Vane Control
- HR./MIN. (Time Set)
- Powerful: Faster Cooling or Heating

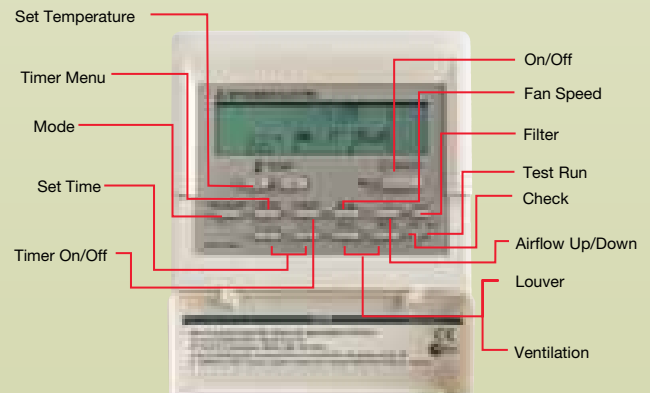


Wired controller for the SEZ ducted indoor unit. (optional controller for wall-mounted systems and requires MAC-397 adapter)

- Set Temperature
- Timer Menu
- Mode
- Set Time
- Timer On/Off
- On/Off
- Fan Speed
- Filter
- Test Run
- Check
- Airflow Up/Down
- Louver
- Ventilation



(MS-A12WA MODEL SHOWN)



MS/MSY COOLING-ONLY

NON-INVERTER

| Model Name | Indoor Unit | | MS-A09WA | MS-A12WA | |
|---------------------------|-----------------------------------|-----------------|--------------------------|-------------|--|
| | Outdoor Unit | | MU-A09WA | MU-A12WA | |
| Cooling *1 | Rated Capacity | Btu/h | 9,500 | 12,000 | |
| | Capacity Range | Btu/h | - | - | |
| | Total Input | W | 870 | 1,070 | |
| | Energy Efficiency | SEER | 13 | | |
| | Moisture Removal | Pints/h | 2.7 | 3.2 | |
| | Sensible Heat Factor | | 0.68 | 0.70 | |
| Power Supply | Phase, Cycle, Voltage | | 1 Phase, 60Hz, 115V *2 | | |
| Voltage | Indoor - Outdoor L1-N-2 | | AC 115V | | |
| | Indoor - Outdoor L1-N-2 | | AC 115V | | |
| | Indoor - Remote Controller | | Wireless Type | | |
| Indoor Unit | MCA | A | 1.2 | | |
| | Fan Motor | F.L.A. | 0.95 | | |
| | Airflow (Lo-Med-Hi) | DRY (CFM) | 183-261-335 | 222-286-406 | |
| | | WET (CFM) | 162-233-300 | 198-254-363 | |
| | Sound Pressure Level (Lo-Med-Hi) | dB(A) | 26-32-40 | 33-38-45 | |
| | External Finish Color | | Munsell No. 1.0Y 9.2/0.2 | | |
| | Dimension Unit | W: In. | 30-11/16 | | |
| | | D: In. | 8-1/4 | | |
| | | H: In. | 11-3/4 | | |
| | Weight Unit | Lbs. | 23 | | |
| Field Drainpipe Size O.D. | In. | 5/8 | | | |
| Outdoor Unit | MCA | A | 14 | 16 | |
| | MOCP | (Time Delay) A | 15 | 20 | |
| | Fan Motor | F.L.A. | 0.63 | 0.93 | |
| | Compressor | Model (Type) | Single Rotary | | |
| | | R.L.A. | 9.3 | 10.82 | |
| | | L.R.A. | 47 | 56 | |
| | Airflow | CFM | 1,083 | 1,327 | |
| | Refrigerant Control | | Capillary Tube | | |
| | Sound Pressure Level (Cooling) *1 | dB(A) | 47 | 52 | |
| | External Finish Color | | Munsell No. 3Y 7.8/1.1 | | |
| | Dimensions | W: In. | 31-1/2 | 33-7/16 | |
| | | D: In. | 11-1/4 | 11-7/16 | |
| | | H: In. | 21-5/8 | 23-13/16 | |
| Weight | Lbs. | 78 | 96 | | |
| Remote Controller | Type | Wireless Remote | | | |
| | Type | R410A | | | |
| Refrigerant | Charge | Lbs., Oz. | 2, 5 | 3, 1 | |
| | Oil | Type (Fl. Oz.) | NEO22 (10.8) | | |
| Refrigerant Pipe | Gas Side O.D. | In. | 3/8 | 1/2 | |
| | Liquid Side O.D. | | 1/4 | | |
| | Height Difference (Max.) | Ft. | 35 | | |
| | Length (Max.) | | 65 | | |
| Connection Method | Indoor/Outdoor | | Flared/Flared | | |

NOTES: Test conditions are based on AHRI 210/240.

*1 Rating conditions (cooling) - Indoor D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2 Indoor units receive power from outdoor units through field-supplied interconnected wiring.


Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.



(MSY-A17WA MODEL SHOWN)

INVERTER



MSY COOLING-ONLY (CONT.)



TAX CREDIT



TAX CREDIT

| Model Name | Indoor Unit | | MSY-GE09NA | MSY-GE12NA | MSY-GE15NA | MSY-GE18NA | MSY-GA24NA | MSY-D30NA | MSY-D36NA | | |
|---------------------------|---|---|---|-----------------|---------------------|--------------------------------|-------------------|-------------------|-------------------|-------|---------|
| | Outdoor Unit | | MUY-GE09NA | MUY-GE12NA | MUY-GE15NA | MUY-GE18NA | MUY-GA24NA | MUY-D30NA | MUY-D36NA | | |
| Cooling *1 | Rated Capacity | Btu/h | 9,000 | 12,000 | 14,000 | 17,200 | 22,000 | 30,700 | 34,600 | | |
| | Capacity Range | Btu/h | 3,800-12,200 | 3,800-13,600 | 3,100-18,200 | 3,700-18,700 | 4,400-22,000 | 9,800-30,700 | 9,800-34,600 | | |
| | Total Input | W | 660 (205-1,200) | 960 (205-1,300) | 1,080 (160-2,000) | 1,640 (240-2,070) | 2,500 (270-2,500) | 3,380 (620-3,380) | 4,240 (620-4,240) | | |
| | Energy Efficiency | SEER | 21 | 20.5 | 21 | 19.2 | 17.5 | 16 | 15.1 | | |
| | Moisture Removal | Pints/h | 1.5 | 2.5 | 2.7 | 4.6 | 7.3 | 9.9 | 11.9 | | |
| | Sensible Heat Factor | | 0.82 | 0.74 | 0.80 | 0.71 | 0.63 | 0.64 | 0.62 | | |
| Power Supply | Phase, Cycle, Voltage | | 1-phase, 60Hz, 208 / 230V *2 | | | | | | | | |
| Voltage | Indoor - Outdoor S1 - S2 | | AC 208 / 230V | | | | | | | | |
| | Indoor - Outdoor S2 - S3 | | DC12-24V | | | | | | | | |
| | Indoor - Remote Controller | | Wireless Type (Optional Wired Controller: DC 12V) | | | | | | | | |
| Indoor Unit | MCA | A | 1.0 | | | | | | | | |
| | Fan Motor | F.L.A. | 0.76 | | | | | | | | |
| | Airflow at Cooling (Quiet-Lo-Med-Hi-Super Hi) *1 | DRY (CFM) | 145-170-237-321-399 | | 205-272-335-420-533 | 230-275-339-420-533 | 296-431-568-624 | | 389-639-848 | | |
| | | WET (CFM) | 109-134-201-286-364 | | 170-237-300-385-498 | 194-240-304-385-498 | 265-385-508-558 | | 350-576-763 | | |
| | Sound Pressure Level at Cooling (Quiet-Lo-Med-Hi-Super Hi) *1 | dB(A) | 19-22-30-37-43 | 19-22-30-37-45 | 26-32-38-44-49 | 28-33-38-44-49 | 34-40-49-51 | | 32-42-49 | | |
| | External Finish Color | | Munsell No. 1.0Y 9.2 / 0.2 | | | | | | | | |
| | Dimension Unit | W: In. | 31-7/16 | | | | 43-5/16 | | 46-1/16 | | |
| | | D: In. | 9-1/8 | | | | 10-1/4 | | 11-5/8 | | |
| | | H: In. | 11-5/8 | | | | 12-13/16 | | 14-3/8 | | |
| | Weight Unit | Lbs. | 22 | | | | 37 | | 40 | | |
| Field Drainpipe Size O.D. | | In. 5/8 | | | | | | | | | |
| Outdoor Unit | MCA | A | 12 | | 14 | | 17 | | 21 | | |
| | MOCP | A | 15 | | 20 | | 25 | | | | |
| | Fan Motor | F.L.A. | 0.50 | | | 0.93 | | | | | |
| | Compressor | Model (Type) | DC INVERTER-driven | | | DC INVERTER-driven Twin Rotary | | | | | |
| | | R.L.A. | 6.6 | | 7.4 | | 10.0 | | 12.8 | | 16 |
| | | L.R.A. | 8.2 | | 9.3 | | 12.5 | | 16.0 | | 20 |
| | Airflow (Cooling) | CFM | 1,151 | 1,229 | 1,243 | 1,730 | 1,729 | 1,941 | | | |
| | Refrigerant Control | | Linear Expansion Valve | | | | | | | | |
| | Sound Pressure Level at Cooling *1 | dB(A) | 46 | 49 | | 54 | | 55 | | 56 | |
| | External Finish Color | | Munsell No. 3Y 7.8 / 1.1 | | | | | | | | |
| | Dimensions | W: In. | 31-1/2 | | | | 33-1/16 | | | | |
| | | D: In. | 11-1/4 | | | | 13 | | 13 | | 13 |
| | | H: In. | 21-5/8 | | | | 33-7/16 | | 33-7/16 | | 33-7/16 |
| Weight | Lbs. | 66 | 77 | 80 | 119 | 117 | 141 | | | | |
| Remote Controller | Type | Wireless Remote (Optional Wired Controller) | | | | | | | | | |
| | Type | R410A | | | | | | | | | |
| Refrigerant | Charge | Lbs., Oz. | 1, 12 | 2, 9 | | 3, 7 | | 4 | | 4, 10 | |
| | Oil | Type (fl. oz.) | NEO22 (10.8) | | | NEO22 (15.2) | | | NEO22 (29.5) | | |
| Refrigerant Pipe | Gas Side O.D. | In. | 3/8 | | 1/2 | | 5/8 | | | | |
| | Liquid Side O.D. | In. | 1/4 | | 1/4 | | 3/8 | | | | |
| Refrigerant Pipe Length | Height Difference (Max.) | Ft. | 40 | | | 50 | | | | | |
| | Length (Max.) | Ft. | 65 | | | 100 | | | | | |
| Connection Method | Indoor/Outdoor | | Flared/Flared | | | | | | | | |

NOTES: Test conditions are based on AHRI 210/240.

*1 Rating conditions (cooling) - Indoor D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2 Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.



(MSZ-FE12NA MODEL SHOWN)



MSZ HEAT PUMP



TAX CREDIT



TAX CREDIT



TAX CREDIT



TAX CREDIT

| Model Name | Indoor Unit | | MSZ-GE09NA | MSZ-FE09NA | MSZ-GE12NA | MSZ-FE12NA |
|------------------------------------|--|--|---------------------|-----------------------------------|---------------------|-----------------------------------|
| | Outdoor Unit | | MUZ-GE09NA | MUZ-FE09NA | MUZ-GE12NA | MUZ-FE12NA |
| Cooling *1 | Rated Capacity | Btu/h | 9,000 | 9,000 | 12,000 | 12,000 |
| | Capacity Range | Btu/h | 3,800-12,200 | 2,800-9,000 | 3,800-13,600 | 2,800-12,000 |
| | Total Input | W | 660 (205-1,200) | 580 (160-650) | 960 (205-1,300) | 930 (160-960) |
| | Energy Efficiency | SEER | 21 | 26 | 20.5 | 23 |
| | Moisture Removal | Pints/h | 1.5 | 2.1 | 2.5 | 2.9 |
| | Sensible Heat Factor | | 0.82 | 0.76 | 0.74 | 0.73 |
| Heating at 47° F *2 | Rated Capacity | Btu/h | 10,900 | 10,900 | 14,400 | 13,600 |
| | Capacity Range | Btu/h | 4,500-14,100 | 3,000-18,000 | 5,500-18,100 | 3,000-21,000 |
| | Total Input | W | 760 (255-1,200) | 710 (150-2,250) | 1,170 (340-1,660) | 950 (150-2,250) |
| | HSPF (IV) | Btu/h/W | 10 | | | 10.6 |
| | Maximum Capacity | Btu/h | 8,700 | 12,500 (10,900 @ 5° F) | 11,200 | 13,600 (12,507 @ 5° F) |
| Heating at 17° F *3 | Rated Capacity | Btu/h | 6,600 | 6,700 | 8,800 | 8,300 |
| | Rated Total Input | W | 700 | 650 | 900 | 800 |
| Power Supply | Phase, Cycle, Voltage | 1-phase, 60Hz, 208 / 230V *4 | | | | |
| Voltage | Indoor - Outdoor S1 - S2 | AC 208 / 230V | | | | |
| | Indoor - Outdoor S2 - S3 | DC12-24V | | | | |
| | Indoor - Remote Controller | Wireless Type (Optional Wired Controller: DC 12V) | | | | |
| Indoor Unit | MCA | A | 1.0 | | | |
| | Fan Motor | F.L.A. | 0.76 | | | |
| | Airflow at Cooling (Lo-Med-Hi-Super HI-Powerful) *1 | DRY (CFM) | 145-170-237-321-399 | 162-226-339-381 | 145-170-237-321-399 | 162-226-381-410 |
| | | WET (CFM) | 109-134-201-286-364 | 144-202-307-343 | 109-134-201-286-364 | 144-202-350-367 |
| | Airflow at Heating (Lo-Med-Hi-Super HI-Powerful) *2 | WET (CFM) | 145-170-237-321-406 | 166-240-367-381 | 145-170-237-321-406 | 166-240-399-420 |
| | | Sound Pressure Level at Cooling (Lo-Med-Hi-Super HI-Powerful) *1 | dB(A) | 19-22-30-37-43 | 22-31-39-42 | 19-22-30-37-45 |
| | Sound Pressure Level at Heating (Lo-Med-Hi-Super HI-Powerful) *2 | dB(A) | 19-22-30-37-43 | 22-31-40-42 | 19-22-30-37-43 | 22-33-43-44 |
| | External Finish Color | Munsell No. 1.0Y 9.2 / 0.2 | | | | |
| | Dimension Unit | W: In. | 31-7/16 | | | |
| | | D: In. | 9-1/8 | 10-1/8 | 9-1/8 | 10-1/8 |
| | | H: In. | 11-5/8 | | | |
| | Weight Unit | Lbs. | 22 | 27 | 22 | 27 |
| | Field Drainpipe Size O.D. | In. | 5/8 | | | |
| | Outdoor Unit | MCA | A | 12 | | |
| MOCP | | A | 15 | | | |
| Fan Motor | | F.L.A. | 0.50 | 0.56 | 0.50 | 0.56 |
| Compressor | | Model (Type) | DC INVERTER-driven | DC INVERTER-driven Twin Rotary | DC INVERTER-driven | DC INVERTER-driven Twin Rotary |
| | | R.L.A. | 6.6 | 8.6 | 6.6 | 8.6 |
| | | L.R.A. | 8.2 | 10.8 | 8.2 | 10.8 |
| Airflow (Cooling/Heating) | | CFM | 1,151 / 1,225 | 1,102 / 1,187 | 1,229 / 1,172 | 1,102 / 1,187 |
| Refrigerant Control | | Linear Expansion Valve | | | | |
| Defrost Method | | Reverse Cycle | | | | |
| Sound Pressure Level at Cooling *1 | | dB(A) | 46 | 48 | 49 | 48 |
| Sound Pressure Level at Heating *2 | | dB(A) | 50 | 49 | 51 | 49 |
| External Finish Color | | Munsell No. 3Y 7.8 / 1.1 | | | | |
| Dimensions | | W: In. | 31-1/2 | | | |
| | | D: In. | 11-1/4 | | | |
| | H: In. | 21-5/8 | | | | |
| Weight | Lbs. | 66 | 80 | 77 | 80 | |
| Remote Controller | Type | Wireless Remote (Optional Wired Controller) | | | | |
| Refrigerant | Type | R410A | | | | |
| | Charge | Lbs., Oz. | 1, 12 | 2, 9 | | |
| Refrigerant Pipe | Oil | Type (fl. oz.) | NEO22 (10.8) | | | |
| | Gas Side O.D. | In. | 3/8 | | | |
| Refrigerant Pipe Length | Liquid Side O.D. | In. | 1/4 | | | |
| | Height Difference (Max.) | Ft. | 40 | | | |
| Connection Method | Length (Max.) | Ft. | 65 | | | |
| | Indoor/Outdoor | Flared/Flared | | | | |

NOTES: Test conditions are based on AHRI 210/240.

*1 Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4 Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.



(MSY(Z)-D30NA MODEL SHOWN)

INVERTER



MSZ HEAT PUMP (CONT.)



| Model Name | Indoor Unit | | MSZ-GE15NA | MSZ-GE18NA | MSZ-GA24NA | MSZ-D30NA | MSZ-D36NA |
|-----------------------|---|---|--|---------------------|-------------------|-------------------|-------------------|
| | Outdoor Unit | | MUZ-GE15NA | MUZ-GE18NA | MUZ-GA24NA | MUZ-D30NA | MUZ-D36NA |
| Cooling *1 | Rated Capacity | Btu/h | 14,000 | 17,200 | 22,000 | 30,700 | 33,200 |
| | Capacity Range | Btu/h | 3,100-18,200 | 3,700-18,700 | 4,400-22,000 | 9,800-30,700 | 9,800-33,200 |
| | Total Input | W | 1,080 (160-2,000) | 1,640 (240-2,070) | 2,500 (270-2,500) | 3,850 (620-3,850) | 4,360 (620-4,360) |
| | Energy Efficiency | SEER | 21 | 19.2 | 17.5 | 14.5 | |
| | Moisture Removal | Pints/h | 2.7 | 4.6 | 7.3 | 9.9 | 11.3 |
| | Sensible Heat Factor | | 0.80 | 0.71 | 0.63 | 0.64 | 0.62 |
| Heating at 47° F *2 | Rated Capacity | Btu/h | 18,000 | 21,600 | 23,200 | 32,600 | 35,200 |
| | Capacity Range | Btu/h | 4,800-20,900 | 3,500-25,200 | 3,600-24,400 | 8,700-34,000 | 8,700-36,000 |
| | Total Input | W | 1,600 (270-2,010) | 1,900 (230-2,680) | 2,140 (250-2,520) | 3,360 (520-3,600) | 3,840 (520-4,100) |
| | HSPF (Region IV) | Btu/h/W | 10 | 10 | 9.5 | 8.2 | |
| Heating at 17° F *3 | Rated Capacity | Btu/h | 11,300 | 13,400 | 14,000 | 19,500 | 21,800 |
| | Total Input | W | 1,150 | 1,450 | 1,635 | 2,400 | 2,820 |
| | Maximum Capacity | Btu/h | 15,900 | 17,200 | 15,200 | 20,800 | 22,800 |
| Power Supply | Phase, Cycle, Voltage | | 1 Phase, 60Hz, 208/230V *4 | | | | |
| Voltage | Indoor - Outdoor S1-S2 | | AC 208 / 230V | | | | |
| | Indoor - Outdoor S2-S3 | | DC12-24 | | | | |
| | Indoor - Remote Controller | | Wireless Type (Optional Wired Controller: DC12V) | | | | |
| Indoor Unit | MCA | A | 1.0 | | | | |
| | Fan Motor | F.L.A. | 0.76 | | | | |
| | Airflow (Cool) (Lo-Med-Hi-Super HI-Powerful) *1 | DRY (CFM) | 205-272-335-420-533 | 230-275-339-420-533 | 296-431-568-624 | 389-639-848 | |
| | | WET (CFM) | 170-237-300-385-498 | 194-240-304-385-498 | 265-385-508-558 | 350-576-763 | |
| | Airflow (Heat) (Lo-Med-Hi-Super HI-Powerful) *2 | DRY (CFM) | 205-247-304-367-463 | 230-275-339-431-512 | 350-486-568-590 | 445-639-848 | |
| | Sound Pressure Level (Cooling) (Lo-Med-Hi-Super HI-Powerful) *1 | dB(A) | 26-32-38-44-49 | | 28-33-38-44-49 | 34-40-49-51 | 32-42-49 |
| | | | 26-30-35-40-46 | | 28-33-38-43-48 | 34-40-48-49 | 34-42-49 |
| | External Finish Color | Munsell No. 1.0Y 9.2/0.2 | | | | | |
| | Dimension Unit | W: In. | 31-7/16 | | 43-5/16 | | 46-1/16 |
| | | D: In. | 9-1/8 | | 10-1/4 | | 11-5/8 |
| | | H: In. | 11-5/8 | | 12-13/16 | | 14-3/8 |
| | Weight Unit | Lbs. | 22 | | 37 | | 40 |
| | Field Drainpipe Size O.D. | In. | 5/8 | | | | |
| | MCA | A | 12 | 14 | 17 | 21 | |
| MOCP | A | 15 | | | 20 | 25 | |
| Fan Motor | F.L.A. | 0.50 | 0.93 | | | | |
| Compressor | Model (Type) | DC INVERTER-driven Twin Rotary | | | | | |
| | R.L.A. | 7.4 | 10.0 | 12.8 | 16 | | |
| | L.R.A. | 9.3 | 12.5 | 16.0 | 20 | | |
| Airflow | CFM | 1,243 / 1,229 | 1,730 / 1,659 | 1,729 / 1,660 | 1,941 | | |
| Refrigerant Control | Linear Expansion Valve | | | | | | |
| Defrost Method | Reverse Cycle | | | | | | |
| Sound Pressure Level | dB(A) *1 | 49 | 54 | 55 | | 56 | |
| External Finish Color | Munsell No. 3Y 7.8/1.1 | | | | | | |
| Dimensions | W: In. | 31-1/2 | 33-1/16 | | | | |
| | D: In. | 11-1/4 | 13 | | | | |
| | H: In. | 21-5/8 | 33-7/16 | | | | |
| Weight | Lbs. | 80 | 119 | 117 | 141 | | |
| Remote Controller | Type | Wireless Remote (Optional Wired Controller) | | | | | |
| Refrigerant | Type | R410A | | | | | |
| | Charge | Lbs., Oz. | 2, 9 | 3, 7 | 4 | 4, 10 | |
| | Oil | Type (Fl. Oz.) | NE022 (15.2) | | NEO 22(15.2) | NE022 (29) | |
| Refrigerant Pipe | Gas Side O.D. | In. | 1/2 | | 5/8 | | |
| | Liquid Side O.D. | | 1/4 | | | 3/8 | |
| | Height Difference (Max.) | Ft. | 40 | 50 | | | |
| | Length (Max.) | | 65 | 100 | | | |
| Connection Method | Indoor/Outdoor | Flared/Flared | | | | | |

NOTES: Test conditions are based on AHRI 210/240.

*1 Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4 Indoor units receive power from outdoor units through field-supplied interconnected wiring. Specifications are subject to change without notice.

MULTIPLE ROOMS WITH INDIVIDUAL CONTROL FROM A SINGLE SYSTEM

With a multi-room system, you can enjoy your ideal level of comfort in the most important rooms in your home. Each room (zone) operates independently. People in different rooms – the kitchen, master bedroom or living room – can enjoy temperature settings that make each of them most comfortable.

If you're looking for a complete comfort solution for several different rooms, the MXZ multi-room system is the right choice. The system is flexible enough to conform to your particular cooling and heating needs, with over 40 different indoor unit combinations, up to four indoor units connected to one outdoor unit. And now, with a SEZ horizontal ducted unit, you can enjoy an even greater range of zoning options provided by an MXZ system.

An MXZ multi-room system is an excellent choice for supplementing capacity to your current system or to condition newly finished spaces or new additions. You can also benefit from lower energy costs year-round while staying comfortable, thanks to Mitsubishi's energy-efficient technologies.


The new dual-zone MXZ-2B20 system with two MSZ-GE09 wall-mounted indoor units also qualifies for both ENERGY STAR® and the Federal Tax Credit.

At right: a single level home with several system types represented.
(For illustrative purposes only.)

To find out which system is the best solution for you, contact your local Mitsubishi Diamond Dealer for an in-home evaluation.



MXZ Multi-Room Systems

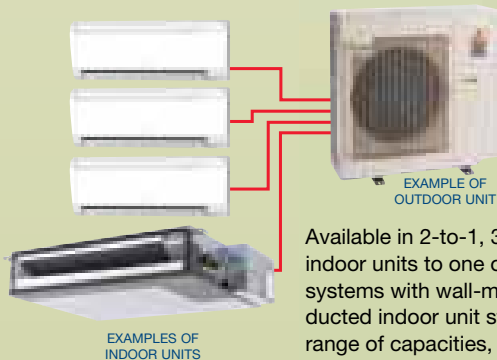


Available in 2-to-1, 3-to-1 and 4-to-1 indoor units to one outdoor unit systems with wall-mounted and/or ducted indoor unit styles in a wide range of capacities, the MXZ multi-room system has the right solution for your needs.

MSZ Wall-Mounted Indoor Units for MXZ Heat Pump Systems

Providing a wide range of cooling and heating capacities, each wall-mounted indoor unit mounts high on a wall and connects to the outdoor unit by a refrigerant line run via a 3" hole. The MSZ units provide highly efficient solutions to cooling and heating needs, and provide personalized comfort for the individual zones in which they are installed.

Features of the MSZ units on MXZ systems include:

- Sleek, flat panel design
- Hot-start technology
- Quiet operation
- i-see™ sensor technology (MSZ-FE only)
- Enhanced filtration system
- Wireless remote control



MSZ Indoor Unit

MUZ Outdoor Unit

SEZ Horizontal Ducted Indoor Units for MXZ Heat Pump Systems

SEZ ducted units can provide similar split air-conditioning system advantages, with the added benefit of being concealed to provide virtually no visual footprint within the conditioned space other than a register and grille for the air to flow. With the use of short run ductwork, these units can provide comfort to a single room that needs air dispersed evenly throughout the space, unusually shaped rooms and even adjacent rooms.

Other features of the SEZ unit on MXZ systems include:

- Concealed design for short run ductwork
- Quiet operation
- Built-in condensate lift mechanism
- Wired remote control



MULTI-ROOM MXZ INVERTER HEAT PUMP

INVERTER



| Model Name | Outdoor Unit | | MXZ-2A20NA *5 | MXZ-3A30NA *6 | MXZ-4A36NA *7 | |
|-------------------|--|-----------------------------------|--------------------------------|------------------------|---------------------|---------------------|
| Outdoor Unit | Cooling *1 Non-ducted/Ducted | Rated Capacity | Btu/h | 20,000/20,000 | 28,400/27,400 | 36,000/34,400 |
| | | Capacity Range | Btu/h | 7,800-20,000 | 12,600-28,400 | 12,600-36,400 |
| | | Total Input | W | 2,150 (630-2,150) | 3,250 (1,000-3,330) | 3,820 (1,000-4,020) |
| | Heating at 47° F *2 Non-ducted/Ducted | Rated Capacity | Btu/h | 22,000/22,000 | 28,600/27,600 | 36,000/34,400 |
| | | Capacity Range | Btu/h | 8,500-22,000 | 11,400-36,000 | 11,400-43,000 |
| | | Total Input | W | 1,780 (520-1,780) | 2,180 (740-2,880) | 3,100 (740-4,350) |
| | Heating at 17° F *3 Non-ducted/Ducted | Rated Capacity | Btu/h | 14,500/12,500 | 16,000/15,100 | 19,400/20,300 |
| | | Total Input | W | 1,500/1,430 | 1,690/1,590 | 2,330/2,340 |
| | | Maximum Capacity | Btu/h | 14,500/12,500 | 18,800/18,000 | 24,600/25,400 |
| | Maximum Total Input | W | 1,500/1,430 | 2,120/2,140 | 3,340/3,450 | |
| Power Supply | Phase,Cycle,Voltage | | 1 Phase, 60Hz, 208 / 230V *8 | | | |
| Voltage | Indoor - Outdoor S1-S2 | | AC 208-230V | | | |
| | Indoor - Outdoor S2-S3 | | DC12-24V | | | |
| Outdoor Unit *4 | MCA | A | 15 | | 19 | |
| | MOCP | A | 20 | | | |
| | Fan Motor | F.L.A. | 0.96 | | 0.93 | |
| | | | DC INVERTER-driven Twin Rotary | | | |
| | Compressor | Model (Type) | | | | |
| | | R.L.A. | 10.1 | 11 | 14.4 | |
| | | L.R.A. | 15 | | | |
| | Airflow (Cooling/Heating) *1/*2 | CFM | 1,485/1,640 | 1,365/1,605 | 2,068/2,068 | |
| | Refrigerant Control | Linear Expansion Valve | | | | |
| | Defrost Method | Reverse Cycle | | | | |
| | Sound Pressure Level (Cooling/Heating) *1/*2 | dB(A) | 49/51 | 49/49 | 54/57 | |
| | External Finish Color | Munsell No. 5Y 8/1 | | Munsell No. 3Y 7.8/1.1 | | |
| | Dimensions | W: In. | 33-1/16 | 35-7/16 | | |
| D: In. | | 13 (+1-3/16) | 12-5/8 (+1-3/16) | | | |
| H: In. | | 27-15/16 | 35-7/16 | | | |
| Weight | Lbs. | 130 | 148 | 150 | | |
| Remote Controller | Type | Associated With Indoor Unit Model | | | | |
| Refrigerant | Type | R410A | | | | |
| | Charge | Lbs., Oz. | 5,15 | 7,11 | 8,13 | |
| | Oil | Type (Fl. Oz.) | NEO22 (23.7) | | NEO22 (29.4) | |
| Refrigerant Pipe | Gas Side O.D. | In. | A, B: 3/8 | | A: 1/2; B, C: 3/8 | |
| | Liquid Side O.D. | | 1/4 | | | |
| | Height Difference (Max.) | | 49/33 *9 | | | |
| | Length (Max.) | | 164 (A+B) | 230 (A+B+C) | 230 (A+B+C+D) | |
| | Length (Each Indoor Unit) | | 82 | | | |
| Connection Method | Indoor/Outdoor | Flared/Flared | | | | |



*Compatible with the MSZ-A, MSZ-FD and SEZ series indoor units

NOTES: Test conditions are based on AHRI 210/240. One indoor unit is turned off during low-speed testing under the new test conditions. **Systems actually exhibit higher energy efficiencies during normal operation.**

*1 Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-9° C), W.B. 15° F (-9° C).

*4 Refer to pages 12 and 13 for Indoor Unit specifications.

*5 Data from combination of Indoor Units MSZ-A09NA and MSZ-A12NA.

*6 Data from combination of Indoor Units MSZ-A09NA, MSZ-A09NA and MSZ-A12NA.

*7 Data from combination of four MSZ-A09NA Indoor Units.

*8 Indoor units receive power from outdoor units through field-supplied interconnected wiring.

*9 49' Applies to installations where the outdoor unit is installed below the indoor unit.

Power factor equals 97 percent.

Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.

Rated Combinations

The charts below indicate the rated capacities for each of the MXZ systems.

With the addition of ducted indoor units to the MXZ-Series, the number of available combinations has greatly expanded. The installation specifications and rated capacities vary on systems using wall-mounted only (MSZ-A and/or MSZ-FD), ducted only or a combination of unit styles.

MXZ-2A20NA Combinations

| |
|---------|
| 9 + 9 |
| 9 + 12 |
| 9 + 15 |
| 12 + 12 |

MXZ-3A30NA Combinations

| |
|---------------------|
| 9 + 9 |
| 9 + 12 |
| 9 + 15 |
| 9 + 17 or 18 |
| 9 + 24 |
| 12 + 12 |
| 12 + 15 |
| 12 + 17 or 18 |
| 15 + 15 |
| 15 + 17 or 18 |
| 17 or 18 + 17 or 18 |
| 9 + 9 + 9 |
| 9 + 9 + 12 |
| 9 + 9 + 15 |
| 9 + 9 + 17 or 18 |

MXZ-4A36NA Combinations

| |
|--------------------|
| 9 + 9 + 9 |
| 9 + 9 + 12 |
| 9 + 9 + 15 |
| 9 + 9 + 17 or 18 |
| 9 + 9 + 24 |
| 9 + 12 + 12 |
| 9 + 2 + 15 |
| 9 + 12 + 17 or 18 |
| 9 + 15 + 15 |
| 9 + 15 + 17 or 18 |
| 9 + 17 + 17 or 18 |
| 12 + 12 + 12 |
| 12 + 12 + 15 |
| 12 + 12 + 17 or 18 |
| 12 + 15 + 17 or 18 |
| 9 + 9 + 9 + 9 |
| 9 + 9 + 9 + 12 |
| 9 + 9 + 9 + 15 |
| 9 + 9 + 12 + 12 |

SEER and HSPF Ratings

| Model | Indoor Unit Type | SEER | HSPF |
|------------|-----------------------|------|------|
| MXZ-2A20NA | Non-ducted | 16 | 8.5 |
| | Ducted and Non-ducted | 15.5 | 8.5 |
| | Ducted | 15.5 | 8.5 |
| MXZ-3A30NA | Non-ducted | 16 | 10 |
| | Ducted and Non-ducted | 15.2 | 9.7 |
| | Ducted | 14.5 | 9.5 |
| MXZ-4A36NA | Non-ducted | 16 | 8.5 |
| | Ducted and Non-ducted | 15.5 | 8.75 |
| | Ducted | 15 | 9 |

MSZ WALL-MOUNTED INDOOR UNITS FOR MXZ-2A20NA, MXZ-3A30NA, MXZ-4A36NA

INVERTER



| Model Name | Indoor Unit | | MSZ-A09NA | MSZ-FD09NA | MSZ-A12NA | MSZ-FD12NA | MSZ-A15NA | MSZ-A17NA | MSZ-A24NA |
|---|-------------------------------|-------------------------------|--|-------------|-------------|-------------|-------------|-------------|-------------|
| | Outdoor Unit | | For Use with all MXZ-Series | | | | | | |
| Cooling *1 | Rated Capacity | Btu/h | 9,000 | 9,000 | 12,000 | 12,000 | 15,000 | 16,200 | 22,000 |
| | Total Input | W | 16 | 18 | 21 | 24 | 30 | 30 | 53 |
| Heating at 47° F *2 | Rated Capacity | Btu/h | 10,900 | 10,900 | 13,600 | 13,600 | 18,000 | 20,100 | 23,200 |
| | Total Input | W | 16 | 24 | 21 | 30 | 30 | 30 | 53 |
| Power Supply | Phase, Cycle, Voltage | | 1 Phase, 60Hz, 208 / 230V *4 | | | | | | |
| Voltage | Indoor - Outdoor S1-S2 | | AC 208-230V | | | | | | |
| | Indoor - Outdoor S2-S3 | | DC12-24V | | | | | | |
| | Indoor - Remote Controller | | Wireless Type (Optional Wired Controller: DC12V) | | | | | | |
| Fan | MCA *4 | A | 1.0 | | | | | | |
| | Fan Motor | F.L.A. | 0.76 | | | | | | |
| | Airflow (Cool) (Lo-Med-Hi) *1 | DRY (CFM) | 152-229-307 | 162-226-339 | 152-240-353 | 162-226-381 | 268-328-381 | | 296-431-568 |
| | | WET (CFM) | 134-205-275 | 144-202-307 | 134-215-318 | 144-202-350 | 240-293-342 | | 265-385-508 |
| | | Airflow (Heat) (Lo-Med-Hi) *2 | DRY (CFM) | 159-222-307 | 166-240-367 | 159-240-353 | 166-240-399 | 254-314-381 | |
| Sound Pressure Level (Cooling) (Lo-Med-Hi) *1 | | dB(A) | 22-33-38 | 22-31-39 | 22-34-42 | 22-33-43 | 34-40-45 | 34-40-46 | 34-40-49 |
| Sound Level Pressure (Heating) (Lo-Med-Hi) *2 | | | 22-33-38 | 22-31-40 | 22-34-42 | 22-33-43 | 34-38-44 | | 34-40-48 |
| External Finish Color | | Munsell No. 1.0Y 9.2/0.2 | | | | | | | |
| Dimension | W: In. | | 30-11/16 | 31-7/16 | 30-11/16 | 31-7/16 | 30-11/16 | | 43-5/16 |
| | D: In. | | 8-1/4 | 10-1/8 | 8-1/4 | 10-1/8 | 8-1/4 | | 10-1/4 |
| | H: In. | | 11-3/4 | 11-5/8 | 11-3/4 | 11-5/8 | 11-3/4 | | 12-13/16 |
| Weight | Lbs. | | 23 | 27 | 23 | 27 | 23 | | 37 |
| Field Drainpipe Size | In. | | O.D.: 5/8 | | | | | | |
| Remote Controller | Type | | Wireless Remote (Optional Wired Controller) | | | | | | |
| Refrigerant | Type | | R410A | | | | | | |
| Refrigerant Pipe | Gas Side O.D. | In. | 3/8 | | 1/2 | | 5/8 | | |
| | Liquid Side O.D. | | 1/4 | | | | | | |
| Connection Method | Indoor/Outdoor | | Flared/Flared | | | | | | |

NOTES: Test conditions are based on AHRI 210/240.

*1 Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C).

*4 Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.

For data on specific indoor unit combinations, see pages 21 to 23.



SEZ DUCTED INDOOR UNIT FOR MXZ-2A20NA, MXZ-2B20NA, MXZ-3A30NA, MXZ-4A36NA

INVERTER



| Model Name | Indoor Unit | | SEZ-KD09NA | SEZ-KD12NA | SEZ-KD15NA | SEZ-KD18NA |
|-----------------------------------|-----------------------------|-------------------------|------------------------------|-------------|-------------|-------------|
| | Outdoor Unit | | For Use with all MXZ-Series | | | |
| Cooling *1 | Rated Capacity | Btu/h | 9,000 | 12,000 | 15,000 | 17,200 |
| | Total Input | W | 60 | 70 | 90 | |
| Heating at 47° F *2 | Rated Capacity | Btu/h | 10,900 | 13,600 | 18,000 | 20,100 |
| | Total Input | W | 40 | 50 | 70 | |
| Power Supply | Phase, Cycle, Voltage | | 1-Phase, 60Hz, 208 / 230V *4 | | | |
| Voltage | Indoor - Outdoor S1-S2 | | AC 208- 230V | | | |
| | Indoor - Outdoor S2-S3 | | DC24V | | | |
| | MCA *4 | A | 1.0 | | | |
| Fan | Fan Motor Output | | 96 | | | |
| | Airflow (Lo-Med-Hi) | CFM | 194-247-317 | 247-317-388 | 353-441-529 | 423-529-635 |
| | External Static Pressure *3 | | In.W.G. 0.02-0.06-0.14-0.20 | | | |
| Sound Pressure Levels (Lo-Med-Hi) | | dB(A) | 23-26-30 | 23-28-33 | 30-34-37 | 30-34-38 |
| External Finish | | Galvanized-steel Sheets | | | | |
| Dimension | W: In. | | 31-1/8 | 39 | | 46-7/8 |
| | D: In. | | 27-9/16 | | | |
| | H: In. | | 7-7/8 | | | |
| Weight | Lbs. | | 40 | 46 | 51 | 60 |
| Drain Lift Mechanism (Included) | H: In. | | 21-11/16 | | | |
| Field Drainpipe Size | In. | | O.D.: 1-1/4 | | | |
| Remote Controller | Type | | Wired Controller (PAR-21MAA) | | | |
| Refrigerant | Type | | R410A | | | |
| Refrigerant Pipe | Gas Side O.D. | In. | 3/8 | | 1/2 | |
| | Liquid Side O.D. | | 1/4 | | | |
| Connection Method | | | Flared/Flare | | | |

Notes:

*1 Cooling-Indoor: D.B. 80° F (26.7° C), W.B. 67° F (19.4° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (23.9° C).

*2 Heating-Indoor: D.B. 70° F (21.1° C), W.B. 60° F (15.6° C); Outdoor: D.B. 47° F (8.3° C), W.B. 43° F (6.1° C).

*3 External static pressure is factory set to 0.06" W.G. Adjustable via the PAR-21MAA

*4 Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY Seven-year warranty on compressor. Five-year warranty on parts.

**For data on specific indoor unit combinations, see page 21 - 23

Multiple Rooms With An Added Bonus



The MXZ-2B20NA system, when combined with two MSZ-GE09NA indoor units, is ENERGY STAR rated and qualifies for the government's Economic Stimulus Tax Credit of up to \$1,500.

This is only the start. The system continues to be rated with a wide variety of combinations of indoor units to handle a number of applications.

Visit www.mitsubishicomfort.com/taxcredit for more details on the qualified systems or ask your contractor.

Visit www.dsireusa.org for any possible local rebate opportunities from state or utility companies.

MULTI-ROOM MXZ-2B20NA INVERTER HEAT PUMP

| Model Name | | Outdoor Unit | | MXZ-2B20NA *5 | |
|-------------------------|---------------------------------------|------------------------------------|-----------------------------------|--------------------------------|--|
| Outdoor Unit | Cooling *1 Non-ducted/Ducted | Rated Capacity | Btu/h | 18,000/20,000 | |
| | | Capacity Range | Btu/h | 7,800-20,000 | |
| | | Total Input | W | 2,190 (630-2,190) | |
| | Heating at 47° F *2 Non-ducted/Ducted | Rated Capacity | Btu/h | 22,000/22,000 | |
| | | Capacity Range | Btu/h | 8,500-25,500 | |
| | | Total Input | W | 1,780 (520-1,780) | |
| | Heating at 17° F *3 Non-ducted/Ducted | Rated Capacity | Btu/h | 12,500/12,500 | |
| | | Rated Total Input | W | 1,350/1,430 | |
| | | Maximum Capacity | Btu/h | 14,500 | |
| | Maximum Total Input | W | 1,500 | | |
| Power Supply | | Phase, Cycle, Voltage | | 1-phase, 60Hz, 208 / 230V *8 | |
| Voltage | | Indoor - Outdoor S1 - S2 | | AC 208 / 230V | |
| | | Indoor - Outdoor S2 - S3 | | DC12-24V | |
| Outdoor Unit *4 | | MCA | A | 15 | |
| | | MOC | A | 20 | |
| | | Fan Motor | F.L.A. | 0.96 | |
| | | Compressor | Model (Type) | DC INVERTER-driven Twin Rotary | |
| | | | R.L.A. | 10.1 | |
| | | | L.R.A. | 15 | |
| | | Airflow (Cooling/Heating) | CFM | 1,640 | |
| | | Refrigerant Control | Linear Expansion Valve | | |
| | | Defrost Method | Reverse Cycle | | |
| | | Sound Pressure Level at Cooling *1 | dB(A) | 49 | |
| | | Sound Pressure Level at Heating *2 | dB(A) | 51 | |
| | | External Finish Color | Munsell No. 5Y 8.0 / 1.0 | | |
| | | Dimensions | W: In. | 33-1/16 | |
| | | | D: In. | 13 | |
| | | | H: In. | 27-15/16 | |
| Weight | Lbs. | 130 | | | |
| Remote Controller | | Type | Associated With Indoor Unit Model | | |
| Refrigerant | | Type | R410A | | |
| | | Charge | Lbs., Oz. | 5, 15 | |
| | | Oil | Type (fl. oz.) | NEO22 (23.7) | |
| Refrigerant Pipe | | Gas Side O.D. | In. | 3/8 | |
| | | Liquid Side O.D. | In. | 1/4 | |
| Refrigerant Pipe Length | | Height Difference (Max.) | Ft. | 49/33 | |
| | | Length (Max.) | Ft. | 164 | |
| Connection Method | | Indoor/Outdoor | Flared/Flared | | |



INVERTER



*Compatible with the MSZ-A, MSZ-FD, MSZ-GE, MSZ-FE and SEZ series indoor units

NOTES: Test conditions are based on AHRI 210/240. One indoor unit is turned off during low-speed testing under the new test conditions. **Systems actually exhibit higher energy efficiencies during normal operation.**

*1 Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4 Refer to pages 12 and 13 for Indoor Unit specifications.

*5 Data from combination of two Indoor Units MSZ-GE09NA.

*6 Data from combination of Indoor Units MSZ-A09NA, MSZ-A09NA and MSZ-A12NA.

*7 Data from combination of four MSZ-A09NA Indoor Units.

*8 Indoor units receive power from outdoor units through field-supplied interconnected wiring.

*9 49' Applies to installations where the outdoor unit is installed below the indoor unit.

Power factor equals 97 percent.

Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.

Rated Combinations

The charts below indicate the rated capacities for each of the MXZ systems.

With the addition of ducted indoor units to the MXZ-Series, the number of available combinations has greatly expanded. The installation specifications and rated capacities vary on systems using wall-mounted (MSZ-GE and/or MSZ-FE), ducted only (SEZ-KD) or a combination of unit styles.

MXZ-2B20NA Combinations

| |
|---------|
| 9 + 9 |
| 9 + 12 |
| 9 + 15 |
| 12 + 12 |

SEER and HSPF Ratings

| Model | Indoor Unit Type | SEER | HSPF |
|-------------------------------------|-----------------------|------|------|
| MXZ-2B20NA | Non-ducted | 16 | 8.5 |
| | Ducted and Non-ducted | 15.5 | 8.5 |
| | Ducted | 15.5 | 8.5 |
| MXZ-2B20NA ENERGY STAR & TAX CREDIT | 2 x MSZ-GE09NA | 18 | 8.9 |

MSZ WALL-MOUNTED INDOOR UNITS FOR MXZ-2B20NA

INVERTER



| Model Name | Indoor Unit | MSZ-GE09NA | MSZ-FE09NA | MSZ-GE12NA | MSZ-FE12NA | MSZ-GE15NA | MSZ-GE18NA | |
|--|---|---|---------------------|-----------------|---------------------|-----------------|---------------------|---------------------|
| Cooling *1 | Rated Capacity | Btu/h | 9,000 | 9,000 | 12,000 | 12,000 | 14,000 | 17,200 |
| | Total Input | W | 22 | 18 | 22 | 24 | 45 | 43 |
| Heating at 47° F *2 | Rated Capacity | Btu/h | 10,900 | 10,900 | 14,400 | 13,600 | 18,000 | 21,600 |
| | Total Input | W | 23 | 24 | 23 | 30 | 31 | 37 |
| Power Supply | Phase, Cycle, Voltage | 1-phase, 60Hz, 208 / 230V *3 | | | | | | |
| Voltage | Indoor - Outdoor S1 - S2 | AC 208 / 230V | | | | | | |
| | Indoor - Outdoor S2 - S3 | DC12-24V | | | | | | |
| | Indoor - Remote Controller | Wireless Type (Optional Wired Controller: DC 12V) | | | | | | |
| | MCA | A | 1.0 | | | | | |
| Fan | Fan Motor | F.L.A. | 0.76 | | | | | |
| | Airflow at Cooling (Quiet-Lo-Med-Hi-Super Hi or Lo-Med-Hi-Powerful)*1 | DRY (CFM) | 145-170-237-321-399 | 162-226-339-381 | 145-170-237-321-399 | 162-226-381-410 | 205-272-335-420-533 | 230-275-339-420-533 |
| | | WET (CFM) | 109-134-201-286-364 | 144-202-307-343 | 109-134-201-286-364 | 144-202-350-367 | 170-237-300-385-498 | 194-240-304-385-498 |
| | Airflow at Heating (Quiet-Lo-Med-Hi-Super Hi or Lo-Med-Hi-Powerful)*2 | WET (CFM) | 145-170-237-321-406 | 166-240-367-381 | 145-170-237-321-406 | 166-240-399-420 | 205-247-304-367-463 | 230-275-339-431-512 |
| Sound Pressure Level at Cooling (Quiet-Lo-Med-Hi-Super Hi or Lo-Med-Hi-Powerful)*1 | dB(A) | 19-22-30-37-43 | 22-31-39-42 | 19-22-30-37-45 | 22-33-43-45 | 26-32-38-44-49 | 28-33-38-44-49 | |
| Sound Pressure Level at Heating (Quiet-Lo-Med-Hi-Super Hi or Lo-Med-Hi-Powerful)*2 | dB(A) | 19-22-30-37-43 | 22-31-40-42 | 19-22-30-37-43 | 22-23-43-44 | 26-30-35-40-46 | 28-33-38-43-48 | |
| External Finish Color | | Munsell No. 1.0Y 9.2 / 0.2 | | | | | | |
| Dimension Unit | W: In. | 31-7/16 | | | | | | |
| | D: In. | 9-1/8 | 10-1/8 | 9-1/8 | 10-1/8 | | 9-1/8 | |
| | H: In. | 11-5/8 | | | | | | |
| Weight Unit | Lbs. | 22 | 27 | 22 | 27 | | 22 | |
| Field Drainpipe Size O.D. | In. | 5/8 | | | | | | |
| Remote Controller | Type | Wireless Remote (Optional Wired Controller) | | | | | | |
| Refrigerant | Type | R410A | | | | | | |
| Refrigerant Pipe | Gas Side O.D. | In. | 3/8 | | | 1/2 | | |
| | Liquid Side O.D. | In. | 1/4 | | | | | |
| Connection Method | Indoor/Outdoor | Flared/Flared | | | | | | |

*MXZ-2B20NA is also compatible with the MSZ-A and MSZ-FD series indoor units.
NOTES: Test conditions are based on AHRI 210/240.

*1 Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3 Indoor units receive power from outdoor units through field-supplied wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY Seven-year warranty on compressor. Five-year warranty on parts.

For data on specific indoor unit combinations, see pages 21.



SEZ DUCTED INDOOR UNIT FOR MXZ-2A20NA, MXZ-2B20NA, MXZ-3A30NA, MXZ-4A36NA

INVERTER



| Model Name | Indoor Unit | | SEZ-KD09NA | SEZ-KD12NA | SEZ-KD15NA | SEZ-KD18NA |
|-----------------------------------|-----------------------------|------------------------------|-----------------------------|-------------|-------------|-------------|
| | Outdoor Unit | | For Use with all MXZ-Series | | | |
| Cooling *1 | Rated Capacity | Btu/h | 9,000 | 12,000 | 15,000 | 17,200 |
| | Total Input | W | 60 | 70 | 90 | |
| Heating at 47° F *2 | Rated Capacity | Btu/h | 10,900 | 13,600 | 18,000 | 20,100 |
| | Total Input | W | 40 | 50 | 70 | |
| Power Supply | Phase, Cycle, Voltage | 1-Phase, 60Hz, 208 / 230V *4 | | | | |
| Voltage | Indoor - Outdoor S1-S2 | AC 208-230V | | | | |
| | Indoor - Outdoor S2-S3 | DC24V | | | | |
| | MCA *4 | A | 1.0 | | | |
| Fan | Fan Motor Output | W | 96 | | | |
| | Airflow (Lo-Med-Hi) | CFM | 194-247-317 | 247-317-388 | 353-441-529 | 423-529-635 |
| | External Static Pressure *3 | In.W.G. | 0.02-0.06-0.14-0.20 | | | |
| Sound Pressure Levels (Lo-Med-Hi) | dB(A) | 23-26-30 | 23-28-33 | 30-34-37 | 30-34-38 | |
| External Finish | | Galvanized-steel Sheets | | | | |
| Dimension | W: In. | 31-1/8 | 39 | | 46-7/8 | |
| | D: In. | 27-9/16 | | | | |
| | H: In. | 7-7/8 | | | | |
| Weight | Lbs. | 40 | 46 | 51 | 60 | |
| Drain Lift Mechanism (Included) | H: In. | 21-11/16 | | | | |
| Field Drainpipe Size | In. | O.D.: 1-1/4 | | | | |
| Remote Controller | Type | Wired Controller (PAR-21MAA) | | | | |
| Refrigerant | Type | R410A | | | | |
| Refrigerant Pipe | Gas Side O.D. | In. | 3/8 | | 1/2 | |
| | Liquid Side O.D. | In. | 1/4 | | | |
| Connection Method | | Flared/Flare | | | | |

Notes:

*1 Cooling-Indoor: D.B. 80° F (26.7° C), W.B. 67° F (19.4° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (23.9° C).

*2 Heating-Indoor: D.B. 70° F (21.1° C), W.B. 60° F (15.6° C); Outdoor: D.B. 47° F (8.3° C), W.B. 43° F (6.1° C).

*3 External static pressure is factory set to 0.06" W.G. Adjustable via the PAR-21MAA

*4 Indoor units receive power from outdoor units through field supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY Seven-year warranty on compressor. Five-year warranty on parts.

**For data on specific indoor unit combinations, see page 21 - 23


SEZ STATIC PERFORMANCE CURVES



(SEZ-KD12NA MODEL SHOWN)


SEZ-KD09NA

(External static pressure 0.06[in.WG](15Pa) 208/230V 60Hz

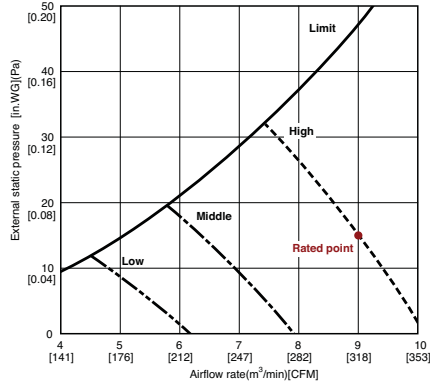


SEZ-KD09NA

(External static pressure 0.14[in.WG](35Pa) 208/230V 60Hz

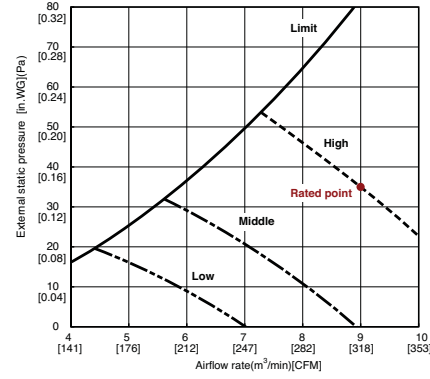


SEZ-KD09NA

(External static pressure 0.20[in.WG](50Pa) 208/230V 60Hz

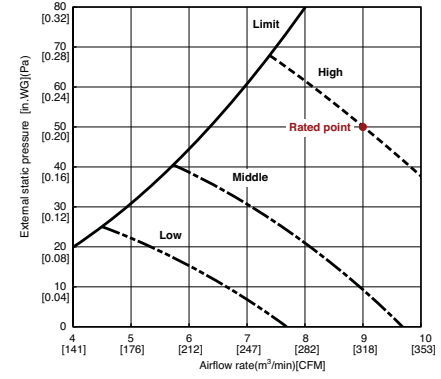


SEZ-KD12NA

(External static pressure 0.06[in.WG](15Pa) 208/230V 60Hz

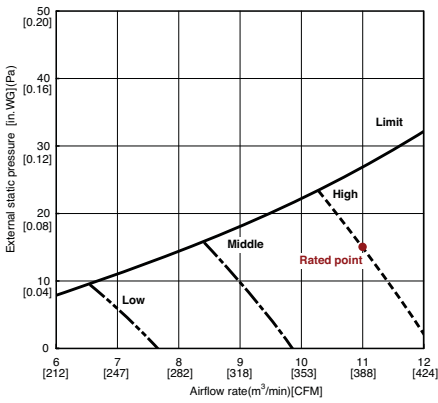


SEZ-KD12NA

(External static pressure 0.14[in.WG](35Pa) 208/230V 60Hz

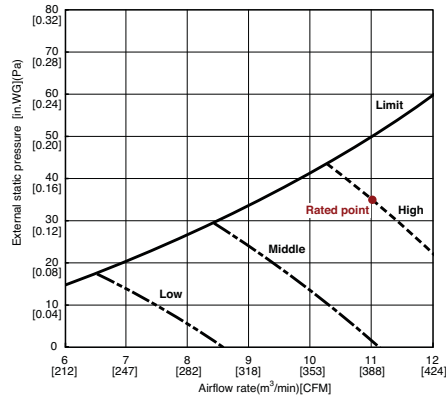


SEZ-KD12NA

(External static pressure 0.20[in.WG](50Pa) 208/230V 60Hz

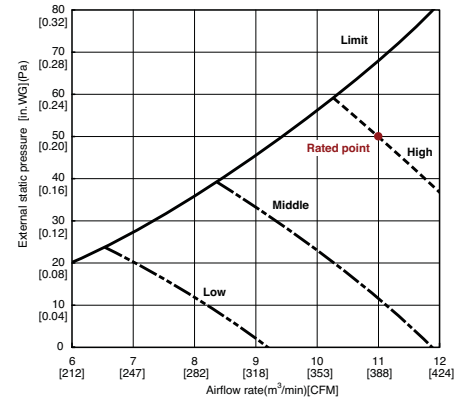


SEZ-KD15NA

(External static pressure 0.06[in.WG](15Pa) 208/230V 60Hz

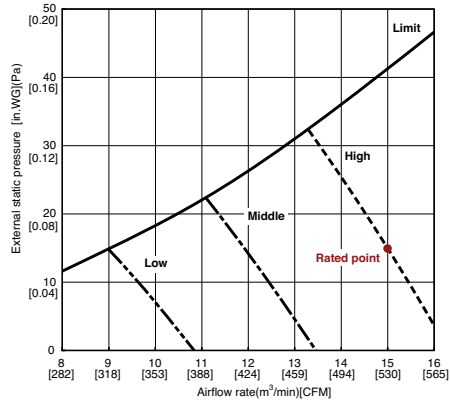


SEZ-KD15NA

(External static pressure 0.14[in.WG](35Pa) 208/230V 60Hz

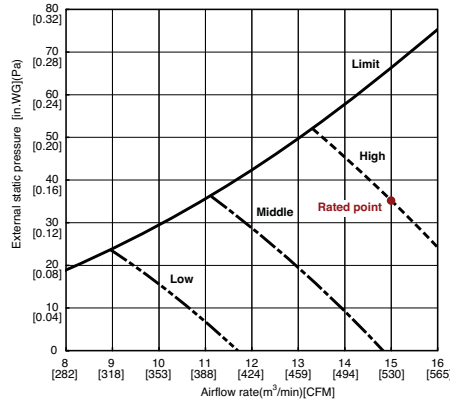


SEZ-KD15NA

(External static pressure 0.20[in.WG](50Pa) 208/230V 60Hz

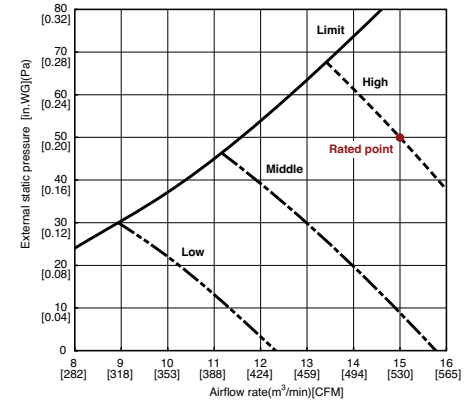


SEZ-KD18NA

(External static pressure 0.06[in.WG](15Pa) 208/230V 60Hz

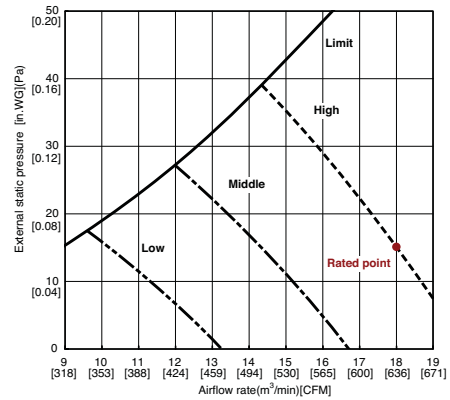


SEZ-KD18NA

(External static pressure 0.14[in.WG](35Pa) 208/230V 60Hz

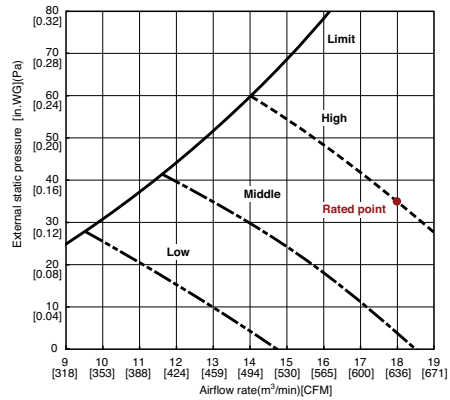

SEZ-KD18NA


(External static pressure 0.20[in.WG](50Pa) 208/230V 60Hz

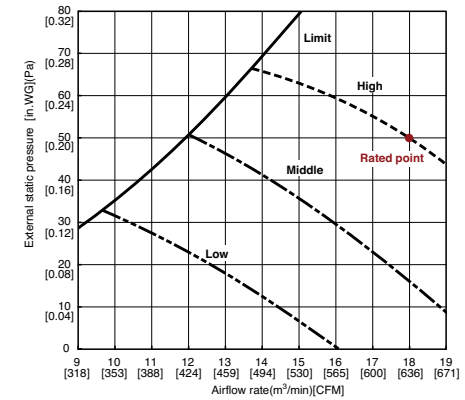

Note: ESP @ 208/230V, 60 Hz. See manual for Static Performance Curve, including @ 0.02 in W.G.

MXZ SYSTEM COMBINATION OPTIONS

MXZ-3A30NA (3:1, 2:1)
Outdoor Unit

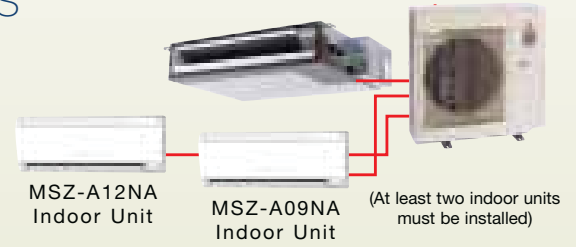


MXZ-2A20NA Combinations*

(using MSZ-A and/or MSZ-FD wall-mounted indoor units and/or SEZ ducted indoor units)

| Indoor Unit (Unit A + Unit B) Combinations | Cooling Capacity (Btu/h) | | | Power Usage (W) |
|--|--------------------------|--------|--------|--------------------|
| | Heating Capacity (Btu/h) | | | |
| | Unit A | Unit B | Total | |
| 9 + 9 | 9,000 | 9,000 | 18,000 | 1,740-1,780 |
| | 10,900 | 10,900 | 21,800 | 1,820 |
| 9 + 12 | 8,500 | 11,500 | 20,000 | 2,150-2,190 |
| | 9,500 | 12,500 | | |
| 9 + 15 | 7,500 | 12,500 | 22,000 | 1,780 |
| | 8,250 | 13,750 | | |
| 12 + 12 | 10,000 | 10,000 | 22,000 | 1,780 |
| | 11,000 | 11,000 | | |

* Information provided at 208/230V. Refer to MXZ Outdoor Unit Service Manual for detail specification and additional information per indoor unit combination. Specifications are subject to change without notice.

MXZ-2B20NA (2:1)
Outdoor Unit



MXZ-2B20NA Combinations*

(using MSZ-GE and/or MSZ-FE wall-mounted indoor units and/or SEZ ducted indoor units)

| Indoor Unit (Unit A + Unit B) Combinations | Cooling Capacity (Btu/h) | | | Power Usage (W) |
|--|--------------------------------|--------------------------------|--|--------------------|
| | Heating Capacity (Btu/h) | | | |
| | Unit A | Unit B | Total | |
| 9 + 9 | 9,000 | 9,000 | 18,000 | 1,440 - 1,780 |
| | Wall: 11,000 Ducted: 10,900 | Wall: 11,000 Ducted: 10,900 | 22,000 (All Wall-mounted MSZ) 21,800 (All Ducted SEZ) 21,900 (Combination) | 1,650 - 1,820 |
| 9 + 12 | 8,500 | 11,500 | 18,000 | 1,660 - 2,190 |
| | 9,500 | 12,500 | | |
| 9 + 15 | 7,500 | 12,500 | 22,000 | 1,650 - 1,780 |
| | 8,250 | 13,750 | | |
| 12 + 12 | 10,000 | 10,000 | 22,000 | 1,630 - 2,190 |
| | 11,000 | 11,000 | | |

* Information provided at 208/230V. Refer to MXZ Outdoor Unit Service Manual for detail specification and additional information per indoor unit combination.

Specifications are subject to change without notice.

MXZ-3A30NA Combinations*

(using MSZ-A and/or MSZ-FD wall-mounted indoor units and/or SEZ ducted indoor units)

| Indoor Unit (Unit A + Unit B + Unit C) Combinations ** | Cooling Capacity (Btu/h) | | | | Power Usage (W) |
|--|------------------------------|------------------------------|------------------------------|---|--------------------|
| | Heating Capacity (Btu/h) | | | | |
| | Unit A | Unit B | Unit C | Total | |
| 9 + 9 | 9,000 | 9,000 | - | 18,000 | 1,800 - 1,840 |
| | 10,900 | 10,900 | - | 21,800 | 1,700 |
| 9 + 12 | 9,000 | 12,000 | - | 21,000 | 2,000 - 2,040 |
| | 10,900 | 13,600 | - | 24,500 | 1,980 |
| 9 + 15 | 9,000 | 15,000 | - | 24,000 | 2,500 - 2,540 |
| | 10,100 | 16,900 | - | 27,000 | 2,200 |
| 9 + 17 | 9,000 | 16,200 | - | 25,200 | 2,700 - 2,720 |
| | 9,300 | 17,700 | - | 27,000 | 2,200 |
| 9 + 18 | 8,900 | 17,100 | - | 26,000 | 2,820 - 2,840 |
| | 9,000 | 18,000 | - | 27,000 | 2,200 |
| 9 + 24 | 7,600 | 20,400 | - | 28,000 | 3,200 - 3,220 |
| | 7,300 | 19,700 | - | 27,000 | 1,980 |
| 12 + 12 | 12,000 | 12,000 | - | 24,000 | 2,500 - 2,540 |
| | 13,500 | 13,500 | - | 27,000 | 2,200 |
| 12 + 15 | 11,500 | 14,500 | - | 26,000 | 2,800 - 2,840 |
| | 12,000 | 15,000 | - | 27,000 | 2,160 |
| 12 + 17 | 10,800 | 15,200 | - | 26,000 | 2,800 - 2,820 |
| | 11,200 | 15,800 | - | 27,000 | 2,140 |
| 12 + 18 | 10,400 | 15,600 | - | 26,000 | 2,820 - 2,840 |
| | 10,800 | 16,200 | - | 27,000 | 2,140 |
| 15 + 15 | 13,000 | 13,000 | - | 26,000 | 2,800 - 2,840 |
| | 13,500 | 13,500 | - | 27,000 | 2,120 |
| 15 + 17 | 12,200 | 13,800 | - | 26,000 | 2,800 - 2,820 |
| | 12,700 | 14,300 | - | 27,000 | 2,110 |
| 15 + 18 | 11,800 | 14,200 | - | 26,000 | 2,820 - 2,840 |
| | 12,300 | 14,700 | - | 27,000 | 2,110 |
| 17 + 17 | 13,000 | 13,000 | - | 26,000 | 2,800 |
| | 13,500 | 13,500 | - | 27,000 | 2,100 |
| 17 + 18 | 12,600 | 13,400 | - | 26,000 | 2,820 |
| | 13,100 | 13,900 | - | 27,000 | 2,100 |
| 18 + 18 | 13,000 | 13,000 | - | 26,000 | 2,840 |
| | 13,500 | 13,500 | - | 27,000 | 2,100 |
| 9 + 9 + 9 | Wall: 9,000 Ducted: 8,500 | Wall: 9,000 Ducted: 8,500 | Wall: 9,000 Ducted: 8,500 | 27,000 (All Wall-mounted MSZ) 25,500 (All Ducted SEZ) 26,500 - 26,000 (Combination) | 2,860 - 2,950 |
| | Wall: 9,500 Ducted: 9,000 | Wall: 9,500 Ducted: 9,000 | Wall: 9,500 Ducted: 9,000 | 28,500 (All Wall-mounted MSZ) 27,000 (All Ducted SEZ) 28,000 - 27,500 (Combination) | 2,180 - 2,240 |
| 9 + 9 + 12 | Wall: 8,500 Ducted: 8,000 | Wall: 8,500 Ducted: 8,000 | 11,400 | 28,400 (All Wall-mounted MSZ) 27,400 (All Ducted SEZ) 28,400 - 27,400 (Combination) | 3,250 - 3,330 |
| | Wall: 8,600 Ducted: 8,100 | Wall: 8,600 Ducted: 8,100 | 11,400 | 28,600 (All Wall-mounted MSZ) 27,600 (All Ducted SEZ) 28,600 - 27,600 (Combination) | 2,180 - 2,220 |
| 9 + 9 + 15 | Wall: 7,750 Ducted: 7,250 | Wall: 7,750 Ducted: 7,250 | 12,900 | 28,400 (All Wall-mounted MSZ) 27,400 (All Ducted SEZ) 28,400 - 27,400 (Combination) | 3,250 - 3,330 |
| | Wall: 7,800 Ducted: 7,300 | Wall: 7,800 Ducted: 7,300 | 13,000 | 28,600 (All Wall-mounted MSZ) 27,600 (All Ducted SEZ) 28,600 - 27,600 (Combination) | 2,180 - 2,200 |
| 9 + 9 + 17 | Wall: 7,300 Ducted: 6,800 | Wall: 7,300 Ducted: 6,800 | 13,800 | 28,400 (All Wall-mounted MSZ) 27,400 (All Ducted SEZ) 27,900 (Combination) | 3,250 - 3,310 |
| | Wall: 7,350 Ducted: 6,850 | Wall: 7,350 Ducted: 6,850 | 13,900 | 28,600 (All Wall-mounted MSZ) 27,600 (All Ducted SEZ) 28,100 (Combination) | 2,180 - 2,220 |
| 9 + 9 + 18 | Wall: 7,100 Ducted: 6,600 | Wall: 7,100 Ducted: 6,600 | 14,200 | 28,400 (All Wall-mounted MSZ) 27,400 (All Ducted SEZ) 27,900 (Combination) | 3,270 - 3,330 |
| | Wall: 7,200 Ducted: 6,700 | Wall: 7,200 Ducted: 6,700 | 14,200 | 28,600 (All Wall-mounted MSZ) 27,600 (All Ducted SEZ) 28,100 (Combination) | 2,180 - 2,220 |

* Information provided at 208/230V. Refer to MXZ Outdoor Unit Service Manual for detail specification and additional information per indoor unit combination.

** Sizes 17 and 24 only available in MSZ-A17 and MSZ-A24 wall-mounted indoor unit style, respectively. Size 18 only available in SEZ-KD18 ducted indoor unit style specification and additional information per indoor unit combination.

Specifications are subject to change without notice.

MXZ-4A36NA Combinations*

(using MSZ-A and/or MSZ-FD wall-mounted indoor units and/or SEZ ducted indoor units)

| Indoor Unit (Unit A + Unit B + Unit C + Unit D) Combinations ** | Cooling Capacity (Btu/h) | | | | | Power Usage (W) |
|---|--------------------------------|--------------------------------|--------------------------------|--------|---|-----------------------|
| | Heating Capacity (Btu/h) | | | | | |
| | Unit A | Unit B | Unit C | Unit D | Total | |
| 9 + 9 + 9 | Wall: 9,000 Ducted: 8,500 | Wall: 9,000 Ducted: 8,500 | Wall: 9,000 Ducted: 8,500 | - | 27,000 (All Wall-mounted MSZ) 25,800 (All Ducted SEZ) 26,600 - 26,200 (Combination) | 2,860 - 2,950 |
| | Wall: 10,800 Ducted: 10,400 | Wall: 10,800 Ducted: 10,400 | Wall: 10,800 Ducted: 10,400 | - | 32,400 (All Wall-mounted MSZ) 31,200 (All Ducted SEZ) 32,000 - 31,600 (Combination) | 2,700 |
| 9 + 9 + 12 | Wall: 9,000 Ducted: 8,600 | Wall: 9,000 Ducted: 8,600 | 12,000 | - | 30,000 (All Wall-mounted MSZ) 29,200 (All Ducted SEZ) 30,000 - 29,200 (Combination) | 3,270 - 3,350 |
| | Wall: 10,000 Ducted: 9,600 | Wall: 10,000 Ducted: 9,600 | 12,400 | - | 32,400 (All Wall-mounted MSZ) 31,600 (All Ducted SEZ) 32,400 - 31,600 (Combination) | 2,700 |
| 9 + 9 + 15 | Wall: 8,800 Ducted: 8,400 | Wall: 8,800 Ducted: 8,400 | 14,500 | - | 32,100 (All Wall-mounted MSZ) 31,300 (All Ducted SEZ) 32,100 - 31,300 (Combination) | 3,500 - 3,580 |
| | Wall: 8,900 Ducted: 8,500 | Wall: 8,900 Ducted: 8,500 | 14,600 | - | 32,400 (All Wall-mounted MSZ) 31,600 (All Ducted SEZ) 32,400 - 31,600 (Combination) | 2,700 |
| 9 + 9 + 17 | Wall: 8,200 Ducted: 7,800 | Wall: 8,200 Ducted: 7,800 | 15,700 | - | 32,100 (All Wall-mounted MSZ) 31,300 (All Ducted SEZ) 31,700 (Combination) | 3,500 - 3,560 |
| | Wall: 8,400 Ducted: 8,000 | Wall: 8,400 Ducted: 8,000 | 15,600 | - | 32,400 (All Wall-mounted MSZ) 31,600 (All Ducted SEZ) 32,000 (Combination) | 2,700 |
| 9 + 9 + 18 | Wall: 8,100 Ducted: 7,700 | Wall: 8,100 Ducted: 7,700 | 15,900 | - | 32,100 (All Wall-mounted MSZ) 31,300 (All Ducted SEZ) 31,700 (Combination) | 3,520 - 3,580 |
| | Wall: 8,100 Ducted: 7,700 | Wall: 8,100 Ducted: 7,700 | 16,200 | - | 32,400 (All Wall-mounted MSZ) 31,600 (All Ducted SEZ) 32,000 (Combination) | 2,700 |
| 9 + 9 + 24 | Wall: 6,900 Ducted: 6,500 | Wall: 6,900 Ducted: 6,500 | 18,300 | - | 32,100 (All Wall-mounted MSZ) 31,300 (All Ducted SEZ) 31,700 (Combination) | 3,500 - 3,560 |
| | Wall: 7,800 Ducted: 7,400 | Wall: 7,800 Ducted: 7,400 | 16,800 | - | 32,400 (All Wall-mounted MSZ) 31,600 (All Ducted SEZ) 32,000 (Combination) | 2,700 |
| 9 + 12 + 12 | Wall: 8,700 Ducted: 8,300 | 11,700 | 11,700 | - | 32,100 (All Wall-mounted MSZ) 31,700 (All Ducted SEZ) 32,100 - 31,700 (Combination) | 3,500 - 3,570 |
| | Wall: 9,400 Ducted: 9,000 | 11,500 | 11,500 | - | 32,400 (All Wall-mounted MSZ) 32,000 (All Ducted SEZ) 32,400 - 32,000 (Combination) | 2,700 |
| 9 + 12 + 15 | Wall: 8,000 Ducted: 7,600 | 10,700 | 13,400 | - | 32,100 (All Wall-mounted MSZ) 31,700 (All Ducted SEZ) 32,100 - 31,700 (Combination) | 3,500 - 3,570 |
| | Wall: 8,300 Ducted: 7,900 | 10,400 | 13,700 | - | 32,400 (All Wall-mounted MSZ) 32,000 (All Ducted SEZ) 32,400 - 32,000 (Combination) | 2,700 |
| 9 + 12 + 17 | Wall: 7,600 Ducted: 7,200 | 10,100 | 14,400 | - | 32,100 (All Wall-mounted MSZ) 31,700 (All Ducted SEZ) 32,100 - 31,700 (Combination) | 3,500 - 3,550 |
| | Wall: 7,900 Ducted: 7,500 | 9,900 | 14,600 | - | 32,400 (All Wall-mounted MSZ) 32,000 (All Ducted SEZ) 32,400 - 32,000 (Combination) | 2,700 |
| 9 + 12 + 18 | Wall: 7,500 Ducted: 7,100 | 10,000 | 14,600 | - | 32,100 (All Wall-mounted MSZ) 31,700 (All Ducted SEZ) 32,100 - 31,700 (Combination) | 3,520 - 3,570 |
| | Wall: 7,600 Ducted: 7,200 | 9,900 | 14,900 | - | 32,400 (All Wall-mounted MSZ) 32,000 (All Ducted SEZ) 32,400 - 32,000 (Combination) | 2,700 |
| 9 + 15 + 15 | Wall: 7,500 Ducted: 7,100 | 12,300 | 12,300 | - | 32,100 (All Wall-mounted MSZ) 31,700 (All Ducted SEZ) 32,100 - 31,700 (Combination) | 3,500 - 3,570 |
| | Wall: 7,600 Ducted: 7,200 | 12,400 | 12,400 | - | 32,400 (All Wall-mounted MSZ) 32,000 (All Ducted SEZ) 32,400 - 32,000 (Combination) | 2,700 |
| 9 + 15 + 17 | Wall: 7,100 Ducted: 6,700 | 11,700 | 13,300 | - | 32,100 (All Wall-mounted MSZ) 31,700 (All Ducted SEZ) 32,100 - 31,700 (Combination) | 3,500 - 3,570 |
| | Wall: 7,200 Ducted: 6,800 | 11,900 | 13,300 | - | 32,400 (All Wall-mounted MSZ) 32,000 (All Ducted SEZ) 32,400 - 32,000 (Combination) | 2,700 |

* Information provided at 208V.
Refer to MXZ Outdoor Unit Service Manual for detail specification and additional information per indoor unit combination.

** Sizes 17 and 24 only available in MSZ-A17 and MSZ-A24 wall-mounted indoor unit style, respectively. Size 18 only available in SEZ-KD18 ducted indoor unit style specification and additional information per indoor unit combination.

Specifications are subject to change without notice.

MXZ-4A36NA Combinations* (continued)

(using MSZ-A and/or MSZ-FD wall-mounted indoor units and/or SEZ ducted indoor units)


| Indoor Unit (Unit A + Unit B + Unit C + Unit D) Combinations ** | Cooling Capacity (Btu/h) | | | | | Power Usage (W) |
|---|------------------------------|------------------------------|------------------------------|------------------------------|---|-----------------------|
| | Heating Capacity (Btu/h) | | | | | |
| | Unit A | Unit B | Unit C | Unit D | Total | |
| 9 + 15 + 18 | Wall: 7,000 Ducted: 6,600 | 11,600 | 13,500 | - | 32,100 (All Wall-mounted MSZ) 31,700 (All Ducted SEZ) 32,100 - 31,700 (Combination) | 3,500 - 3,570 |
| | Wall: 7,100 Ducted: 6,700 | 11,900 | 13,400 | - | 32,400 (All Wall-mounted MSZ) 32,000 (All Ducted SEZ) 32,400 - 32,000 (Combination) | 2,700 |
| 9 + 17 + 17 | Wall: 6,700 Ducted: 6,300 | 12,700 | 12,700 | - | 32,100 (All Wall-mounted MSZ) 31,700 (Combination) | 3,500 - 3,530 |
| | Wall: 7,000 Ducted: 6,600 | 12,700 | 12,700 | - | 32,400 (All Wall-mounted MSZ) 32,000 (Combination) | 2,700 |
| 9 + 17 + 18 | Wall: 6,600 Ducted: 6,200 | 12,600 | 12,900 | - | 32,100 - 31,700 (Combination) | 3,520 - 3,550 |
| | Wall: 6,900 Ducted: 6,500 | 12,700 | 12,800 | - | 32,400 - 32,000 (Combination) | 2,700 |
| 9 + 18 + 18 | Wall: 6,500 Ducted: 6,100 | 12,800 | 12,800 | - | 31,700 (All Ducted SEZ) 32,100 (Combination) | 3,540 - 3,570 |
| | Wall: 6,800 Ducted: 6,400 | 12,800 | 12,800 | - | 32,400 - 32,000 (Combination) | 2,700 |
| 12 + 12 + 12 | 10,700 | 10,700 | 10,700 | - | 32,100 | 3,500 - 3,560 |
| | 10,800 | 10,800 | 10,800 | - | 32,400 | 2,700 |
| 12 + 12 + 15 | 9,900 | 9,900 | 12,300 | - | 32,100 | 3,500 - 3,560 |
| | 9,700 | 9,700 | 13,000 | - | 32,400 | 2,700 |
| 12 + 12 + 17 | 9,400 | 9,400 | 13,300 | - | 32,100 | 3,500 - 3,540 |
| | 9,300 | 9,300 | 13,800 | - | 32,400 | 2,700 |
| 12 + 12 + 18 | 9,300 | 9,300 | 13,500 | - | 32,100 | 3,520 - 3,560 |
| | 9,200 | 9,200 | 14,000 | - | 32,400 | 2,700 |
| 12 + 15 + 15 | 9,100 | 11,500 | 11,500 | - | 32,100 | 3,500 - 3,560 |
| | 9,000 | 11,700 | 11,700 | - | 32,400 | 2,700 |
| 9 + 9 + 9 + 9 | Wall: 9,000 Ducted: 8,600 | Wall: 9,000 Ducted: 8,600 | Wall: 9,000 Ducted: 8,600 | Wall: 9,000 Ducted: 8,600 | 36,000 (All Wall-mounted MSZ) 34,400 (All Ducted SEZ) 35,600 - 34,800 (Combination) | 3,820 - 3,940 |
| | Wall: 9,000 Ducted: 8,600 | Wall: 9,000 Ducted: 8,600 | Wall: 9,000 Ducted: 8,600 | Wall: 9,000 Ducted: 8,600 | 36,000 (All Wall-mounted MSZ) 34,400 (All Ducted SEZ) 35,600 - 34,800 (Combination) | 3,100 |
| 9 + 9 + 9 + 12 | Wall: 8,300 Ducted: 7,900 | Wall: 8,300 Ducted: 7,900 | Wall: 8,300 Ducted: 7,900 | 11,100 | 36,000 (All Wall-mounted MSZ) 34,800 (All Ducted SEZ) 36,000 - 34,800 (Combination) | 3,820 - 3,930 |
| | Wall: 8,300 Ducted: 7,900 | Wall: 8,300 Ducted: 7,900 | Wall: 8,300 Ducted: 7,900 | 11,100 | 36,000 (All Wall-mounted MSZ) 34,800 (All Ducted SEZ) 36,000 - 34,800 (Combination) | 3,100 |
| 9 + 9 + 9 + 15 | Wall: 7,700 Ducted: 7,300 | Wall: 7,700 Ducted: 7,300 | Wall: 7,700 Ducted: 7,300 | 12,900 | 36,000 (All Wall-mounted MSZ) 34,800 (All Ducted SEZ) 36,000 - 34,800 (Combination) | 3,820 - 3,930 |
| | Wall: 7,700 Ducted: 7,300 | Wall: 7,700 Ducted: 7,300 | Wall: 7,700 Ducted: 7,300 | 12,900 | 36,000 (All Wall-mounted MSZ) 34,800 (All Ducted SEZ) 36,000 - 34,800 (Combination) | 3,100 |
| 9 + 9 + 12 + 12 | Wall: 7,700 Ducted: 7,300 | Wall: 7,700 Ducted: 7,300 | 10,300 | 10,300 | 36,000 (All Wall-mounted MSZ) 35,200 (All Ducted SEZ) 36,000 - 35,200 (Combination) | 3,820 - 3,920 |
| | Wall: 7,700 Ducted: 7,300 | Wall: 7,700 Ducted: 7,300 | 10,300 | 10,300 | 36,000 (All Wall-mounted MSZ) 35,200 (All Ducted SEZ) 36,000 - 35,200 (Combination) | 3,100 |

* Information provided at 208V.
Refer to MXZ Outdoor Unit Service Manual for detail specification and additional information per indoor unit combination.

** Sizes 17 and 24 only available in MSZ-A17 and MSZ-A24 wall-mounted indoor unit style, respectively. Size 18 only available in SEZ-KD18 ducted indoor unit style specification and additional information per indoor unit combination.

Specifications are subject to change without notice.

MXZ-4A36NA (3:1, 4:1)
Outdoor Unit

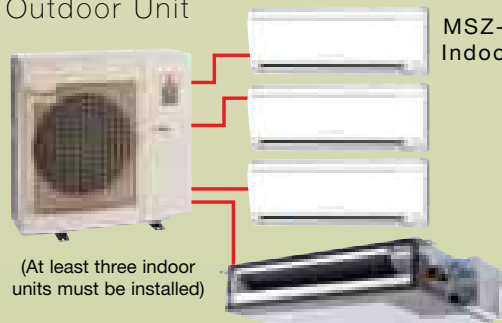

(At least three indoor units must be installed)

SEZ-KD12NA
Indoor Units

Mitsubishi System Technologies:

commercial, institutional and large residential personalized comfort solution. (P-Series systems)



Mitsubishi Electric delivers flexible and convenient cooling and heating solutions to almost any commercial, institutional or large residential application. Choose from small, quiet indoor and outdoor units that operate with the increased efficiency you need. Whether in a church, office building, school, nursing home, restaurant, retail store, or equipment room, the compact design of the indoor units make cooling and heating difficult spaces a breeze.

With wall-mounted, ceiling-recessed, ceiling-suspended and horizontal ducted options, capacities of up to 42,000 Btu/h of cooling or heating performance and Hyper-Heating INVERTER P-Series technology that provides 100 percent heating capacity down to 5° F, Mitsubishi Electric systems have the perfect solution for almost any building.

Technology Benefits of Mitsubishi Systems

| Features | Benefits |
|--|--|
| INVERTER TECHNOLOGY | You can enjoy high-speed cooling and heating and consistent delivery of comfort year-round. |
| QUIET OPERATION | You can hold a board meeting or teach a class in quiet comfort. |
| EASY INSTALLATION | Installs quickly room by room with minimal interruption. |
| ZONE CONTROL | You can cool and heat only those spaces desired for maximum control and energy efficiency. |
| ADVANCED MICROPROCESSOR TECHNOLOGY | Built-in electronics ensure efficient operation and maximum performance for optimum comfort. |
| LOW AMBIENT COOLING DOWN TO 0° F OUTDOORS (REQUIRES WIND BAFFLE) | This feature is perfect for computer network centers and telecom equipment rooms that need help to stay cool down to 0° F outside. |
| ENVIRONMENTALLY FRIENDLY REFRIGERANT | Mitsubishi systems use R410A, an environmentally-friendly refrigerant. |

Redi-charged Systems

Mitsubishi outdoor units come with enough refrigerant to be installed 70 feet (PUY(Z)12-36) and up to 100 feet (PUY(Z)42) from the indoor units. Linesets can be run up to 100 feet from PUY(Z)12-18 outdoor units and 165 feet from PUY(Z)24-42 outdoor units when additional charge is added.

Thanks to unique design profiles and R410A refrigerant, these systems are easier to fit into any space. R410A is environmentally friendly with zero Ozone Depletion Potential (ODP).

Hot-start System

Heat pump systems use our hot-start technology to provide warmth from the beginning by ramping up fan speed as the coil warms. When you want warm air without annoying drafts, that's what you'll get.

Low Ambient Operation (PUY/PUZ)

The ability of these units to operate effectively in low temperatures, along with the addition of a low-ambient wind baffle accessory, allows for a space to be air-conditioned even when it is as low as 0° F outside. This cooling ability is important when dealing with electronic equipment rooms, telecom substations, surveillance mechanical rooms, restaurant kitchens, fitness centers and more.

Auto Fan Speed Feature (excludes PEA model)

Choose from multiple set fan speeds or auto fan speed to ensure faster achievement of room temperature. Auto fan speed mode allows the fan to adjust its speed based on the degree of differential between set-point and room temperature.


Flexible Control

Convenient and efficient zone control means you can cool or heat only the spaces in use. You can even have single or dual controllers connected to one system. The controller does not even have to be in the space shared with the indoor unit. Features of the controller include a weekly timer, temperature range limiting, auto-off, expanded fault codes, and service call number display.

Installation Service and Maintenance Ease

The units use only three polarity sensitive wires plus a ground conductor run from the outdoor to the indoor unit, providing both power and communication connections. Two non-polar wires connect the indoor unit and wall-mounted controller. This wiring design helps avoid installation errors. An optional wireless remote controller kit is available for the ceiling-mounted indoor units.

Mitsubishi outdoor units are designed with easy service and maintenance in mind. Maintenance points are located behind easy-access panels to make installation and service effortless for a trained technician. Four-way piping access allows connection in four directions: front, rear, right and bottom (all PUY/PUZ models).





Innovative Compressor Technology

Located in the outdoor unit, INVERTER-driven compressor systems detect subtle changes in temperature and, like a car's cruise control, automatically adjust compressor speed unlike conventional units, which start and stop repetitively.

Special components within the compressor increase the magnetic flux and reduce its weight allowing the compressor to generate higher energy efficiencies with the best in performance than ever at low levels of sound during start-up and running.



INVERTER

Extra Energy Savings

Six (6) Mitsubishi Hyper-Heating INVERTER (H2i®) P-Series systems are ENERGY STAR rated and **One (1)** system qualifies for the Economic Stimulus Tax Credit offered as part of the American Reinvestment and Recovery Act (qualifying systems detailed on page 31).

Visit www.mitsubishicomfort.com/taxcredit for more details or ask your contractor.

Visit www.dsireusa.org for any possible local rebate opportunities.



Easy-clean Filters

Convenient tabs let you remove the washable filters quickly and easily for faster cleaning in the PKA, PCA and PLA indoor units. You'll also save time and money because you won't need to replace the filters.

Auto Cooling/Heating Changeover

In Auto Mode our systems monitor and sense when a space needs cooling or heating and automatically switch operation as needed to maintain a consistent temperature within the selected range of a single zone.

Bring In Outside Air

Ducting can be installed with minimal on-site work to bring in outside air for PCA, PLA and PEA/D indoor units, creating a healthier indoor environment.




Mitsubishi System Technologies: indoor unit specific technologies

PLA ceiling-recessed model


Wider Air Stream

Longer air outlets deliver wider air streams for improved air distribution and energy savings. This feature means quieter air delivery with fewer drafts and great overall cooling and heating coverage.

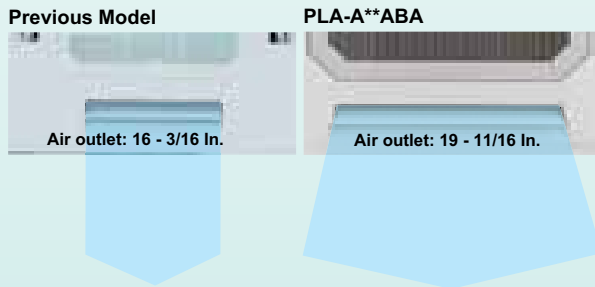

Independent Vane Motor Control

Each of the four vanes can be set by the wired remote controller to operate independently to match the room layout. Specific vane settings include five fixed directions plus swing.

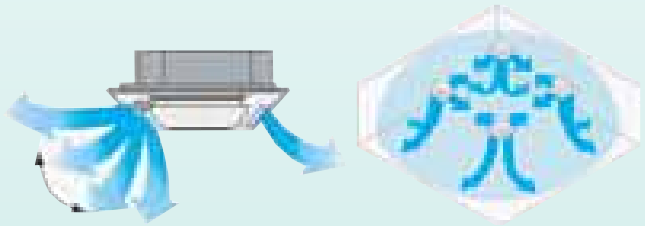

Auto Wave Feature (HEATING mode)

In the HEATING mode each air outlet vane operates independently, distributing warm air in multiple directions for the best in room heating.



i-see™ Sensor Accessory **i-see Sensor**

In addition to the return air temperature, the PLA-A**BA four-way ceiling cassette with the field-installed i-see sensor measures the floor temperature in real time, observing the room vertically for better management of sensible temperature (temperature felt by the occupant). The i-see sensor measures the infrared rays generated from the surrounding wall and floor surface at an angle of 360°. The infrared ray energy is converted into a temperature value. The i-see sensor rotates 90° slowly in five-second intervals for correct measurement of temperature to cover the full floor space. When combined with the auto fan speed mode, air can be directed to the farthest corners of the room for enhanced temperature coverage.



i-see sensor detail

PKA wall-mounted model



Ultimate Comfort Meets Ultimate Convenience

Select from a wall-mounted, hard-wired controller (PKA-HA/KA) for ultimate comfort control.

The set-temperature display is large and easy to read. Using the 24-hour timer, you can get the unit operation to start and stop at specified times and to repeat daily. And the convenient remote provides easy control of the Fan Speed as well as the COOL, HEAT, AUTO and DRY modes from anywhere in the room.

The hand-held wireless remote controller is easier to use than most TV remotes for the PKA-HA(L)/KA(L).

Lightweight, Easy-to-install Indoor Unit

The smallest PKA unit measures about 36" wide, 11-1/2" tall and 9-3/4" deep. It weighs just 29 lbs., is easily installed above windows or doorways, and can typically be installed by just two licensed installers in about half of a day. And the PKA-Series models don't even require ductwork, only a small three-inch opening in the wall or ceiling, so they can be installed in some of the toughest spaces, even on brick and masonry walls.

Auto Vane Control

With a simple press of the OFF button, the vane closes the air outlet for a clean presentation when not in use. During operation, the vane can be adjusted with the remote controller to the perfect position to direct the airflow horizontally in cooling mode or towards the floor in heating mode, keeping room temperature even and comfortable.

PCA ceiling-suspended model



Control Airflow Angle for Better Coverage

With the wired remote controller, four different airflow positions can be set. The Autovane feature when in use during cooling, permits the angle to self-adjust into a horizontal position and circulate cold air more effectively.

During heating, the vane directs the hot air downward toward the floor, where it will rise and circulate, keeping your room comfortable from top to bottom.

i-see™ Sensor Optional Accessory **i-see Sensor**

The field-installed i-see sensor accessory improves the operation in the room by sensing and controlling for the temperature felt by the room's occupants to help prevent over cooling or under heating. Taking floor temperature samples five times every 40 seconds over a 160° angle of the surface area. Sensors alter the Auto Fan setting and Vane control setting to account for ambient room temperature fluctuations from the set point.

PEA/PEAD horizontal ducted models



When installed, the PEA/PEAD indoor unit utilizes short duct runs allowing for the air-conditioning of adjacent spaces or extending the range of distributed capacities within a single zone with very little visual impact to the conditioned area. With features like a built-in condensate lift mechanism, adjustable static pressure, multiple fan speeds, DRY Mode and an operating sound as low as 23 dB(A) the PEA system expands the number of installation applications for the P-Series line.

Built-in Drain Pump

The PEA indoor unit features a built-in drain pump that lifts condensation up to 21-11/16 inches above the drain pan. The unit's fail-safe mechanism recognizes when there is a high level in the condensate pan and shuts off the indoor fan and the outdoor unit compressor to prevent overflow.



Product Line-Up Showcase

SYSTEM MODELS AND CONTROLLERS




Indoor Unit Models

Mitsubishi Electric indoor units are available in a wide variety of styles and capacity ranges to provide an almost unlimited number of applications. If there is a problem, we have a solution.

PKA (HA/HAL, KA/KAL) WALL-MOUNTED SERIES

Air-Conditioner and Heat Pumps
12,000 to 34,200 Btu/h

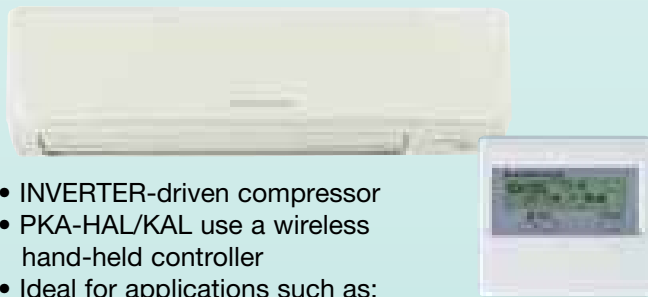

- INVERTER-driven compressor
- PKA-HAL/KAL use a wireless hand-held controller
- Ideal for applications such as:
 - Churches, classrooms, day care rooms, out buildings, guard houses and more

PLA CEILING-RECESSED SERIES

Air-Conditioner and Heat Pumps
12,000 to 42,000 Btu/h



- Built-in condensate lift mechanism
- i-see™ Sensor optional
- Knockout for ventilation air
- Built-in condensate lift mechanism
- Ideal for applications such as:
 - Retail stores, classrooms, office spaces, conference rooms, lobbies and more

PCA CEILING-SUSPENDED SERIES

Air-Conditioner and Heat Pumps
24,000 to 42,000 Btu/h



- INVERTER-driven compressor
- i-see™ Sensor optional
- Knockout for ventilation air
- AUTO fan speed control
- Ideal for applications such as:
 - Restaurants, classrooms, building entrances, retail stores and more

PEA/PEAD HORIZONTAL DUCTED SERIES

Air-Conditioner and Heat Pumps
12,000 to 42,000 Btu/h



- INVERTER-driven compressor
- Automatic fan speed control
- Built-in condensate lift mechanism
- Ideal for applications such as:
 - Retail stores, classrooms, office spaces, conference rooms, lobbies and more




Outdoor Unit Models

Mitsubishi Electric outdoor units, either cooling-only or heat pump models, work with each of the indoor unit styles creating a wide range of installation applications.

These outdoor units employ advanced Pulse Amplitude Modulation (PAM). PAM adjusts the form of the current wave to emulate the form of the supply voltage wave so that **98 percent** of input power is effectively utilized.

PUZ-HA**NHA2 (H2i®) Hyper-Heating INVERTER

PUY/PUZ-NHA3 Cooling-only and Heat Pump



12,000 to
18,000 Btu/h



24,000 to
36,000 Btu/h




42,000 Btu/h



30,000 to
36,000 Btu/h
(see page 30-31
for more information)

WIRED REMOTE CONTROLLER

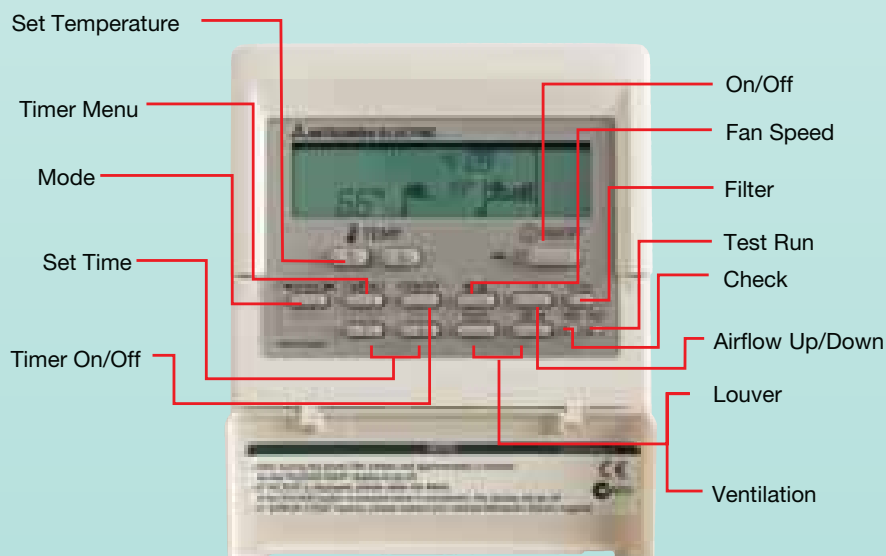

Wired controller for the indoor unit. (multi-lingual)

P-Series Hyper-Heating INVERTER

BRINGING YEAR-ROUND COMFORT SOLUTIONS
TO EXTREME CLIMATES.

Heat Pump System: 34,200 to 36,000 Btu/h Capacity



Unequaled Year-round Comfort

The cooling and heating success of Mitsubishi Electric's INVERTER heat pump systems is well documented. Our Hyper-Heating INVERTER (H2i) P-Series technology advances the process a step further with the added benefit of year-round comfort with a single system even on the coldest days of the year in most areas. The 2.5- and 3-ton wall-mounted, ceiling-suspended, ceiling-cassette and ducted indoor units connected to the H2i P-Series outdoor units are flexible enough to satisfy almost any light commercial or institutional renovation or new construction project.



The Next Generation in Heat Pump Technology

These H2i P-Series outdoor units give a new level of performance to Mitsubishi P-Series models, providing the extra heat-generating power it takes to deliver comfort and consistency in extreme climates. H2i units use Mitsubishi Electric's INVERTER-driven scroll compressor technology to achieve the desired room temperature quickly, maintaining it consistently while simultaneously conserving energy. Plus with the integration of our exclusive H2i flash technology, these H2i P-Series units recover heat energy that is normally wasted in the flash process at the outdoor coil. This process helps the H2i system overcome issues commonly associated with conventional heat pumps such as decreases in low-side pressure, refrigerant mass flow rate and operational capacity. As a result, H2i P-Series units exhibit 100 percent of rated heating capacity at 5° F and 80 percent at -13° F outdoor ambient temperatures (see Figure 1). Plus they use R410A environmentally friendly refrigerant.

H2i P-Series heat pumps offer a variety of features designed to take the worry out of temperature control such as automatic restart in the case of power outages and automatic cool/heat changeover. And its long line length capabilities of up to 245 ft. expand application possibilities.


Sometimes cooling spaces such as computer or mechanical rooms and kitchens is necessary even when the temperature is below freezing. Air conditioning down to 0° F outdoor ambient temperature is possible with the addition of a wind baffle. Whether cooling or heating, the H2i P-Series gives you the flexibility to temper extreme outdoor temperatures.




Warm Air Quickly!

At startup, a special circuit in H2i P-Series quickly delivers refrigerant to the air-conditioning cycle, which rapidly increases the mass flow rate in the system. As a result, air at comfortable temperatures begins flowing from indoor units right away. Even at an outdoor temperature of -13°F , the H2i P-Series system can discharge 100°F temperature air from the indoor units. At 5°F outdoor temperature and above, the discharge temperature reaches an impressive 110°F with a 40°F temperature rise (see Figure 2). This feature translates into a comfortable climate in all zones of a home or office, whether cooling or heating, no matter the temperature outside.

(Figure 1)

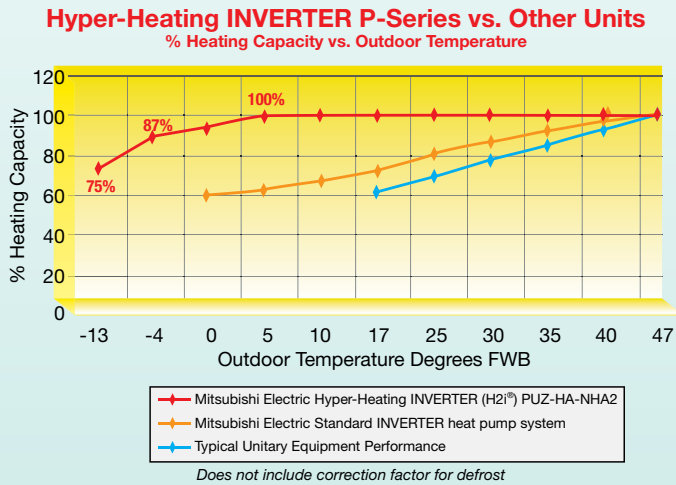

(Figure 2)

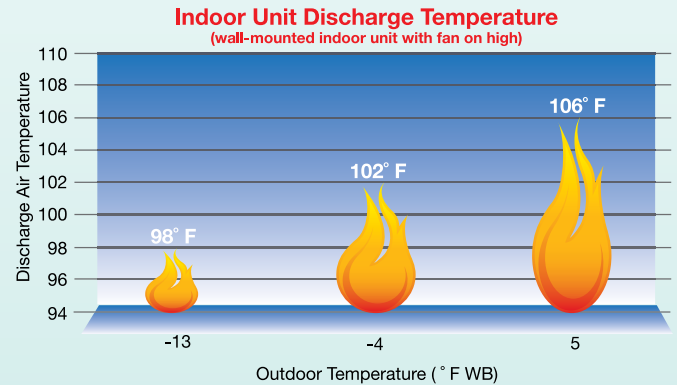

ENERGY STAR and Tax Credit Systems

Six (6) H2i P-Series systems are ENERGY STAR rated and one (1) qualifies for the Federal Tax Credit.



Energy Star


PKA-A30KA
 PKA-A36KA
 PLA-A30BA
 PLA-A36BA
 PCA-A30KA
 PCA-A36KA

Tax Credit

PLA-A36BA

Two in One

If you have a large space such as a long room or hallway which would be considered one zone, two indoor units can be connected to one outdoor unit to cool or heat the space, providing the maximum amount of comfort. The process, in which two indoor units act as one to spread the outdoor unit's capacity over a large area, is called *Twinning*.

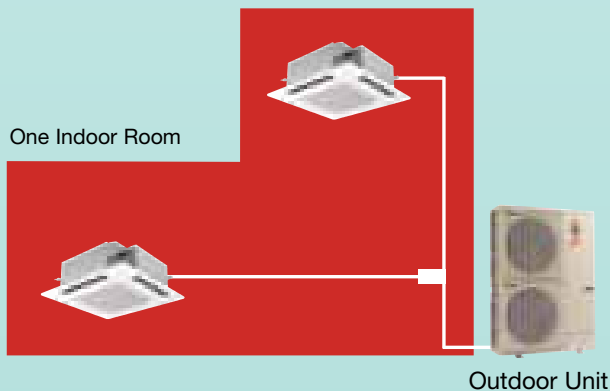

Heating Performance at Low Temperatures

Our Hyper-Heating INVERTER system provides outstanding heating performance at extremely low temperatures while keeping effective energy usage at the forefront. See the impressive COP (Coefficient of Performance) values in the table below. The Mitsubishi H2i P-Series systems are able to maximize efficiency at low temperatures while providing tremendous heating output.

Heating Performance at Low Temperatures

PUZ-HA30NHA

| COP if | PKA | PLA | PCA | PEAD |
|--------|------|------|------|------|
| 47° F | 3.20 | 2.72 | 3.13 | 3.41 |
| 17° F | 1.84 | 1.63 | 1.81 | 1.90 |
| 5° F | 1.62 | 1.41 | 1.60 | 1.73 |

PUZ-HA36NHA

| COP if | PKA | PLA | PCA | PEAD |
|--------|------|------|------|------|
| 47° F | 3.26 | 3.44 | 3.40 | 3.53 |
| 17° F | 1.85 | 2.10 | 1.94 | 2.06 |
| 5° F | 1.64 | 1.90 | 1.70 | 1.82 |



(PKA-A30HA MODEL SHOWN)

INVERTER



PKA COOLING-ONLY

HA/KA = Wired controller
 HAL/KAL = Wireless controller
 BS = Seacoast Protection

| Model Name | Indoor Unit | | PKA-A12HA(L) | PKA-A18HA(L) | PKA-A24KA(L) | PKA-A30KA(L) | PKA-A36KA(L) |
|---------------------------|------------------------------------|---|--------------------------------|-------------------|-------------------|-------------------|-------------------|
| | Outdoor Unit | | PUY-A12NHA3 (-BS) | PUY-A18NHA3 (-BS) | PUY-A24NHA3 (-BS) | PUY-A30NHA3 (-BS) | PUY-A36NHA3 (-BS) |
| Cooling *1 | Rated Capacity | Btu/h | 12,000 | 18,000 | 24,000 | 30,000 | 34,200 |
| | Capacity Range | Btu/h | 6,000-12,000 | 8,000-18,000 | 12,000-24,000 | 12,000-30,000 | 12,000-34,200 |
| | Total Input | W | 1,190 | 2,240 | 2,270 | 4,130 | 5,030 |
| | Energy Efficiency | SEER | 15.2 | 15.3 | 17.0 | 15.5 | 14.0 |
| | Moisture Removal | Pints/h | 2.0 | 5.2 | 5.0 | 8.1 | 9.2 |
| | Sensible Heat Factor | | 0.81 | 0.68 | 0.77 | 0.70 | 0.70 |
| Power Supply | Phase, Cycle, Voltage | | 1-phase, 60Hz, 208 / 230V *2 | | | | |
| Voltage | Indoor - Outdoor S1 - S2 | | AC 208 / 230V | | | | |
| | Indoor - Outdoor S2 - S3 | | DC24 | | | | |
| | Indoor - Remote Controller | | DC12V: Wired Type (HA/KA) | | | | |
| | Indoor - Remote Controller | | Wireless Type (HAL/KAL) | | | | |
| Indoor Unit | MCA | A | 1 | | | | |
| | Fan Motor | F.L.A. | 0.33 | | 0.36 | | 0.57 |
| | Fan Motor Output | W | 30 | | 56 | | 56 |
| | Airflow (Lo-Mid-Hi) | DRY (CFM) | 320-370-425 | | 635-705-775 | | 705-810-920 |
| | | WET (CFM) | 290-335-380 | | 570-635-700 | | 635-730-830 |
| | Sound Pressure Level (Lo-Mid-Hi) | dB(A) | 36-40-43 | | 39-42-45 | | 43-46-49 |
| | External Finish Color | | Munsell No. 1.0Y 9.2 / 0.2 | | | | |
| | Dimension Unit | W: In. | 35-3/8 | | 46-1/16 | | |
| | | D: In. | 9-13/16 | | 11-5/8 | | |
| | | H: In. | 11-5/8 | | 14-3/8 | | |
| | Weight Unit | Lbs. | 29 | | 46 | | |
| Field Drainpipe Size I.D. | In. | 5/8 | | | | | |
| Outdoor Unit | MCA | A | 13 | | 18 | 25 | |
| | MOCP | A | 15 | 20 | 30 | 40 | |
| | Fan Motor | F.L.A. | 0.35 | | 0.75 | | |
| | Fan Motor Output | W | 40 | | 75 | | |
| | Compressor | Model (Type) | DC INVERTER-driven Twin Rotary | | | | |
| | | R.L.A. | 12 | | | | |
| | | L.R.A. | 14 | | 17.5 | | |
| | Airflow | CFM | 1,200 | | 1,940 | | |
| | Refrigerant Control | | Linear Expansion Valve | | | | |
| | Sound Pressure Level at Cooling *1 | dB(A) | 46 | | 48 | | |
| | External Finish Color | | Munsell No. 3Y 7.8 / 1.1 | | | | |
| | Dimensions | W: In. | 31-1/2 | | 37-3/8 | | |
| | | D: In. | 13 + 7/8 | | 13 + 1-3/16 | | |
| H: In. | | 23-5/8 | | 37-1/8 | | | |
| Weight | Lbs. | 90 | 97 | 163 | | | |
| Remote Controller | Type | HA/KA: Wired Controller; HAL/KAL: Wireless Controller (Packaged with Indoor Unit) | | | | | |
| Refrigerant | Type | R410A | | | | | |
| | Charge | Lbs. | 2, 14 | 3, 12 | 6, 10 | | |
| | Oil | Type (fl. oz.) | MEL56 (20) | | FV50S (28) | | |
| Refrigerant Pipe | Gas Side O.D. | In. | 1/2 | | 5/8 | | |
| | Liquid Side O.D. | In. | 1/4 | | 3/8 | | |
| Refrigerant Pipe Length | Height Difference (Max.) | Ft. | 100 | | | | |
| | Length (Max.) | Ft. | 100 | | 165 | | |
| Connection Method | Indoor/Outdoor | | Flared/Flared | | | | |

NOTES: Test conditions are based on AHRI 210/240.

*1 Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2 Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.



(PKA-A30HA MODEL SHOWN)

INVERTER



PKA HEAT PUMP

HA/KA = Wired controller
 HAL/KAL = Wireless controller
 BS = Seacoast Protection

| Model Name | Indoor Unit | | PKA-A18HA(L) | PKA-A24KA(L) | PKA-A30KA(L) | PKA-A36KA(L) | |
|---------------------------|------------------------------------|---|--------------------------------|-------------------|-------------------|-------------------|-------------|
| | Outdoor Unit | | PUZ-A18NHA3 (-BS) | PUZ-A24NHA3 (-BS) | PUZ-A30NHA3 (-BS) | PUZ-A36NHA3 (-BS) | |
| Cooling *1 | Rated Capacity | Btu/h | 18,000 | 24,000 | 30,000 | 34,200 | |
| | Capacity Range | Btu/h | 8,000-18,000 | 12,000-24,000 | 12,000-30,000 | 12,000-34,200 | |
| | Total Input | W | 2,240 | 2,270 | 4,130 | 5,030 | |
| | Energy Efficiency | SEER | 15.3 | 17.0 | 15.5 | 14.0 | |
| | Moisture Removal | Pints/h | 5.2 | 5.0 | 8.1 | 9.2 | |
| | Sensible Heat Factor | | 0.68 | 0.77 | 0.70 | 0.70 | |
| Heating at 47° F *2 | Rated Capacity | Btu/h | 19,000 | 26,000 | 32,000 | 37,000 | |
| | Capacity Range | Btu/h | 8,000-20,000 | 12,000-28,000 | 12,000-34,000 | 12,000-38,000 | |
| | Total Input | W | 1,970 | 2,330 | 3,150 | 3,610 | |
| | HSPF (IV) | Btu/h/W | 9.5 | 10.8 | 8.9 | 9.3 | |
| Heating at 17° F *3 | Capacity | Btu/h | 13,000 | 18,000 | 23,000 | 25,000 | |
| | Total Input | W | 1,670 | 2,200 | 2,850 | 3,030 | |
| Power Supply | Phase, Cycle, Voltage | | 1-phase, 60Hz, 208 / 230V *4 | | | | |
| Voltage | Indoor - Outdoor S1 - S2 | | AC 208 / 230V | | | | |
| | Indoor - Outdoor S2 - S3 | | DC24 | | | | |
| | Indoor - Remote Controller | | DC12V: Wired Type (HA/KA) | | | | |
| | Indoor - Remote Controller | | Wireless Type (HAL/KAL) | | | | |
| Indoor Unit | MCA | A | 1 | | | | |
| | Fan Motor | F.L.A. | 0.33 | 0.36 | 0.57 | | |
| | Fan Motor Output | W | 30 | 56 | 56 | | |
| | Airflow (Lo-Mid-Hi) | DRY (CFM) | | 320-370-425 | 635-705-775 | | 705-810-920 |
| | | WET (CFM) | | 290-335-380 | 570-635-700 | | 635-730-830 |
| | Sound Pressure Level (Lo-Mid-Hi) | dB(A) | 36-40-43 | 39-42-45 | | 43-46-49 | |
| | External Finish Color | | Munsell No. 1.0Y 9.2 / 0.2 | | | | |
| | Dimension Unit | W: In. | 35-3/8 | 46-1/16 | | | |
| | | D: In. | 9-13/16 | 11-5/8 | | | |
| | | H: In. | 11-5/8 | 14-3/8 | | | |
| | Weight Unit | Lbs. | 29 | 46 | | | |
| Field Drainpipe Size I.D. | In. | 5/8 | | | | | |
| Outdoor Unit | MCA | A | 13 | 18 | 25 | | |
| | MOCp | A | 20 | 30 | 40 | | |
| | Fan Motor | F.L.A. | 0.35 | 0.75 | | | |
| | Fan Motor Output | W | 40 | 75 | | | |
| | Compressor | Model (Type) | DC INVERTER-driven Twin Rotary | | | | |
| | | R.L.A. | 12 | | | | |
| | | L.R.A. | 14 | 17.5 | | | |
| | Airflow | CFM | 1,200 | 1,940 | | | |
| | Refrigerant Control | Linear Expansion Valve | | | | | |
| | Defrost Method | Reverse Cycle | | | | | |
| | Sound Pressure Level at Cooling *1 | dB(A) | 46 | 48 | | | |
| | Sound Pressure Level at Heating *2 | dB(A) | 47 | 50 | | | |
| | External Finish Color | | Munsell No. 3Y 7.8 / 1.1 | | | | |
| | Dimensions | W: In. | 31-1/2 | 37-3/8 | | | |
| | | D: In. | 13 + 7/8 | 13 + 1-3/16 | | | |
| H: In. | | 23-5/8 | 37-1/8 | | | | |
| Weight | Lbs. | 99 | 165 | | | | |
| Remote Controller | Type | HA/KA: Wired Controller; HAL/KAL: Wireless Controller (Packaged with Indoor Unit) | | | | | |
| Refrigerant | Type | R410A | | | | | |
| | Charge | Lbs. | 3, 12 | 6, 10 | | | |
| | Oil | Type (fl. oz.) | MEL56 (20) | FV50S (28) | | | |
| Refrigerant Pipe | Gas Side O.D. | In. | 1/2 | 5/8 | | | |
| | Liquid Side O.D. | In. | 1/4 | 3/8 | | | |
| Refrigerant Pipe Length | Height Difference (Max.) | Ft. | 100 | | | | |
| | Length (Max.) | Ft. | 100 | 165 | | | |
| Connection Method | Indoor/Outdoor | Flared/Flared | | | | | |

NOTES: Test conditions are based on AHRI 210/240.

*1 Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8.3° C), W.B. 15° F (-9° C).

*4 Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.



(PLA-A36BA MODEL SHOWN WITH OPTIONAL I-SEE™ SENSOR)

INVERTER



PLA COOLING-ONLY

BS = Seacoast Protection

| Model Name | Indoor Unit | | PLA-A12BA | PLA-A18BA | PLA-A24BA | PLA-A30BA | PLA-A36BA | PLA-A42BA | |
|---------------------------------|------------------------------------|----------------|--|-------------------|-------------------|-------------------|-------------------|-------------------|------------------------|
| | Outdoor Unit | | PUY-A12NHA3 (-BS) | PUY-A18NHA3 (-BS) | PUY-A24NHA3 (-BS) | PUY-A30NHA3 (-BS) | PUY-A36NHA3 (-BS) | PUY-A42NHA3 (-BS) | |
| Cooling *1 | Rated Capacity | Btu/h | 12,000 | 18,000 | 24,000 | 30,000 | 35,000 | 42,000 | |
| | Capacity Range | Btu/h | 6,000-12,000 | 8,000-18,000 | 12,000-24,000 | 12,000-30,000 | 12,000-35,000 | 18,000-42,000 | |
| | Total Input | W | 1,260 | 1,940 | 2,500 | 4,100 | 4,500 | 4,600 | |
| | Energy Efficiency | SEER | 13.5 | 14.2 | 13.6 | | 14.2 | 14.4 | |
| | Moisture Removal | Pints/h | 1.7 | 3.0 | 5.1 | 7.2 | 8.1 | 10.9 | |
| | Sensible Heat Factor | | 0.84 | 0.81 | 0.76 | 0.73 | 0.74 | 0.71 | |
| Power Supply | Phase, Cycle, Voltage | | 1-phase, 60Hz, 208 / 230V *2 | | | | | | |
| Voltage | Indoor - Outdoor S1 - S2 | | AC 208 / 230V | | | | | | |
| | Indoor - Outdoor S2 - S3 | | DC24V | | | | | | |
| | Indoor - Remote Controller | | DC12V: Wired Type | | | | | | |
| Indoor Unit | MCA | A | 1 | | | | 2 | | |
| | Fan Motor | F.L.A. | 0.51 | | | | 1.00 | | |
| | Fan Motor Output | W | 50 | | | | 120 | | |
| | Airflow (Lo-M1-M2-Hi) | DRY (CFM) | 390-420-460-530 | 420-490-570-640 | | 490-570-640-740 | 710-810-920-1,060 | 780-880-990-1,090 | |
| | | WET (CFM) | 350-390-420-490 | 390-460-530-600 | | 460-530-600-710 | 670-770-880-1,030 | 740-850-950-1,060 | |
| | Sound Pressure Level (Lo-M1-M2-Hi) | dB(A) | 27-28-29-31 | 28-29-31-32 | | 28-30-32-34 | 32-34-37-40 | 34-36-39-41 | |
| | External Finish Color (Panel) | | Munsell No. 6.4Y 8.9 / 0.4 | | | | | | |
| | Dimension Unit (Panel) | W: In. | 33-1/16 (37-3/8) | | | | | | |
| | | D: In. | 33-1/16 (37-3/8) | | | | | | |
| | | H: In. | 10-3/16 (1-3/8) | | | | 11-3/4 (1-3/8) | | |
| | Weight Unit (Panel) | Lbs. | 49 (13) | | 51 (13) | | 55 (13) | | |
| Drain Lift Mechanism (Included) | H: In. | 33-7/16 | | | | | | | |
| Field Drainpipe Size O.D. | In. | 1-1/4 | | | | | | | |
| Outdoor Unit | MCA | A | 13 | | 18 | 25 | | 26 | |
| | MOCP | A | 15 | 20 | 30 | 40 | | | |
| | Fan Motor | F.L.A. | 0.35 | | 0.75 | | 0.4 + 0.4 | | |
| | Fan Motor Output | W | 40 | | 75 | | 86 + 86 | | |
| | Compressor | Model (Type) | DC INVERTER-driven Twin Rotary | | | | | | INVERTER-driven Scroll |
| | | R.L.A. | 12 | | | | | | 20 |
| | | L.R.A. | 14 | | | | 17.5 | | 27.5 |
| | Airflow | CFM | 1,200 | | 1,940 | | 3,530 | | |
| | Refrigerant Control | | Linear Expansion Valve | | | | | | |
| | Sound Pressure Level at Cooling *1 | dB(A) | 46 | | 48 | | 51 | | |
| | External Finish Color | | Munsell No. 3Y 7.8 / 1.1 | | | | | | |
| | Dimensions | W: In. | 31-1/2 | | 37-3/8 | | | | |
| | | D: In. | 13 + 7/8 | | 13 + 1-3/16 | | | | |
| | | H: In. | 23-5/8 | | 37-1/8 | | 53-1/8 | | |
| Weight | Lbs. | 90 | 97 | 163 | | 258 | | | |
| Remote Controller | Type | | Wired Remote Controller Packaged with Grille | | | | | | |
| Refrigerant | Type | | R410A | | | | | | |
| | Charge | Lbs. | 2, 4 | 3, 12 | 6, 10 | | 10 | | |
| | Oil | Type (fl. oz.) | MEL56 (20) | | FV50S (28) | | FV50S (45) | | |
| Refrigerant Pipe | Gas Side O.D. | In. | 1/2 | | 5/8 | | | | |
| | Liquid Side O.D. | In. | 1/4 | | 3/8 | | | | |
| Refrigerant Pipe Length | Height Difference (Max.) | Ft. | 100 | | | | | | |
| | Length (Max.) | Ft. | 100 | | 165 | | | | |
| Connection Method | Indoor/Outdoor | | Flared/Flared | | | | | | |

NOTES: Test conditions are based on AHRI 210/240.

*1 Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2 Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.



(PLA-A36BA MODEL SHOWN WITH OPTIONAL I-SEET™ SENSOR)



PLA HEAT PUMP

BS = Seacoast Protection

| Model Name | Indoor Unit | | PLA-A18BA | PLA-A24BA | PLA-A30BA | PLA-A36BA | PLA-A42BA | |
|------------------------------------|------------------------------------|--------------------------|--|-------------------|-------------------|-------------------|-------------------|------------------------|
| | Outdoor Unit | | PUZ-A18NHA3 (-BS) | PUZ-A24NHA3 (-BS) | PUZ-A30NHA3 (-BS) | PUZ-A36NHA3 (-BS) | PUZ-A42NHA3 (-BS) | |
| Cooling *1 | Rated Capacity | Btu/h | 18,000 | 24,000 | 30,000 | 35,000 | 42,000 | |
| | Capacity Range | Btu/h | 8,000-18,000 | 12,000-24,000 | 12,000-30,000 | 12,000-35,000 | 18,000-42,000 | |
| | Total Input | W | 1,940 | 2,500 | 4,100 | 4,500 | 4,600 | |
| | Energy Efficiency | SEER | 14.2 | 13.6 | | 14.2 | 14.4 | |
| | Moisture Removal | Pints/h | 3.0 | 5.1 | 7.2 | 8.1 | 10.9 | |
| | Sensible Heat Factor | | 0.81 | 0.76 | 0.73 | 0.74 | 0.71 | |
| Heating at 47° F *2 | Rated Capacity | Btu/h | 19,000 | 26,000 | 32,000 | 37,000 | 45,000 | |
| | Capacity Range | Btu/h | 8,000-20,000 | 12,000-28,000 | 12,000-34,000 | 12,000-38,000 | 18,000-48,000 | |
| | Total Input | W | 1,900 | 2,570 | 3,370 | 3,300 | 4,450 | |
| | HSPF (IV) | Btu/h/W | 9.8 | 8.5 | 8.7 | 9.3 | | |
| Heating at 17° F *3 | Capacity | Btu/h | 13,000 | 16,000 | 23,000 | 25,000 | 30,000 | |
| | Total Input | W | 1,590 | 2,200 | 3,050 | 3,070 | 4,300 | |
| Power Supply | Phase, Cycle, Voltage | | 1-phase, 60Hz, 208 / 230V *4 | | | | | |
| Voltage | Indoor - Outdoor S1 - S2 | | AC 208 / 230V | | | | | |
| | Indoor - Outdoor S2 - S3 | | DC24V | | | | | |
| | Indoor - Remote Controller | | DC12V: Wired Type | | | | | |
| Indoor Unit | MCA | A | 1 | | | 2 | | |
| | Fan Motor | F.L.A. | 0.51 | | | 1.00 | | |
| | Fan Motor Output | W | 50 | | | 120 | | |
| | Airflow (Lo-M1-M2-Hi) | DRY (CFM) | 420-490-570-640 | | | 490-570-640-740 | 710-810-920-1,060 | 780-880-990-1,090 |
| | | WET (CFM) | 390-460-530-600 | | | 460-530-600-710 | 670-770-880-1,030 | 740-850-950-1,060 |
| | Sound Pressure Level (Lo-M1-M2-Hi) | dB(A) | 28-29-31-32 | | | 28-30-32-34 | 32-34-37-40 | 34-36-39-41 |
| | External Finish Color (Panel) | | Munsell No. 6.4Y 8.9 / 0.4 | | | | | |
| | Dimension Unit (Panel) | W: In. | 33-1/16 (37-3/8) | | | | | |
| | | D: In. | 33-1/16 (37-3/8) | | | | | |
| | | H: In. | 10-3/16 (1-3/8) | | | 11-3/4 (1-3/8) | | |
| | Weight Unit (Panel) | Lbs. | 49 (13) | 51 (13) | | 55 (13) | | |
| | Drain Lift Mechanism (Included) | H: In. | 33-7/16 | | | | | |
| | Field Drainpipe Size O.D. | In. | 1-1/4 | | | | | |
| | Outdoor Unit | MCA | A | 13 | 18 | 25 | | 26 |
| MOCP | | A | 15 | 30 | 40 | | | |
| Fan Motor | | F.L.A. | 0.35 | 0.75 | | | 0.4 + 0.4 | |
| Fan Motor Output | | W | 40 | 75 | | | 86 + 86 | |
| Compressor | | Model (Type) | DC INVERTER-driven Twin Rotary | | | | | INVERTER-driven Scroll |
| | | R.L.A. | 12 | | | | | 20 |
| | | L.R.A. | 14 | | | 17.5 | | 27.5 |
| Airflow | | CFM | 1,200 | 1,940 | | | 3,530 | |
| Refrigerant Control | | Linear Expansion Valve | | | | | | |
| Defrost Method | | Reverse Cycle | | | | | | |
| Sound Pressure Level at Cooling *1 | | dB(A) | 46 | 48 | | | 51 | |
| Sound Pressure Level at Heating *2 | | dB(A) | 47 | 50 | | | 55 | |
| External Finish Color | | Munsell No. 3Y 7.8 / 1.1 | | | | | | |
| Dimensions | | W: In. | 31-1/2 | 37-3/8 | | | | |
| | | D: In. | 13 + 7/8 | 13 + 1-3/16 | | | | |
| | | H: In. | 23-5/8 | 37-1/8 | | | 53-1/8 | |
| Weight | | Lbs. | 99 | 165 | | | 260 | |
| Remote Controller | Type | | Wired Remote Controller Packaged with Grille | | | | | |
| Refrigerant | Type | | R410A | | | | | |
| | Charge | Lbs. | 3, 12 | 6, 10 | | | 10 | |
| | Oil | Type (fl. oz.) | MEL56 (20) | FV50S (28) | | | FV50S (45) | |
| Refrigerant Pipe | Gas Side O.D. | In. | 1/2 | 5/8 | | | | |
| | Liquid Side O.D. | In. | 1/4 | 3/8 | | | | |
| Refrigerant Pipe Length | Height Difference (Max.) | Ft. | 100 | | | | | |
| | Length (Max.) | Ft. | 100 | 165 | | | | |
| Connection Method | Indoor/Outdoor | | Flared/Flared | | | | | |

NOTES: Test conditions are based on AHRI 210/240.

*1 Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C);
Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C);
Outdoor: D.B. 47° F (8° C), W.B. 43° F (6.1° C).

*3 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C);
Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4 Indoor units receive power from outdoor units through field-supplied interconnected wiring. Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor.
Five-year warranty on parts.



(PCA-A36KA MODEL SHOWN)



PCA COOLING-ONLY



BS = Seacoast Protection

| Model Name | Indoor Unit | | PCA-A24KA | PCA-A30KA | PCA-A36KA | PCA-A42KA | |
|---------------------------|------------------------------------|---|--------------------------------|-------------------|-------------------|-------------------|------------------------|
| | Outdoor Unit | | PUY-A24NHA3 (-BS) | PUY-A30NHA3 (-BS) | PUY-A36NHA3 (-BS) | PUY-A42NHA3 (-BS) | |
| Cooling *1 | Rated Capacity | Btu/h | 24,000 | 30,000 | 35,000 | 42,000 | |
| | Capacity Range | Btu/h | 12,000-24,000 | 12,000-30,000 | 12,000-35,000 | 18,000-42,000 | |
| | Total Input | W | 2,340 | 3,760 | 4,630 | 4,110 | |
| | Energy Efficiency | SEER | 16.8 | 14.5 | 14.4 | 15.8 | |
| | Moisture Removal | Pints/h | 5.8 | 8.3 | 8.5 | 11.7 | |
| | Sensible Heat Factor | | 0.73 | 0.69 | 0.73 | 0.69 | |
| Power Supply | Phase, Cycle, Voltage | | 1-phase, 60Hz, 208 / 230V *2 | | | | |
| Voltage | Indoor - Outdoor S1 - S2 | | AC 208 / 230V | | | | |
| | Indoor - Outdoor S2 - S3 | | DC24V | | | | |
| | Indoor - Remote Controller | | DC12V: Wired Type | | | | |
| Indoor Unit | MCA | A | 1 | | 2 | | |
| | Fan Motor | F.L.A. | 0.54 | | 0.97 | | |
| | Fan Motor Output | W | 95 | | 160 | | |
| | Airflow (Lo-M1-M2-Hi) | DRY (CFM) | 530-565-600-670 | 565-600-635-705 | 775-850-920-990 | 810-885-955-1,025 | |
| | | WET (CFM) | 495-530-565-635 | 530-565-600-670 | 705-775-850-920 | 740-810-885-955 | |
| | Sound Pressure Level (Lo-M1-M2-Hi) | dB(A) | 33-35-37-40 | 35-37-39-41 | 37-39-41-43 | 39-41-43-45 | |
| | External Finish Color | | Munsell No. 6.4Y 8.9 / 0.4 | | | | |
| | Dimension Unit | W: In. | 50-3/8 | | 63 | | |
| | | D: In. | 26-3/4 | | | | |
| | | H: In. | 9-1/16 | | | | |
| | Weight Unit | Lbs. | 71 | | 79 | 84 | |
| Field Drainpipe Size O.D. | In. | 1-1/16 | | | | | |
| Outdoor Unit | MCA | A | 18 | 25 | 26 | | |
| | MOCOP | A | 30 | 40 | | | |
| | Fan Motor | F.L.A. | 0.75 | | | 0.4 + 0.4 | |
| | Fan Motor Output | W | 75 | | | 86 + 86 | |
| | Compressor | Model (Type) | DC INVERTER-driven Twin Rotary | | | | INVERTER-driven Scroll |
| | | R.L.A. | 12 | | | | 20 |
| | | L.R.A. | 14 | 17.5 | | 27.5 | |
| | Airflow | CFM | 1,940 | | | 3,530 | |
| | Refrigerant Control | | Linear Expansion Valve | | | | |
| | Sound Pressure Level at Cooling *1 | dB(A) | 48 | | | 51 | |
| | External Finish Color | | Munsell No. 3Y 7.8 / 1.1 | | | | |
| | Dimensions | W: In. | 37-3/8 | | | | |
| | | D: In. | 13 + 1-3/16 | | | | |
| | | H: In. | 37-1/8 | | | 53-1/8 | |
| Weight | Lbs. | 163 | | | 258 | | |
| Remote Controller | Type | Wired Remote Controller (Packaged with Indoor Unit) | | | | | |
| Refrigerant | Type | R410A | | | | | |
| | Charge | Lbs. | 6, 10 | | | 10 | |
| | Oil | Type (fl. oz.) | FV50S (28) | | | FV50S (45) | |
| Refrigerant Pipe | Gas Side O.D. | In. | 5/8 | | | | |
| | Liquid Side O.D. | In. | 3/8 | | | | |
| Refrigerant Pipe Length | Height Difference (Max.) | Ft. | 100 | | | | |
| | Length (Max.) | Ft. | 165 | | | | |
| Connection Method | Indoor/Outdoor | Flared/Flared | | | | | |

NOTES: Test conditions are based on AHRI 210/240.

*1 Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2 Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.



(PCA-A36KA MODEL SHOWN)

INVERTER



PCA HEAT PUMP



BS = Seacoast Protection

| Model Name | Indoor Unit | | PCA-A24KA | PCA-A30KA | PCA-A36KA | PCA-A42KA | |
|---------------------------|------------------------------------|------------------------|---|-------------------|-------------------|------------------------|--|
| | Outdoor Unit | | PUZ-A24NHA3 (-BS) | PUZ-A30NHA3 (-BS) | PUZ-A36NHA3 (-BS) | PUZ-A42NHA3 (-BS) | |
| Cooling *1 | Rated Capacity | Btu/h | 24,000 | 30,000 | 35,000 | 42,000 | |
| | Capacity Range | Btu/h | 12,000-24,000 | 12,000-30,000 | 12,000-35,000 | 18,000-42,000 | |
| | Total Input | W | 2,340 | 3,760 | 4,630 | 4,110 | |
| | Energy Efficiency | SEER | 16.8 | 14.5 | 14.4 | 15.8 | |
| | Moisture Removal | Pints/h | 5.8 | 8.3 | 8.5 | 11.7 | |
| | Sensible Heat Factor | | 0.73 | 0.69 | 0.73 | 0.69 | |
| Heating at 47° F *2 | Rated Capacity | Btu/h | 26,000 | 32,000 | 37,000 | 45,000 | |
| | Capacity Range | Btu/h | 12,000-28,000 | 12,000-34,000 | 12,000-38,000 | 18,000-48,000 | |
| | Total Input | W | 2,310 | 3,210 | 3,190 | 3,830 | |
| | HSPF (IV) | Btu/h/W | 10.9 | 9.2 | 10.2 | 10.2 | |
| Heating at 17° F *3 | Capacity | Btu/h | 18,000 | 23,000 | 25,000 | 30,000 | |
| | Total Input | W | 2,200 | 2,940 | 2,800 | 3,820 | |
| Power Supply | Phase, Cycle, Voltage | | 1-phase, 60Hz, 208 / 230V *4 | | | | |
| Voltage | Indoor - Outdoor S1 - S2 | | AC 208 / 230V | | | | |
| | Indoor - Outdoor S2 - S3 | | DC24V | | | | |
| | Indoor - Remote Controller | | DC12V: Wired Type | | | | |
| Indoor Unit | MCA | A | 1 | | 2 | | |
| | Fan Motor | F.L.A. | 0.54 | | 0.97 | | |
| | Fan Motor Output | W | 95 | | 160 | | |
| | Airflow (Lo-M1-M2-Hi) | DRY (CFM) | 530-565-600-670 | 565-600-635-705 | 775-850-920-990 | 810-885-955-1,025 | |
| | | WET (CFM) | 495-530-565-635 | 530-565-600-670 | 705-775-850-920 | 740-810-885-955 | |
| | Sound Pressure Level (Lo-M1-M2-Hi) | dB(A) | 33-35-37-40 | 35-37-39-41 | 37-39-41-43 | 39-41-43-45 | |
| | External Finish Color | | Munsell No. 6.4Y 8.9 / 0.4 | | | | |
| | Dimension Unit | W: In. | 50-3/8 | | 63 | | |
| | | D: In. | 26-3/4 | | | | |
| | | H: In. | 9-1/16 | | | | |
| | Weight Unit | Lbs. | 71 | 79 | 84 | | |
| Field Drainpipe Size O.D. | In. | 1-1/16 | | | | | |
| Outdoor Unit | MCA | A | 18 | 25 | 26 | | |
| | MOCP | A | 30 | 40 | | | |
| | Fan Motor | F.L.A. | 0.75 | | 0.4 + 0.4 | | |
| | Fan Motor Output | W | 75 | | 86 + 86 | | |
| | Compressor | Model (Type) | DC INVERTER-driven Twin Rotary | | | INVERTER-driven Scroll | |
| | | R.L.A. | 12 | | 20 | | |
| | | L.R.A. | 14 | 17.5 | | 27.5 | |
| | Airflow | CFM | 1,940 | | 3,530 | | |
| | Refrigerant Control | Linear Expansion Valve | | | | | |
| | Defrost Method | Reverse Cycle | | | | | |
| | Sound Pressure Level at Cooling *1 | dB(A) | 48 | | 51 | | |
| | Sound Pressure Level at Heating *2 | dB(A) | 50 | | 55 | | |
| | External Finish Color | | Munsell No. 3Y 7.8 / 1.1 | | | | |
| | Dimensions | W: In. | 37-3/8 | | | | |
| D: In. | | 13 + 1-3/16 | | | | | |
| H: In. | | 37-1/8 | | 53-1/8 | | | |
| Weight | Lbs. | 165 | | 260 | | | |
| Remote Controller | Type | | Wired Remote Controller (Packaged with Indoor Unit) | | | | |
| Refrigerant | Type | | R410A | | | | |
| | Charge | Lbs. | 6, 10 | | 10 | | |
| | Oil | Type (fl. oz.) | FV50S (28) | | FV50S (45) | | |
| Refrigerant Pipe | Gas Side O.D. | In. | 5/8 | | | | |
| | Liquid Side O.D. | In. | 3/8 | | | | |
| Refrigerant Pipe Length | Height Difference (Max.) | Ft. | 100 | | | | |
| | Length (Max.) | Ft. | 165 | | | | |
| Connection Method | Indoor/Outdoor | | Flared/Flared | | | | |

NOTES: Test conditions are based on AHRI 210/240.

*1 Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6° C).

*3 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4 Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.



(PEA-A18AA MODEL SHOWN)

INVERTER



PEA/PEAD COOLING-ONLY

BS = Seacoast Protection

| Model Name | Indoor Unit | | PEA-A12AA | PEA-A18AA | PEAD-A24AA | PEAD-A30AA | PEAD-A36AA | PEAD-A42AA | |
|---------------------------------|------------------------------------|--|--------------------------------|-------------------|-------------------|----------------------------------|-------------------|-------------------|------------------------|
| | Outdoor Unit | | PUY-A12NHA3 (-BS) | PUY-A18NHA3 (-BS) | PUY-A24NHA3 (-BS) | PUY-A30NHA3 (-BS) | PUY-A36NHA3 (-BS) | PUY-A42NHA3 (-BS) | |
| Cooling *1 | Rated Capacity | Btu/h | 12,000 | 18,000 | 24,000 | 30,000 | 35,000 | 42,000 | |
| | Capacity Range | Btu/h | 6,000-12,000 | 8,000-18,000 | 12,000-24,000 | 12,000-30,000 | 12,000-35,000 | 18,000-42,000 | |
| | Total Input | W | 1,240 | 2,150 | 2,400 | 3,850 | 4,850 | 5,350 | |
| | Energy Efficiency | SEER | 13.8 | 14.3 | 16.0 | 15.5 | 15.0 | 13.8 | |
| | Moisture Removal | Pints/h | 2.47 | 3.3 | 6.9 | 8.6 | 7.9 | 9.0 | |
| | Sensible Heat Factor | | 0.77 | 0.80 | 0.68 | | 0.75 | 0.76 | |
| Power Supply | Phase, Cycle, Voltage | | 1-phase, 60Hz, 208 / 230V *2 | | | | | | |
| Voltage | Indoor - Outdoor S1 - S2 | | AC208/230V | | | | | | |
| | Indoor - Outdoor S2 - S3 | | DC24V | | | | | | |
| | Indoor - Remote Controller | | DC12: For Wired Controller | | | | | | |
| Indoor Unit | MCA | A | 1 | 2 | 2.63 | 2.73 | 3.30 | 3.50 | |
| | Fan Motor | F.L.A. | 0.57 | 0.74 | 2.10 | 2.18 | 2.64 | 2.80 | |
| | Fan Motor Output | W | 96 | | 121 | | 244 | | |
| | Airflow (Lo-Mid-Hi) | DRY (CFM) | 247-317-388 | 423-529-635 | 512-636-742 | 618-742-883 | 847-1,024-1,201 | 1,042-1,254-1,483 | |
| | | WET (CFM) | 222-285-349 | 381-476-572 | 494-600-671 | 565-671-812 | 777-953-1,130 | 953-1,165-1,412 | |
| | External Static Pressure | In. WG | 0.02 - 0.06 - 0.14 - 0.20 | | | 0.14 - 0.20 - 0.28 - 0.40 - 0.60 | | | |
| | Sound Pressure Level (Lo-Mid-Hi) | dB(A) | 23-28-33 | 30-34-38 | 30-33-37 | 30-34-39 | 33-38-42 | 36-40-44 | |
| | External Finish Color | | Galvanized-steel Sheet | | | | | | |
| | Dimension Unit | W: In. | 39 | 46-7/8 | 43-5/16 | | 55-1/8 | | |
| | | D: In. | 27-9/16 | | 28-7/8 | | | | |
| | | H: In. | 7-7/8 | | 9-7/8 | | | | |
| | Weight Unit | Lbs. | 48 | 60 | 73 | | 91 | 95 | |
| Drain Lift Mechanism (Included) | H: In. | 21-11/16 | | 27-9/16 | | | | | |
| Field Drainpipe Size I.D. | In. | 1-1/4 | | | | | | | |
| Outdoor Unit | MCA | A | 13 | | 18 | 25 | | 26 | |
| | MOCP | A | 15 | 20 | 30 | 40 | | | |
| | Fan Motor | F.L.A. | 0.35 | | 0.75 | | 0.4 + 0.4 | | |
| | Fan Motor Output | W | 40 | | 75 | | 86 + 86 | | |
| | Compressor | Model (Type) | DC INVERTER-driven Twin Rotary | | | | | | INVERTER-driven Scroll |
| | | R.L.A. | 12 | | | | | | 20 |
| | | L.R.A. | 14 | | 17.5 | | 27.5 | | |
| | Airflow | CFM | 1,200 | | 1,940 | | 3,530 | | |
| | Refrigerant Control | | Linear Expansion Valve | | | | | | |
| | Sound Pressure Level at Cooling *1 | dB(A) | 46 | | 48 | | 51 | | |
| | External Finish Color | | Munsell No. 3Y 7.8 / 1.1 | | | | | | |
| | Dimensions | W: In. | 31-1/2 | | 37-3/8 | | | | |
| D: In. | | 13 + 7/8 | | 13 + 1-3/16 | | | | | |
| H: In. | | 23-5/8 | | 37-1/8 | | 53-1/8 | | | |
| Weight | Lbs. | 90 | 97 | 165 | | 260 | | | |
| Remote Controller | Type | Wired Remote Controller (Located with Indoor Unit) | | | | | | | |
| Refrigerant | Type | R410A | | | | | | | |
| | Charge | Lbs., Oz. | 2, 14 | 3, 12 | 6, 10 | | 10 | | |
| | Oil | Type (fl. oz.) | MEL56 (20) | | FV50S (28) | | FV50S (45) | | |
| Refrigerant Pipe | Gas Side O.D. | In. | 1/2 | | 5/8 | | | | |
| | Liquid Side O.D. | In. | 1/4 | | 3/8 | | | | |
| Refrigerant Pipe Length | Height Difference (Max.) | Ft. | 100 | | | | | | |
| | Length (Max.) | Ft. | 100 | | 165 | | | | |
| Connection Method | Indoor/Outdoor | Flared/Flared | | | | | | | |

NOTES: Test conditions are based on AHRI 210/240.

*1 Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6.1° C).

*3 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).

*4 Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.



(PEA-A18AA MODEL SHOWN)

INVERTER



PEA/PEAD HEAT PUMP

BS = Seacoast Protection

| Model Name | Indoor Unit | | PEA-A18AA | PEAD-A24AA | PEAD-A30AA | PEAD-A36AA | PEAD-A42AA | |
|-------------------------|---|--------------------------|--------------------------------|-------------------|----------------------------------|-------------------|-------------------|------------------------|
| | Outdoor Unit | | PUZ-A18NHA3 (-BS) | PUZ-A24NHA3 (-BS) | PUZ-A30NHA3 (-BS) | PUZ-A36NHA3 (-BS) | PUZ-A42NHA3 (-BS) | |
| Cooling *1 | Rated Capacity | Btu/h | 18,000 | 24,000 | 30,000 | 35,000 | 42,000 | |
| | Capacity Range | Btu/h | 8,000-18,000 | 12,000-24,000 | 12,000-30,000 | 12,000-35,000 | 18,000-42,000 | |
| | Total Input | W | 2,150 | 2,400 | 3,850 | 4,850 | 5,350 | |
| | Energy Efficiency | SEER | 14.3 | 16.0 | 15.5 | 15.0 | 13.8 | |
| | Moisture Removal | Pints/h | 3.3 | 6.9 | 8.6 | 7.9 | 9.0 | |
| | Sensible Heat Factor | | 0.80 | 0.68 | | 0.75 | 0.76 | |
| Heating at 47° F *2 | Rated Capacity | Btu/h | 19,000 | 26,000 | 32,000 | 37,000 | 45,000 | |
| | Capacity Range | Btu/h | 8,000-20,000 | 12,000-26,000 | 12,000-34,000 | 12,000-38,000 | 18,000-48,000 | |
| | Total Input | W | 1,540 | 2,130 | 2,750 | 2,810 | 3,820 | |
| | HSPF (IV) | Btu/h/W | 10 | 10.2 | 9.4 | 9.8 | 10.0 | |
| Heating at 17° F *3 | Capacity | Btu/h | 13,000 | 18,000 | 23,000 | 25,000 | 30,000 | |
| | Total Input | W | 1,520 | 2,130 | 2,750 | 2,810 | 3,820 | |
| Power Supply | Phase, Cycle, Voltage | | 1-phase, 60Hz, 208 / 230V *4 | | | | | |
| Voltage | Indoor - Outdoor S1 - S2 | | AC208/230V | | | | | |
| | Indoor - Outdoor S2 - S3 | | DC24V | | | | | |
| | Indoor - Remote Controller | | DC12: For Wired Controller | | | | | |
| Indoor Unit | MCA | A | 2 | 2.63 | 2.73 | 3.30 | 3.50 | |
| | Fan Motor | F.L.A. | 0.74 | 2.10 | 2.18 | 2.64 | 2.80 | |
| | Fan Motor Output | W | 96 | 121 | | 244 | | |
| | Airflow (Lo-Mid-Hi) | DRY (CFM) | 423-529-635 | 512-636-742 | 618-742-883 | 847-1,024-1,201 | 1,042-1,254-1,483 | |
| | | WET (CFM) | 381-476-572 | 494-600-671 | 565-671-812 | 777-953-1,130 | 953-1,165-1,412 | |
| | External Static Pressure | In. WG | 0.02 - 0.06 - 0.14 - 0.20 | | 0.14 - 0.20 - 0.28 - 0.40 - 0.60 | | | |
| | Sound Pressure Level (Lo-Mid-Hi) | dB(A) | 30-34-38 | 30-33-37 | 30-34-39 | 33-38-42 | 36-40-44 | |
| | External Finish Color | Galvanized-steel Sheet | | | | | | |
| | Dimension Unit | W: In. | 46-7/8 | 43-5/16 | | 55-1/8 | | |
| | | D: In. | 27-9/16 | 28-7/8 | | | | |
| | | H: In. | 7-7/8 | 9-7/8 | | | | |
| | Weight Unit | Lbs. | 60 | 73 | 91 | 95 | | |
| | Drain Lift Mechanism (Included) | H: In. | 21-11/16 | 27-9/16 | | | | |
| | Field Drainpipe Size I.D. | In. | 1-1/4 | | | | | |
| Outdoor Unit | MCA | A | 13 | 18 | 25 | | 26 | |
| | MOCF | A | 20 | 30 | 40 | | | |
| | Fan Motor | F.L.A. | 0.35 | 0.75 | | | 0.4 + 0.4 | |
| | Fan Motor Output | W | 40 | 75 | | | 86 + 86 | |
| | Compressor | Model (Type) | DC INVERTER-driven Twin Rotary | | | | | INVERTER-driven Scroll |
| | | R.L.A. | 12 | | | | 20 | |
| | | L.R.A. | 14 | | 17.5 | | 27.5 | |
| | Airflow | CFM | 1,200 | 1,940 | | | 3,530 | |
| | Refrigerant Control | Linear Expansion Valve | | | | | | |
| | Defrost Method | Reverse Cycle | | | | | | |
| | Sound Pressure Level at Cooling *1 | dB(A) | 46 | 48 | | | 51 | |
| | Sound Pressure Level at Heating *2 | dB(A) | 47 | 50 | | | 55 | |
| | External Finish Color | Munsell No. 3Y 7.8 / 1.1 | | | | | | |
| | Dimensions | W: In. | 31-1/2 | 37-3/8 | | | | |
| | | D: In. | 13 + 7/8 | 13 + 1-3/16 | | | | |
| | | H: In. | 23-5/8 | 37-1/8 | | | 53-1/8 | |
| | Weight | Lbs. | 99 | 165 | | | 260 | |
| Remote Controller | Type Wired Remote Controller (Packaged with Indoor Unit) | | | | | | | |
| Refrigerant | Type | R410A | | | | | | |
| | Charge | Lbs., Oz. | 3, 12 | 6, 10 | | | 10 | |
| Refrigerant Pipe | Oil | Type (fl. oz.) | MEL56 (20) | FV50S (28) | | | FV50S (45) | |
| | Gas Side O.D. | In. | 1/2 | 5/8 | | | | |
| Refrigerant Pipe Length | Liquid Side O.D. | In. | 1/4 | 3/8 | | | | |
| | Height Difference (Max.) | Ft. | 100 | | | | | |
| Connection Method | Length (Max.) | Ft. | 100 | 165 | | | | |
| | Indoor/Outdoor | Flared/Flared | | | | | | |

NOTES: Test conditions are based on AHRI 210/240.

*1 Rating conditions (cooling)-Indoor: D.B. 80° F (27° C), W.B. 67° F (19° C); Outdoor: D.B. 95° F (35° C), W.B. 75° F (24° C).

*2 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 47° F (8° C), W.B. 43° F (6.1° C).

*3 Rating conditions (heating)-Indoor: D.B. 70° F (21° C), W.B. 60° F (16° C); Outdoor: D.B. 17° F (-8° C), W.B. 15° F (-9° C).


*4 Indoor units receive power from outdoor units through field-supplied interconnected wiring.



Specifications are subject to change without notice.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.



PEA/PEAD STATIC PERFORMANCE CURVES

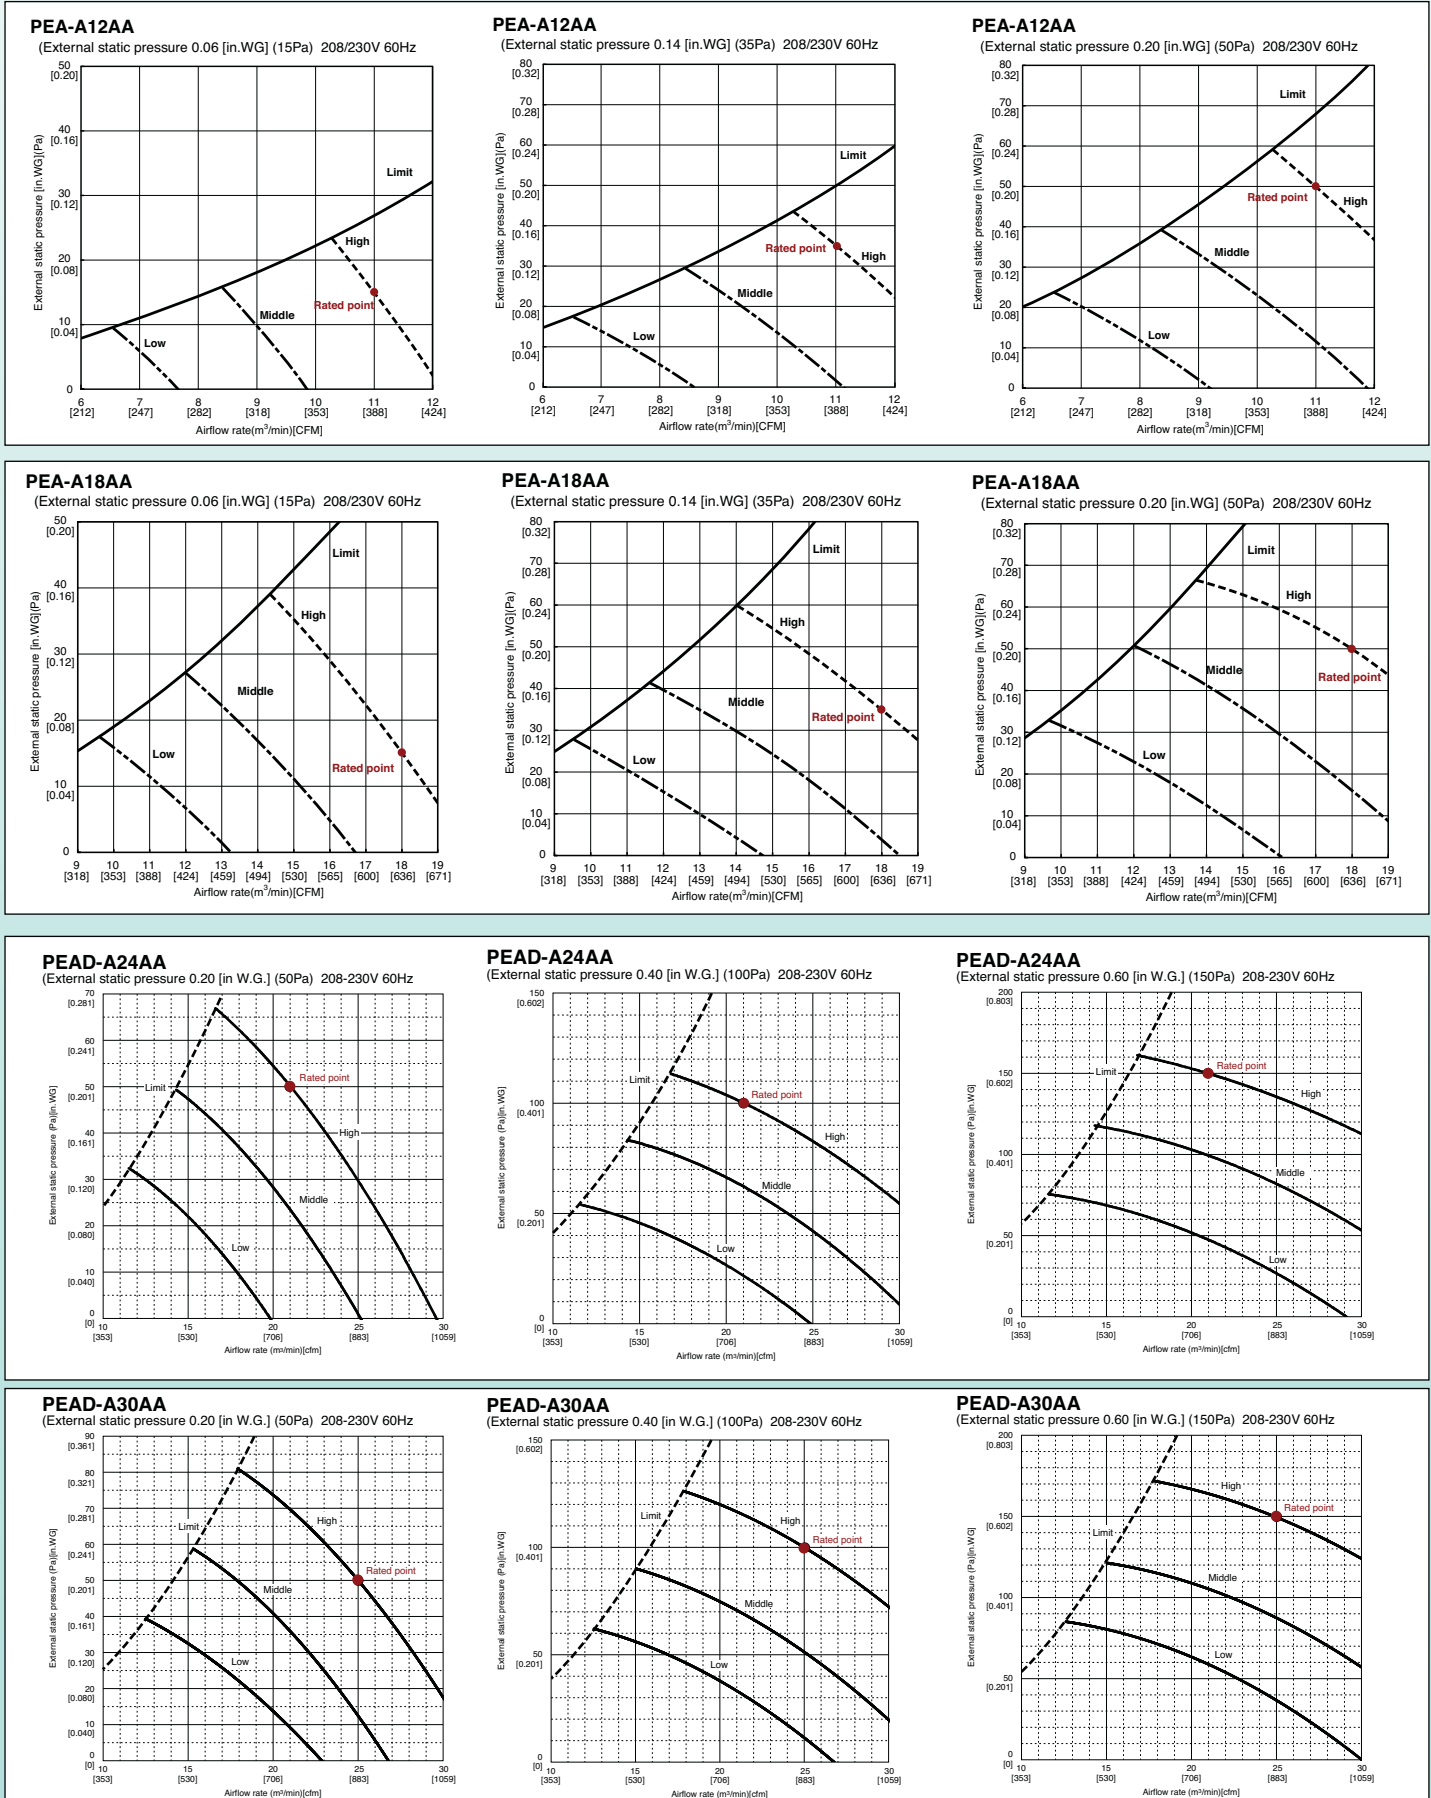

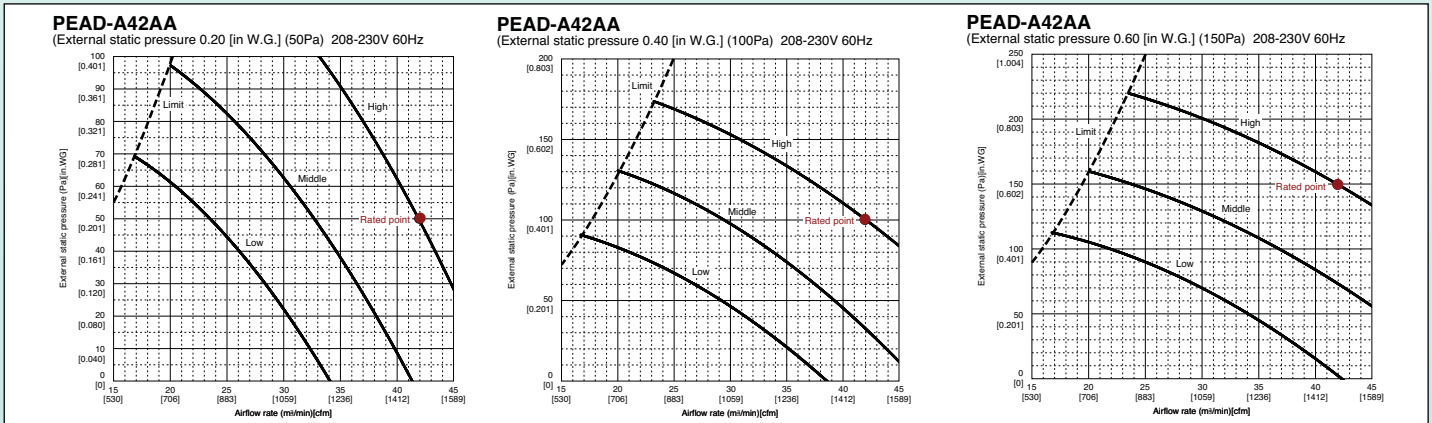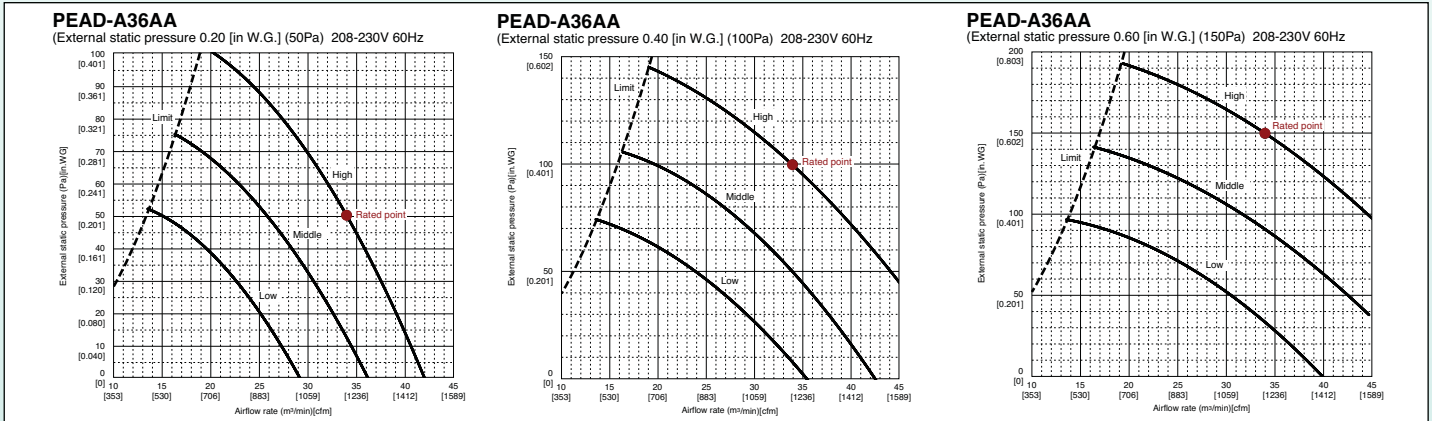

Ducting considerations for the PEA/PEAD Horizontal Ducted Indoor Unit

With the introduction of ducted indoor unit products, some information on duct selection and design seems appropriate. Considering the performance and design of these indoor units, selection and proper duct sizing and installation will be necessary for satisfactory operation.

The maximum available static pressure from the PEA indoor unit is 0.2 in. W.G. and for the PEADs 0.6 in. W.G.. With this in mind, the ductwork design must be taken into consideration to ensure proper airflow to the space is achieved. The emphasis should still be on moving refrigerant and not air; not only will this help to work within the static pressure available but it is also more efficient. Here are some good practices when ducting the low profile unit:

- When reviewing static pressure duct loss in a system, the longest duct run from the unit is the maximum static pressure the unit will see.
- Flexible ductwork, while making installations simpler, can add unnecessary static pressure loss if not utilized properly. Most of the static pressure duct loss comes from allowing the duct work to sag. Allowing even a 30 percent sag in the ductwork can increase the static pressure loss up to eight times. Flexible ductwork runs should be kept to less than 15 ft. Elbows should be kept to a minimum and made as wide as possible.
- Grilles should be selected so that the air velocity is less than 500 ft. per minute, this will help to minimize static pressure loss. The chart below shows grille sizes and corresponding flow rates to keep the static pressure loss under 0.05 in.:

| | | | | | |
|-------------------------|-----|-----|-----|-----------|------------|
| Air Flow (CFM) | 50 | 100 | 150 | 200 | 250 |
| Grille Size (In. x In.) | 6x6 | 6x6 | 8x6 | 10x6, 8x8 | 12x6, 10x8 |

- The final component is to understand what the static pressure loss is in the ductwork. The chart below shows approximate static pressure loss per 100 ft. for various round duct sizes and flow rates. If flexible ductwork is being used and the flex remains stretched, 20 percent can be added to the values below to approximate the loss.

| Inches of Static Pressure Loss per 100 ft of hard duct | | | | |
|--|------|------|------|------|
| | 4"ø | 6"ø | 8"ø | 10"ø |
| 50 CFM | 0.15 | 0.02 | - | - |
| 100 CFM | 0.6 | 0.08 | 0.02 | - |
| 150 CFM | - | 0.2 | 0.04 | - |
| 200 CFM | - | 0.3 | 0.08 | 0.02 |
| 250 CFM | - | 0.45 | 0.11 | 0.04 |
| 500 CFM | - | - | 0.4 | 0.15 |

H2i® P-SERIES HEAT PUMP



INVERTER



Wall-mounted models

Ceiling-cassette models

Ceiling-suspended models



TAX CREDIT



KA = Wired Controller; KAL = Wireless Controller

| Model Name | Indoor Unit | | PKA-A30KA(L) | PKA-A36KA(L) | PLA-A30BA | PLA-A36BA | PCA-A30KA | PCA-A36KA |
|-----------------------------|---|---|----------------------------------|-------------------------|--|-----------------------------|--|-----------------|
| | Outdoor Unit | | PUZ-HA30NHA2 | PUZ-HA36NHA2 | PUZ-HA30NHA2 | PUZ-HA36NHA2 | PUZ-HA30NHA2 | PUZ-HA36NHA2 |
| Cooling *1 | Rated Capacity | Btu/h | 30,000 | 33,500 | 30,000 | 34,000 | 30,000 | 34,000 |
| | Capacity Range | Btu/h | 18,000-30,000 | 18,000-34,200 | 18,000-30,000 | 18,000-36,000 | 18,000-30,000 | 18,000-36,000 |
| | Total Input | W | 2,500 | 2,790 | 2,450 | 2,690 | 2,480 | 2,810 |
| | Energy Efficiency | SEER | 16.5 | 16.2 | 15.6 | 17 | 16.1 | 16.6 |
| | Moisture Removal | Pints/h | 8.1 | 8.7 | 7.2 | 7.1 | 8.3 | 8.2 |
| | Sensible Heat Factor | | 0.70 | 0.71 | 0.73 | 0.71 | 0.69 | 0.73 |
| Heating at 47° F *2 | Rated Capacity | Btu/h | 32,000 | 38,000 | 32,000 | 38,000 | 32,000 | 38,000 |
| | Capacity Range | Btu/h | 18,000-34,000 | 18,000-40,000 | 18,000-34,000 | 18,000-40,000 | 18,000-34,000 | 18,000-40,000 |
| | Total Input | W | 2,930 | 3,410 | 3,440 | 3,230 | 2,990 | 3,270 |
| | HSPF (IV) | Btu/h/W | 9.5 | 10 | 9.4 | 10 | 9.3 | 10.3 |
| Heating at 17° F *3 | Rated Capacity | Btu/h | 19,000 | 25,000 | 19,000 | 28,000 | 19,000 | 27,000 |
| | Rated Total Input | W | 2,570 | 3,330 | 2,710 | 3,590 | 2,830 | 3,490 |
| | Maximum Capacity | Btu/h | 32,000 | 38,000 | 32,000 | 38,000 | 32,000 | 38,000 |
| | Maximum Total Input | W | 5,080 | 6,010 | 5,720 | 5,300 | 5,170 | 5,720 |
| Heating at 5° F *4 | Maximum Capacity | Btu/h | 32,000 | 38,000 | 32,000 | 38,000 | 32,000 | 38,000 |
| | Maximum Total Input | W | 5,770 | 6,760 | 6,630 | 5,860 | 5,830 | 6,550 |
| Power Supply | Phase, Cycle, Voltage | | 1-phase, 60Hz, 208/230V *5 | | | | | |
| Voltage | Indoor - Outdoor S1 - S2 | | AC208 / 230V | | | | | |
| | Indoor - Outdoor S2 - S3 | | DC24V | | | | | |
| | Indoor - Remote Controller | | DC12V: For Wired Controller (KA) | | | DC12V: For Wired Controller | | |
| | Indoor - Remote Controller | | Wireless Type (KAL) | | | N/A | | |
| Indoor Unit | MCA | A | 1 | | 2 | | 1 | 2 |
| | Fan Motor | F.L.A. | 0.36 | 0.57 | 0.51 | 1.00 | 0.54 | 0.97 |
| | Fan Motor Output | W | 56 | | 50 | 120 | 95 | 160 |
| | Airflow (Lo-Mid-Hi or Lo-Mid1-Mid2-Hi) | DRY (CFM) | 635-705-775 | 705-810-920 | 490-570-640-740 | 710-810-920-1,060 | 565-600-635-705 | 775-850-920-990 |
| | | WET (CFM) | 570-635-700 | 635-730-830 | 460-530-600-710 | 670-770-880-1,030 | 530-565-600-670 | 705-775-850-920 |
| | Sound Pressure Level (Lo-Mid-Hi or Lo-Mid1-Mid2-Hi) | dB(A) | 39-42-45 | 43-46-49 | 28-30-32-34 | 32-34-37-40 | 35-37-39-41 | 37-39-41-43 |
| | External Finish Color | | Munsell No. 1.0Y 9.2 / 0.2 | | Munsell No. 6.4Y 8.9 / 0.4 (Grille) | | Munsell No. 6.4Y 8.9 / 0.4 | |
| | Dimension Unit | W: In. | 46-1/16 | | 33-1/16 (Grille: 37-3/8) | | 50-3/8 | 63 |
| | | D: In. | 11-5/8 | | 33-1/16 (Grille: 37-3/8) | | 26-3/4 | |
| | | H: In. | 14-3/8 | 10-3/16 (Grille: 1-3/8) | 11-3/4 (Grille 1-3/8) | 9-1/16 | | |
| | Weight Unit | Lbs. | 46 | 51 (Grille: 13) | 55 (Grille: 13) | 71 | 79 | |
| | Drain Lift Mechanism (Included) | H: In. | N/A | | 33-7/16 | | N/A | |
| | Field Drainpipe Size | In. | 5/8 I.D. | | 1-1/4 O.D. | | 1-1/16 O.D. | |
| Outdoor Unit | MCA | A | 28 | | | | | |
| | MOCP | A | 40 | | | | | |
| | Fan Motor | F.L.A. | 0.4 + 0.4 | | | | | |
| | Fan Motor Output | W | 60 + 60 | | | | | |
| | Compressor | Model (Type) | INVERTER-driven Scroll | | | | | |
| | | R.L.A. | 18 | | | | | |
| | | L.R.A. | 27.5 | | | | | |
| | Airflow | CFM | 3,530 | | | | | |
| | Refrigerant Control | Electronic Expansion Valve | | | | | | |
| | Defrost Method | Reverse Cycle | | | | | | |
| | Sound Pressure Level at Cooling *1 | dB(A) | 52 | | | | | |
| | Sound Pressure Level at Heating *2 | dB(A) | 53 | | | | | |
| | External Finish Color | | Munsell No. 3Y 7.8 / 1.1 | | | | | |
| Dimensions | W: In. | 37-3/8 | | | | | | |
| | D: In. | 13 + 1-3/16 | | | | | | |
| | H: In. | 53-1/8 | | | | | | |
| Weight | Lbs. | 265 | | | | | | |
| Remote Controller | Type | KA = Wired, KAL = Wireless (Located with Indoor Unit) | | | Wired Remote Controller (Packaged with Grille) | | Wired Remote Controller (Located with Indoor Unit) | |
| | Type | R410A | | | | | | |
| Refrigerant | Charge | Lbs. | 12 | | | | | |
| | Oil | Type (fl. oz.) | FV50S (45) | | | | | |
| Refrigerant Pipe | Gas Side O.D. | In. | 5/8 | | | | | |
| | Liquid Side O.D. | In. | 3/8 | | | | | |
| Refrigerant Pipe Length | Height Difference (Max.) | Ft. | 100 | | | | | |
| | Length (Max.) | Ft. | 245 | | | | | |
| Connection Method | Indoor/Outdoor | Flared/Flared | | | | | | |
| Operating Temperature Range | Cooling | 0° F D.B. to 115° F D.B. with Wind Baffle Accessory Installed | | | | | | |
| | Heating | -13° F W.B. to +59° F W.B. | | | | | | |

Specifications are subject to change without notice.

Notes:

*1 Rating conditions (cooling)-Indoor: D.B. 26.7° C (80° F), W.B. 19.4° C (67° F); Outdoor: D.B. 35° C (95° F), W.B. 23.9° C (75° F).

*3 Rating conditions (heating)-Indoor: D.B. 21.1° C (70° F), W.B. 15.6° C (60° F); Outdoor: D.B. -8.3° C (17° F), W.B. -9.4° C (15° F).

*5 Indoor units receive power from outdoor units through field-supplied interconnected wiring.

*2 Rating conditions (heating)-Indoor: D.B. 21.1° C (70° F), W.B. 15.6° C (60° F); Outdoor: D.B. 8.3° C (47° F), W.B. 6.1° C (43° F).

*4 Rating conditions (heating)-Indoor: D.B. 21.1° C (70° F), W.B. 15.6° C (60° F); Outdoor: D.B. -15° C (5° F), W.B. -15° C (5° F).

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.

H2i® P-SERIES HEAT PUMP

Horizontal ducted models



INVERTER



KA = Wired Controller; KAL = Wireless Controller

| Model Name | Indoor Unit | | PEAD-A30AA | PEAD-A36AA |
|-----------------------------|------------------------------------|---|-----------------------------|-----------------|
| | Outdoor Unit | | PUZ-HA30NHA2 | PUZ-HA36NHA2 |
| Cooling *1 | Rated Capacity | Btu/h | 30,000 | 34,000 |
| | Capacity Range | Btu/h | 18,000-30,000 | 18,000-36,000 |
| | Total Input | W | 2,500 | 2,800 |
| | Energy Efficiency | SEER | 16.5 | 16.8 |
| | Moisture Removal | Pints/h | 8.9 | 7.3 |
| | Sensible Heat Factor | | 0.67 | 0.76 |
| Heating at 47° F *2 | Rated Capacity | Btu/h | 32,000 | 38,000 |
| | Capacity Range | Btu/h | 18,000-34,000 | 18,000-40,000 |
| | Total Input | W | 2,750 | 3,150 |
| | HSPF (IV) | Btu/h/W | 9.5 | 10.4 |
| Heating at 17° F *3 | Rated Capacity | Btu/h | 19,000 | 27,000 |
| | Rated Total Input | W | 2,590 | 3,250 |
| | Maximum Capacity | Btu/h | 32,000 | 38,000 |
| | Maximum Total Input | W | 4,930 | 5,400 |
| Heating at 5° F *4 | Maximum Capacity | Btu/h | 32,000 | 38,000 |
| | Maximum Total Input | W | 5,420 | 6,100 |
| Power Supply | Phase, Cycle, Voltage | | 1 Phase, 60Hz, 208/230V *5 | |
| Voltage | Indoor - Outdoor S1 - S2 | | AC 208 - 230V | |
| | Indoor - Outdoor S2 - S3 | | DC24V | |
| | Indoor - Remote Controller | | DC12V: For Wired Controller | |
| Indoor Unit | MCA | A | 2.73 | 3.30 |
| | Fan Motor | F.L.A. | 2.18 | 2.64 |
| | Fan Motor Output | W | 0.121 | 0.244 |
| | Airflow (Lo-Mid-Hi) | DRY (CFM) | 618-742-883 | 847-1,024-1,201 |
| | | WET (CFM) | 565-671-812 | 777-953-1,130 |
| | External Static Pressure *6 | In. WG | 0.14 - 0.20 - 0.28 | 0.40 - 0.60 |
| | Sound Pressure Level (Lo-Mid-Hi) | dB(A) | 30-34-39 | 33-38-42 |
| | External Finish Color | | Galvanized-steel Sheets | |
| | Dimension Unit | W: In. | 43-5/16 | 55-1/8 |
| | | D: In. | 28-7/8 | |
| | | H: In. | 9-7/8 | |
| | Weight Unit | Lbs. | 73 | 91 |
| | Drain Lift Mechanism (Included) | H: In. | 27-9/16 | |
| Field Drainpipe Size | In. | 1-1/4 | | |
| Outdoor Unit | MCA | A | 28 | |
| | MOCOP | A | 40 | |
| | Fan Motor | F.L.A. | 0.4 + 0.4 | |
| | Fan Motor Output | W | 60 + 60 | |
| | Compressor | Model (Type) | Inverter-driven Scroll | |
| | | R.L.A. | 18 | |
| | | L.R.A. | 27.5 | |
| | Airflow | CFM | 3,530 | |
| | Refrigerant Control | Electronic Expansion Valve | | |
| | Defrost Method | Reverse Cycle | | |
| | Sound Pressure Level at Cooling *1 | dB(A) | 52 | |
| | Sound Pressure Level at Heating *2 | dB(A) | 53 | |
| | External Finish Color | | Munsell No. 3Y 7.8 / 1.1 | |
| Dimensions | W: In. | 37-3/8 | | |
| | D: In. | 13 + 1-3/16 | | |
| | H: In. | 53-1/8 | | |
| Weight | Lbs. | 265 | | |
| Remote Controller | Type | Wired | | |
| Refrigerant | Type | R410A | | |
| | Charge | Lbs. | 12 | |
| | Oil | Type (fl. oz.) | FV50S (45) | |
| Refrigerant Pipe | Gas Side O.D. | In. | 5/8 | |
| | Liquid Side O.D. | In. | 3/8 | |
| Refrigerant Pipe Length | Height Difference (Max.) | Ft. | 100 | |
| | Length (Max.) | Ft. | 245 | |
| Connection Method | Indoor/Outdoor | Flared/Flared | | |
| Operating Temperature Range | Cooling | 0° F D.B. to 115° F with Wind Baffle Accessory Installed | | |
| | Heating | -13° F W.B. to +59° F W.B. | | |

Specifications are subject to change without notice.



Notes:

*1 Rating conditions (cooling)-Indoor: D.B. 26.7° C (80° F), W.B. 19.4° C (67° F); Outdoor: D.B. 35° C (95° F), W.B. 23.9° C (75° F).

*2 Rating conditions (heating)-Indoor: D.B. 21.1° C (70° F), W.B. 15.6° C (60° F); Outdoor: D.B. 8.3° C (47° F), W.B. 6.1° C (43° F).

*3 Rating conditions (heating)-Indoor: D.B. 21.1° C (70° F), W.B. 15.6° C (60° F); Outdoor: D.B. -8.3° C (17° F), W.B. -9.4° C (15° F).

*4 Rating conditions (heating)-Indoor: D.B. 21.1° C (70° F), W.B. 15.6° C (60° F); Outdoor: D.B. -15° C (5° F), W.B. -15° C (5° F).

*5 Indoor units receive power from outdoor units through field-supplied interconnected wiring.

*6 External static pressure is factory set to 0.20"WG.

LIMITED WARRANTY | Seven-year warranty on compressor. Five-year warranty on parts.

M-SERIES RATING CONDITIONS

| | | INDOOR INTAKE AIR TEMPERATURE | OUTDOOR INTAKE AIR TEMPERATURE |
|---------|---------|--|--|
| COOLING | MAXIMUM | 95° F D.B., 71° F W.B. (MU, MXZ-A/-B) 90° F D.B., 73° F W.B. (MUZ/Y-A/-GA/-GE/-D/-FE) | 115° F D.B. (All M-Series Units) |
| | MINIMUM | 67° F D.B., 57° F W.B. (All M-Series Units) | 14° F D.B. (MUZ/Y-A/-GA/-GE/-D/-FE; MXZ-A/-B) 67° F D.B. (MU*) |
| HEATING | MAXIMUM | 80° F D.B., 67° F W.B. (All M-Series Inverter Heat Pump Units) | 75° F D.B., 67° F W.B. (All M-Series Inverter Heat Pumps) |
| | MINIMUM | 70° F D.B., 60° F W.B. (All M-Series Inverter Heat Pump Units) | -13° F D.B., -15° F W.B. (MUZ-FE) -4° F D.B., -5° F W.B. (MUZ-GE) 14° F D.B., 12° F W.B. (MXZ-A/-B) 14° F D.B., 13° F W.B. (MUZ-A/-GA/-D) |

* MU units operate at intake air temperature down to 10° F with the addition of an ICM-326HM-1 low temperature control.

H2I P-SERIES (PUZ-HA) RATING CONDITIONS



| | | INDOOR INTAKE AIR TEMPERATURE | OUTDOOR INTAKE AIR TEMPERATURE |
|---------|---------|-------------------------------|--------------------------------|
| COOLING | MAXIMUM | 90° F D.B., 73° F W.B. | 115° F D.B. |
| | MINIMUM | 66° F D.B., 59° F W.B. | 0° F D.B.* |
| HEATING | MAXIMUM | 83° F D.B. | 70° F D.B., 59° F W.B. |
| | MINIMUM | 63° F D.B. | -13° F D.B., -13° F W.B. |

(* With wind baffle accessory installed) Without wind baffle installed, the minimum temperature will be 23° F D.B.

P-SERIES (PUY/PUZ-A) RATING CONDITIONS

| | | INDOOR INTAKE AIR TEMPERATURE | OUTDOOR INTAKE AIR TEMPERATURE |
|---------|---------|-------------------------------|--------------------------------|
| COOLING | MAXIMUM | 95° F D.B., 71° F W.B. | 115° F D.B. |
| | MINIMUM | 67° F D.B., 57° F W.B. | 0° F D.B.* |
| HEATING | MAXIMUM | 80° F D.B., 67° F W.B. | 70° F D.B., 59° F W.B. (PUZ-A) |
| | MINIMUM | 70° F D.B., 60° F W.B. | 12° F D.B., 10° F W.B. (PUZ-A) |

(* With wind baffle accessory installed) Without wind baffle installed, the minimum temperature will be 23° F D.B.

REFRIGERANT TUBING SETS

| Lineset Model Number | Tube Size (In.) | Length Ft. | Insul. | Use With Mitsubishi Electric Models |
|----------------------|-----------------|------------|--------|---|
| MLS143812T-15 | 1/4 x 3/8 | 15 | 1/2" | MS-A09WA; MSZ-A09,12NA; MSY/Z-GE09,12NA; MSZ-FD/FE09,12NA |
| MLS143812T-30 | 1/4 x 3/8 | 30 | 1/2" | |
| MLS143812T-50 | 1/4 x 3/8 | 50 | 1/2" | |
| MLS143812T-65 | 1/4 x 3/8 | 65 | 1/2" | MS-A12WA; MSY/Z-A15,17NA; MSY/Z-GE15,18NA; PKA-A12,18HA(L); PLA-A12,18BA |
| MLS141212T-15 | 1/4 x 1/2 | 15 | 1/2" | |
| MLS141212T-30 | 1/4 x 1/2 | 30 | 1/2" | |
| MLS141212T-50 | 1/4 x 1/2 | 50 | 1/2" | |
| MLS141212T-65 | 1/4 x 1/2 | 65 | 1/2" | |
| MLS141212-100 | 1/4 x 1/2 | 100 | 1/2" | |
| MLS145812T-15 | 1/4 x 5/8 | 15 | 1/2" | MSY/Z-A24NA, MSY/Z-GA24NA |
| MLS145812T-30 | 1/4 x 5/8 | 30 | 1/2" | |
| MLS145812T-50 | 1/4 x 5/8 | 50 | 1/2" | |
| MLS145812T-65 | 1/4 x 5/8 | 65 | 1/2" | |
| MLS145812T-100 | 1/4 x 5/8 | 100 | 1/2" | MSY/Z-D30,36NA; PKA-A24,30,36KA(L); PLA-A24,30,36,42BA; PCA-A24,30,36,42KA |
| MPLS385812T-10 | 3/8 x 5/8 | 10 | 1/2" | |
| MPLS385812T-15 | 3/8 x 5/8 | 15 | 1/2" | |
| MPLS385812T-30 | 3/8 x 5/8 | 30 | 1/2" | |
| MPLS385812T-50 | 3/8 x 5/8 | 50 | 1/2" | |
| MPLS385812T-65 | 3/8 x 5/8 | 65 | 1/2" | |
| MPLS385812T-100 | 3/8 x 5/8 | 100 | 1/2" | |

REFRIGERANT LINE LENGTH FLARE/FLARE

| INDOOR UNIT | OUTDOOR UNIT | LENGTH IN FEET | HEIGHT IN FEET |
|---|---------------|----------------|----------------|
| MS-A09WA | MU-A09WA | 65 | 35 |
| MS-A12WA | MU-A12WA | 65 | 35 |
| MSY-A15NA | MUY-A15NA | 65 | 40 |
| MSY-A17NA | MUY-A17NA | 65 | 40 |
| MSZ-A09NA | MUZ-A09NA | 65 | 40 |
| MSZ-A12NA | MUZ-A12NA | 65 | 40 |
| MSZ-A15NA | MUZ-A15NA | 65 | 40 |
| MSZ-A17NA | MUZ-A17NA | 65 | 40 |
| MSY-GA24NA | MUY-A24NA | 100 | 50 |
| MSZ-GA24NA | MUZ-A24NA | 100 | 50 |
| MSY-D30NA | MUY-D30NA | 100 | 50 |
| MSZ-D30NA | MUZ-D30NA | 100 | 50 |
| MSY-D36NA | MUY-D36NA | 100 | 50 |
| MSZ-D36NA | MUZ-D36NA | 100 | 50 |
| MSY-GE09NA | MUY-GE09NA | 65 | 40 |
| MSY-GE12NA | MUY-GE12NA | 65 | 40 |
| MSY-GE15NA | MUY-GE15NA | 65 | 40 |
| MSY-GE18NA | MUY-GE18NA | 100 | 50 |
| MSZ-GE09NA | MUZ-GE09NA | 65 | 40 |
| MSZ-GE12NA | MUZ-GE12NA | 65 | 40 |
| MSZ-GE15NA | MUZ-GE15NA | 65 | 40 |
| MSZ-GE18NA | MUZ-GE18NA | 100 | 50 |
| MSZ-FE09NA | MUZ-FE09NA | 65 | 40 |
| MSZ-FE12NA | MUZ-FE12NA | 65 | 40 |
| MSZ-A09,12,15NA; SEZ-KD09,12,15NA | MXZ-2A20NA | 164 | 49*/33 |
| MSZ-GE09,12NA, MSZ-FE09,12NA; SEZ-KD09,12NA | MXZ-2B20NA | 164 | 49*/33 |
| MSZ-A09,12,15,17,24NA; SEZ-KD09,12,15,18NA | MXZ-3A30NA | 230 | 49*/33 |
| MSZ-A09,12,15,17,24NA; SEZ-KD09,12,15,18NA | MXZ-4A36NA | 230 | 49*/33 |
| PKA-A12HA(L) | PUY-A12NHA | 100 | 100 |
| PKA-A18HA(L) | PUY/Z-A18NHA3 | 100 | 100 |
| PKA-A24KA(L) | PUY/Z-A24NHA3 | 165 | 100 |
| PKA-A30KA(L) | PUY/Z-A30NHA3 | 165 | 100 |
| PKA-A30KA(L) (H2i) | PUZ-HA30NHA2 | 245 | 100 |
| PKA-A36KA(L) | PUY/Z-A36NHA3 | 165 | 100 |
| PKA-A36KA(L) (H2i) | PUZ-HA36NHA2 | 245 | 100 |
| PLA-A12BA | PUY-A12NHA | 100 | 100 |
| PLA-A18BA | PUY/Z-A18NHA3 | 100 | 100 |
| PLA-A24BA | PUY/Z-A24NHA3 | 165 | 100 |
| PLA-A30BA | PUY/Z-A30NHA3 | 165 | 100 |
| PLA-A30BA (H2i) | PUZ-HA36NHA2 | 245 | 100 |
| PLA-A36BA | PUY/Z-A36NHA3 | 165 | 100 |
| PLA-A36BA (H2i) | PUZ-HA36NHA2 | 245 | 100 |
| PLA-A42BA | PUY/Z-A42NHA3 | 165 | 100 |
| PCA-A24KA | PUY/Z-A24NHA3 | 165 | 100 |
| PCA-A30KA | PUY/Z-A30NHA3 | 165 | 100 |
| PCA-A30KA (H2i) | PUZ-HA36NHA2 | 245 | 100 |
| PCA-A36KA | PUY/Z-A36NHA3 | 165 | 100 |
| PCA-A36KA (H2i) | PUZ-HA36NHA2 | 245 | 100 |
| PCA-A42KA | PUY/Z-A42NHA3 | 165 | 100 |
| PEA-A12AA | PUY-A12NHA3 | 100 | 100 |
| PEA-A18AA | PUY/Z-A18NHA3 | 100 | 100 |
| PEAD-A24AA | PUY/Z-A24NHA3 | 165 | 100 |
| PEAD-A30AA | PUY/Z-A30NHA3 | 165 | 100 |
| PEAD-A30AA (H2i) | PUZ-HA30NHA2 | 245 | 100 |
| PEAD-A36AA | PUY/Z-A36NHA3 | 165 | 100 |
| PEAD-A36AA (H2i) | PUZ-HA36NHA2 | 245 | 100 |
| PEAD-A42AA | PUY/Z-A42NHA3 | 165 | 100 |

OPTIONAL ACCESSORIES

| PART NUMBER | USE WITH | DESCRIPTION |
|-------------------------|---|--|
| Controls Options | | |
| MAC-397IF-E | M-Series INVERTER Units | MA and contact terminal interface |
| MAC-399IF-E | M-Series INVERTER Units | M-NET control adapter for Mr. Slim MSY and MSZ models |
| PAC-725AD | P-Series | Connector for CN51/multiple remote controller adapter and duct fan controller |
| PAC-715AD | P-Series | Connector for CN32 (For remote ON/OFF) |
| PAC-SE41TS-E | P-Series | Remote temperature sensor for indoor units |
| PAC-SA1ME-E | PLA-ABA | i-see™ sensor corner panel for PLA-ABA indoor units |
| PAC-SH91MK-E | i-see sensor for PAC / PCFY | i-see Sensor |
| PAR-SA92MW-E | wireless remote controller kit with i-see sensor for PCA / PCFY | Wireless remote controller |
| PAR-SL93B-E | Wireless remote controller kit for PCA / PCFY | Wireless remote controller |
| PAC-SF40RM-E | P-Series | Remote operation adapter: display and ON/OFF |
| PAC-SF81MA-E | P-Series | M-NET control adapter for Mr. Slim PUY-A, PUZ-A, PUZ-HA |
| PAC-SK52ST | P-Series | Control / service tool |
| PAR-21MAA-G | Use for wired M-Series Controller | Deluxe MA remote controller (Requires MAC-397IF-E for ductless indoor units) |
| PAR-SL99U-E | PCA | Wireless remote controller kit for PCA suspended units |
| PAR-FA32MA-E | PLA-ABA | Wireless remote controller for PLA-ABA units (Requires signal receiver PAR-SA9FA-E) |
| PAR-SA9FA-E | PLA-ABA | Wireless signal receiver for PLA-ABA units (For PAR-FA32MA-E controller) |
| PZ-41SLB-E | Lossnay® | Lossnay ERV remote controller for LGH ERV control |
| Low Ambient | | |
| WB-PA1 | P-Series | Wind baffle (1 piece) PUY/Z-A12/A18 |
| WB-PA2 | P-Series | Wind baffle (1 piece) PUY/Z-A24/A30/A36/A42 (42 installation requires 2 pieces); PUZ-HA36NA (Requires 2 pieces) |
| ICM-326HM-1 | M-Series Non-INVERTER units | Low ambient head pressure controller |
| Filters | | |
| MAC-2300FT | M-Series Indoor Unit - A24 | Anti-allergy enzyme filter |
| MAC-415FT | M-Series Indoor Unit - A09/A12/A15/A17 | Anti-allergy enzyme filter |
| MAC-418FT | MSZ-FD09/12 | Anti-allergy enzyme filter |
| MAC-308FT | MSZ-FD09/12 | Platinum deodorizing filter |
| MAC-1415FT-E | M-Series Indoor Unit - D30/36 | Anti-allergy enzyme filter |
| PAC-SE81KF-E | PCA | High-efficiency (MERV 8) filter element |
| PAC-SH59KF-E | PLA-ABA | High-efficiency (MERV 10) filter element (Requires PAC-SH53TM-E multi-function casement) |
| PAC-SH89KF | PCA-A24/30KA | High-efficiency filter element |
| PAC-SH90KF | PCA-A36/42KA | High-efficiency filter element |
| Pumps | | |
| SI1730-230 | P-Series - A24 and larger | Mini-condensation pump: 230V |
| SI3100-115 | MS-Series | Mini-condensation pump: 115V |
| SI3100-230 | MSY/Z-Series - P-Series - A18 and smaller | Mini-condensation pump: 230V |
| PAC-SH84DM-E | PCA-A**KA | Mini condensation pump: 230V |
| Miscellaneous | | |
| TAZ-MS303 | M-Series and P-Series | Three-pole disconnect switch; 30A, 600V; turns off power between indoor and outdoor units |
| CWMB1 | MU and PU outdoor units | Condensing unit wall mounting brackets: painted steel |
| PAC-SH53TM-E | PLA-ABA | Multi-function casement (High-efficiency filter element not included) |
| PAC-SH51SP-E | PLA-ABA | Air outlet shutter plates (1 set = 2 pieces) |
| PAC-SG58SG-E | P-Series | Air outlet guide (1 piece) PUY/Z-A12/A18 |
| PAC-SG59SG-E | P-Series | Air outlet guide (1 piece) PUY/Z-A24/A30/A36/A42 (42 installation requires 2 pieces); PUZ-HA36NA (Requires 2 pieces) |
| PAC-SG61DS-E | P-Series | Drain socket |
| MAC-851DS | MUZ-FD09/12 | Drain socket |
| MAC-811DS | MUY(Z)-D30/36 | Drain socket assembly |
| PAC-SG63DP-E | PUY(Z)-A12/18 | Drain pan |
| PAC-SG64DP-E | PUY(Z)-A24/30/36/42 and PUZ-HA36 | Drain pan |
| MAC-640BH-U | MUZ-GE09/12/15, MUZ-FE09/12 outdoor unit | Drain pan heater |
| MAC-641BH-U | MUZ-GE18 putdoor unit | Drain pan heater |
| RCMKP1CB | M and P Series Wireless | Lockdown bracket for wireless remote controller |
| DSD-400N | M-Series and P-Series | Outdoor unit mounting base (Platform Stand) |
| ULTRILITE1 | All M-Series and PUZ(Y)-A12/18 | Condensing unit mounting pad: 16" x 36" x 3" |
| ULTRILITE2 | PUY(Z)-A24/30/36/42; PUZ-HA36 | Condensing unit mounting pad: 24" x 42" x 3" |
| Port Adapters | | |
| MAC-A454JP-E | MXZ-Series | Adapter: 3/8" x 1/2" |
| MAC-A455JP-E | MXZ-Series | Adapter: 1/2" x 3/8" |
| MAC-A456JP-E | MXZ-Series | Adapter: 1/2" x 5/8" |
| PAC-493PI | MXZ-Series | Adapter: 1/4" x 5/8" |
| PAC-SG76RJ-E | MXZ-Series | Adapter: 3/8" x 5/8" |
| PAC-493PI | MXZ Series | Adaptor: 1/4" X 3/8" |
| MSDD-50SR-E | P-Series | Distribution pipe - Twinning applications - P-Series |
| PAC-SC84PI-E | PKA-Series (A24/30/36/42) | L-connector pipe (for left-side piping) |

LINE-HIDE™

Lineset Cover System

Put a professional finish on air conditioning installations with an easy-to-install modular system that beautifies exteriors and protects linesets, drainlines, and wiring.

- Available in four sizes: 2-1/4", 3", 4", and 6" tubes.
- Snap-on covers and a full selection of couplings, elbows, T-joints, caps, and more for any application, complex or simple.
- High-quality PVC with UV inhibitors for outdoor service in all weather conditions.
- Can be painted with most house paints to match exterior decors.
- Not just for HVAC. Hide any exterior cabling, piping, or wiring.
- Use it indoors, too! Meets UL94v-0 for interior applications.

Download a brochure at www.line-hide.com to find out more information.






DIAMONDBACK™ BV-Series Ball Valves

Model numbers:

BV14FFSI
BV38FFSI
BV12FFSI
BV58FFSI



- Size available: 1/4"; 3/8"; 1/2"; 5/8"
- Fully factory assembled
- Furnace brazed and pressure tested
- Each ball valve is equipped with Schrader Valve for refrigerant service
- Design working pressure: 700 PSIG
- Temperature range:
-40° F to +325° F (-40° C to +149° C)
- Forged brass body and seal cap
- Teflon® seals and gaskets (no synthetic O-rings)
- Seal cap design permits valve operation without removal of seal cap
- Suitable for use with R-11, R-22, R-123, R-125, R-134A, R-236FA, R-4202A, R-402B, R-404A, R-407C, R-410A, R-500, R-502, and R-507
- One year limited materials and workmanship warranty on Ball Valves

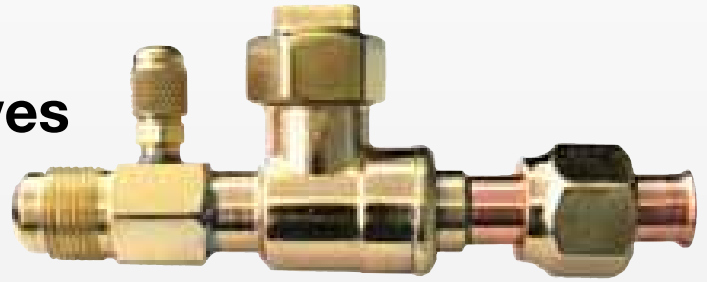

- **Engineered for Mini-split and Multi-split HVAC Units**
- **Full Port Design**
- **700 PSIG Rated**
- **R-410A Compatible**
- **Flare Connections**

| Part Number | SAE Flare | A | B | C | D | E | F |
|-------------|-----------|------|------|------|------|------|------|
| BV14FFSI | 1/4" | 6.19 | 2.60 | 1.80 | 1.22 | 1.42 | 1.10 |
| BV38FFSI | 3/8" | 6.30 | 2.67 | 1.80 | 1.22 | 1.42 | 1.10 |
| BV12FFSI | 1/2" | 6.51 | 2.67 | 1.80 | 1.22 | 1.42 | 1.10 |
| BV58FFSI | 5/8" | 6.64 | 2.67 | 1.80 | 1.28 | 1.42 | 1.10 |

*Ball valves come with an insulation piece





DIAMONDBACK™ Platform Stands

Lift the Mitsubishi Electric Comfort Solution outdoor unit to new heights with our Diamondback Platform Stands.

- Easy to install
- Available for all sizes of Mr. Slim outdoor units
- Color matched to the outdoor units

Model Number: DSD-400N

L: 15-3/4" x W: 3-1/4" x H: 3-1/4"





Mitsubishi Electric Shizuoka Works acquired ISO 9001 certification under Series 9000 of the International Standard Organization (ISO), based on a review of quality warranties for the production of air-conditioning equipment. The plant also acquired environmental management system standard ISO 14001 certification.



Please Recycle



Cooling and Heating Solutions

Mitsubishi Electric Advanced Products Division
3400 Lawrenceville Suwanee Road
Suwanee, GA 30024

Phone: 888-467-7546 Fax: 800-658-1458

©2009 Mitsubishi Electric & Electronics USA, Inc. Mr Slim and H2i are registered trademarks of Mitsubishi Electric. The three-diamond logo is a registered logo of Mitsubishi Electric Corporation. *Hyper-Heating technology Patent Pending.

See complete warranty for terms, conditions and limitations. A copy is available from Mitsubishi Electric.

Form No. MBROGEN-10-09-30M PD

For more information visit www.mitsubishicomfort.com