

Safety Instructions 2-3

Principal Parts 4

Additional Components 4

Assembly Instructions 5

Installation 6-7

 Charging trap

 Trap Placement

 Propane Tank Installation

 Tank Changing Tips

Maintenance 8

 Starting Instructions

 Shut-Down Instructions

 For Best Results

Quick Clear Valve 9

Troubleshooting 10-11

 LED Fault Codes

 Gas Reset Tool

Warranty 12

Questions or Comments

Please contact American Biophysics® Corporation if you have any questions, experience any problems with your Mosquito Magnet® or for replacement parts at: **1-877-699-8727**

American Biophysics Corporation
140 Frenchtown Rd.
North Kingstown, RI 02852
P: 401-884-3500
F: 401-884-6688
www.mosquitomagnet.com

Model No.:	Liberty Plus
Serial No.:	
Type of Gas:	Propane
Manifold Pressure:	100 – 110 psi
Minimum Gas Supply Pressure:	11.0 in. WC
Input Rating:	650 Btu/Hr.
Minimum Clearances:	20 – 24"



How the Mosquito Magnet® Works

Mosquitoes and other biting insects use the long-range attractant carbon dioxide (CO₂) to locate people. Once in close proximity, mosquitoes use short-range attractants such as scents emitted from the skin, to determine which person they are going to bite. The Mosquito Magnet® mimics a human by converting propane to CO₂, with its patented catalytic conversion technology, in combination with a short-range attractant (patent pending).

Attracted by the CO₂ and short-range attractant, mosquitoes and other biting insects are drawn to the Mosquito Magnet®. When they reach the trap, the insects are vacuumed into a net by our patented Counterflow Technology™, where they dehydrate and die within 24 hours.

The Mosquito Magnet® is silent and odorless. When properly placed in your yard, the trap begins working immediately. Noticeable results can be achieved in 7 to 10 days. To greatly reduce your biting insect population, allow 4 – 6 weeks. Leave the Mosquito Magnet® out all summer long, to control the mosquito population in your yard.

Only biting insects are targeted including mosquitoes, no-see-ums, black flies and biting midges, not beneficial insects such as butterflies, bees or moths.

Please read and follow all safety instructions and warnings.

FOR YOUR SAFETY

If you smell gas:

1. Shut off the gas to the appliance.
2. Extinguish any open flame.
3. Open lid.
4. If odor continues, immediately call your gas supplier or your fire department.

FOR YOUR SAFETY

1. Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.
2. An LP cylinder not connected for use shall not be stored in the vicinity of this or any other appliance.

Children and adults should be alerted to the hazards of high surface temperatures and should stay away to avoid burns or clothing ignition.

Young children should be carefully supervised when they are in the area of the heater. Keep out of reach of children.

Clothing or other flammable materials should not be hung from the heater, or placed on or near the heater.

- Note:** Some or all of the following required safety instructions for propane powered devices may apply to your Liberty Plus.
- Warning:** Improper installation, adjustment, alteration, service or maintenance can cause injury or property damage. Read the installation, operating and maintenance instructions thoroughly before installing or servicing the Liberty Plus.
- Caution:** The gas pressure regulator provided with this appliance must be used. This regulator is set for an outlet pressure of 11.0 in. Water Column. The minimum inlet gas supply pressure is 11" WC from regulator.
- This unit is not intended to be installed in or on recreational vehicles and/or boats.
 - The gas supply must be turned off at the LP-Gas supply cylinder when this appliance is not in use.
 - The installation must conform with local codes or, in the absence of local codes, with the National Fuel Gas Code, ANSI Z223.1-1998 for US and with the CAN1-B149 for Canada.
 - To test for a gas leak, place soapy water around the connector, regulator, and gas hose assembly. If bubbles appear, there is a gas leak.
 - Inspect the hose before each use of the unit. If it is evident there is excessive abrasion or wear, or the hose is cut, it must be replaced prior to the unit being put into operation. The replacement hose shall be that specified by the manufacturer.
 - The Liberty Plus is equipped with an internal hot surface ignition device. Failure to follow starting procedure will result in the trap not starting.
 - Installation and repair should be done by a qualified service person. The heater should be inspected before use and at least annually by a qualified service person. More frequent cleaning may be required as necessary. It is imperative that the control compartment, burners, and circulating air passageways of the heater be kept clean.
 - Adequate clearances of 20" – 24" around air openings into the combustion chamber, clearances from combustible material, provisions for accessibility and for combustion and ventilating air supply. Keep the Liberty Plus area clear and free from combustible materials, gasoline, and other flammable vapors and liquids. The appliance is not to be used in locations where flammable vapor or explosive dust is likely to exist.
 - Do not obstruct the flow of combustion and ventilation air.
 - Keep the ventilating openings of the cylinder enclosure free and clear from debris.
 - Clean the Liberty Plus with a water damp cloth, if necessary.


Safety Instructions

- A maximum of a 20 lb. LP-Gas cylinder shall be used.
- The LP-Gas cylinder must be provided with a shut-off valve terminating in an LP-Gas supply cylinder valve outlet specified for Connection No. 510 in the Standard for Compressed Gas Cylinder Valve Outlet and Inlet Connections, ANSI/CGA-V-1-1977.
- The LP-Gas cylinder supply system must be arranged for vapor withdrawal and the cylinder must include a collar to protect the cylinder valve.
- The LP-Gas cylinder used shall be constructed and marked in accordance with the specifications for LA-Gas cylinders of the U.S. Department of Transportation (DOT).
- The Liberty Plus shall be used outdoors only in a well ventilated space and shall not be used in a building, garage, or any other enclosed area.
- The LP-Gas cylinder must be disconnected and removed from the appliance, if the appliance is stored indoors.
- LP-Gas cylinders must be stored outdoors in a well-ventilated area out of reach of children.
- Disconnected cylinders must have threaded valve plugs tightly installed and must not be stored in a building, garage, or any other enclosed area.
- The pressure regulator and hose assembly supplied with this appliance must be used for connection to the LP-Gas cylinder. Replacement pressure regulators and hose assemblies must be specified by the manufacturer.
- Avoid improper use of extension cords. Keep connections away from moisture and avoid damage to the cord.
- If the supply cord is damaged, it must be replaced by the manufacturer or its service agent or a similarly qualified person in order to avoid hazard.


Please contact Customer Service if you have any questions at: **1-877-699-8727**

Principal Parts

Self-Contained Liberty Plus

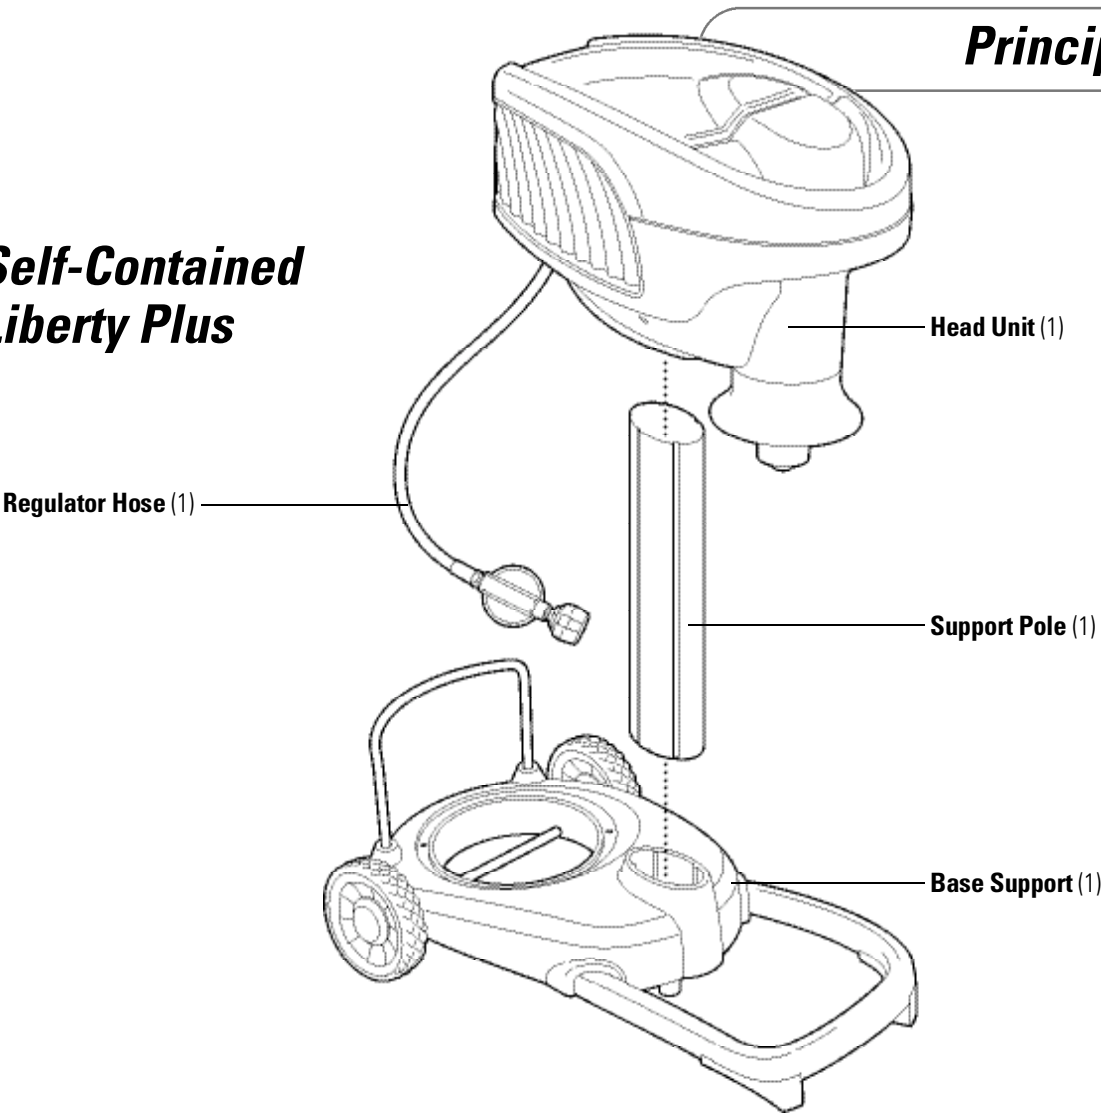


Parts Included

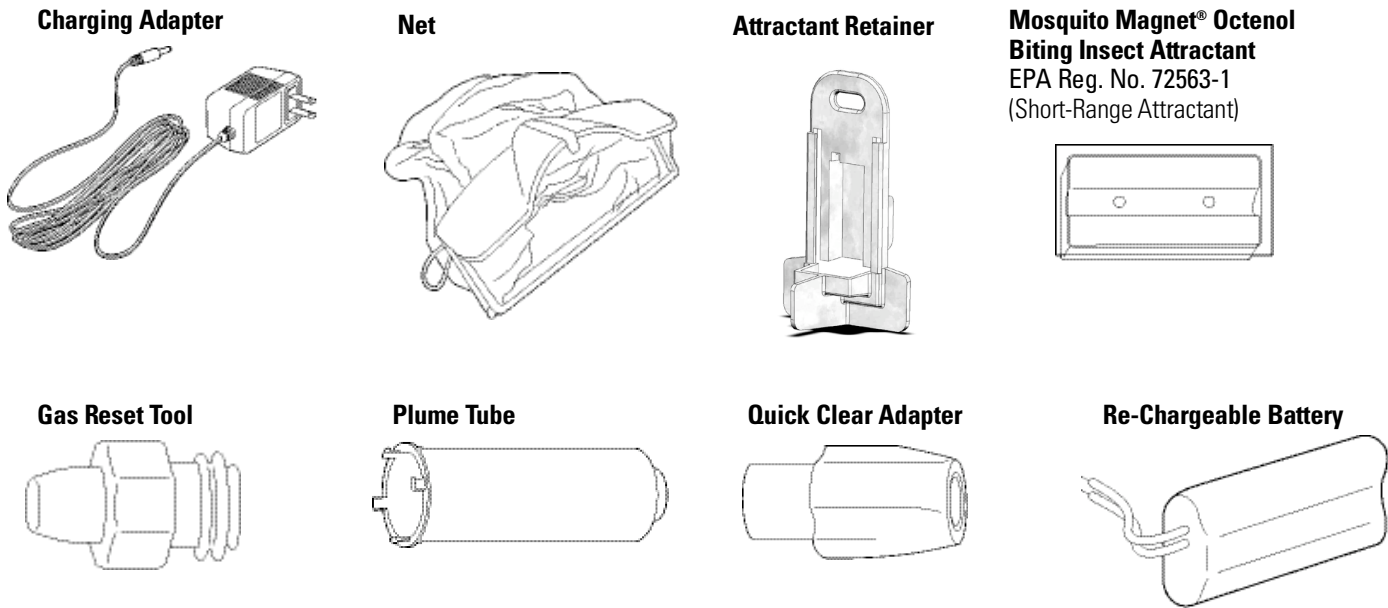

Trap Assembly:

Step 1

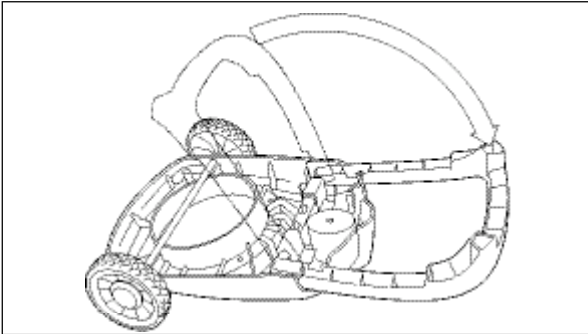


Place base upside down on a flat surface, unfold U-shaped support leg until it locks in place.

Step 2



Turn base and leg assembly right-side-up and place support pole into cavity on base.


Step 3

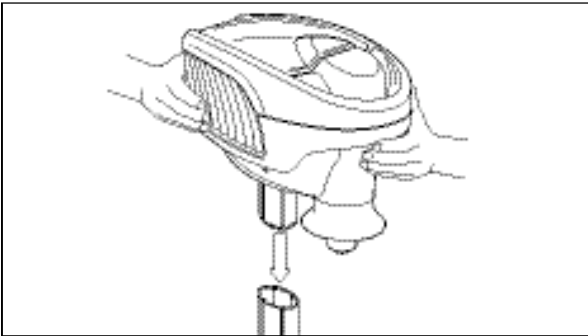

Place Liberty Plus power head onto pole. Press down firmly with two hands to secure.

Assembled trap should have the front of power head in the same direction as base U-shaped legs.

Step 4

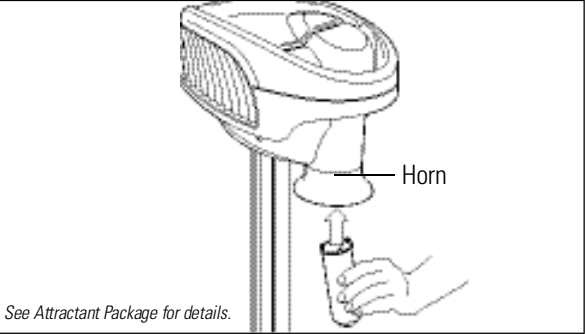

Insert the Plume Tube into horn and turn until Tube locks into place.

Step 5


Charge Liberty Plus for 24 hours before use. See pg. 6 for further details.

NOTE: You will not need to charge it again until the following season.

Net Installation:

Lift clear plastic lid and lock plastic holding bracket of net into front of compartment. Close plastic lid when finished.

Note: Fabric loops hook over plastic posts allowing net to expand to its highest capacity.

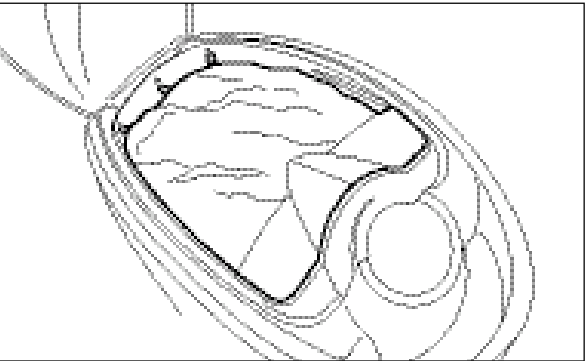

Net locks into front of compartment

Charging your Mosquito Magnet® Liberty Plus

1. Remove cover panel from rear of Head Unit (panel snaps off).
 2. Insert and connect re-chargeable battery.
 3. Insert Charging Adapter into rear of Head Unit.
- Allow to charge for 24 hours at the beginning of each season. You will not need to charge again until next season.
- Replace cover panel when completed (panel snaps into place).


NOTE: Unit must be charged indoors, trap is not weatherproof with cover panel removed.

Attractant Installation:

See Mosquito Magnet® attractant label for installation, use, storage and disposal instructions.


Trap Placement

1. Determine the direction of the prevailing wind. Check local weather patterns if you are unsure.
2. Stand in the center of the area you are trying to protect and look toward the prevailing wind.
3. Proper placement of the Liberty Plus will be 30 – 40 feet in front of you, within 5-6 feet of ground cover (i.e., bushes, flowerbeds, tree line, marshbed). Ensure that trap is not directly against any blockades such as buildings, fences, etc.
4. It is recommended that the trap be placed in the shade.
5. Do not place trap directly above a water source (sprinklers, hose, etc.).
7. Trap must be placed on level ground to avoid tipping or uneven propane distribution.
8. For more information, refer to trap placement CD-ROM included with your Liberty Plus.

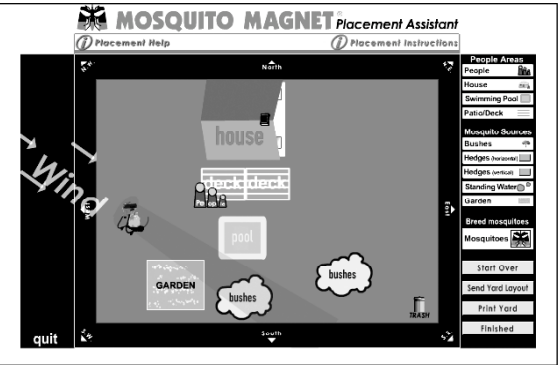


For optimal trap placement in your yard, refer to trap placement CD-ROM included with your Liberty Plus.


Remove Back Panel

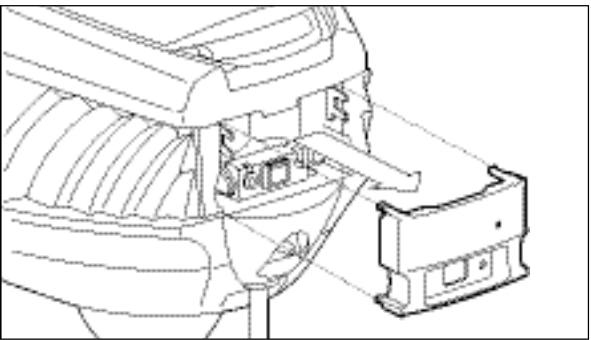

Insert & Connect Battery

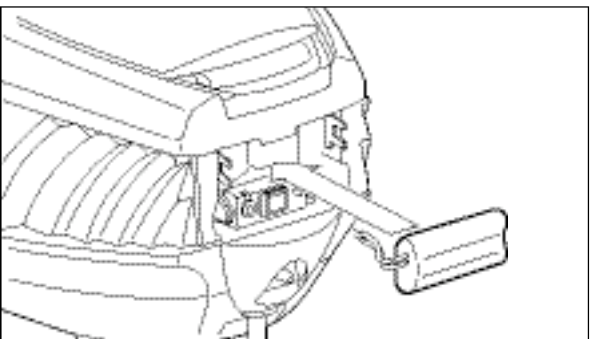

Plug Charger Into Battery Charging Powerhead

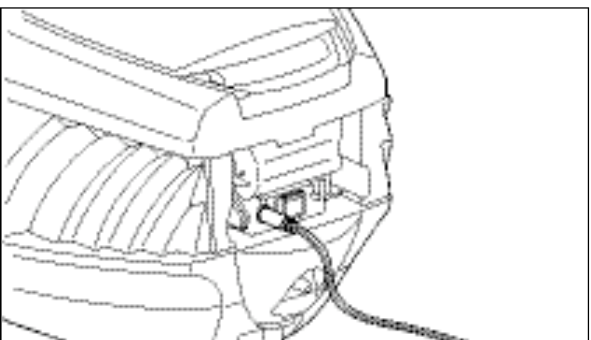

Installation

Propane Tank Installation

1. After trap is placed in its ideal location, place propane tank onto the molded cradle.
2. Making sure propane tank is fully closed, utilize Gas Reset Tool (see page 11). Attach propane regulator hose to propane tank. Secure tightly by hand.
Do not use tools.
3. Turn propane on by *slowly* turning valve counter-clockwise. Take care not to turn too quickly to avoid engagement of safety check valve regulator.


⚠ DO NOT MOVE TRAP WITH TANK ATTACHED!
TANK MUST BE DISCONNECTED FROM REGULATOR BEFORE TRAP IS RELOCATED TO AVOID DAMAGE TO REGULATOR AND/OR TRAP. BE ADVISED, DAMAGE CAUSED FROM FAILURE TO COMPLY WITH THIS INSTRUCTION IS NOT COVERED UNDER WARRANTY.

Propane Tank Changing Tips


When attaching the regulator handle to a tank after a tank change, be sure to fully tighten the regulator handle onto the tank. No need to use tools, but do turn the handle as far as possible by hand. When this is done, loosen the handle 1/4 turn, then re-tighten the handle. Frequently this action will result in additional turns beyond the 1/4 turn.

The purpose for this is to fully engage the regulator onto the tank. If the regulator is not fully engaged, the flow of gas may be restricted to the point where the trap will show a gas empty code. If this occurs, press the off button, close the tank valve, and remove the regulator from the tank. Utilize Gas Reset Tool (see page 11) then re-attach the regulator and try again.


Step 1 – Propane Tank Placement

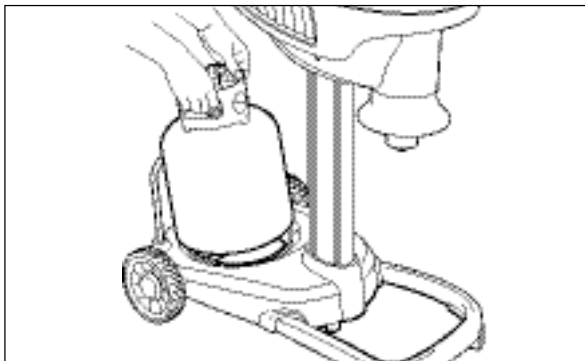

Step 2 – Attach Regulator

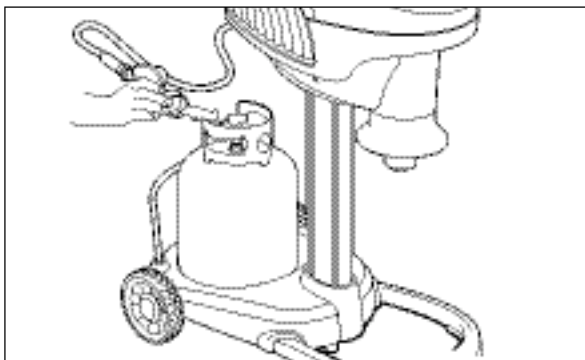

Step 3 – Slowly Open Valve

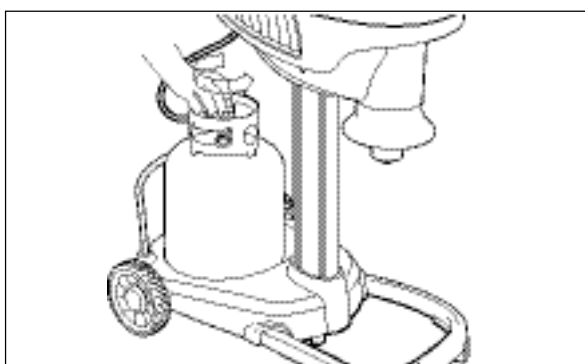

Starting Instructions

It is recommended that you read the entire manual before starting the Liberty Plus trap.

1. Connect regulator to propane tank.
2. Slowly open propane tank valve.
3. Push ON/OFF switch to ON position.
LED light will turn solid orange indicating warm-up.
After 15 to 25 min. trap LED light will turn solid green indicating the trap is running at full capacity.

Shut Down Instructions

Push ON/OFF switch to OFF position to shut down the Liberty Plus. The LED light will go out and the fan will continue running until trap is cool. Close the propane tank valve and disconnect regulator.

Any open Mosquito Magnet® attractant should be removed and discarded. See attractant label for disposal instructions. The net should also be discarded prior to storing the Liberty Plus.

STORAGE: Liberty Plus should be stored indoors in the off-season. Cover unit with trap cover available at www.mosquitomagnet.com or with a tarp and secure tightly at the bottom to keep out dust, spider webs and other debris.

NOTE: It is recommended that you use the Quick Clear valve before seasonal storage to avoid build-up of contaminants during off-season (see page 9).


Maintenance

• 21 Day Maintenance Cycle


- Refill propane. (propane lasts approximately 21 days with 24-hour operation)
- Use gas Reset Tool before connecting newly filled propane tank to the regulator. (see page 11)
- Replace short-range attractant cartridge.
See Mosquito Magnet® attractant label for instructions.
- Empty or replace net.
- Utilize the Quick Clear valve at first tank change and every second tank change thereafter.
- Periodically wipe down the outside of the Liberty Plus with a clean, water damp cloth.
- Charge your Mosquito Magnet® Liberty Plus for 24 hours at the beginning of each season (see page 6).

Maintenance

ON/OFF Switch

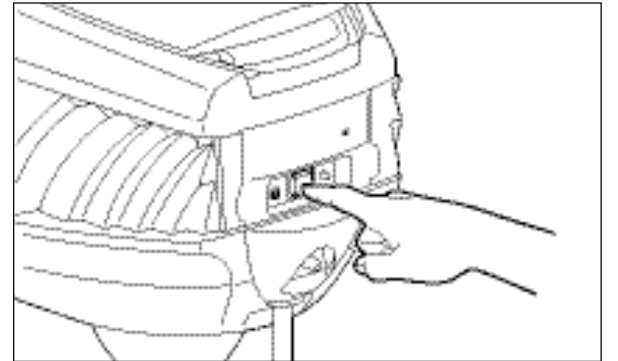

Shut Down

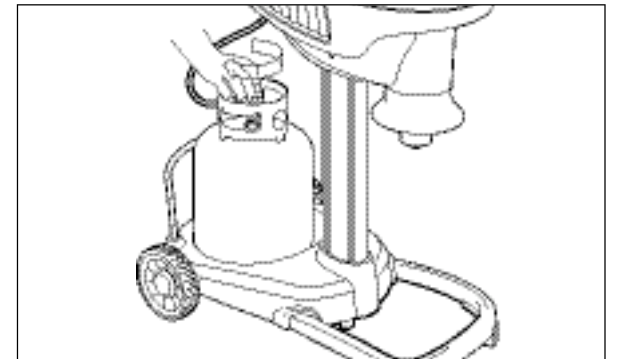

For Best Results

- Your trap will begin capturing immediately, but allow 4 – 6 weeks to significantly reduce the mosquito population in your yard.
- Never spray insecticide in or around trap.
- Trap can be left running in the rain.
- If using lime or fertilizer compounds, be sure to shut down the Liberty Plus first to prevent dust or fine mist from being drawn into trap and clogging net

Quick Clear Valve

⚠ Important: Extinguish all smoking materials prior to use of Quick Clear Valve. Do not stand directly behind the Quick Clear cartridge during operation.

Quick Clear is recommended for regular maintenance to remove built-up contaminants but is not required for operation of your Liberty Plus.

Recommended for use at first tank change, and every second tank change thereafter. Also recommended for use before seasonal storage to avoid build up of contaminants during the off-season.

The Quick Clear valve is a gold, threaded knob located on the back of your trap. It should be used with the adapter included with your Liberty Plus, and a threaded Quick Clear cartridge available on our website at: www.mosquitomagnet.com or at your local Mosquito Magnet Dealer.


1. Shut down your Liberty Plus. Let fan run until it stops. (About 35 mins)
 2. Close the propane tank valve by turning to the "OFF" position. (Turn the tank valve clockwise)
 3. Remove the protective cap from Quick Clear valve on your trap.
 4. Hand-screw the Quick Clear adapter on to Quick Clear valve, until finger tight.
 5. Hand-screw the Quick Clear cartridge into the Quick Clear adapter clockwise until hand tight while holding the adapter in place.
- Important:** Do not over-tighten.
6. While holding the adapter in place, slowly unscrew Quick Clear cartridge up to 1/4 turn only in counter clockwise direction from the Quick Clear adapter only. The strong flow of compressed air lasts approximately 3 minutes. Be sure to allow Quick Clear cartridge to run out completely. (Hissing will stop when cylinder is empty. Quick Clear cartridge will be cold to the touch)
 7. Unscrew the Quick Clear cartridge to remove. Discard empty Quick Clear cartridge after use, it is not reusable or refillable.
 8. Unscrew the Quick Clear adapter to remove.

Use caution when removing Quick Clear adapter and cartridge, as some compressed air may come out at this time.

Remember to keep the Quick Clear adapter for future use.


9. Replace Quick Clear valve protective cap, and proceed with normal start up of your Liberty Plus. If use of Quick Clear valve feature does not resolve starting trouble, contact Customer Service **1-877-699-8727**.

Step 4

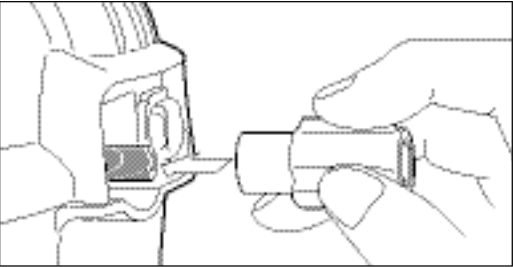


First hand-screw the Quick Clear adapter onto the valve.

Step 5

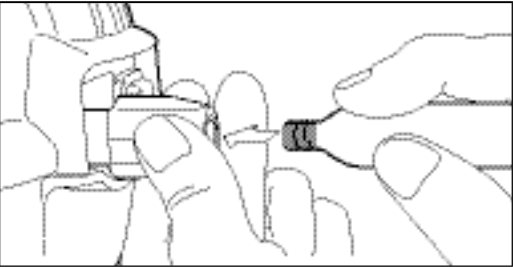


While holding the adapter in place, screw the Quick Clear cartridge into Quick Clear adapter.

Step 6

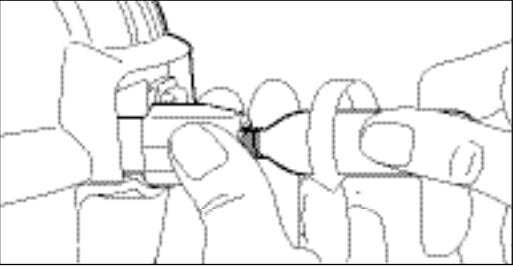

To start cleaning process, while holding Quick Clear Adapter in place, unscrew the Quick Clear cartridge 1/4 Turn Only.

Step 7

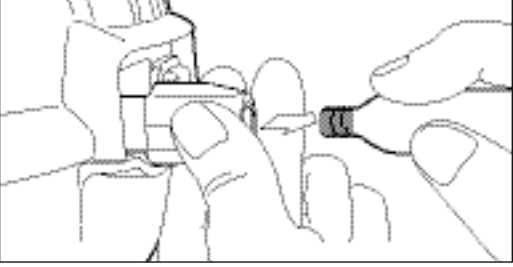

Unscrew the Quick Clear cartridge first, then unscrew Quick Clear adapter and discard the spent Quick Clear cartridge. Remember to keep the Quick Clear adapter for future use.

Problem	Possible Cause	Solutions
Unit won't start Red LED light flashing slowly	1. Propane tank may be empty. 2. If propane tank is new and has been newly filled it must be purged. 3. There could be a loose connecton. 4. If tank has been opened too quickly, security check valve may have been triggered. 5. Fuel line maybe blocked by propane contaminants.	1. Weigh tank and check against "empty" weight written on tank. 2. Bring tank to filling location. Air may be in fuel line. Ask for tank to be purged. <i>Hint: If you have another propane powered device operating on a standard, 20 lb propane tank, try hooking that tank up to the Liberty Plus to verify that the issue is with your tank.</i> 3. Verify all connections. Make sure propane tank valve is fully open. 4. Refer to Gas Reset Tool Instructions on page 11. 5. Use Quick Clear valve.
Unit won't stay running	1. 'Possible Causes' 1 & 3 above may apply. 2. Fuel line may be blocked by propane contaminants. 3. Regulator is not fully engaged.	1. Go through above steps 1 & 3. 2. See Quick Clear valve instructions on page 9. 3. See Tank Changing Tips on page 7.
Low or No Catch	If not getting bitten 1. Insects may not be out yet. If getting bitten 2. Trap placement issue. 3. Biting insect reproductive cycles have not yet been broken. 4. Counterflow may be disrupted.	1. Verify temperature is consistently over 50°F (10°C). 2. Follow steps in the "Trap Placement" section of your owner's manual or refer to your trap Placement CD included with your Liberty Plus. 3. Keep trap in constant operation 24 hours/day, 7 days per week for at least 4-6 weeks to reduce the mosquito population. 4. Air flow may be restricted. Call Customer Service at: 1-877-699-8727.
LED Flashing alt RED/GREEN	High Temp	1. Turn off trap and allow to cool for 1/2 hour. Then restart. If code continues, call Customer Service at: 1-877-699-8727.
LED Flashing alt RED/ORANGE	Battery Voltage Low	1. Make sure you have charged the battery for 24 hours before starting trap for the first time out of the box, and the first time before each season. 2. Check all battery connections, make sure they are fully inserted. 3. After several repeated unsuccessful attempts to start your Mosquito Magnet® the battery may need to be recharged.
Red LED light flashing quickly	Thermister fault	1. Contact Tech support at 1-877-699-8727
LED light solid red	Electrical fault	1. Contact Tech support at 1-877-699-8727

Gas Reset Tool Instructions

Gas Reset Tool (patent pending) should be used every time tank is refilled, before connecting tank to regulator. If your Liberty Plus fails to start, it may be the result of poor gas flow from the propane tank through the regulator to the trap. The Gas Reset Tool has been designed to reset the internal mechanisms of the propane regulator and release any back pressure from your propane tank. Please follow these steps:

⚠ CAUTION: Extinguish all smoking materials prior to use of Gas Reset Tool.
For Customer Service: 1-877-699-8727


1. Shut down your Liberty Plus.
2. Completely close the propane tank valve by turning to the "OFF" position. (turn valve clockwise)
3. Disconnect the regulator from the propane tank valve.
4. Screw the threaded end of the reset tool into the propane tank valve until it is fully engaged. You may hear a small "hiss" sound. This is the pressure being released from the propane tank.
Note: the threads in the tank valve are left handed threads. (turn valve counter clockwise)
5. Screw the regulator connector to the opposite end of the reset tool until fully engaged.
Note: hold the reset tool to prevent it from backing out of the tank.
6. The regulator and propane tank are now reset.
Disconnect the reset tool from the regulator connector and the propane tank.
7. Re-attach regulator connector to the propane tank valve.
8. Slowly turn the propane tank valve on .
9. Restart your trap.

Customer Service


All of us at American Biophysics® want you to get complete satisfaction from your Liberty Plus. Should you have any problems you cannot resolve, simply call one of our trained Customer Service Representatives at **1-877-699-8727**.

We will help you get up and running.


Step 3 - Disconnect Regulator

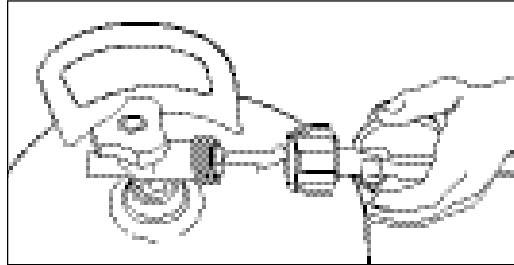

Step 4 - Screw in Threaded End of Reset Tool

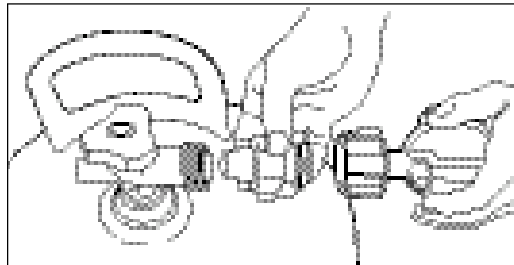

Step 5 - Connect Regulator into Reset Tool

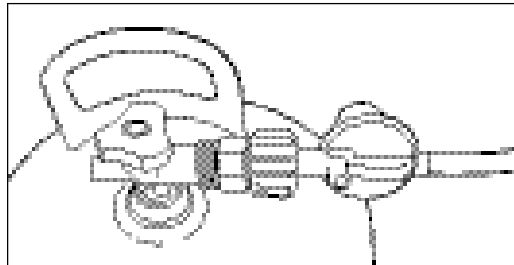

Limited Warranty

This warranty, (1) year from the purchase of the unit, is extended only to the original purchaser/user of products.

American Biophysics Corp. warrants its products to be free from defects in materials and workmanship for the warranty period by the original purchaser/user.

For warranty service, please contact American Biophysics' Technical Center (877-699-8727). Please indicate the nature of the defect.

If American Biophysics Corp. determines there may be a defect, American Biophysics Corp. will issue a return authorization (RMA) number. The defective unit or parts must be returned for warranty inspection using the RMA number, when applicable, as identification within (30) days of return authorization date. DO NOT return products to our factory without our prior consent, as they, as well as C.O.D. shipments will be refused. American Biophysics Corp., at its option, shall replace the unit, replace the defective part(s) and return such unit to you. American Biophysics Corp.'s sole obligation and your exclusive remedy under this warranty shall be limited to such replacement.

LIMITATIONS AND EXCLUSIONS: The warranty shall not apply to problems arising from normal wear, or failure to adhere to the enclosed instructions. In addition, the foregoing warranty shall not apply to serial numbered products if the serial number has been removed or defaced; products subject to negligence, accident, improper operation, maintenance or storage; products damaged by circumstances beyond American Biophysics Corp.'s control; or products modified (including, but not limited to modifications through the use of unauthorized parts or attachments) or repaired by anyone other than American Biophysics Corp. or its designee.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IT SHALL NOT EXTEND BEYOND THE DURATION OF THE EXPRESS WARRANTY PROVIDED HEREIN, AND THE REMEDY FOR VIOLATIONS OF ANY WARRANTY SHALL BE LIMITED TO REPAIR OR REPLACEMENT OF THE DEFECTIVE PRODUCT PURSUANT TO THE TERMS CONTAINED HEREIN. AMERICAN BIOPHYSICS CORP. SHALL NOT BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES WHATSOEVER.

This warranty gives you specific legal rights and you may also have other legal rights which may vary based on location.

This warranty is valid only in the United States. Warranty information for countries other than the United States is available by contacting American Biophysics Corp. International Department at (401) 884-3500.

Product Registration

PLEASE FOLD AND SEAL WITH TAPE ALONG OPEN END. DO NOT USE STAPLES

Place
First-Class
Stamp
Here

Mail completed form today or register on-line at www.mosquitomagnet.com

First Name	Last Name	
Address	City	
State/Province	Zip Code	Country
Phone Number	Email Address	

1. How did you find out about the Mosquito Magnet (check all that apply)?

- ☐ Radio Ad
- ☐ Direct Mail
- ☐ TV Ad
- ☐ Friend/Family
- ☐ Website
- ☐ Magazine Ad
- ☐ Newspaper Ad
- ☐ News Article (newspaper, magazine, TV, etc.)
- ☐ Frontgate
- ☐ In-Store Display
- ☐ Other

2. In your household who decided to purchase the Mosquito Magnet?

- ☐ Male
- ☐ Female
- ☐ Both

3. What is your marital status?

- ☐ Married
- ☐ Single

4. Are there any children in your household?

- ☐ Yes
- ☐ No

5. What are the two most important reasons influencing this purchase?

- ☐ Protection from mosquitoes that may transmit disease
- ☐ Science/technology behind product
- ☐ Recommendation of friend/family member
- ☐ Recommendation of salesperson
- ☐ Reputation of quality
- ☐ Comfort
- ☐ Received as gift
- ☐ Other

6. What is your age?

- ☐ 25 – 35
- ☐ 36 – 45
- ☐ 46 – 55
- ☐ 56 – 70
- ☐ 70+

7. What is your level of education?

- ☐ High School Diploma
- ☐ College Degree
- ☐ Graduate Degree
- ☐ Doctoral Degree
- ☐ Technical/Professional

8. Which best describes the size of your yard?

- ☐ 1/4 – 1/2 acre
- ☐ 1/2 – 3/4 acre
- ☐ 3/4 – 1 acre
- ☐ 1 – 2 acres

9. What is your annual household income?

- ☐ \$25,000 – 40,000
- ☐ \$40,000 – 60,000
- ☐ \$60,000 – 90,000
- ☐ Over \$90,000

10. What other brands of insect abatement have you tried?

- ☐ Zappers
- ☐ Sprays
- ☐ Pesticides
- ☐ Other CO₂ Traps, Name: _____

11. Would you consider giving a testimonial once you are thoroughly convinced of the effectiveness of the Mosquito Magnet?

- ☐ Yes
- ☐ No

12. Would you recommend the Mosquito Magnet to a friend?

- ☐ Yes
- ☐ No

13. Were the assembly directions and operation instructions explained clearly and simply?

- ☐ Yes
- ☐ No

14. Did you require customer service?

- ☐ Yes
- ☐ No

Consumer Confidentiality: All of the information that has been gathered on this reply card is solely for the internal sales and marketing efforts of American Biophysics Corporation. None of the information that you may have provided will be sold, rented or leased to any other company, organization or agency for any purpose whatsoever. None of this information will be posted on our company website or any other vehicle that can be obtained by the public domain. If you wish to make additional comments or testimonials about our product, please address them separately and send them to our Marketing Department at the address listed inside the manual.

American Biophysics® Corporation
140 Frenchtown Rd.
North Kingstown, RI 02852

NECESSARY INFORMATION

In order to properly register your product with American Biophysics® Corporation, the following information is required.

Model: *Circle One*

Garden	Defender	Liberty
Liberty Plus	Pro	Pro Plus

Serial Number:

Date of purchase:



1440-604 Rev. B

Cordless *LibertyPlus*

Operation Manual

Your trap will begin working immediately. See noticeable results in as little as 7 – 10 days, but allow 4 – 6 weeks to significantly reduce the mosquito population in your yard.



American Biophysics Corporation
140 Frenchtown Rd.
North Kingstown, RI 02852
1-877-699-8727
www.mosquitomagnet.com

Patents:
US Patents: No. 6,145,243, No. 6,298,249
Canadian Patents: No. 2,295,944, No. 2,322,038
European Patents: No. 1,011,324
Other patents pending

Made in the USA



GAS-FIRED
UL
C[®] US
LISTED
Gas Fired Insect
Control Equipment
47WB

For Outdoor Use Only