



APC-3228A

Panel PC User Manual

Release Date

Revision

Aug. 2012

V1.0

©2012 Aplex Technology, Inc.

All Rights Reserved.

Published in Taiwan

Aplex Technology, Inc.

15F-1, No.186, Jian Yi Road, Zhonghe District, New Taipei City 235, Taiwan

Tel: 886-2-82262881 Fax: 886-2-82262883 E-mail: aplex@aplex.com.tw URL: www.aplex.com.tw

Warning!

This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions manual, it may cause interference to radio communications. It has been tested and found to comply with the limits for a Class A computing device pursuant to FCC Rules, which are designed to provide reasonable protection against such interference when operated in a commercial environment. Operation of this equipment in a residential area is likely to cause interference in which case the user at his own expense will be required to take whatever measures may be required to correct the interference.

Electric Shock Hazard – Do not operate the machine with its back cover removed. There are dangerous high voltages inside.

Disclaimer

This information in this document is subject to change without notice. In no event shall Apex Technology Inc. be liable for damages of any kind, whether incidental or consequential, arising from either the use or misuse of information in this document or in any related materials.

Packing List

Accessories (as ticked) included in this package are:
<input type="checkbox"/> AC power cable
<input type="checkbox"/> Driver & manual CD disc
<input type="checkbox"/> Other. _____ (please specify)

Safety Precautions

Follow the messages below to prevent your systems from damage:

- ◆ Avoid your system from static electricity on all occasions.
- ◆ Prevent electric shock. Don't touch any components of this card when the card is power-on. Always disconnect power when the system is not in use.
- ◆ Disconnect power when you change any hardware devices. For instance, when you connect a jumper or install any cards, a surge of power may damage the electronic components or the whole system.

Table of Contents

Warning!	2
Disclaimer	2
Packing List	3
Safety Precautions	3

Chapter 1 **Getting Started**

1.1 Specifications	6
1.2 Dimensions	7
1.3 Installation of HDD	8
1.4 Installation of PCI Add-on	10
1.5 Brief Description	11
1.6 Panel Mounting	12

Chapter 2 **Hardware**

2.1 Mainboard	13
2.2 Installations	14
2.2.1 Jumpers Setting and Connectors	14

Chapter 3 **BIOS Setup**

3.1 Operations after POST Screen	39
3.2 BIOS SETUP UTILITY	40
3.3 System Overview	40
3.4 Advanced Settings	41
3.5 Advanced PCI/PnP Settings	50
3.6 Boot Settings	52
3.7 Security Settings	54
3.8 Advanced Chipset Settings	56
3.9 Exit Options	63

Chapter 4 **Installation of Drivers**

4.1 Intel Chipset Driver	66
4.2 Intel Graphics Media Accelerator Driver	69
4.3 Intel 82574L LAN Device Driver	73
4.4 Realtek ALC662 HD Audio Driver Installation	76
4.5 Microsoft .NET Framework 3.5 Service Installation	78

5.1 Introduction to Controller Board.....	81
5.2 Windows 2000/XP USB Driver Installation for 5000 Boards.....	81

Figures

Figure 1.1: APC-3228A Dimensions.....	7
Figure 1.2: Front View.....	11
Figure 1.3: Rear View.....	11
Figure 1.4: Panel mounting.....	12
Figure 1.5: VESA mounting.....	12
Figure 2.1: Mainboard Dimensions.....	13
Figure 2.2: Jumpers and Connectors Location_ Board Top.....	14
Figure 2.3: Jumpers and Connectors Location_ Board Bottom.....	15
Figure 5.1 Birdeye's View of Control Board.....	81

1.1 Specifications

Specs	APC-3228A
CPU	Intel socket P, support Intel T3100 1.9GHz and up to Intel P8600 2.4GHz Processor
Chipset	Intel GM45 + ICH9M
System Memory	2 x 204 Pin SO-DIMM, up to 8GB DDR 3 800/1066MHz FSB
Display Size	1920x1080
Maximum Colors	16.7M
Viewing Angle (Degree)	H:170 / V:160
Luminance (cd/m ²)	400
Backlight Lifetime	40,000 Hours
Rating	Front Panel IP65
Touch Screen Type	Resistive Type (option)
Outside I/O port	4 x USB 2.0 connectors 2 x GbE LAN connectors 1 x Audio Line out/MIC in 1 x VGA 1 x HDMI port 2 x RS-232 (COM1/COM2) 1 x DB9 RS-422/485 Default RS-485 (COM3) 1 x Terminal block for additional power switch 2 x LED light for power and HDD indication 1 x Rocker Switch for Power ON/OFF
Extension	1 x PCI Expansion Slot
Storage	1 x CF slot internal for option 1 x 2.5" SATA HDD Space
Power Supply	9~32V DC
Construction	Steel chassis
Dimensions (WxHxD)	557 x 362 x 100.3 mm
Operating Temperature	-10~50°C
Storage Temperature	-20~60°C
Relative Humidity	10%~90%@ 40°C, non-condensing
Certificate	CE / FCC Class A

1.2 Dimensions


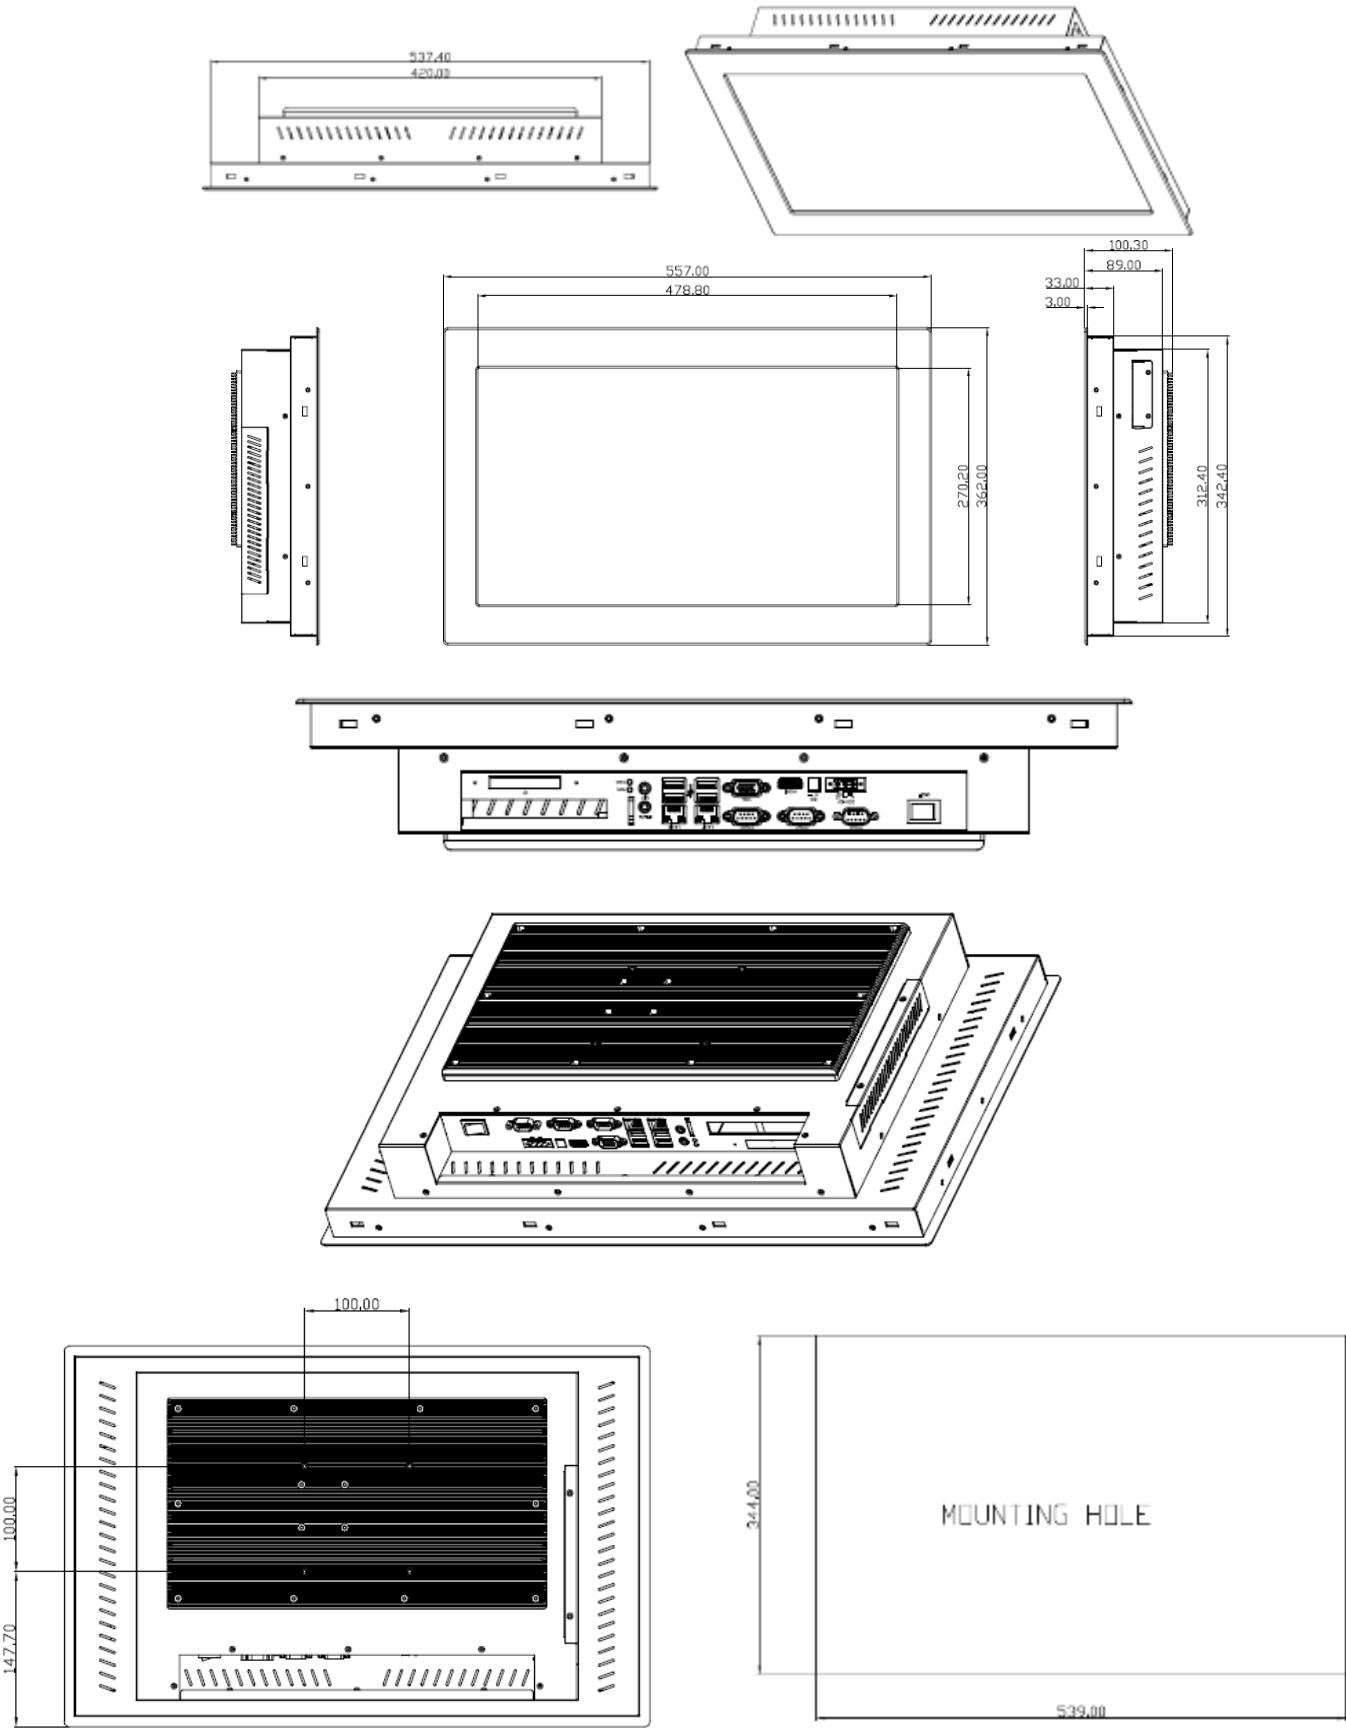


Figure 1.1: Dimensions of the APC-3228A

1.3 Installation of HDD

Step 1

There are 2 screws to deal with when Installing of HDD.

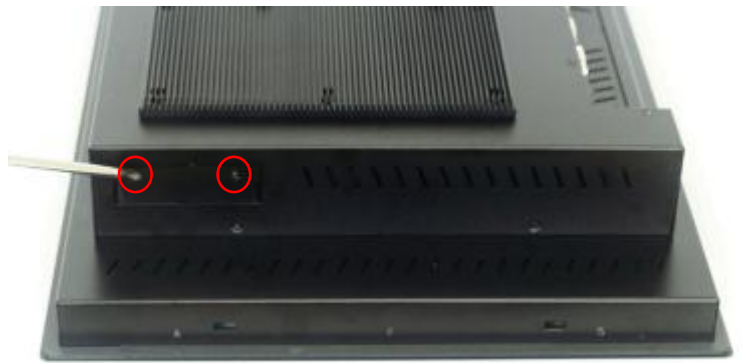

Step 2

Loosen screw and draw the HDD bracket out as shown in the picture.



Step 3

Tighten four screws as shown in the picture



Step 4

Push into the HDD bracket as shown in the picture.



Step 5

Tighten the 2 screws as shown in the picture. That's how it should look after it has been installed.



1.4 Installation of PCI Add-on

Step 1

There are 2 screws to deal with when enclosing or removing the chassis.



Step 2

Now slide the addon into the PCI slot, making sure the golden part faces the slot. When the part that is interfaced together come into the right contact, slightly push the addon into the rail of the slot.



Step 3

After sliding the addon into the PCI expansion slot, get the one screw as circled tightened to finish the connection.



Step 4

To finish the job, just fasten the 2 screws as shown in the picture.



1.5 Brief Description of the APC-3228A

The APC-3228A is a high performance, compact and panel-mount industrial PC, which comes with a 21.5-inch (luminance of 400 cd/m²) TFT LCD. It is powered by an Intel Socket P Core 2 Duo Processor, up to Intel P8600 2.4GHz processor. The industrial panel PC also features one PCI expansion slot, three COM ports, four USB 2.0 ports, one 2.5" HDD, one CF slot internal for option, and 9~32V DC, etc. It is ideal for use as a PC-based controller for Automotive, Logistic Process, Materials Handling, and Kiosk applications.



Figure 1.2: Front View of APC-3228A



Figure 1.3: Rear View of APC-3228A

1.6 Panel Mounting of the APC-3228A

The APC-3228A panel PC is designed to be panel-mounted as shown in Figure 1.4. Just carefully place the unit through the hole and tighten the given 10 screws from the rear to secure the mounting.

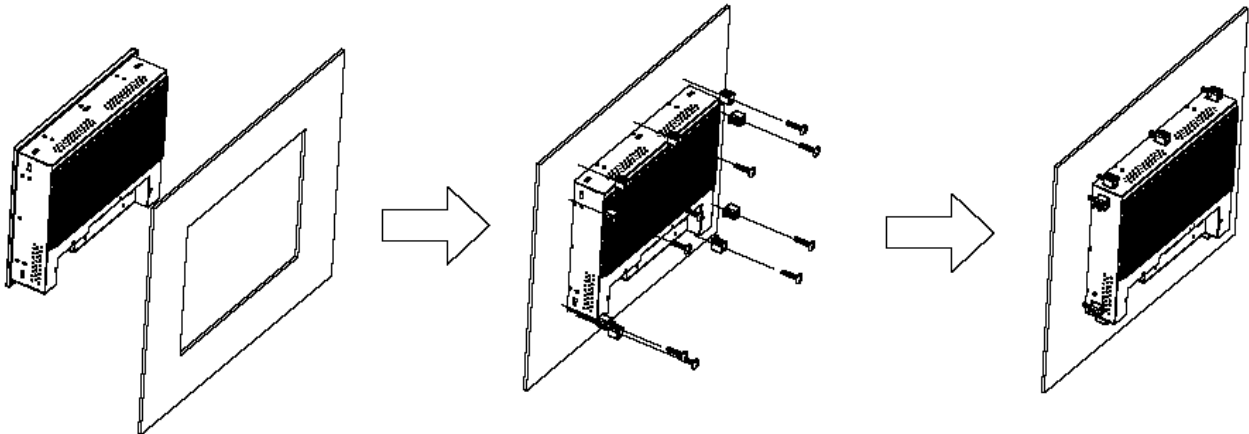


Figure 1.4: Panel mounting of the APC-3228A


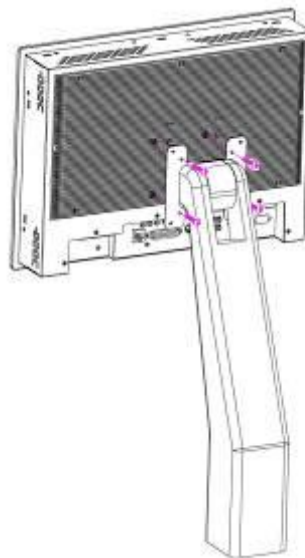


Figure 1.5: VESA mounting of the APC-3228A

Hardware

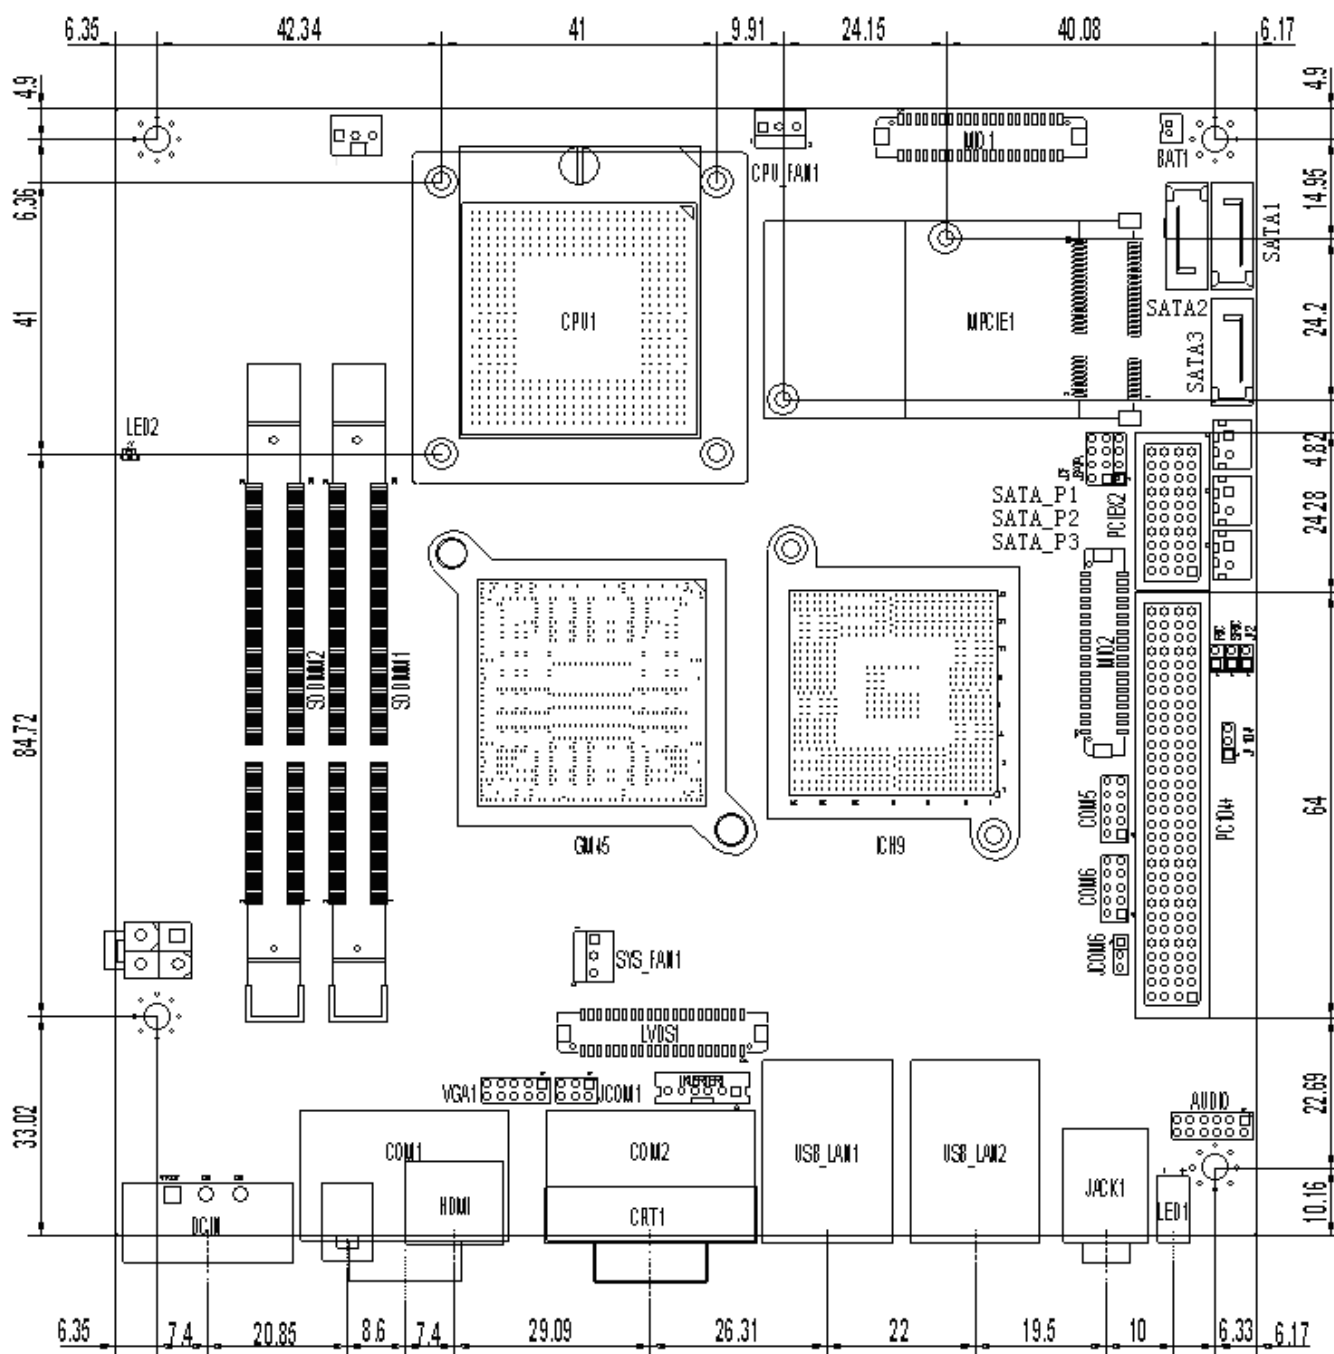

2.2 Installations

ASB-M801 is a Mini-ITX industrial motherboard developed on the basis of Intel GM45 and ICH9M, which provides abundant peripheral interfaces to meet the needs of different customers. Also, it features dual 1000M LAN port, 6-COM port and one Mini PCIE configuration. To satisfy the special needs of high-end customers, PC104+ port (capable of adjusting IO voltage) richer extension functions. The product is widely used in various sectors of industrial control.

2.2.1 Jumpers Setting and Connectors

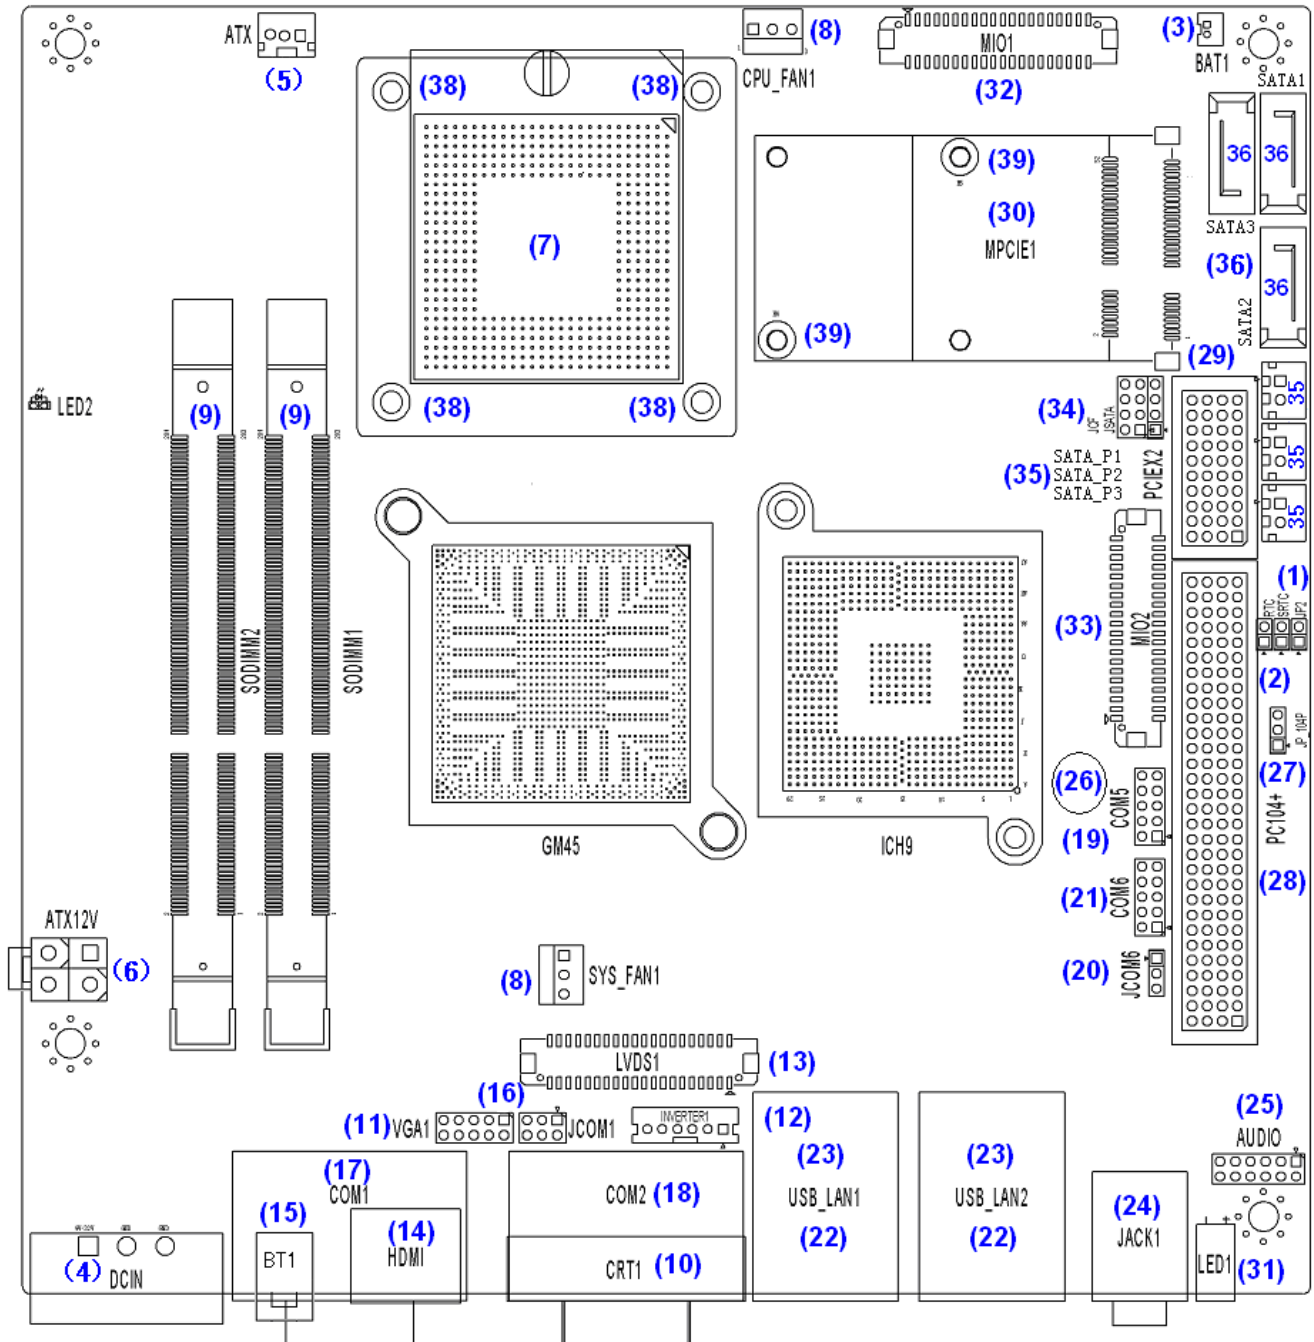


Figure 2.2: Jumpers and Connectors Location_ Board Top

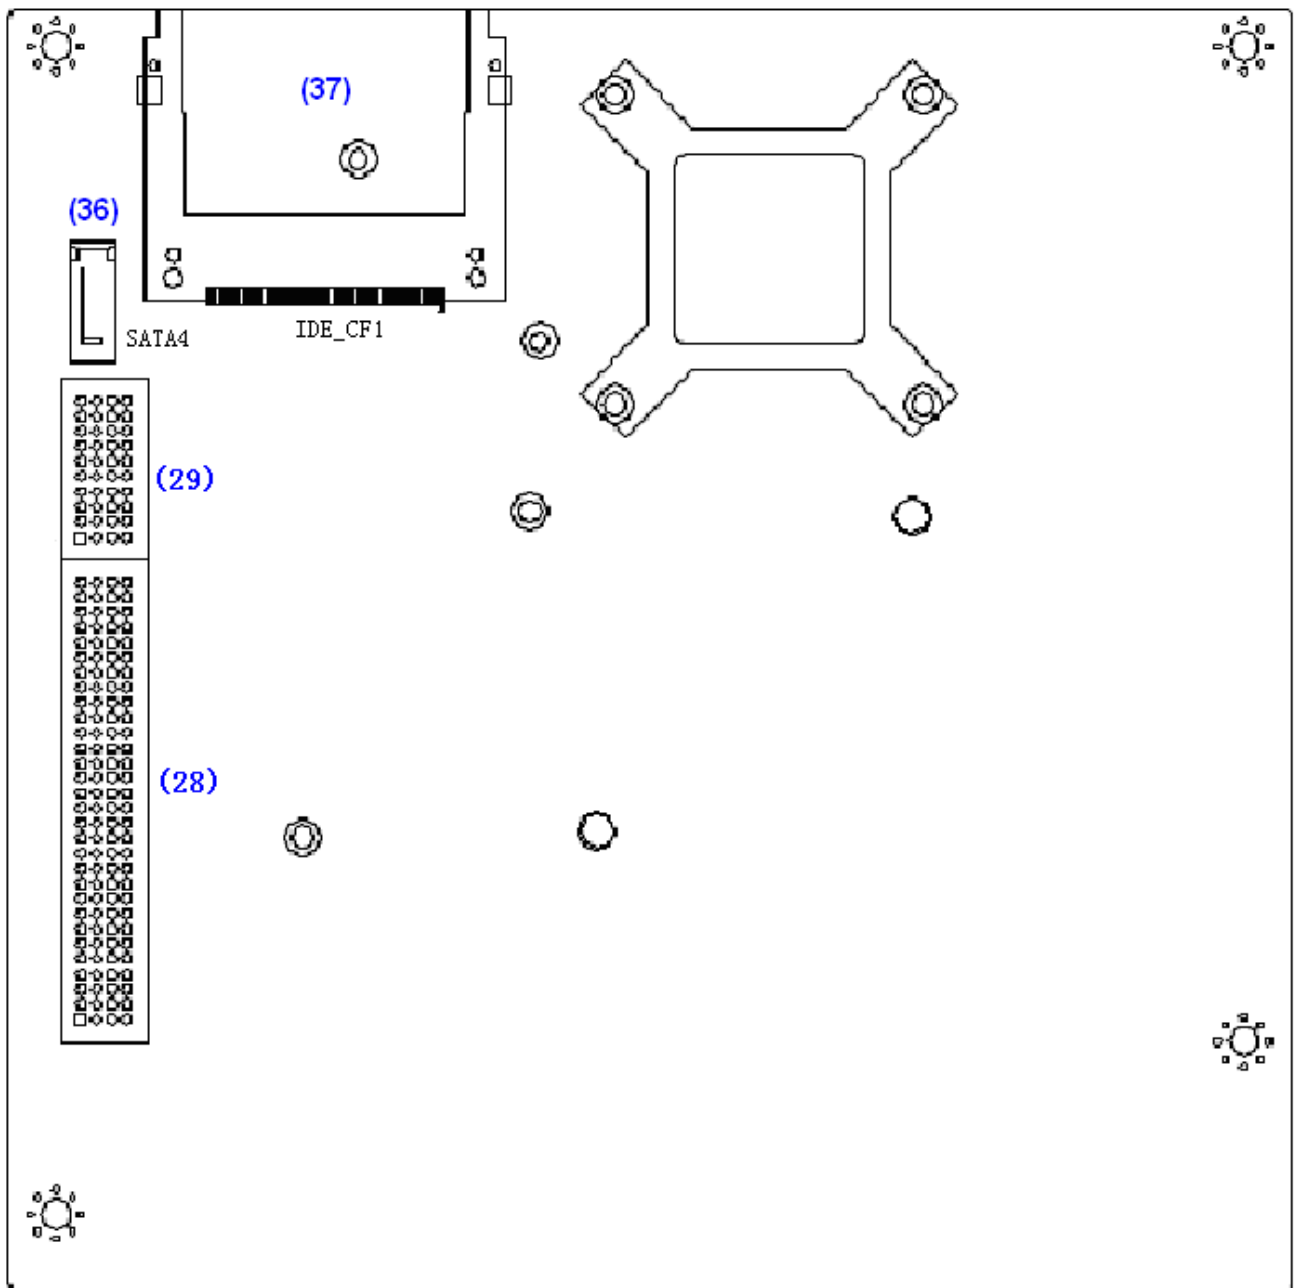


Figure 2.3: Jumpers and Connectors Location_ Board Bottom

1. DCIN:

(5.08mm Pitch 1x3 Pin Connector),DC9V ~ DC32V System power input connector °




Pin#	Power Input
Pin1	DC+9V~32V
Pin2	Ground
Pin3	PG

Power Mode	Location : DCIN (5.4.4.)	Location: ATX12V (5.4.5.)	Location: ATX (5.4.6.)
AT (Default)	input DC9~32V	output DC 12V	NC

2. ATX12V:

(2x2 Pin Connector),DC12V System power **output** connector.



Pin#	Power output
Pin1	Ground
Pin2	Ground
Pin3	DC+12V
Pin4	DC+12V

3. ATX (option):


(2.0mm Pitch 1X3 box Pin Header), connect PSON and 5VSB and Ground

signal,support ATX Power model. Reserved.

Pin#	Signal Name
Pin1	ATX PSON
PIN2	ATX Ground
PIN3	ATX 5VSB


4. CPU1:

(Socket P), installing the CPU Socket.

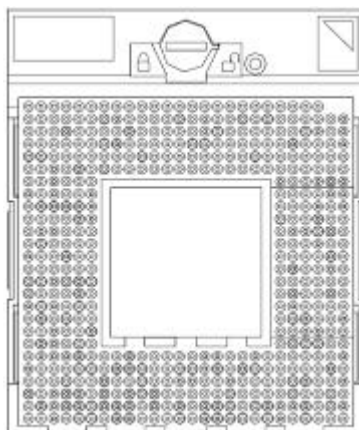

5. CPU_FAN1/SYS_FAN1:

(2.54mm Pitch 1x3 Pin Header), Fan connector, cooling fans can be connected directly for use. You may set the rotation condition of cooling fan in menu of BIOS CMOS Setup.



Pin#	Signal Name
1	Ground
2	VCC
3	Rotation detection



Note:


Output power of cooling fan must be limited under 5W.

6. SODIMM1/SODIMM2:

(SO-DIMM 204Pin socket), DDRIII memory socket, the socket is located at the Top of the board and supports 204Pin 1.5V DDRIII 800/1066MHz FSB SO-DIMM memory module up to 8GB.

7. CRT1:

(CRT DB15 Connector),Video Graphic Array Port, provide high-quality video output.
they can not work at the same time for CRT1 and VGA1.




8. VGA1:

(CRT 2.0mm Pitch 2X5 Pin Header), Video Graphic Array Port, Provide 2x5Pin cable to VGA Port, **they can not work at the same time for CRT and VGA1.**

Signal Name	Pin#	Pin#	Signal Name
CRT_RED	1	2	Ground
CRT_GREEN	3	4	Ground
CRT_BLUE	5	6	VGA_EN
CRT_H_SYNC	7	8	CRT_DDCCDATA
CRT_V_SYNC	9	10	CRT_DDCCCLK

9. INVERTER1:

(2.0mm Pitch 1x6 box Pin Header), Backlight control connector for LVDS1.



Pin#	Signal Name
1	+DC12V
2	+DC12V
3	Ground
4	Ground
5	BKLT_EN
6	BKLT_CTRL



Note:

Pin6 is backlight control signal, support DC or PWM mode, mode select at BIOS CMOS menu.

10. LVDS1:

(1.25mm Pitch 2x20 Connector), For 18/24-bit LVDS output connector, Fully supported by Intel GM45 chipset, the interface features dual channel 18/24-bit output.

Signal Name	Pin#	Pin#	Signal Name
VDD5	2	1	VDD5
Ground	4	3	Ground
VDD33	6	5	VDD33
LB_D0_N	8	7	LA_D0_N
LB_D0_P	10	9	LA_D0_P
Ground	12	11	Ground
LB_D1_N	14	13	LA_D1_N
LA_D1_P	16	15	LA_D1_P
Ground	18	17	Ground
LB_D2_N	20	19	LA_D2_N
LB_D2_P	22	21	LA_D2_P
Ground	24	23	Ground
LB_CLK_N	26	25	LA_CLK_N
LB_CLK_P	28	27	LA_CLK_P
Ground	30	29	Ground
DS_DDC_DATA	32	31	LVDS_DOC_CLK
Ground	34	33	Ground
LB_D3_N	36	35	LA_D3_N
LB_D3_P	38	37	LA_D3_P
NC	40	39	NC

11. HDMI:

(HDMI 19P Connector), High Definition Multimedia Interface connector.



12. BT1:

POWER on/off Button, They are used to connect power switch button. The two pins are disconnected under normal condition. You may short them temporarily to realize system startup & shutdown or awaken the system from sleep state.


13. JCOM1:

(2.0mm Pitch 2x3 Pin Header), COM1 jumper setting, pin 1~6 are used to select signal out of pin 9 of COM1 port.

JP3 Pin#	Function
Close 1-2	COM1 RI (Ring Indicator) (default)
Close 3-4	COM1 Pin9=+5V (option)
Close 5-6	COM1 Pin9=+12V (option)

14. COM1:


(Type DB9), Rear serial port, standard DB9 Male serial port is provided to make a direct connection to serial devices. COM1 port is controlled by pins No.1~6 of JCOM1, select output Signal RI or 5V or 12v, For details, please refer to description of JCOM1.



Pin#	Signal Name
1	DCD# (Data Carrier Detect)
2	RXD (Received Data)
3	TXD (Transmit Data)
4	DTR (Data Terminal Ready)
5	Ground
6	DSR (Data Set Ready)
7	RTS (Request To Send)
8	CTS (Clear To Send)
9	JCOM1 select Setting

15. COM2:

(Type DB9), Rear serial port, standard DB9 Male serial port is provided to make a direct connection to serial devices.



Pin#	Signal Name
1	DCD# (Data Carrier Detect)
2	RXD (Received Data)
3	TXD (Transmit Data)
4	DTR (Data Terminal Ready)
5	Ground
6	DSR (Data Set Ready)
7	RTS (Request To Send)
8	CTS (Clear To Send)
9	RI (Ring Indicator)

16. COM5:

(2.0mm Pitch 2X5 Pin Header), COM5 Port, standard RS232 ports are provided. They can be used directly via COM cable connection.

Signal Name	Pin#	Pin#	Signal Name
DCD	1	2	RXD
TXD	3	4	DTR
Ground	5	6	DSR
RTS	7	8	CTS
RI	9	10	NC

17. JCOM6:

(2.0mm Pitch 1x3 Pin Header) COM6 setting jumper, pin 1~3 are used to select signal out of pin 10 of COM6 port.

JP1 Pin#	Function
Close 1-2	COM5 Pin10=+5V (default)
Close 2-3	COM5 Pin10=+12V (option)


18. COM6:

(2.0mm Pitch 2X5 Pin Header), COM6 Port, standard RS232 ports are provided. They can be used directly via COM cable connection. COM6 port is controlled by pins No. [1~3](#) of JCOM6, select output Signal 5V or 12v, For details, please refer to description of **JCOM6**.

Signal Name	Pin#	Pin#	Signal Name
DCD	1	2	RXD
TXD	3	4	DTR
Ground	5	6	DSR
RTS	7	8	CTS
RI	9	10	JCOM6 select Setting

19. USB4/USB5/USB6/USB7:

(Double stack USB type A), Rear USB connector, it provides up to 4 USB2.0 ports, speed up to 480Mb/s.

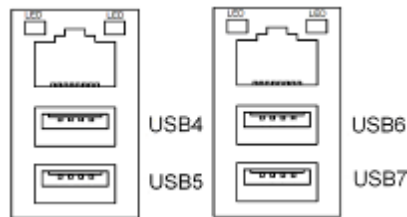


Each USB Type A Receptacle (2 Ports) Current limited value is 1.5A.

If the external USB device current exceeds 1.5A, please separate connectors into different Receptacle.


20. LAN1/LAN2:

(RJ45 Connector), Rear LAN port, Two standard 10/100/1000M RJ-45 Ethernet ports are provided. Used Intel 82574L chipset, LINK LED (green) and ACTIVE LED (yellow) respectively located at the left-hand and right-hand side of the Ethernet port indicate the activity and transmission state of LAN.

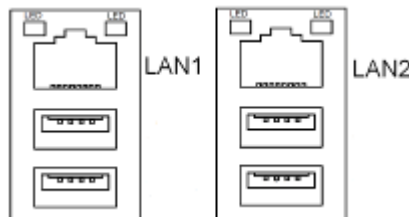

21. JACK1:

(Diameter 3.5mm Double stack Jack), HD Audio port, An onboard Realtek ALC662 codec is used to provide high quality audio I/O ports. Line Out can be connected to a headphone or amplifier, MIC is the port for microphone input audio.



22. AUDIO:

(2.0mm Pitch 2X6 Pin Header), Front Audio, An onboard Realtek ALC662 codec is used to provide high-quality audio I/O ports. Line Out can be connected to a headphone or amplifier. Line In is used for the connection of external audio source via a Line in cable. MIC is the port for microphone input audio.

Signal Name	Pin#	Pin#	Signal Name
FRONT_OUTP-L	1	2	FRONT_OUTP_R
FRONT_OUTN_L	3	4	FRONT_OUTN_R
FRONT_JD	5	6	LINE1_JD
LINE_IN_L	7	8	LINE1_IN_R
MIC2_IN_L	9	10	MIC2_IN_R
Ground	11	12	MIC2_JD

23. BZ:

Onboard buzzer.

24. JP_104P:

(2.0mm Pitch 1X3 Pin Header) PC104+ port voltage selection jumper, select voltage for PCI-104 Plus devices. **The default for this jumper is “all open”, meaning the user must select the voltage to be used.**

JP_104P Pin#	PC104+ VIO Voltage
All Open	Default
Close 1-2	+3.3V PCI Card
Close 2-3	+5V PCI Card

25. PC104+ (option):

(4x30 Pin), PC104 plus connector, it conforms to standard PC104+ specification. Can expand support four PCI devices.

ASB-M801T/ET : PC104+ connector in the top.

ASB-M801B/EB : PC104+ connector in the Bottom.

26. PCIEX2 (option):

(4x10 Pin), PCIe bus connector, it conforms to standard PCI Express x1 specification. Can expand support two PCIe devices.

ASB-M801T/ET : PCIEX2 connector in the top.

ASB-M801B/EB : PCIE X2 connector in the Bottom.

MODEL	PC104+ / PCIE X2
ASB-M801T	Top
ASB-M801ET	Top
ASB-M801B	Bottom
ASB-M801EB	Bottom

27. MPCIE1:

(Socket 52Pin), mini PCIe socket, it is located at the top, it supports mini PCIe devices with USB2.0, SMBUS and PCIe signal. MPCie card size is 30x30mm or 30x50.95mm.

28. LED1:

LED STATUS. Green LED for Motherboard Standby Power Good status, Yellow LED for HDD status.

29. MIO1:

(DF13-40P Connector), For expand output connector, It provides two RS232 ports or one RS485 port, three USB ports, one power led, one power button, via a dedicated cable connected to **TB-522 MIO1** or **TB-523 MIO1**.

Function	Signal Name	Pin#	Pin#	Signal Name	Function
COM3	422RX+	1	2	485+ / 422TX+	COM3 RS422 or RS485
	422RX-	3	4	485- / 422TX-	
	Ground	5	6	NC	
	NC	7	8	NC	
	5V_S5	9	10	5V_S5	
COM4	DCD4-	11	12	RXD4	COM4
	TXD4	13	14	DTR4-	
	Ground	15	16	DSR4-	
	RTS4-	17	18	CTS4-	
	RI4-	19	20	5V_S5	
USB9	5V_S5	21	22	5V_USB_1011	USB10
	USB9_N	23	24	USB10_N	
	USB9_P	25	26	USB10_P	
	Ground	27	28	Ground	
	Ground	29	30	Ground	
	5V_USB_1011	31	32	PWR_LED+	Power LED

USB11	USB11_N	33	34	PWR_LED-	Power Button
	USB11_P	35	36	MIO_PSON	
	Ground	37	38	Ground	
	Ground	39	40	Ground	

30. MIO2:

(DF13-40P Connector), Front panel connector.

Function	Signal Name	Pin#	Pin#	Signal Name	Function
H_LED+	HDD_LED	1	2	PWR-LED	P_LED+
	USB01_OC-	3	4	Ground	P_LED-
	USB23_OC-	5	6	MIO_PSON-	PSON+
RESET+	RESET	7	8	Ground	PSON-
BUZZER+	BUZZER+	9	10	BUZZER-	BUZZER-
GPIO_IN_1	ICH9M-GPIO 10	11	12	ICH9M-GPIO1 8	GPIO_OUT_ 1
GPIO_IN_2	ICH9M-GPIO 13	13	14	ICH9M-GPIO2 0	GPIO_OUT_ 2
GPIO_IN_3	ICH9M-GPIO 14	15	16	ICH9M-GPIO3 3	GPIO_OUT_ 3
GPIO_IN_4	ICH9M-GPIO 17	17	18	ICH9M-GPIO3 4	GPIO_OUT_ 4
PS2_K/B	Ground	19	20	5V_S5	PS2_Mouse
	Ps2_KBDATA	21	22	PS2_MSDATA	
	PS2_KBCLK	23	24	PS2_MSCLK	
USB2	5V_S5_USB	25	26	5V_S5_USB	USB3
	USB2_N	27	28	USB3_N	
	USB2_P	29	30	USB3_P	
	Ground	31	32	Ground	
USB0	5V_S5_USB	33	34	5V_S5_USB	USB1
	USB0_N	35	36	USB1_N	
	USB0_P	37	38	USB1_P	
	Ground	39	40	Ground	

Pin1+ Ground: **HDD LED**, They are used to connect hard disk activity LED. The LED blinks when the hard disk is reading or writing data.

Pin2+Pin4: **POWER LED**, They are used to connect power LED. When the system is powered on or under S0/S1 state, the LED is normally on, when the system is under S4/S5 state, the LED is off.

Pin3: **USB01 OC-**, “USB01_OC-“ Signal.

Pin5: **USB23 OC-**, “USB23_OC-“ Signal.

Pin7+Ground: **RESET Button**, They are used to connect reset button. The two pins are disconnected under normal condition. You may short them temporarily to realize system reset.

Pin6+Pin8: **POWER on/off Button**, They are used to connect power switch button. The two pins are disconnected under normal condition. You may short them temporarily to realize system startup & shutdown or awaken the system from sleep state.

Pin9+Pin10: **BUZZER**, They are used to connect an external buzzer.

Pin11~Pin18: **GPIO IN/GPIO OUT**, General-purpose input/output port, it provides a group of self-programming interfaces to customers for flexible use.

Pin19~Pin24: **PS2 KB/MS**, PS/2 keyboard and mouse port, the port can be connected to PS/2 keyboard and mouse via a dedicated cable for direct used.

Pin25~40: **USB0/USB1/USB2/USB3**, Front USB connector, it provides 4 USB ports via a dedicated USB cable, speed up to 480Mb/s.





Note:

When connecting LEDs and buzzer and GPIO and USB, pay special attention to the signal polarity. Make sure that the connector pins have a one-to-one correspondence with chassis wiring, or it may cause boot up failure.

31. JCF/JSATA(option):

(2.0mm Pitch 3x4 Pin Header), it provides selectable IDE_CF1 or SATA4 signal output control.

Function	Jumper setting
Default	All open

SATA4 (option)	
IDE_CF 1 (option)	

32. SATA_P1/SATA_P2/SATA_P3:

(2.5mm Pitch 1x2 box Pin Header), Two onboard 5V output connectors are reserved to provide power for SATA devices.

Pin#	Signal Name
1	+DC5V
2	Ground



Note:

Output current of the connector must not be above 1A.

33. SATA1/SATA2/SATA3/SATA4:


(SATA 7P), SATA Connectors, Four SATA connectors are provided, with transfer speed up to 3.0Gb/s.

ASB-M801ET/EB: SATA1/SATA2/SATA3 drives supporting RAID 0 or RAID 1 function.

MODEL	SATA Color	RAID
ASB-M801T ASB-M801B	Black: SATA1/SATA2/SATA3/SATA4	No
ASB-M801ET ASB-M801EB	Black: SATA1/SATA2/SATA3	Yes

34. IDE_CF1 (option):

(CF_Card socket), it is located at the bottom of the board and serves as an insert interface for Type I and Type II Compact Flash card. The operating voltage of CF card can be set as 3.3V or 5V, **The default setting of the product is 3.3V.** Please refer to description of JCF/JSATA Jumper setting.



35. CPU SCREW HOLES:


CPU FAN SCREW HOLES, Four screw holes for fixed CPU Cooler assemble.

36. H5/H6:

MPCIE1 SCREW HOLES, H5 for mini PCIE card (30mmx30mm) assemble. H6 for mini PCIE card (30mmx50.95mm) assemble.

37. TB-522:

ASB-M801 I/O Card, via a dedicated cable connected to ASB-M801 MIO1.

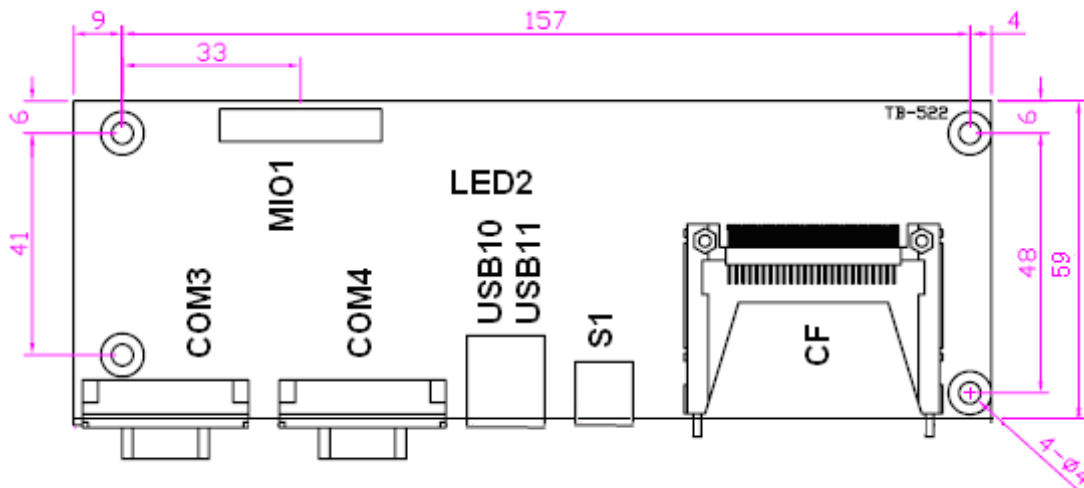

LED2:

CF Card LED status.


S1:

PWR BT: POWER on/off Button, They are used to connect power switch button. The two pins are disconnected under normal condition. You may short them temporarily to realize system startup & shutdown or awaken the system from sleep state.

PWR LED: POWER LED status.

COM3:

(Type DB9),I/O serial port, it provides selectable RS422/RS485 serial signal output.




RS422 Type (option)		RS485 Type (option)	
Signal Name	Pin#	Pin#	Signal Name
422_RX+	1	1	NC
422_RX-	2	2	NC
422_TX-	3	3	485-
422_TX+	4	4	485+
Ground	5	5	Ground
NC	6	6	NC
NC	7	7	NC
NC	8	8	NC
NC	9	9	NC



Note:
Use COM3 RS422 or RS485 Function, please enter BIOS CMOS Setup. Path:
BIOS Setup Utility \ Advanced /Super IO Configuration \ Serial Port3 Type:
[RS-485]
[RS-422]

COM4:

(Type DB9),Rear serial port, standard DB9 Male serial port is provided to make a direct connection to serial devices.




Pin#	Signal Name
1	DCD# (Data Carrier Detect)
2	RXD (Received Data)
3	TXD (Transmit Data)

4	DTR (Data Terminal Ready)
5	Ground
6	DSR (Data Set Ready)
7	RTS (Request To Send)
8	CTS (Clear To Send)
9	RI (Ring Indicator)

USB10,USB11:

(Double stack USB type A), I/O USB connector, it provides up to 2 USB2.0 ports, speed up to 480Mb/s.




Each USB Type A Receptacle (2 Ports) Current limited value is 1.5A.

If the external USB device current exceeds 1.5A, please separate connectors into different Receptacle.

CF:

(CF_Card socket), it is located at TB-522 and serves as an insert interface for Type I and Type II Compact Flash card. The operating voltage of CF card can be set as 3.3V or 5V. **The default setting of the product is 5V.**



MIO1:

(DF13-40P) TB-522 MIO1 via a dedicated cable connected to ASB-M801 MIO1.


Signal Name	Pin#		Signal Name
422_RX+	1	2	485+_422TX+
422_RX-	3	4	485-_422TX-
Ground	5	6	NC
NC	7	8	NC
NC	9	10	5V_S5
DCD4-	11	12	RXD4

TXD4	13	14	DTR4-
Ground	15	16	DSR4-
RTS4-	17	18	CTS4-
RI4-	19	20	5V_S5
5V_USB9	21	22	5V_USB1011
USB9_N	23	24	USB10_N
USB9_P	25	26	USB10_P
Ground	27	28	Ground
Ground	29	30	Ground
5V_USB1011	31	32	PWR_LED+
USB11_N	33	34	PWR_LED-
USB11_P	35	36	PS_ON-
Ground	37	38	Ground
Ground	39	40	Ground

38. TB-520P1:


TB-520P1 connect to ASB-M801T/ET PC104+ connector, PC104+ is located at the top,

It provides one PCI slot.

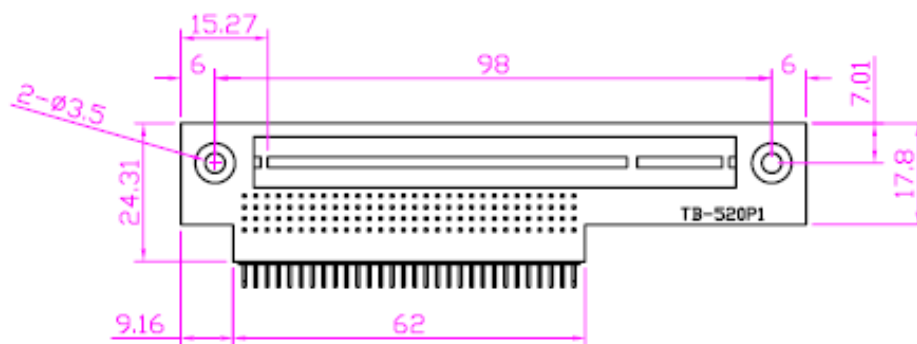


39. TB-520P2:

TB-520P1 connect to ASB-M801T/ET PC104+ connector, PC104+ is located at the top, It provides two PCI slots.

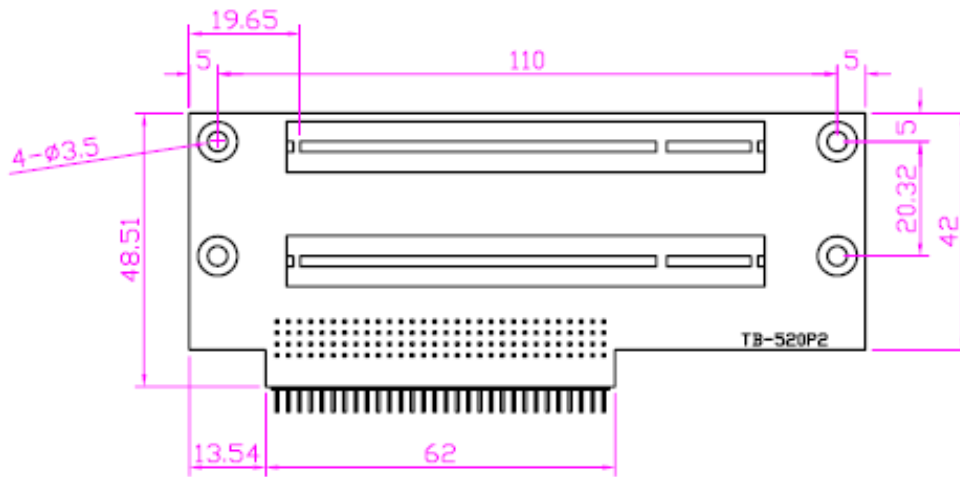


40. TB-520P1E1:

TB-520P1E1 connect to ASB-M801T/ET PC104+ and PCIEX2 connector, PC104+ and PCIEX2 are located at the top, It provides one PCI slot and one PCIE slot.

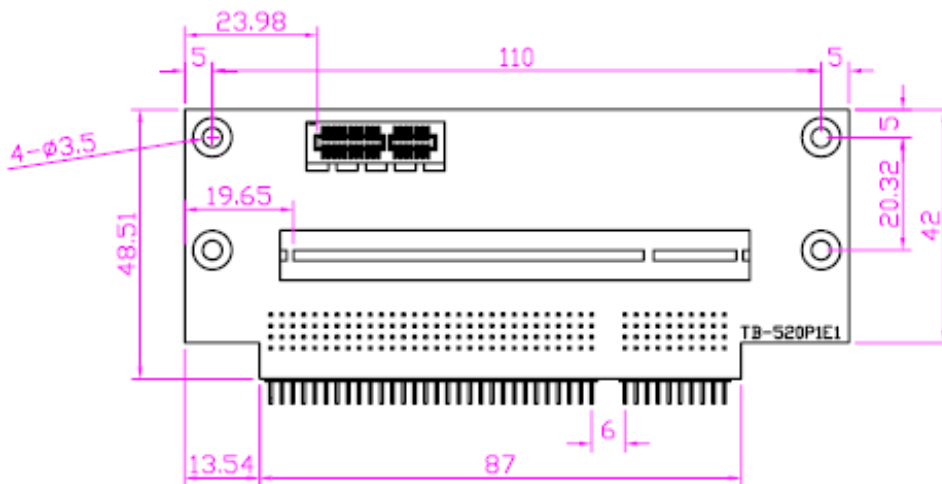


41. TB-521P1:

TB-521P1 connect to ASB-M801B/EB PC104+ connector, PC104+ is located at the Bottom, It provides one PCI slot.

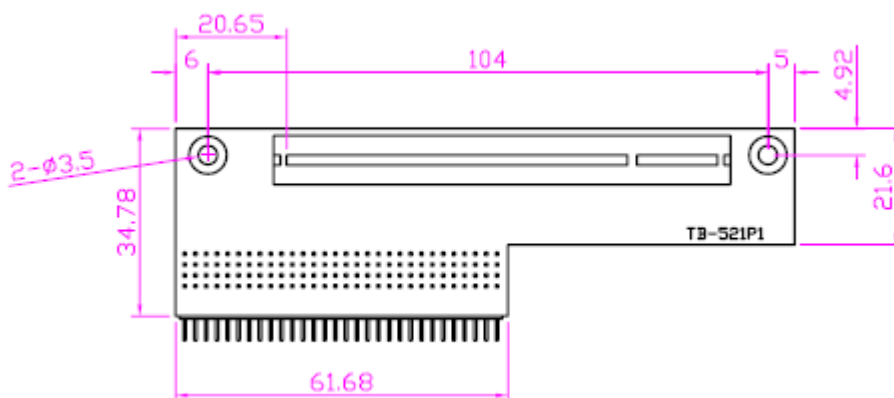


42. TB-521P2:

TB-521P2 connect to ASB-M801B/EB PC104+ connector, PC104+ is located at the Bottom, It provides two PCI slots.

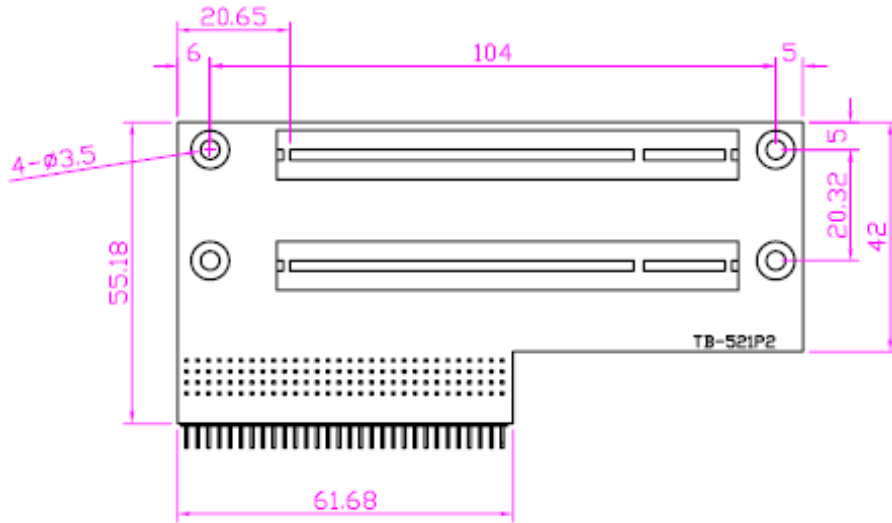


43. **TB-521P1E1:**

TB-521P1E1 connect to ASB-M801B/EB PC104+ and PCIEX2 connector, PC104+ and PCIEX2 are located at the Bottom, It provides one PCI slot and one PCIE slot.

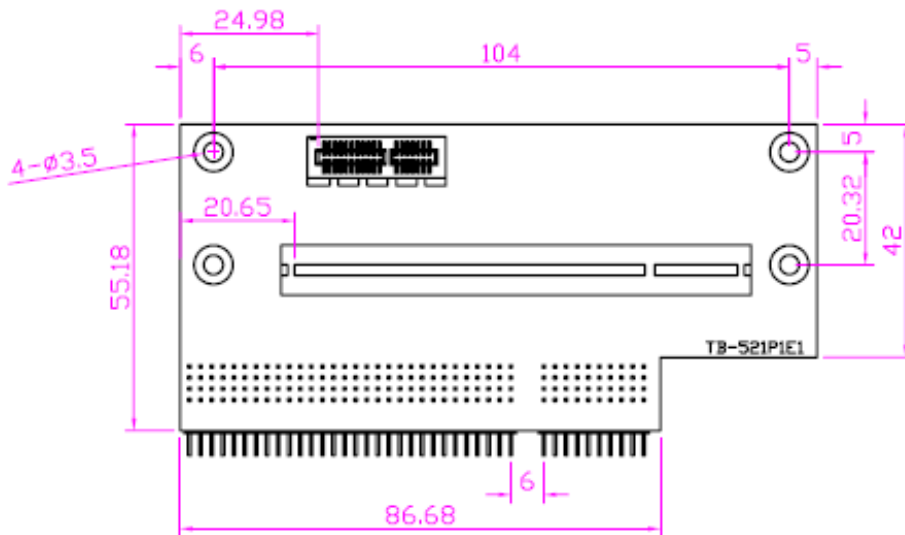

44. **TB-521P1E12:**


TB-521P1E12 connect to ASB-M801B/EB PC104+ and PCIEX2 connector, PC104+ and PCIEX2 are located at the Bottom, It provides one PCI slot and two PCIE slots.

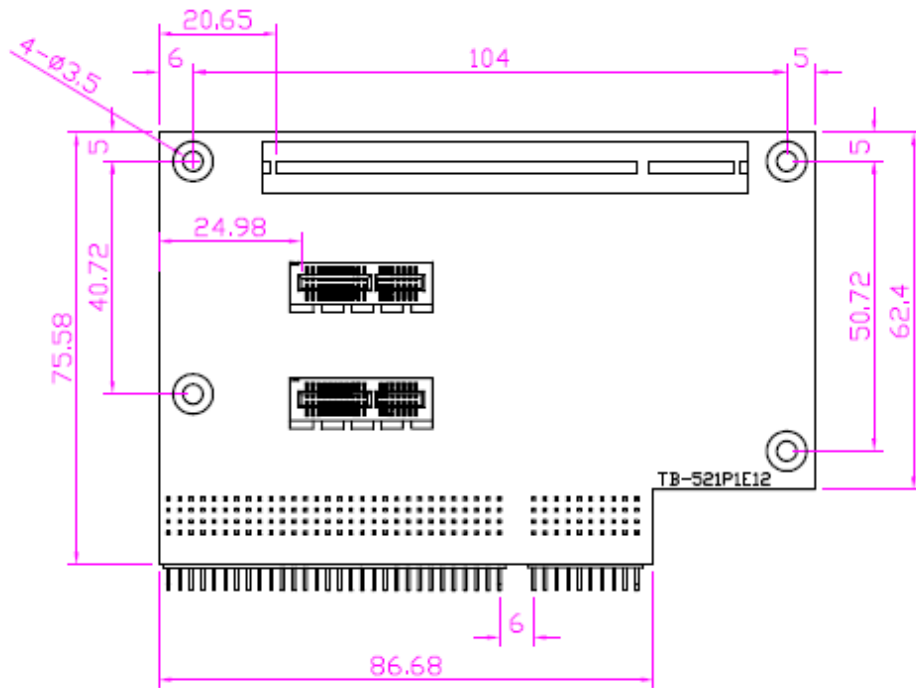


45. TB-523:

ASB-M801 I/O Card, via a dedicated cable connected to ASB-M801 MIO1 and MIO2.

TB-523 Top :

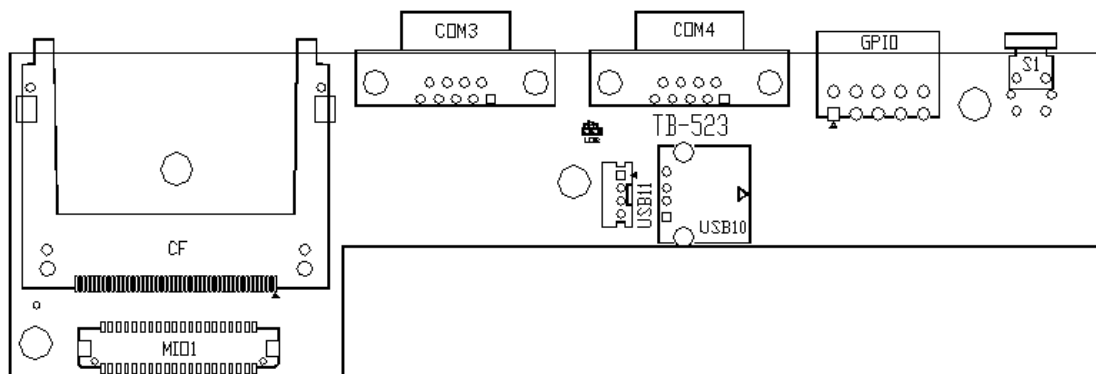

TB-523 Bottom :

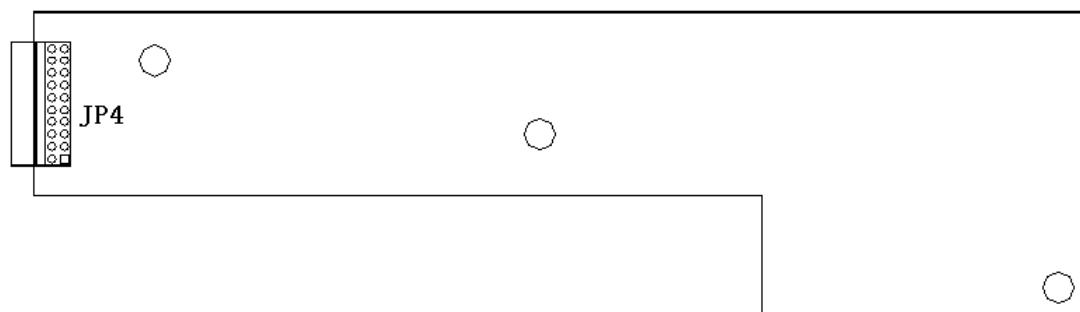

LED2:

CF Card LED status.


S1:

PWR BT: POWER on/off Button, They are used to connect power switch button. The two pins are disconnected under normal condition. You may short them temporarily to realize system startup & shutdown or awaken the system from sleep state.

PWR LED: POWER LED status.

COM3:

(Type DB9),I/O serial port, it provides selectable RS422/RS485 serial signal output.



RS422 Type (option)		RS485 Type (option)	
Signal Name	Pin#	Pin#	Signal Name
422_RX+	1	1	NC
422_RX-	2	2	NC
422_TX-	3	3	485-
422_TX+	4	4	485+
Ground	5	5	Ground
NC	6	6	NC
NC	7	7	NC
NC	8	8	NC
NC	9	9	NC



Note:

Use COM3 RS422 or RS485 Function, please enter BIOS CMOS Setup. Path:
BIOS Setup Utility \ Advanced /Super IO Configuration \ Serial Port3 Type:

[RS-485]

[RS-422]

JP4:


(2.0mm Pitch 2x10 Pin Header) COM4 function setting jumper.

Function	JP4 Pin#
RS232	Close: 3-5,4-6,10-12,11-13 (Default)
RS422	Close: 1-3,2-4,5-7,8-10,9-11,12-14,18-20

	(option)
RS485	Close: 5-7,8-10,9-11,12-14,16-18 (option)

COM4:

(Type DB9), I/O serial port, it provides selectable RS232/RS422/RS485 serial signal output.




COM4 RS232 Type (Default) :	
Pin#	Signal Name
1	DCD# (Data Carrier Detect)
2	RXD (Received Data)
3	TXD (Transmit Data)
4	DTR (Data Terminal Ready)
5	Ground
6	DSR (Data Set Ready)
7	RTS (Request To Send)
8	CTS (Clear To Send)
9	RI (Ring Indicator)

COM4 RS422 Type (option)		COM4 RS485 Type (option)	
Signal Name	Pin#	Pin#	Signal Name
422_RX+	1	1	NC
422_RX-	2	2	NC
422_TX-	3	3	485-
422_TX+	4	4	485+
Ground	5	5	Ground
NC	6	6	NC
NC	7	7	NC
NC	8	8	NC
NC	9	9	NC

USB10:

(Single stack USB type A), I/O USB connector, it provides one USB2.0 port, speed up to 480Mb/s.



USB11:

(2.0mm Pitch 1x4 box Pin Header), I/O USB connector, it provides one USB2.0 port, speed up to 480Mb/s.


Pin#	Signal Name
1	5V_USB1011
2	USB11_N
3	USB11_P
4	Ground

USB10 and USB11 current limited value is 1.5A.

If the external USB device current exceeds 1.5A, please separate connectors into different Receptacle.


CF:

(CF_Card socket), it is located at TB-523 and serves as an insert interface for Type I and Type II Compact Flash card. The operating voltage of CF card can be set as 3.3V or 5V. **The default setting of the product is 5V.**



GPIO:

(3.5mm Pitch 2x5 Pin Connector), General-purpose input/output port, it provides a group of self-programming interfaces to customers for flexible use.



Function	Pin#		Function
+5V	1	2	Ground
GPIO_IN1	3	4	GPIO_IN2
GPIO_IN3	5	6	GPIO_IN4
GPIO_OUT1	7	8	GPIO_OUT2

GPIO_OUT3	9	10	GPIO_OUT4
-----------	---	----	-----------


MIO1:

(DF13-40P) TB-523 MIO1 via a dedicated Y cable connected to ASB-M801 MIO1 and MIO2.

Signal Name	Pin#		Signal Name
422_RX+	1	2	485+_422TX+
422_RX-	3	4	485-_422TX-
Ground	5	6	GPIO_IN1
GPIO_IN2	7	8	GPIO_IN3
GPIO_IN4	9	10	5V_S5
DCD4-	11	12	RXD4
TXD4	13	14	DTR4-
Ground	15	16	DSR4-
RTS4-	17	18	CTS4-
RI4-	19	20	5V_S5
5V_USB9	21	22	5V_USB1011
USB9_N	23	24	USB11_N
USB9_P	25	26	USB11_P
Ground	27	28	Ground
GPIO_OUT1	29	30	GPIO_OUT2
5V_USB1011	31	32	SO_POWER_SENSE
USB10_N	33	34	PWR_LED-
USB10_P	35	36	PS_ON-
Ground	37	38	Ground
GPIO_OUT3	39	40	GPIO_OUT4


3.1 Operations after POST Screen

After CMOS discharge or BIOS flashing operation, the system will display the following screen for your further operation. Press F2 key to continue or F1 key to enter CMOS Setup.

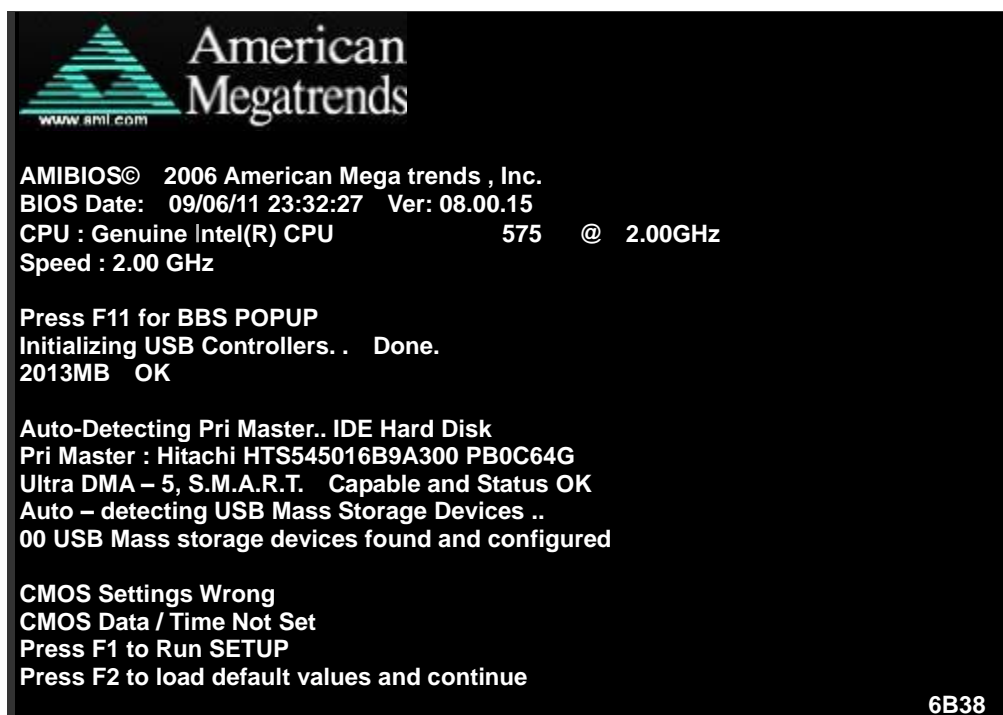

After optimizing and exiting CMOS Setup, the POST screen displayed for the first time is as follows and includes basic information on BIOS, CPU, memory, and storage devices.

Press **F11** key to enter Boot Menu during POST, as shown by the following figure.

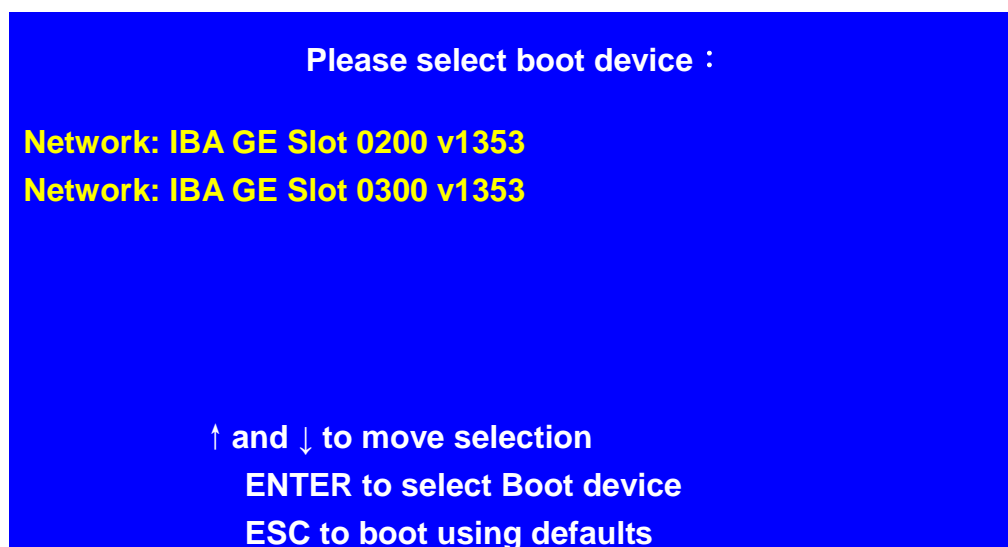

3.2 BIOS SETUP UTILITY

Press [Del] key to enter BIOS Setup utility during POST, and then a main menu containing system summary information will appear.

BIOS SETUP UTILITY	
Main	Advanced PCI/PnP Boot Security Chipset Exit
System Overview	
AMIBIOS Version : 08.00.15 Build Date : 12/12/11 ID : M801V003 Processor Genuine Intel(R) CPU 575 @ 2.00GHz Speed :2000MHz System Memory Size :1981MB System Time [00:00:08] System Date [Tue 09/06/2011]	
User [ENTER] · [TAB] or [SHIFT-TAB] to Select a field Use[+] or [-] to configure system Time. ← Select Screen ↑↓ Select Item +- Charge Field Tab Select Field F1 General Help F10 Save and Exit ESC Exit	
V02.61 © Copyright 1985-2006 American Mega trends , Inc.	

3.3 System Overview

BIOS SETUP UTILITY	
Main	Advanced PCI/PnP Boot Security Chipset Exit
System Overview	
AMIBIOS Version : 08.00.15 Build Date : 12/12/11 ID : M801V003 Processor Genuine Intel(R) CPU 575 @ 2.00GHz Speed :2000MHz System Memory Size :1981MB System Time [00:02:28]	
User [ENTER] · [TAB] or [SHIFT-TAB] to Select a field Use[+] or [-] to configure system Time. ← Select Screen ↑↓ Select Item +- Charge Field Tab Select Field F1 General Help	

System Date	[Tue 09/06/2011]	F10 Save and Exit
		ESC Exit
V02.61 © Copyright 1985-2006 American Mega trends , Inc.		

System Time:

Set the system time, the time format is:

Hour : 0 to 23

Minute : 0 to 59

Second : 0 to 59

System Date:

Set the system date, the date format is:

Day: Note that the 'Day' automatically changes when you set the date.

Month: 01 to 12

Date: 01 to 31

Year: 2009 to 2099

3.4 Advanced Settings

BIOS SETUP UTILITY	
Main	Advanced
<div> <div>Advanced Settings</div> <div> <div>WARNING: Setting wrong values In below sections may cause system to malfunction.</div> <div> <div>CPU Configuration</div> <div>IDE Configuration</div> <div>Super IO Configuration</div> <div>Hardware Health Configuration</div> <div>ACPI Configuration</div> <div>AHCI Configuration</div> <div>MPS Configuration</div> <div>PCI Express Configuration</div> <div>Smbios Configuration</div> <div>USB Configuration</div> </div> </div> </div>	<div> <div>Configure CPU</div> <div> <div>← Select Screen</div> <div>↑↓ Select Item</div> <div>Enter Charge Field</div> <div>F1 General Help</div> <div>F10 Save and Exit</div> <div>ESC Exit</div> </div> </div>

3.4.1 CPU Configuration

BIOS SETUP UTILITY	
Advanced	
Configure advanced CPU settings Module Version: 3F.10	For UP platforms, Leave it enabled.
Manufacturer : Intel Genuine Intel(R) CPU 575 @ 2.00GHz Frequency : 2.00GHz FSB Speed : 668MHz Cache L1 : 32 KB Cache L2 : 1024 KB Ratio Actual Value : L2	For DP/MP serves, It may use to tune Performance to the Specific application.
Hardware Prefetcher [Enabled] Adjacent Cache Line Prefetch [Enabled] Max CPUID Value Limit [Disabled] Execute-Disable Bit Capability [Enabled] Intel(R) C-SATAE tech [Disabled]	← Select Screen ↑↓ Select Item +- Charge Field F1 General Help F10 Save and Exit ESC Exit
V02.61 © Copyright 1985-2006 American Mega trends , Inc.	

Hardware Prefetcher:

[Enabled]

[Disabled]

Adjacent Cache Line Prefetch:

[Enabled]

[Disabled]

Max CPUID Value Limit:

[Disabled]

[Enabled]

Execute-Disable Bit Capability:

[Enabled]

[Disabled]

Intel(R) C-STATE tech:

[Disabled]

[Enabled]

3.4.2 IDE Configuration

BIOS SETUP UTILITY		
Advanced		
IDE Configuration		Disabled
SATA#1 Configuration	[Compatible]	Compatible
Configure SATA as	[IDE]	Enhanced
SATA#1 Configuration	[Enhanced]	
▶ Primary IDE Master : [Not Detected]		
▶ Primary IDE Slaver : [Not Detected]		
▶ Secondary IDE Master : [Not Detected]		
▶ Secondary IDE Slaver : [Not Detected]		← Select Screen
▶ Third IDE Master : [Not Detected]		↑↓ Select Item
▶ Fourth IDE Master : [Hard Disk]		+ - Change Field
		F1 General Help
		F10 Save and Exit
		ESC Exit
Hard Disk Write Protect	[Disabled]	
IDE Detect Time Out (Sec)	[35]	
ATA(PI) 80Pin Cable Detection	[Host & Device]	

V02.61 © Copyright 1985-2006 American Mega trends , Inc.

SATA#1 Configuration:

[Compatible]

[Disabled]
[Enhanced]

Configure SATA as:

[IDE]
[RAID]
[AHCI]

SATA#2 Configuration:

[Enhanced]
[Disabled]

Hard Disk Write Protect:

[Disabled]
[Enabled]

IDE Detect Time Out :

[35]
[0]
[5]
[10]
[15]
[20]
[25]
[30]

ATA(PI) 80Pin Cable Detection:

[Host & Device]
[Host]
[Device]

3.4.3 Super IO Configuration

BIOS SETUP UTILITY		
Advanced		
Configure Win627UHG Super IO Chipset		Allow BIOS to Select
Serial Port1 Address	[3F8]	Serial Port Base Address.
Serial Port2 Address	[2F8]	
Serial Port3 Address	[3E8]	
Serial Port3 IRQ	[IRQ4]	

Serial Port3 Mode	[RS-485]	
Serial Port4 Address	[2E8]	
Serial Port4 IRQ	[IRQ3]	
Serial Port5 Address	[238]	
Serial Port5 IRQ	[IRQ5]	
Serial Port6 Address	[228]	
Serial Port6 IRQ	[IRQ7]	
		← Select Screen
		↑↓ Select Item
		+ - Charge Field
		F1 General Help
		F10 Save and Exit
		ESC Exit
V02.61 © Copyright 1985-2006 American Mega trends , Inc.		

Serial Port3 Mode:

COM3 Options: **[RS485]**
[RS422]
[RS422] for RS422 Mode
[RS485] for RS485 Mode

3.4.4 Hardware Health Configuration

BIOS SETUP UTILITY		
Advanced		
Hardware Health Configuration		
System Temperature	:33°C/91°F	55°C/131°F
CPU Temperature	:30°C/86°F	60°C/140°F
CPUFAN Speed	:4800 RPM	65°C/149°F
		70°C/158°F
Vcore	:1.064V	
AVCC	:5.058V	
5VCC	:5.067 V	
3.3V	:3.264 V	
5.0V	:5.029 V	
12V	:12.042 V	

VS	B	:5.058 V	
VB	AT	:3.366 V	
Smart Fan Configuration			← Select Screen
Maximum CPU Temperature			↑↓ Select Item
Maximum PWM Duty for CPU Fan			+− Charge Field
			F1 General Help
			F10 Save and Exit
			ESC Exit
V02.61 © Copyright 1985-2006 American Mega trends , Inc.			

System Temperature:

Show you the current system temperature.

CPU Temperature:

Show you the current CPU temperature.

CPUFAN Speed:

Show you the current CPU Fan operating speed.

Maximum CPU Temperature:

- [60°C/140°F]
- [55°C/131°F]
- [65°C/149°F]
- [70°C/158°F]

Minimum PWM Duty for CPU Fan:

- [60%]
- [50%]
- [70%]
- [80%]

3.4.5 ACPI Configuration

ACPI Setting:

[Advanced ACPI Configuration]

ACPI Version Features:

- [ACPI V1.0]
- [ACPI V2.0]
- [ACPI V3.0]

ACPI APIC support:

[Enabled]

[Disabled]

AMI OEMB table:

[Enabled]

[Disabled]

Headless mode:

[Disabled]

[Enabled]

[Chipset ACPI Configuration]:

APIC ACPI SCI IRQ:

[Disabled]

[Enabled]

High Performance Event Timer:

[Disabled]

[Enabled]

3.4.6 AHCI Configuration

BIOS SETUP UTILITY	
Advanced	
AHCI Setting	Enables For supporting
AHCI BIOS Support [Enabled]	
AHCI CD/DVD Boot Time out [35]	
▶ AHCI Port0 [Not Detected]	
▶ AHCI Port1 [Not Detected]	
▶ AHCI Port2 [Not Detected]	
▶ AHCI Port3 [Not Detected]	
▶ AHCI Port4 [Not Detected]	
▶ AHCI Port5 [Not Detected]	
	← Select Screen
	↑↓ Select Item
	Enter Go to sub screen
	F1 General Help
	F10 Save and Exit
	ESC Exit
V02.61 © Copyright 1985-2006 American Mega trends , Inc.	

While entering setup, BIOS auto detects the presence of IDE devices. This displays the status of auto detecting of IDE devices

3.4.7 MPS Configuration

BIOS SETUP UTILITY	
Advanced	
MPS Configuration	Select MPS
MPS Revision [1.1]	Revision
	← Select Screen
	↑↓ Select Item
	+− Charge Field
	F1 General Help
	F10 Save and Exit
	ECS Exit
V02.61 © Copyright 1985-2006 American Mega trends , Inc.	

MPS Revision:

[1.1]

[1.4]

3.4.8 PCI Express Configuration

BIOS SETUP UTILITY	
Advanced	
PCI Express Configuration	Enables/Disables
Active State Power -Management	PCI Express L0s and
[Disabled]	L1 Link Power
	States.
	← Select Screen
	↑↓ Select Item
	+− Charge Field
	F1 General Help
	F10 Save and Exit
	ESC Exit

Active State Power Management:

[Disabled]

[Enabled]

3.4.9 Smbios Configuration

BIOS SETUP UTILITY	
Advanced	
Smbios Configuration	SMBIOS SMI Wrapper
Smbios Smi Support [Enabled]	Support for PnP Func 50h-54h
	← Select Screen ↑↓ Select Item +- Change Field F1 General Help F10 Save and Exit ESC Exit
V02.61 © Copyright 1985-2006 American Mega trends , Inc.	

Smbios Smi Support:

[Enabled]

[Disabled]

3.4.10 USB Configuration

BIOS SETUP UTILITY	
Advanced	
USB Configuration	Enables support for legacy USB.ATUO option disables legacy support if no USB devices are connected
Module Version – 2.24.3-13.4	
USB Devices Enabled : 1 Keyboard	
Legacy USB Support [Enabled]	
USB2.0 Controller Mode [Fullspeed]	
BIOS EHCI Hand-Off [Enabled]	
	← Select Screen ↑↓ Select Item

	+- Charge Field F1 General Help F10 Save and Exit ESC Exit
V02.61 © Copyright 1985-2006 American Mega trends , Inc.	

Legacy USB Support:

[Enabled]

[Disabled]

USB2.0 Controller Mode:

[FullSpeed]

[HiSpeed]

BIOS EHCI Hand-Off:

[Enabled]

[Disabled]

3.5 Advanced PCI/PnP Settings

This part describes configurations to be made on PCI bus system. PCI, namely Personal Computer Interconnect, is a computer bus that allows I/O device to operate nearly as fast as CPU in its own way. Some technical terms will be mentioned here. **We recommend that non-professional users not make changes from factory default settings.**

BIOS SETUP UTILITY	
Main	Advanced
PCIPNP	Boot
Security	Chipset
Exit	
Advanced PCI/PnP Settings	
WARNING: Setting wrong values In below sections may cause system to malfunction.	
Clear NVRAM	[No]
Plug & Play O/S	[No]
PCI Latency Timer	[64]
Allocate IRQ to PCI VGA	[Yes]
Palette Snooping	[Disabled]
PCI IDE BusMaster	[Disabled]
OffBoard PCI/ISA IDE Card	[Auto]
Clear NURAM during System Boot.	

IRQ3 [Available] IRQ4 [Available] IRQ5 [Available] IRQ7 [Available] IRQ9 [Available] IRQ10 [Available] IRQ11 [Available]	← Select Screen ↑↓ Select Item +- Charge Field F1 General Help F10 Save and Exit ESC Exit
V02.61 © Copyright 1985-2006 American Mega trends , Inc.	

Clear NVRAM:

[No]
 [Yes]

Plug & Play OS:

[No]
 [Yes]

PCI Latency Timer:

[64]
 [32]
 [96]
 [128]
 [160]
 [192]
 [224]
 [248]

Allocate IRQ to PCI VGA:

[Yes]
 [No]

Palette Snooping:

[Disabled]

[Enabled]

PCI IDE BusMaster:

[Disabled]

[Enabled]

OffBoard PCI/ISA IDE Card:

Some PCI IDE cards may require this to be set to the PCI slot number that is holding the card. Auto:Works for most PCI IDE Cards.

[Auto]

[PCI Slot1]

[PCI Slot2]

[PCI Slot3]

[PCI Slot4]

[PCI Slot5]

[PCI Slot6]

IRQ3/4/5/7/9/10/11/14/15:

[Available]

[Reserved]

Available: Specified IRQ is available to be used by PCI/PnP devices.

Reserved: Specified IRQ is reserved for use by legacy ISA devices.

DMA Channel 0/1/3/5/6/7:

[Available]

[Reserved]

Available: Specified DMA is available to be used by PCI/PnP devices.

Reserved: Specified DMA is reserved for use by legacy ISA devices.

Reserved Memory Size:

Size of memory block to reserve for legacy ISA devices.


[Disabled]


[16k]

[32k]

[64k]

3.6 Boot Settings



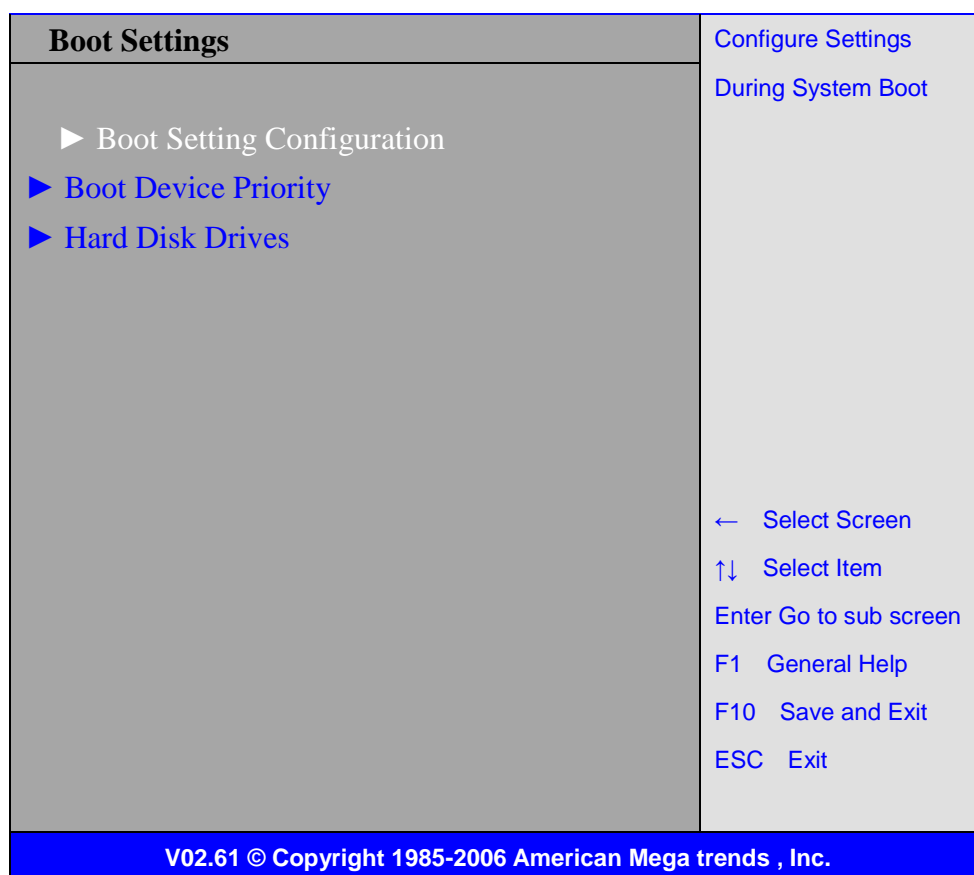

Boot Setting Configuration :

Configure Settings during System Boot.

Quick Boot:

[Enabled]

[Disabled]

Allows BIOS to skip certain tests while booting .This will decrease the time needed to boot the system.

Quiet Boot:

[Disabled]

[Enabled]

Disabled: Displays normal POST messages.

Enabled: Displays OEM logo instead of POST messages.

AddOn ROM Display Mode:

Set display mode for Option ROM.

[Force BIOS]

[Keep Current]

Bootup Num—Lock:

Select Power-on state for Numlock.

[On]

[Off]

Wait For 'F1' If Error:

Wait for F1 key to be pressed if error occurs.

[Enabled]

[Disabled]

Hit 'DEL' Message Display :

Displays "press" DEL to run Setup in POST.

[Enabled]

[Disabled]

Interrupt 19 Capture:

Enabled: Allows option ROMs to trap interrupt 19.

[Disabled]

[Enabled]

Boot Device Priority:


Specifies the Boot Device Priority sequence.

Hard Disk Devices :

Specifies the Boot Device Priority sequence from available Hard Drives.

3.7 Security Settings

BIOS SETUP UTILITY		
Main	Advanced	PCIPnP
Boot	Security	Chipset
Exit		
Security Settings		Install or Change the password.
Supervisor Password	:Not Installed	
User Password	:Not Installed	
Change Supervisor Password		
Change User Password		
Boot Sector Virus Protection		[Disabled]

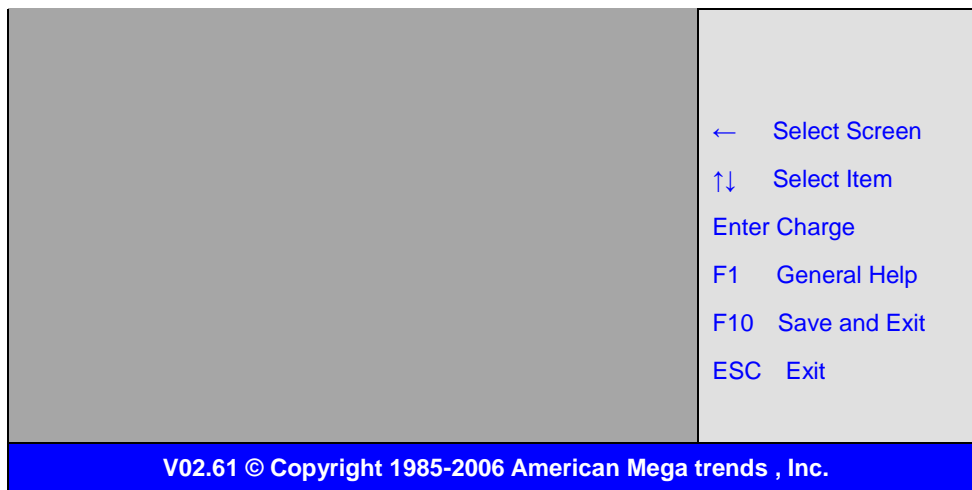

Change Supervisor Password:

Install or Change the password.

Change User Password:

Install or Change the password.

Password Check:

[Setup]

[Always]

Setup: Check password while invoking setup.

Always: Check password while invoking setup as well as on each boot.

Boot Sector Virus Protection:

[Disabled]

[Enabled]

Enabled / Disabled Boot Sector Virus Protection.

Type the password with up to 6 characters and then press <Enter> key. This will clear all previously typed CMOS passwords. You will be requested to confirm the password. Type the password again and press <Enter> key. You may press <Esc> key to abandon password entry operation.

To clear the password, just press <Enter> key when password input window pops up. A confirmation message will be shown on the screen as to whether the password will be disabled. You will have direct access to BIOS setup without typing any password after system reboot once the password is disabled.

Once the password feature is used, you will be requested to type the password each time you enter BIOS setup. This will prevent unauthorized persons from changing your system configurations.

Also, the feature is capable of requesting users to enter the password prior to system boot to control unauthorized access to your computer. Users may enable the feature

in Security Option of Advanced BIOS Features. If Security Option is set to System, you will be requested to enter the password before system boot and when entering BIOS setup; if Security Option is set to Setup, you will be requested for password for entering BIOS setup.

3.8 Advanced Chipset Settings



Note: Due to limited address length of BIOS, only a portion of panel parameters are listed in BIOS Setup. If the connected panel is not included in the parameter list, display problem will occur. In this case, Please do not change BIOS setup.

3.8.1 North Bridge Configuration



Memory	Remap	Feature	Remapping of
[Enabled]			Over lapped PCI Memory
PCI MMIO Allocation: 4Gb To 3072MB			Above the total
Memory		Hole	Physical memory
[Disabled]			DISABLE: Do not allow
Initate Graphic Adapter		[PCI/IGD]	remapping of memory
IGD Graphics Mode		Select	
[Enabled ,64MB]			
IGD GTI Graphic smemory size		[No VT	
mode,2MB]			← Select Screen
			↑↓ Select Item
			+ - Charge Field
			F1 General Help
			F10 Save and Exit
			ESC Exit
PEG Port Configuration			
▶ Video Function Configuration			
V02.61 © Copyright 1985-2006 American Mega trends , Inc.			

Memory Remap Feature:

[Enabled]

[Disabled]

Memory Hole:

[Disabled]

[15MB-16MB]

Initate Graphic Adapter:

Select which graphics controller to use as the primary boot device.

[PCI/IGD]

[IGD]

IGD Graphics Mode Select:

[Enabled, 64MB]

[Disabled]

[Enabled, 32MB]

[Enabled, 128MB]

Video Function Configuration:

BIOS SETUP UTILITY		
Video Function Configuration		Options
DVMT Mode Select	[DVMT Mode]	Fixed Mode DVMT Mode
DVMT/FIXED	Memory	
[256MB]		
Boot	Display	Device
[VBIOS-Default]		
Flat Panel Type	[1024x768]	
18bit 1c]		
Backlight	Control	Support
[VBIOS-Default]		
Backlight Control Level	[Level 8]	
Backlight Control Mode	[DC]	
Backlight	Image	Adaptation
[VBIOS-Default]		

← Select Screen
 ↑↓ Select Item
 +- Charge option
 F1 General Help
 F10 Save and Exit
 ESC Exit

V02.61 © Copyright 1985-2006 American Mega trends , Inc.

DVMT Mode Select:

[DVMT Mode]

[FIXED Mode]

DVMT/FIXED Memory Size:

[256MB]

[128MB]

[Maximum DVMT]

Boot Display Device:

[VBIOS-Default]

[CRT]

[HDMI]
[CRT + HDMI]
[LVDS]
[CRT + LVDS]

Flat Panel Type:

[1024x 768 18bit 1ch]

[640x480 18bit 1ch]

[800x480 18bit 1ch]

[800x600 24bit 1ch]

[1280x800 18bit 1ch]

[1366x768 18bit 1ch]

[1024x768 24bit 2ch]

[1280x1024 24bit 2ch]

[1440x900 24bit 2ch]

[1600x900 24bit 2ch]

[1680x1050 24bit 2ch]

[1920x1080 24bit 2ch]

Backlight Control Support

[VBIOS-Default]

[Both BLC & BIA Disabled]

[BLC Enabled]

Backlight Control Control:

[Level8]

[Level0]

[Level1]

[Level2]

[Level3]

[Level4]

[Level6]

[Level7]

[Level9]

[Level10]

[Level11]

[Level12]

[Level13]

[Level14]

[Level15]



Note: Panel support PWM Function.

Backlight Control Mode:

[DC]

[PWM]

Backlight Image Adaptation:

[VBIOS-Default]

[BIA Disabled]

[BIA Enabled at Level1]

[BIA Enabled at Level2]

[BIA Enabled at Level3]

[BIA Enabled at Level4]

[BIA Enabled at Level5]

3.8.2 South Bridge Configuration:

BIOS SETUP UTILITY		
		Chipset
South Bridge Chipset Configuration		Options
USB Functions	[12 USB Ports]	Disabled
USB2.0 Controller	[Enabled]	2 USB Ports
Keep USB Power at S5	[Enabled]	4 USB Ports
Wireless Controller	[Enabled]	6 USB Ports
HAD Controller	[Enabled]	8 USB Ports
SMBUS Controller	[Enabled]	10 USB Ports
		12 USB Ports
SLP_S4# Min. Assertion Width	[4 to 5 Seconds]	
Restore on AC Power loss	[Power off]	
PCIe Ports Configuration		
PCIe Port 0	[Auto]	← Select Screen
PCIe Port 1	[Auto]	↑↓ Select Item

PCIE Port 2	[Auto]	+ - Charge Field
PCIE Port 3	[Auto]	F1 General Help
PCIE Port 4	[Auto]	F10 Save and Exit
PCIE High Priority Port	[Disabled]	ESC Exit
V02.61 © Copyright 1985-2006 American Mega trends , Inc.		

USB Functions:

[12 USB Ports]

[Disabled] ,

[2 USB Ports]

[4 USB Ports]

[6 USB Ports]

[8 USB Ports]

[10 USB Ports]

USB 2.0 Controller:

[Enabled]

Keep USB Power at S5:

[Enabled]

[Disabled]

Wireless Controller

[Enabled]

[Disabled]

HDA Controller:

[Enabled]

[Disabled]

SMBUS Controller:

[Enabled]

[Disabled]

SLP_S4# Min. Assertion Width:

[4 to 5 Seconds]

[3 to 4 Seconds]

[2 to 3 Seconds]

[1 to 2 Seconds]

Restore on AC Power Loss:

[Power Off]

[Power On]

[Last Status]

PCIe Ports Configuration:

PCIe Port 0:

[Auto]

[Enabled]

[Disabled]

PCIe Port 1:

[Auto]

[Enabled]

[Disabled]

PCIe Port 2:

[Auto]

[Enabled]

[Disabled]

PCIe Port 3:

[Auto]

[Enabled]

[Disabled]

PCIe Port 4:

[Auto]

[Enabled]

[Disabled]

PCIe High priority Port:

[Disabled]

[Port 0]

[Port1]

[Port2]

[Port3]

[Port4]

[Port5]

PCIe Port 0 IOxAPIC Enabled:


PCIe Port 1 IOxAPIC Enabled:

PCIE Port 2 IOxAPIC Enabled:
 PCIE Port3 IOxAPIC Enabled:
 PCIE Port4 IOxAPIC Enabled:
 PCIE Port5 IOxAPIC Enabled:

[Disabled]

[Enabled]

3.9 Exit Options

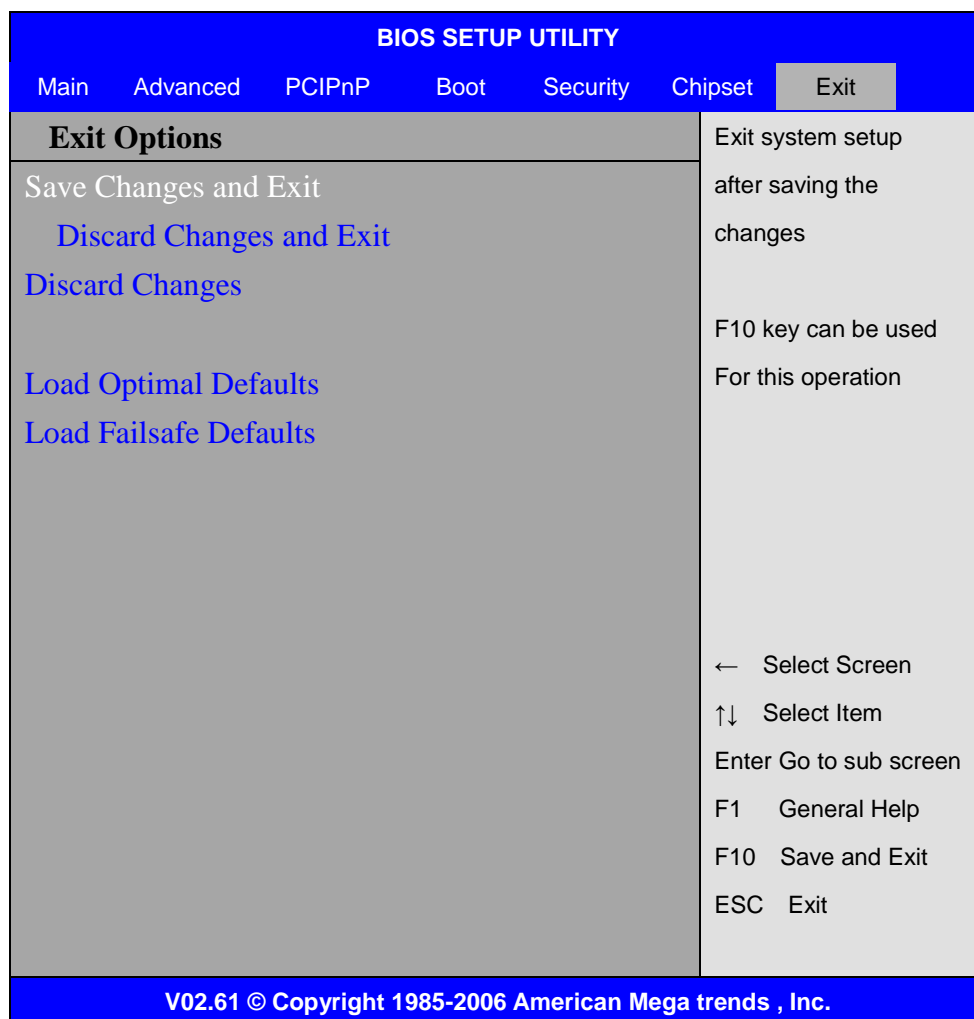

Save Changes and Exit:

Save configuration changes and exit setup?

(F10 key can be used for this operation)

[OK]

[Cancel]

Discard Changes and Exit:

Discard Changes and Exit setup?

(ESC key can be used for this operation)

[OK]

[Cancel]

Discard Changes:

Discard changes?

(F7 key can be used for this operation)

[OK]

[Cancel]

Load Optimal Defaults:

Load Optimal Defaults?

(F9 key can be used for this operation)

[OK]

[Cancel]

Load FailSafe Defaults:

Load FailSafe Defaults?

(F9 key can be used for this operation)

[OK]

[Cancel]

Chapter 4 Installation of Drivers

This chapter describes the installation procedures for software and drivers under the windows XP. The software and drivers are included with the motherboard. The contents include **Intel chipset driver** **VGA driver** **LAN drivers** **Audio driver** **.NET framework 3.5 driver** **Installation instructions are given below.**

Important Note:

After installing your Windows operating system (Windows XP), you must install first the Intel Chipset Software Installation Utility before proceeding with the installation of drivers.



4.1 Intel Chipset Driver

To install the Intel chipset driver, please follow the steps below.

Step 1: Select Chipset from the list



Follow the step-by-step installation process to install the driver.







Click Finish, when the installation process is complete, the Setup Complete screen appears. See as picture.

4.2 Intel Graphics Media Accelerator driver


To install the VGA drivers, follow the steps below to proceed with the installation.


1. Click Intel(R) GM45 Chipset Family Graphics Driver.





Follow the step-by-step installation process to install the Graphics Media Accelerator driver.



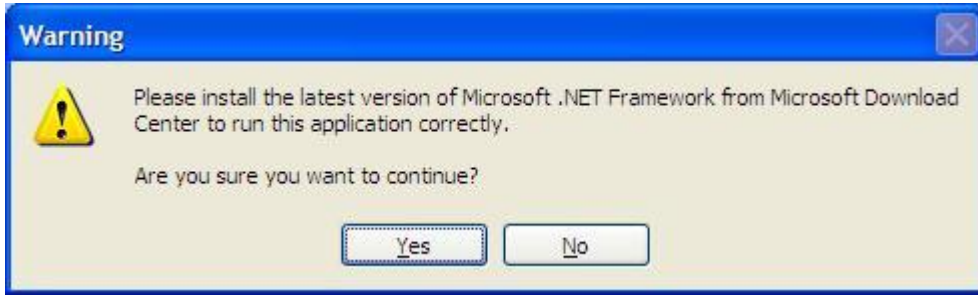

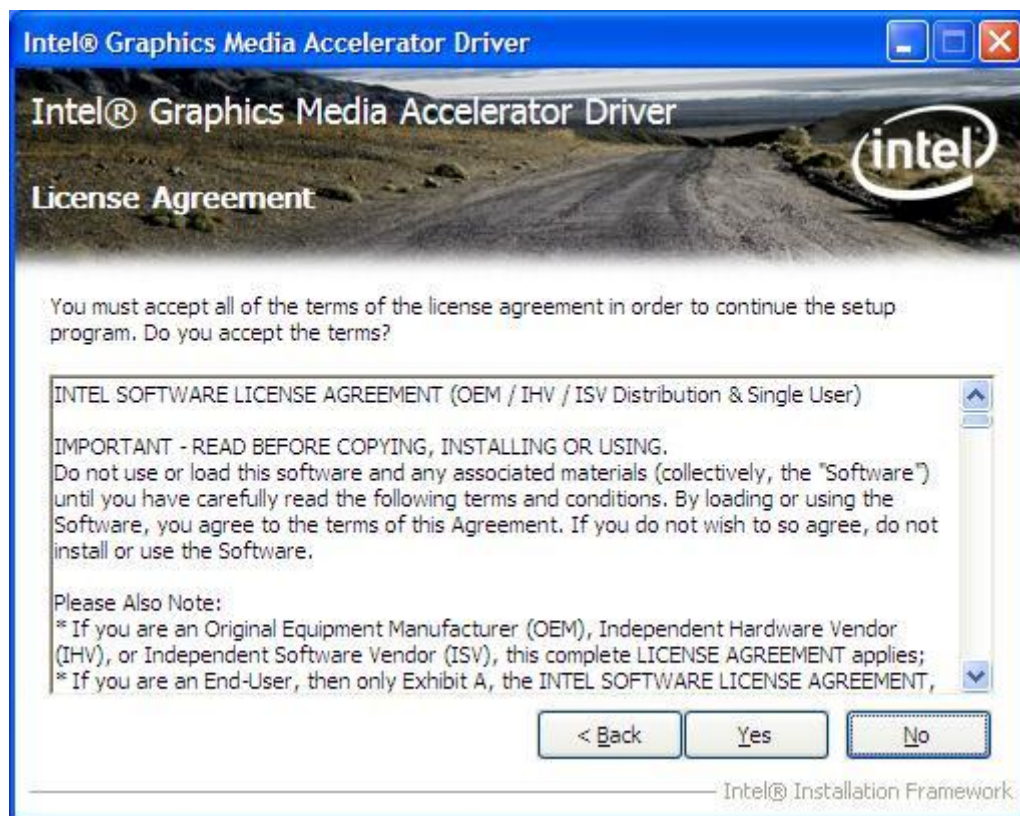

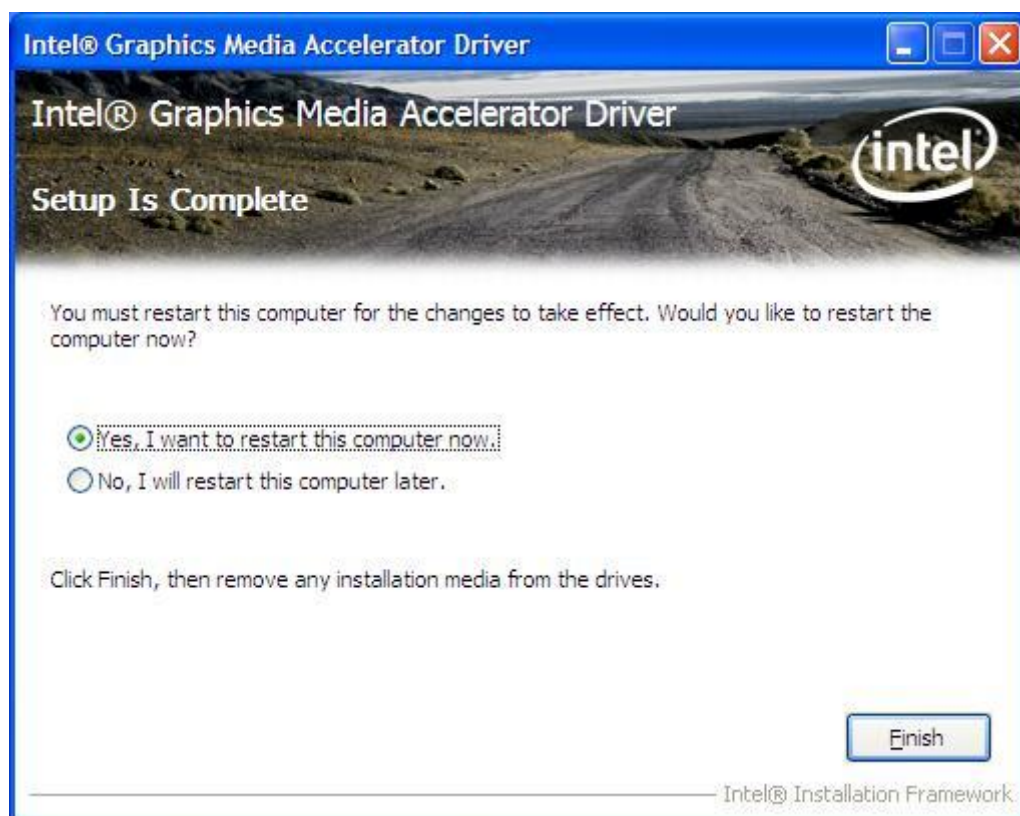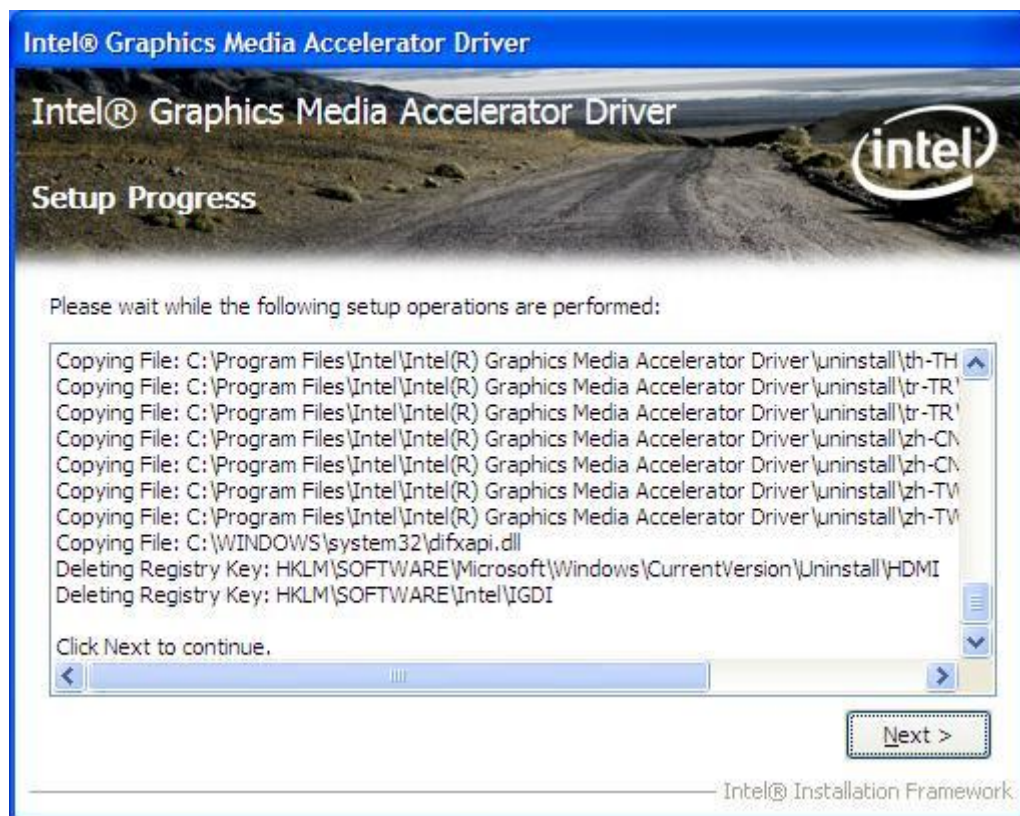


Click FINISH; A Driver Installation Complete.



4.3 Intel 82574L LAN Device Driver



To install the Intel R 82574L Gigabit LAN connect device driver, please follow the steps below.
Select LAN from the list



Follow the step-by-step installation process to install the LAN driver.

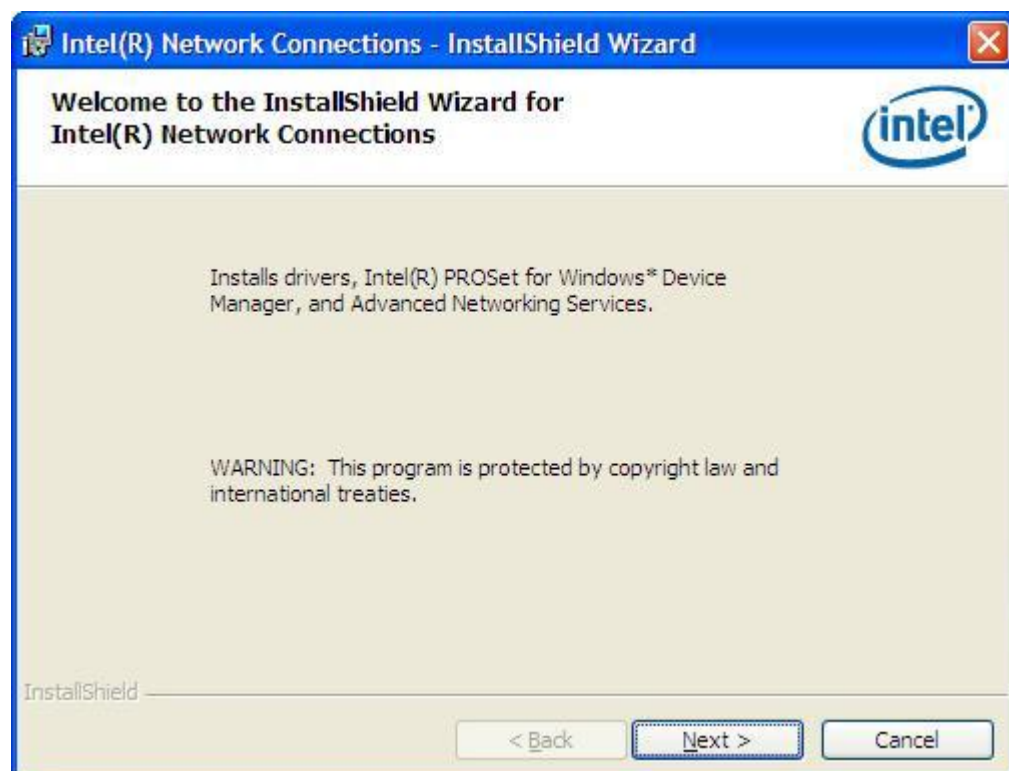

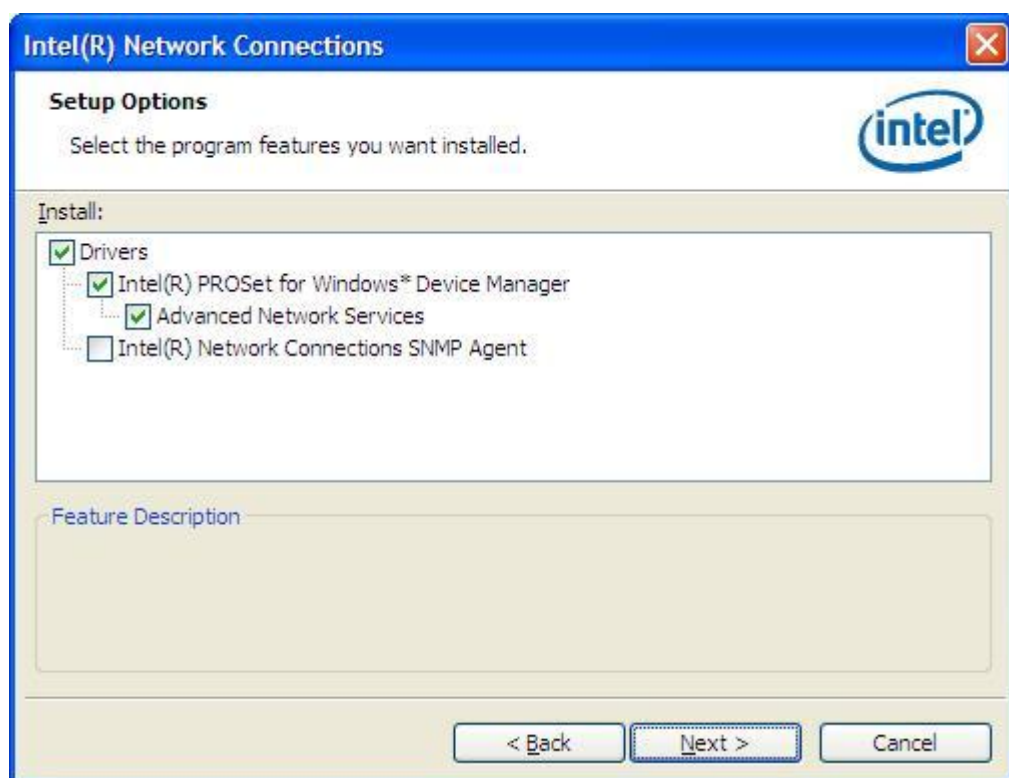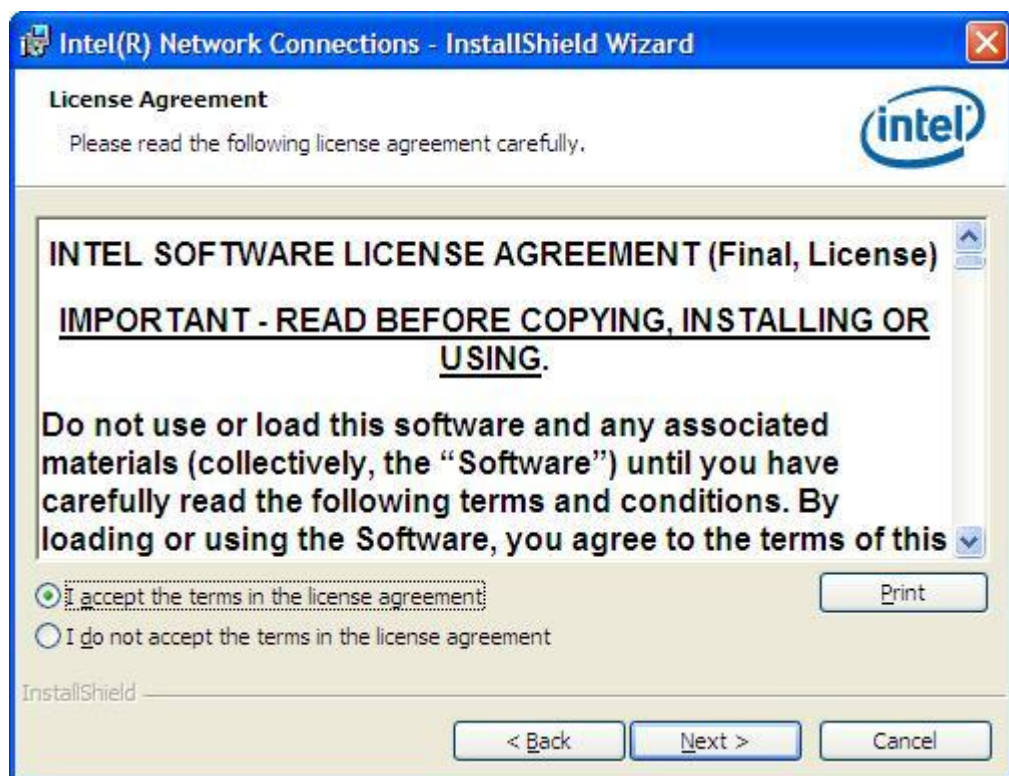

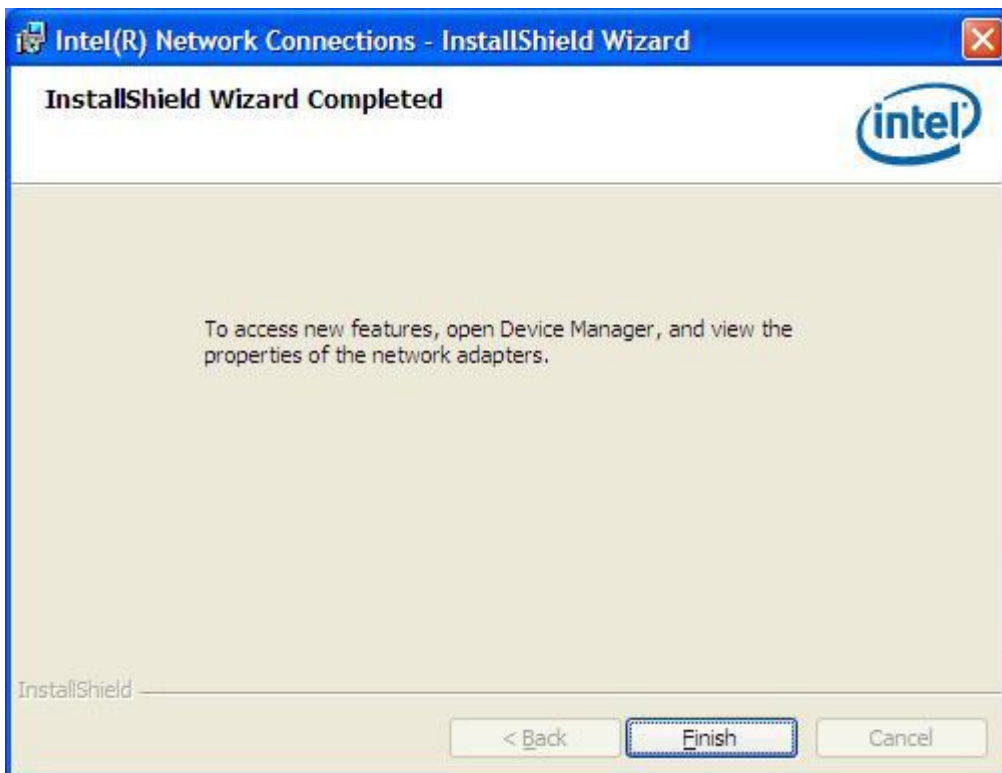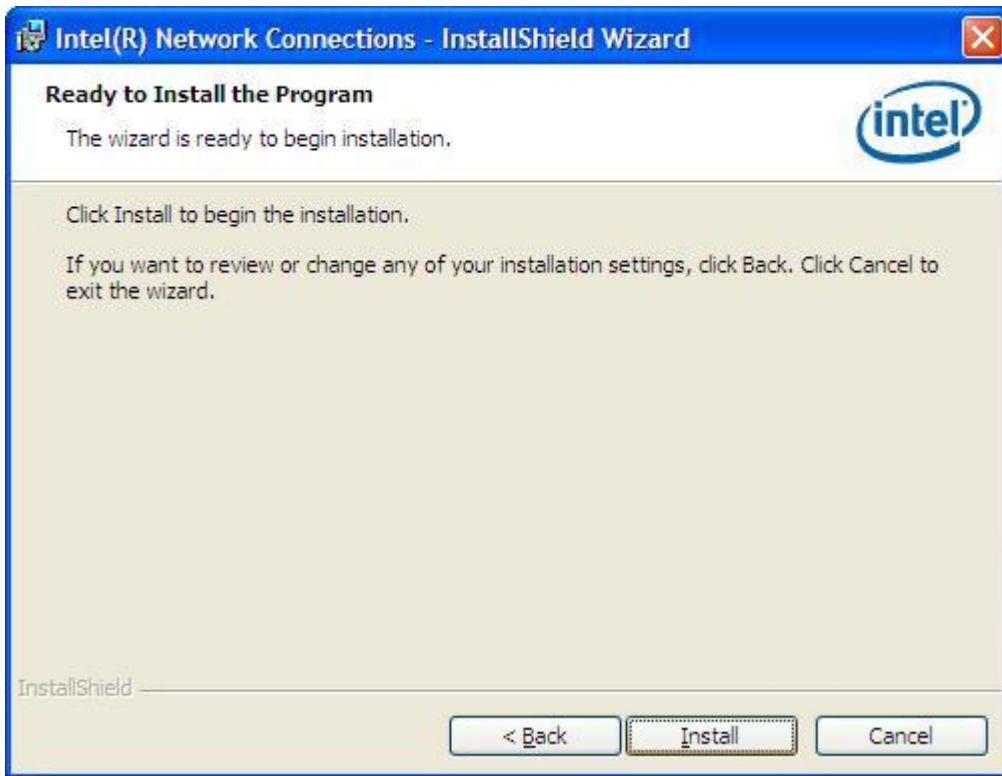


Click FINISH; A Driver Installation Complete.



4.4 Realtek ALC662 HD Audio Driver Installation

To install the Realtek High Definition (HD) Audio driver, please follow the steps below.
Select Audio from the list



Follow the step-by-step installation process to install the Realtek HD Audio driver.

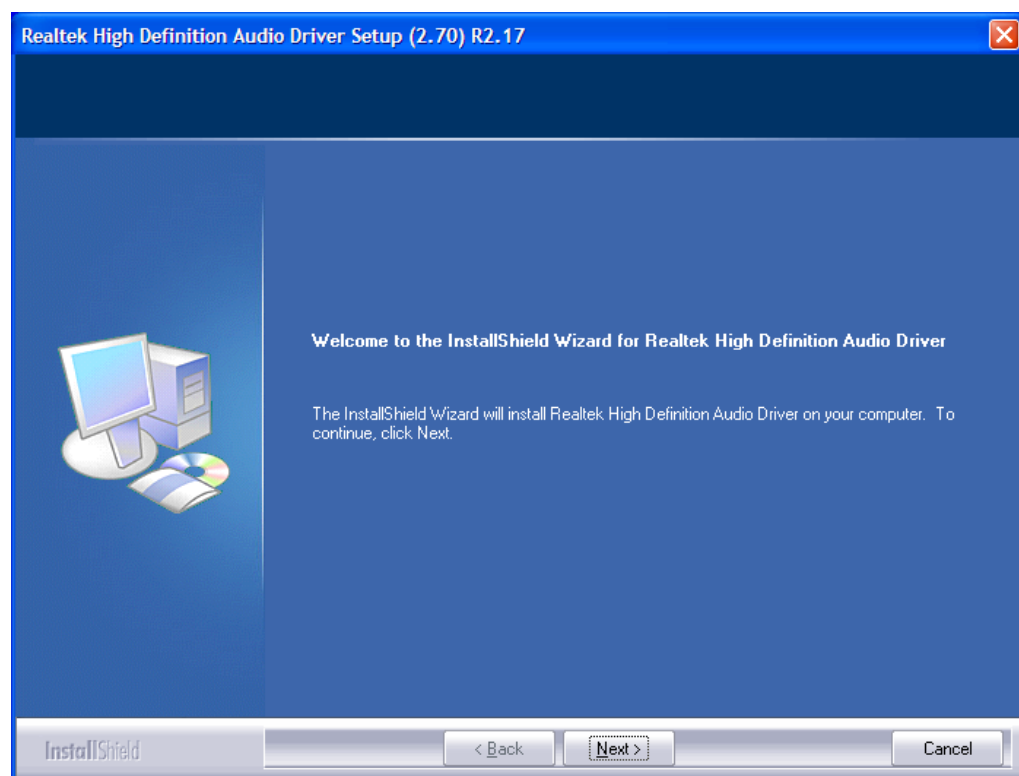

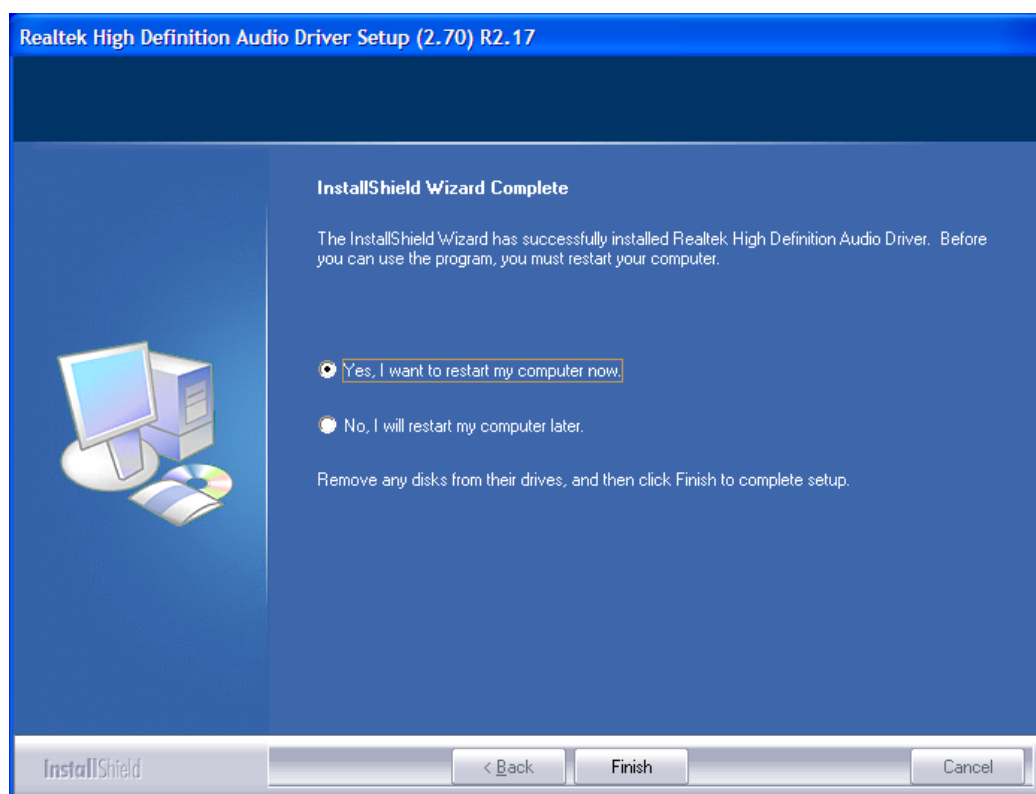
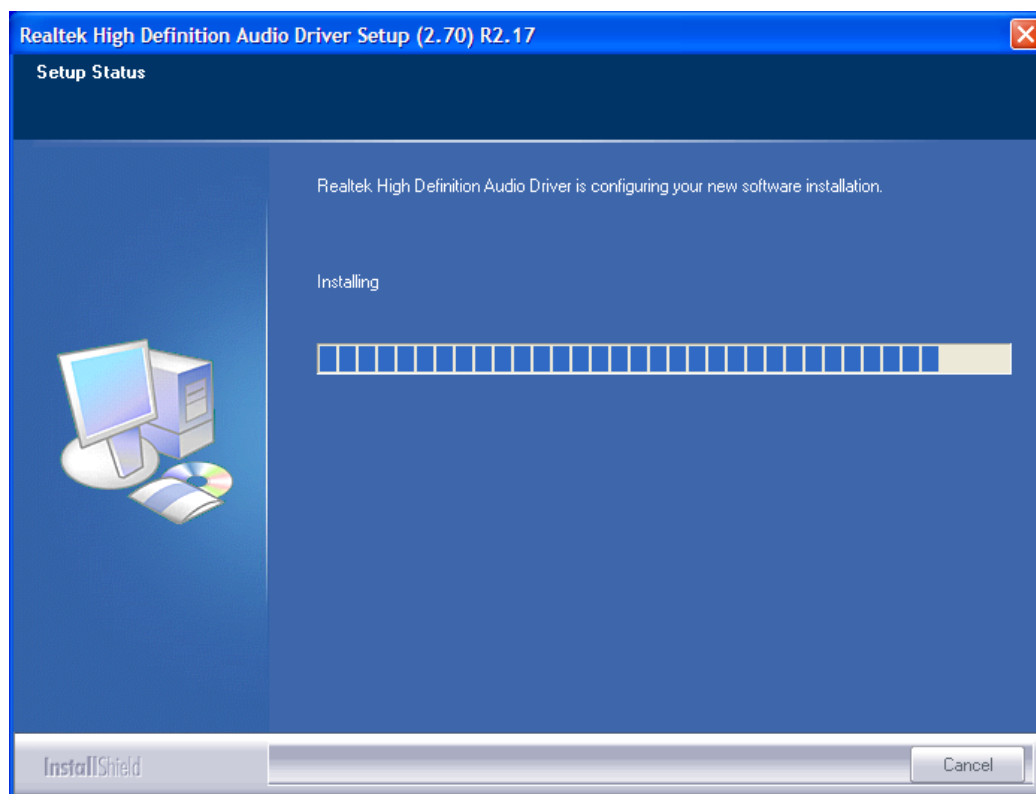



Click FINISH; A Driver Installation Complete.

4.5 Microsoft .NET Framework 3.5 Service Installation

To install the Microsoft .NET Framework 3.5 Service, please follow the steps below.



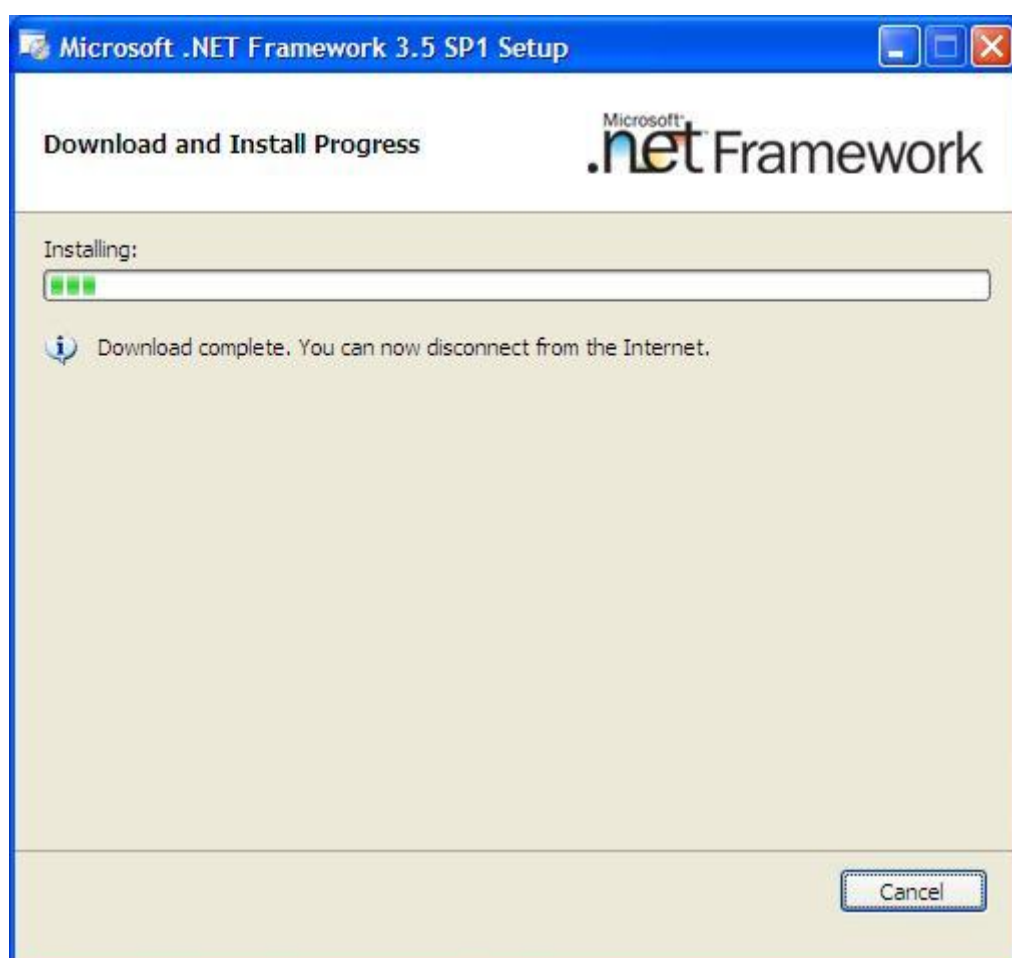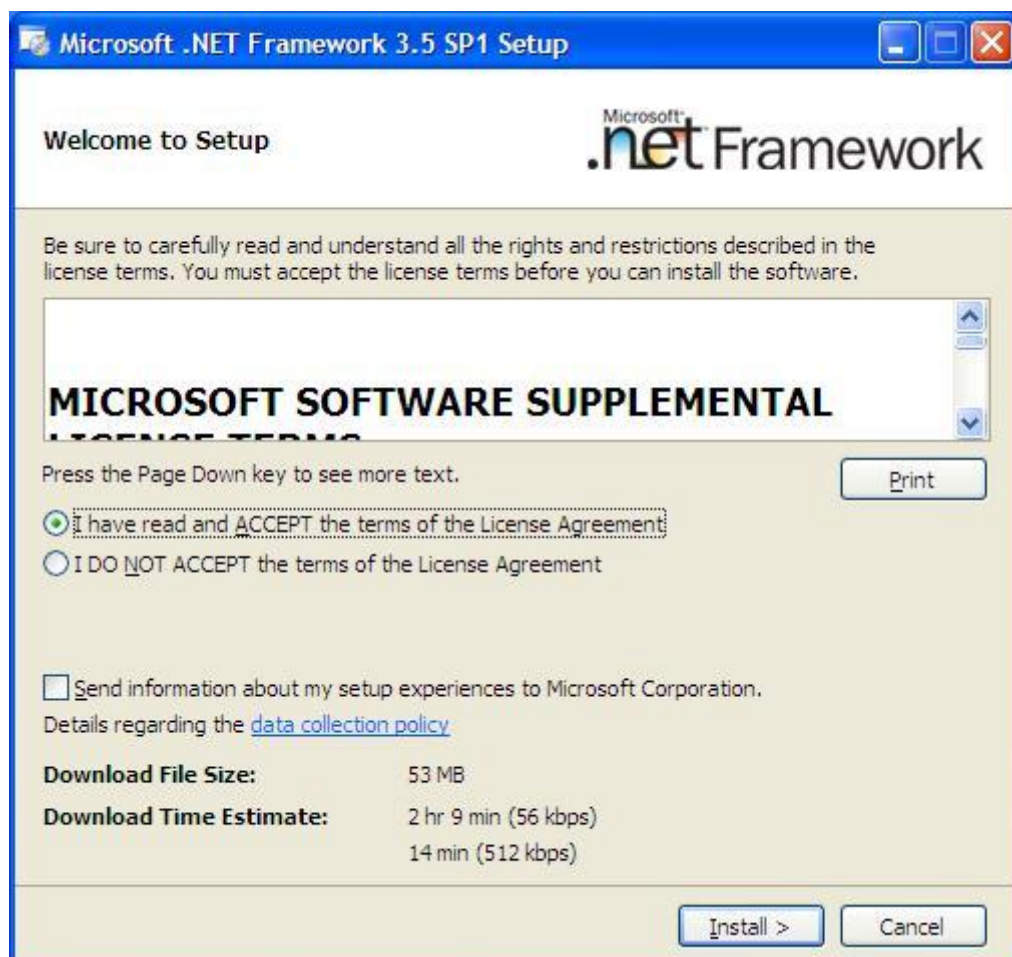

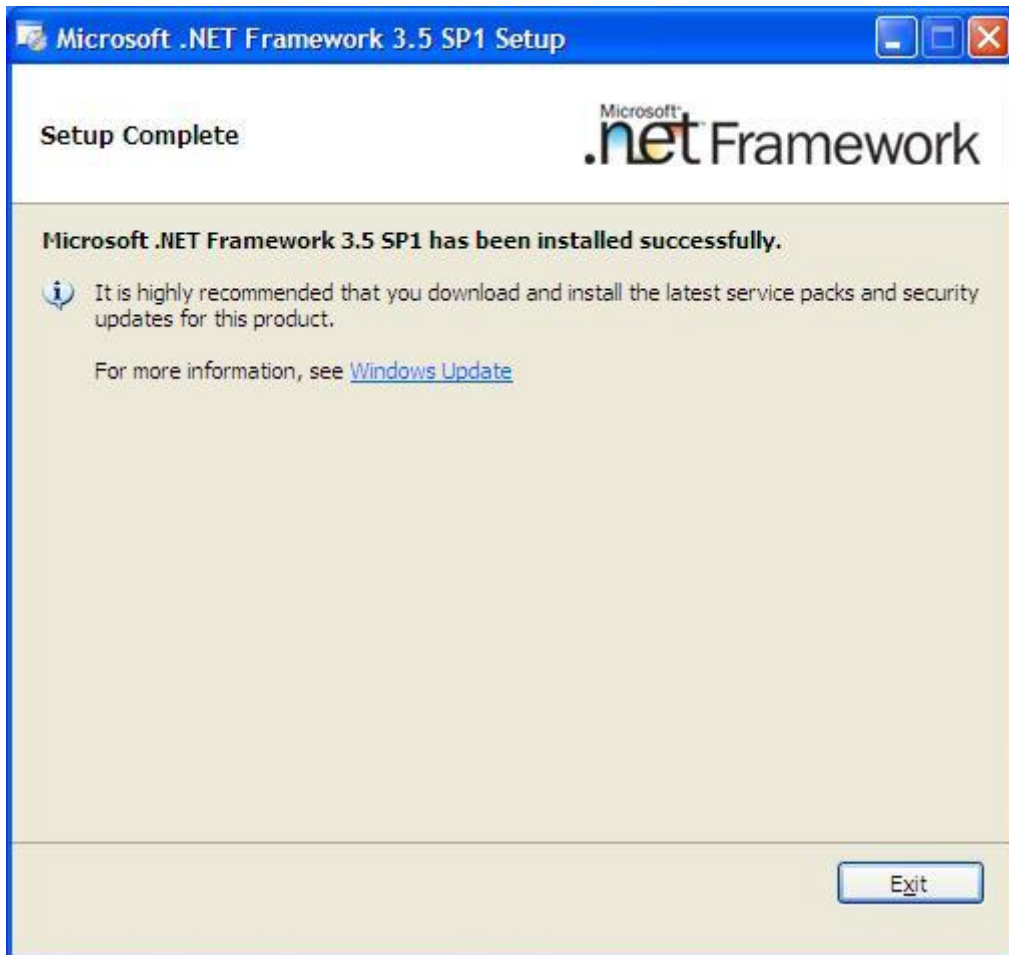

Chapter 5 Touch Screen Installation

This chapter describes how to install drivers and other software that will allow your PenMount 6000 Controller Board to work with different operating systems.

NOTE: PenMount USB drivers support up to 15 USB controllers.

5.1 Introduction to Touch Screen Controller Board

PenMount 6300 USB control board is a touch screen control board designed for USB interface and specific for 4, 5, 8-wire touch screens. It is designed with USB interface features with multiple devices supporting function. PenMount 6300 control board using PenMount 6000 controller that has been designed for those who may like an all-in-one solution with 10-bit A/D converter built-in to make the total printed circuit board denser, circuit diagram also designed for 12-bit ADC for optional. There are two connectors on this board, one connector is for 4, 5, 8-wire touch screen cable (optional), and another is for 4-pin USB A type cable (optional).



Figure 5.1: Bird's Eye View of Control Board

5.2 Windows 2000/XP/2003/Vista Universal Driver Installation for PenMount 6000 Series


Before installing the Windows 2000/XP driver software, you must have the Windows 2000/XP system installed and running on your computer. You must also have one of the following PenMount 6000 series controller or control boards installed: PM6500, PM6300.

5.2.1 Installing Software


If you have an older version of the PenMount Windows 2000/XP driver installed in your system, please remove it first. Follow the steps below to install the PenMount DMC6000 Windows 2000/XP driver.


1. Please make sure your PenMount 6000 device had plugged in advance. If your device uses RS232 interface, please plugged in before the machine is turned on. When the system first detects the controller board, a screen appears that shows “Unknown Device”. Do not use this hardware wizard. Press Cancel.
2. Insert the product CD install **setup.exe**. the screen below would appear. Click touch panel driver



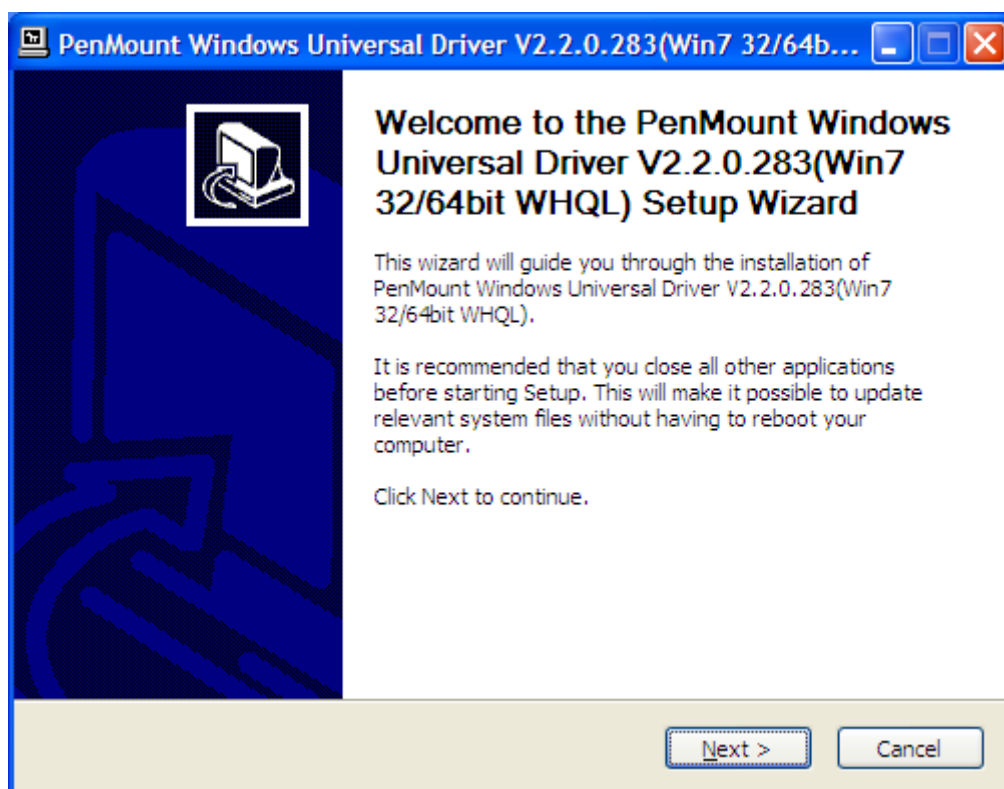


3. A License Agreement appears. Click “**I accept...**” and “**Next**”


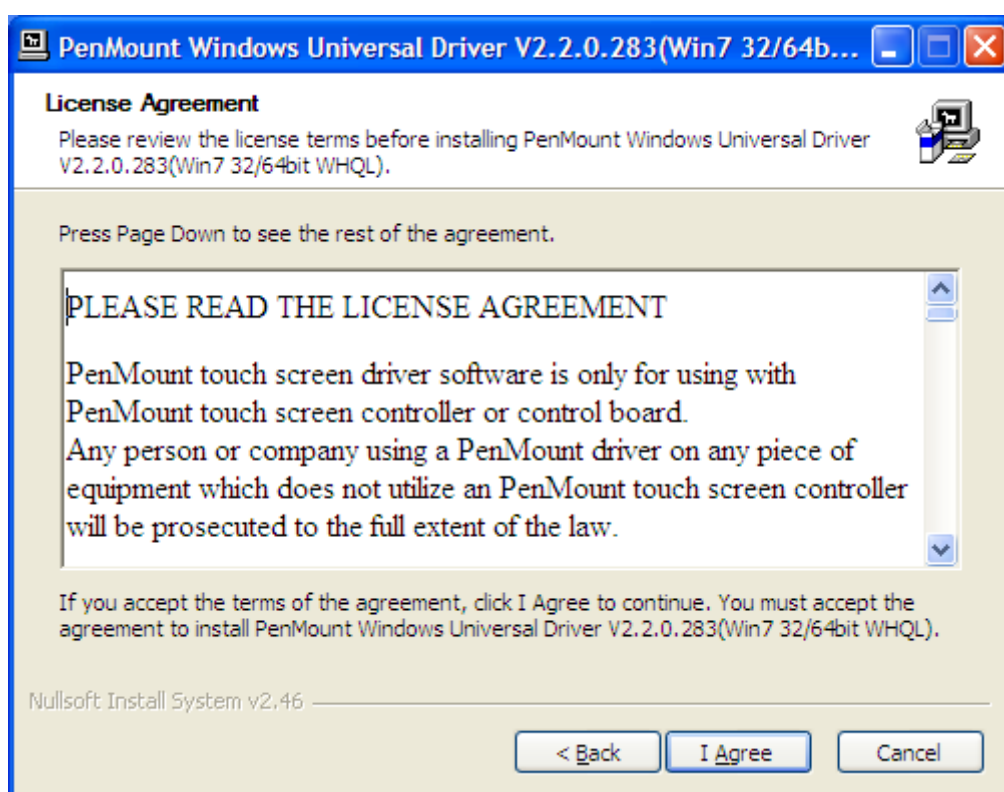


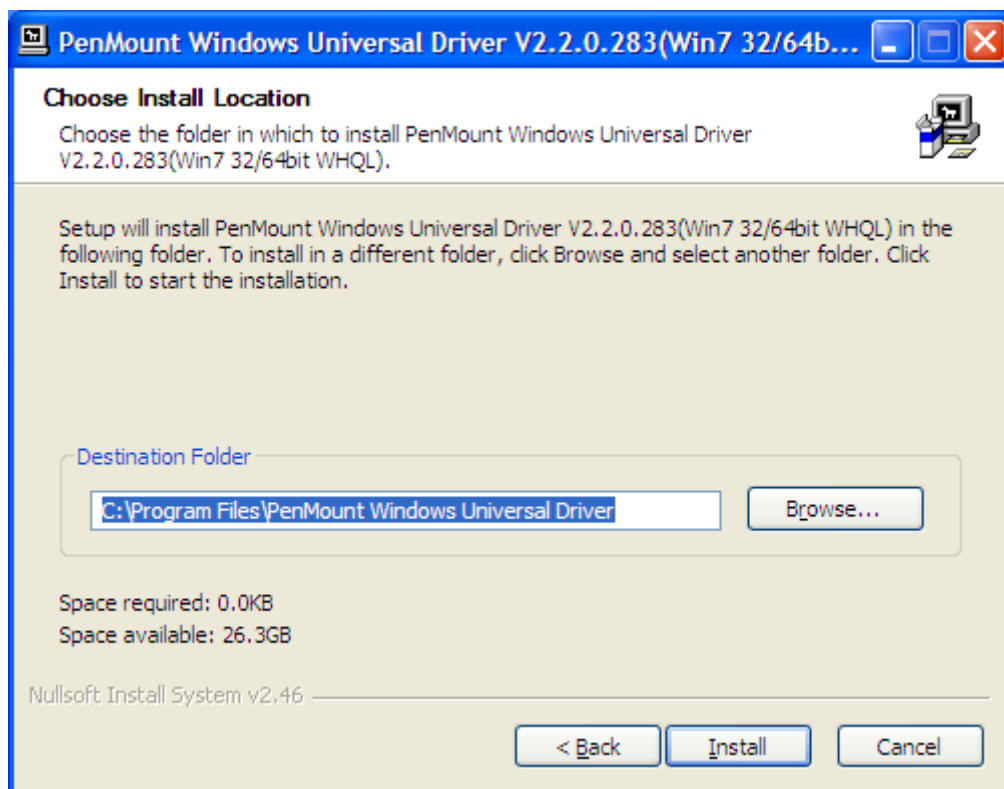

4. Ready to Install the Program. Click **"Install"**

5. Installing

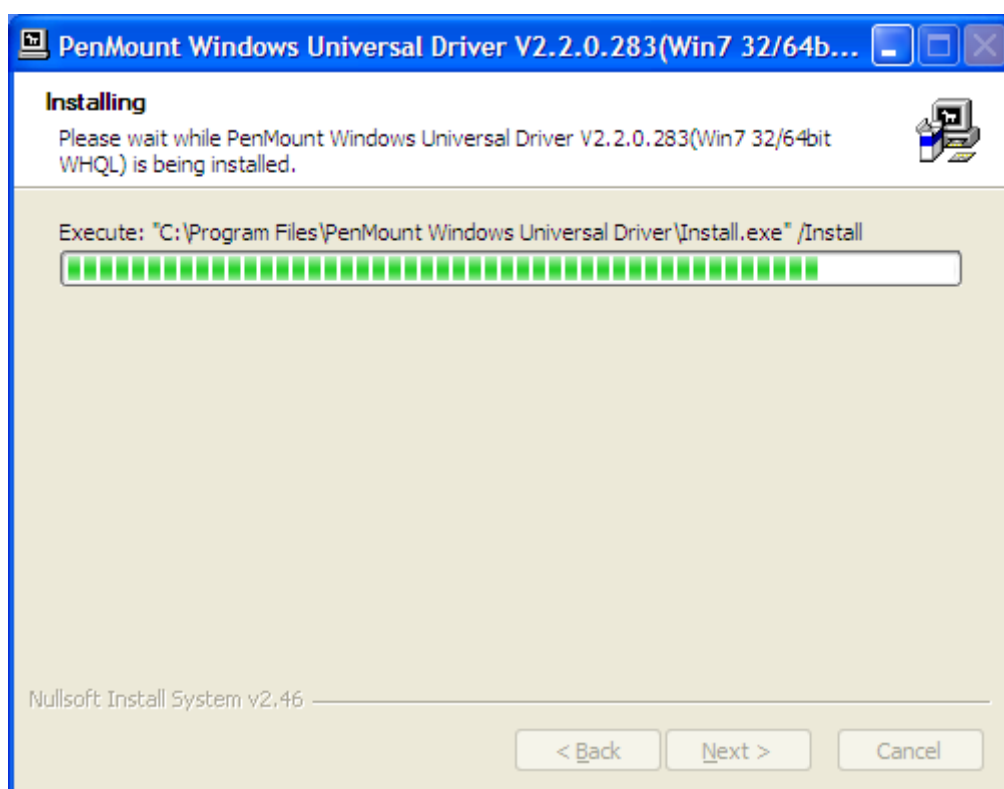

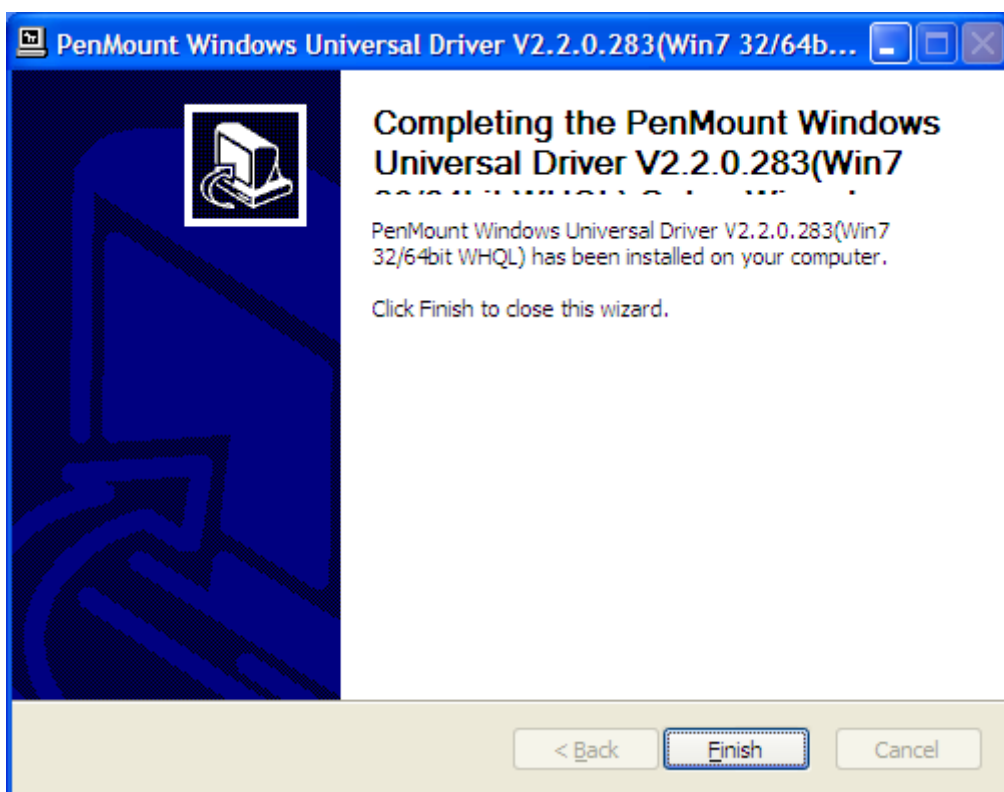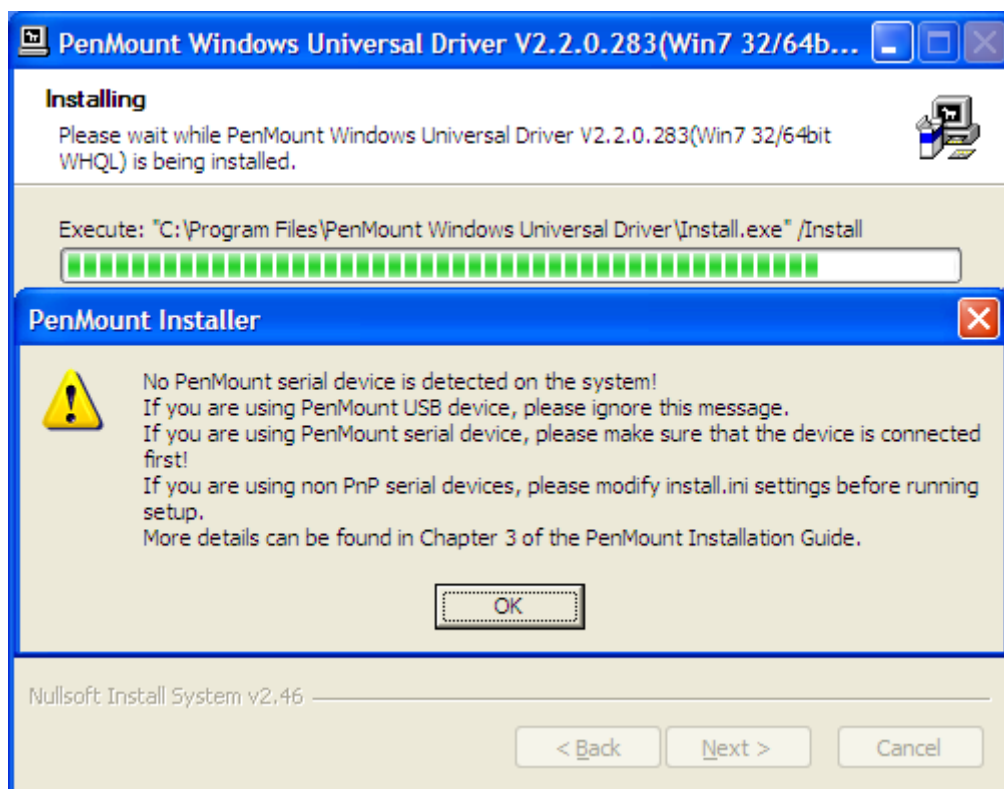

6. The “Install Shield Wizard Completed” appears. Click **Finish**.

5.2.2 Software Functions

Upon rebooting, the computer automatically finds the new 6000 controller board. The touch screen is connected but not calibrated. Follow the procedures below to carry out calibration.


- 1. After installation, click the PenMount Monitor icon “PM” in the menu bar.
- 2. When the PenMount Control Panel appears, select a device to “Calibrate.”

PenMount Control Panel

The functions of the PenMount Control Panel are **Device**, **Multiple Monitors** ,**Tools** and **About**, which are explained in the following sections.

Device

In this window, you can find out that how many devices be detected on your system.

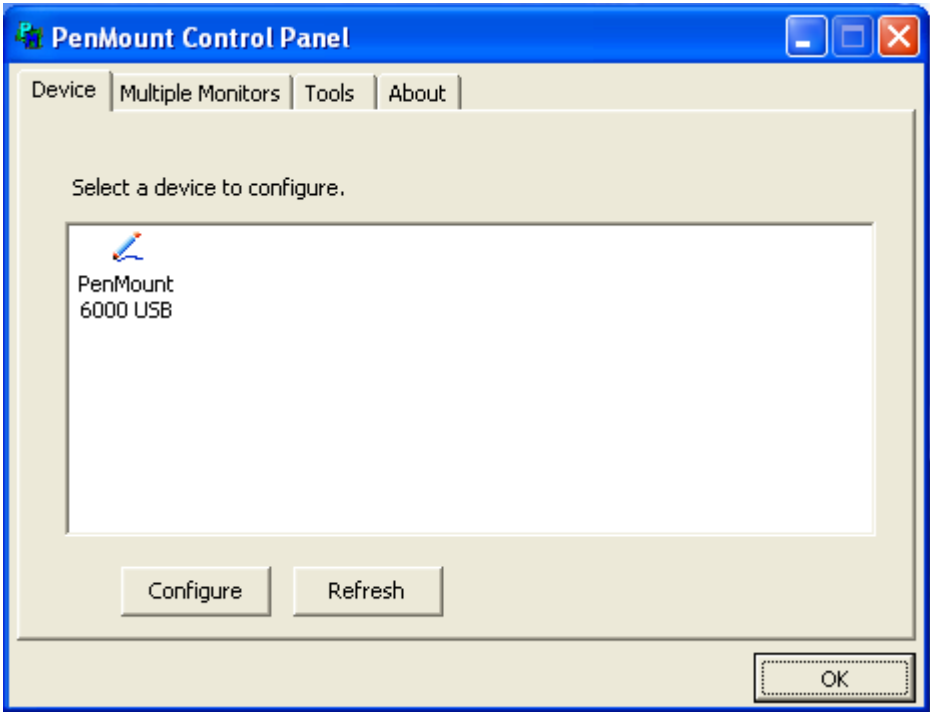


Calibrate

This function offers two ways to calibrate your touch screen. ‘Standard Calibration’ adjusts most touch screens. ‘Advanced Calibration’ adjusts aging touch screens.


Standard Calibration	Click this button and arrows appear pointing to red squares. Use your finger or stylus to touch the red squares in sequence. After the fifth red point calibration is complete. To skip, press ‘ESC’.
----------------------	--

Advanced Calibration	Advanced Calibration uses 4, 9, 16 or 25 points to effectively calibrate touch panel linearity of aged touch screens. Click this button and touch the red squares in sequence with a stylus. To skip, press ESC'.
Command Calibration	Command call calibration function. Use command mode call calibration function, this can uses Standard, 4, 9, 16 or 25 points to calibrate E.g. Please run ms-dos prompt or command prompt c:\Program Files\PenMount Universa Driver\Dmcctrl.exe -calibration 0 (Standard Calibration) Dmcctrl.exe - calibration (\$) 0= Standard Calibration 4=Advanced Calibration 4 9=Advanced Calibration 9 16=Advanced Calibration 16 25=Advanced Calibration 25

1. Please select a device then click “Configure”. You can also double click the device too.

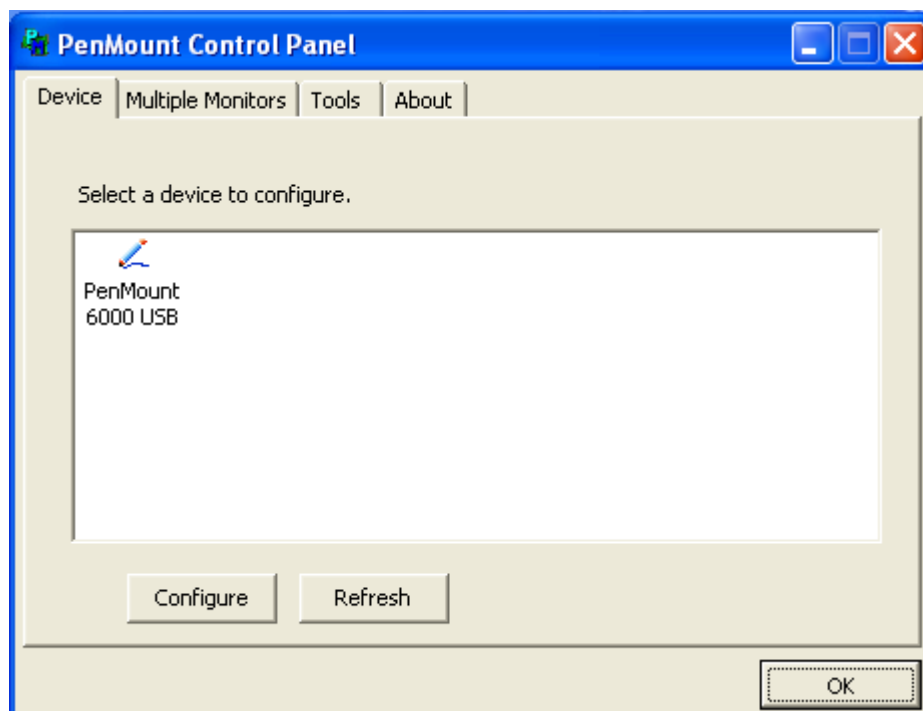


2. Click “Standard Calibration” to start calibration procedure

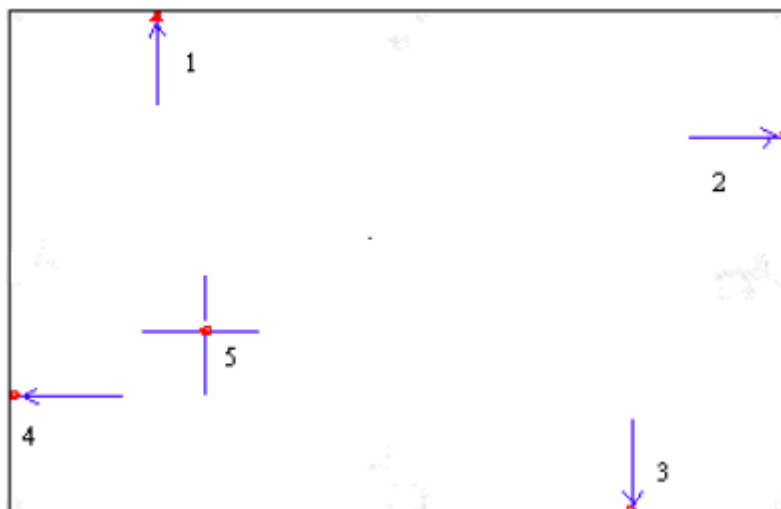

NOTE: The older the touch screen, the more Advanced Mode calibration points you need for an accurate calibration. Use a stylus during Advanced Calibration for greater accuracy. Please follow the step as below:

3. Come back to "PenMount Control Panel" and select "**Tools**" then Click "**Advanced Calibration**".

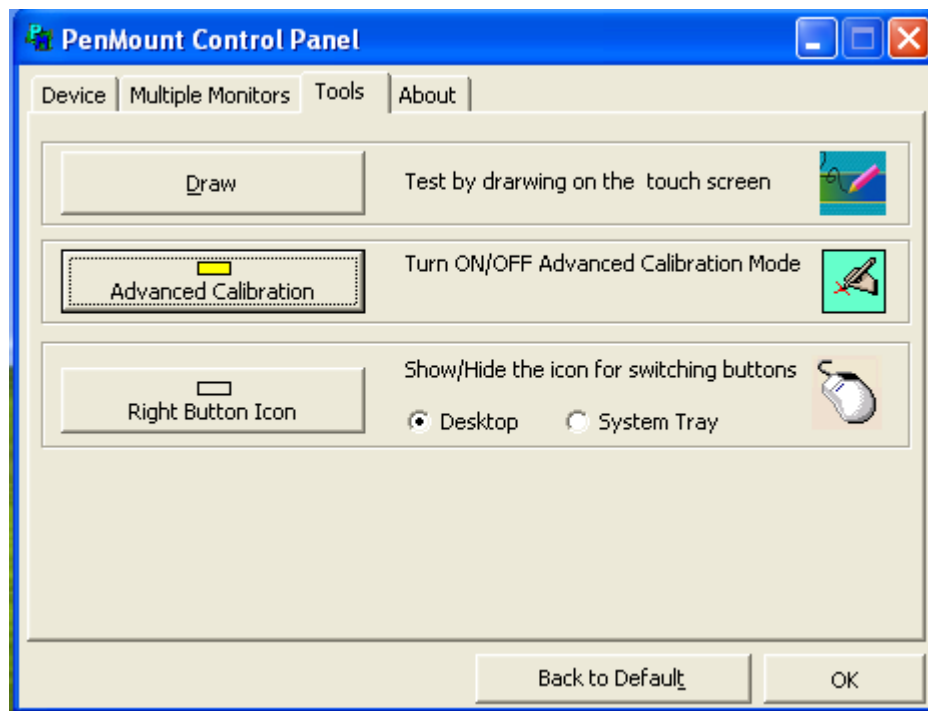

Select “**Device**” to calibrate, then you can start to do “Advanced Calibration”.




NOTE: Recommend to use a stylus during Advanced Calibration for greater accuracy.



Plot Calibration Data	Check this function and a touch panel linearity comparison graph appears when you have finished Advanced Calibration. The blue lines show linearity before calibration and black lines show linearity after calibration.
Turn off EEPROM storage	The function disable for calibration data to write in Controller. The default setting is Enable


Setting

Touch Mode	<p>This mode enables and disables the mouse's ability to drag on-screen icons—useful for configuring POS terminals.</p> <p>Mouse Emulation – Select this mode and the mouse functions as normal and allows dragging of icons.</p> <p>Click on Touch – Select this mode and the mouse only provides a click function, and dragging is disabled</p>
Beep Sound	<p>Enable Beep Sound – turns beep function on and off</p> <p>Beep on Pen Down – beep occurs when pen comes down</p> <p>Beep on Pen Up – beep occurs when pen is lifted up</p> <p>Beep on both – beep occurs when comes down and lifted up</p> <p>Beep Frequency – modifies sound frequency</p> <p>Beep Duration – modifies sound duration</p>
Cursor Stabilizer	Enable the function support to prevent cursor shake.
Use press and hold as right click	You can set the time out and area for you need

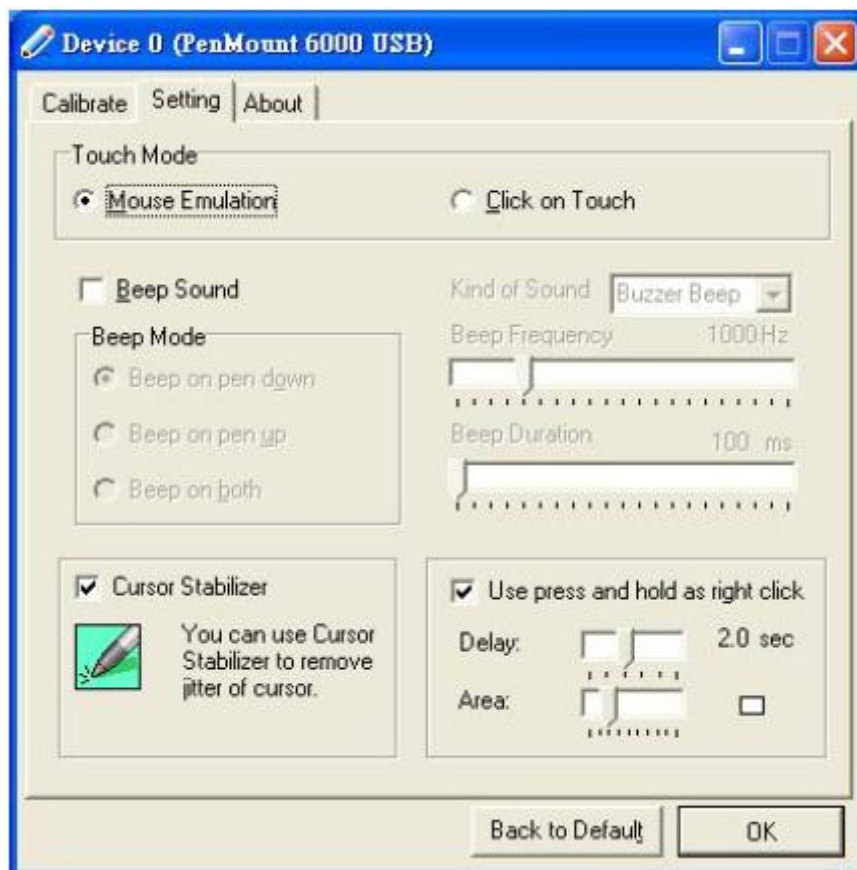

About

This panel displays information about the PenMount controller and driver version.

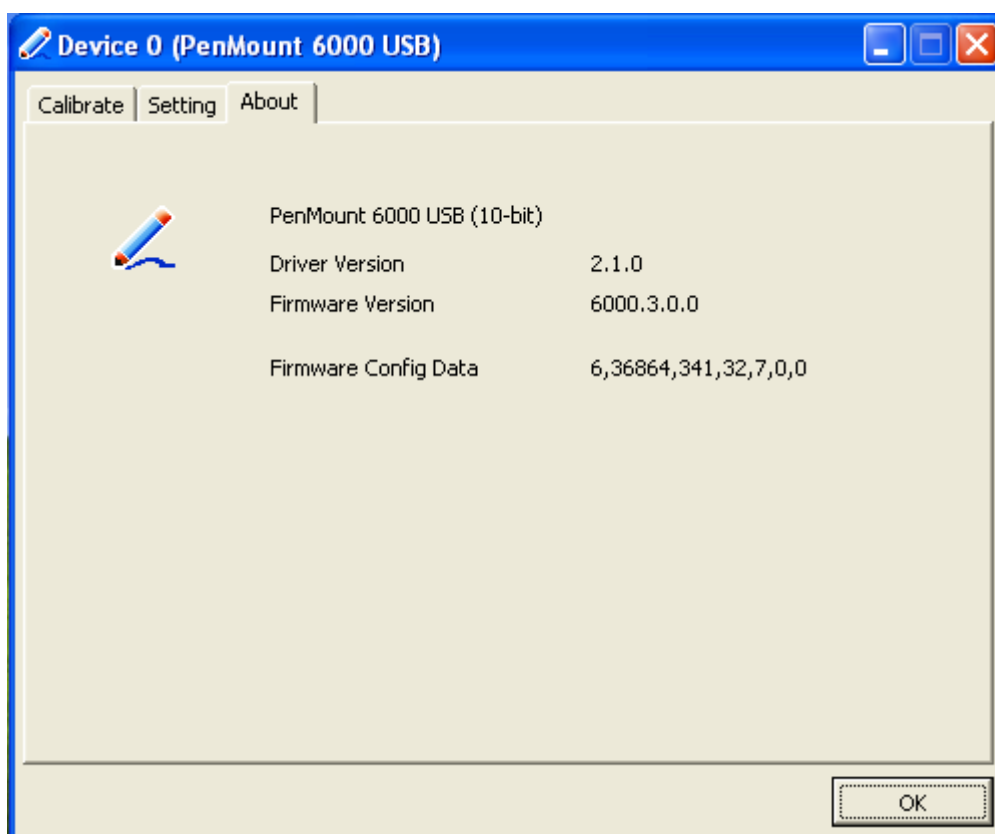

Multiple Monitors


Multiple Monitors supports from two to six touch screen displays for one system. The PenMount drivers for Windows 2000/XP support Multiple Monitors. This function supports from two to six touch screen displays for one system. Each monitor requires its own PenMount touch screen control board, either installed inside the display or in a central unit. The PenMount control boards must be connected to the computer COM ports via the RS-232 interface. Driver installation procedures are the same as for a single monitor. Multiple Monitors supports the following modes:

Windows Extend Monitor Function
Matrox DualHead Multi-Screen Function
nVidia nView Function


NOTE: The Multiple Monitors function is for use with multiple displays only. Do not use this function if you have only one touch screen display. Please note once you turn on this function the Rotating function is disabled.

Enable the multiple display function as follows:


1. Check the “**Multiple Monitor Support**” box; then click “**Map Touch Screens**” to assign touch controllers to displays.

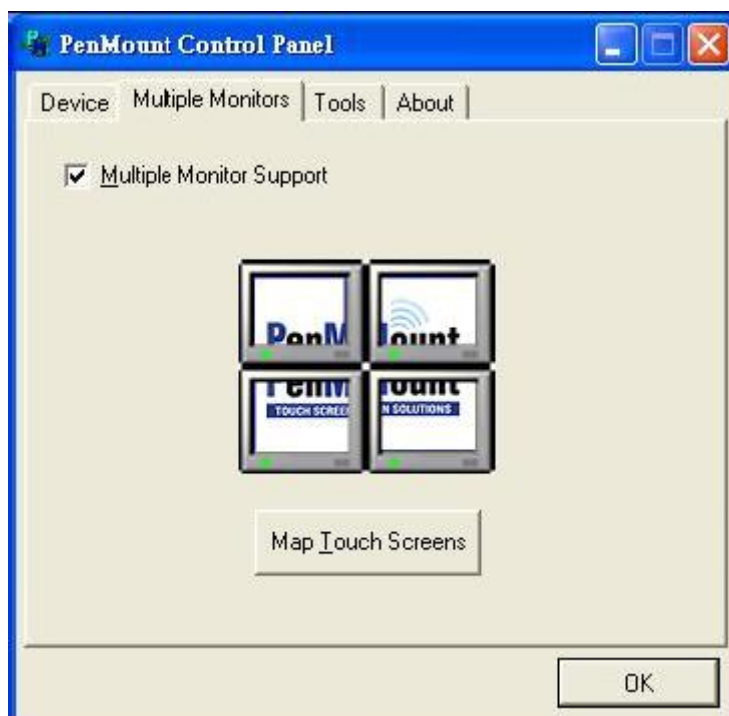

2. When the mapping screen message appears, click “**OK**”

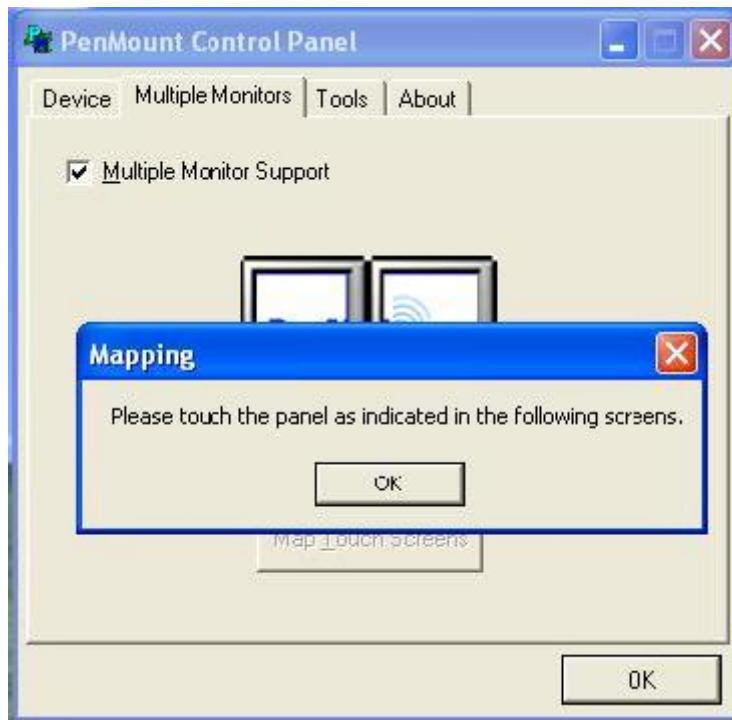

3. Touch each screen as it displays “**Please touch this monitor. Press ‘S’ to skip**” Following this sequence and touching each screen is called **mapping the touch screens**.

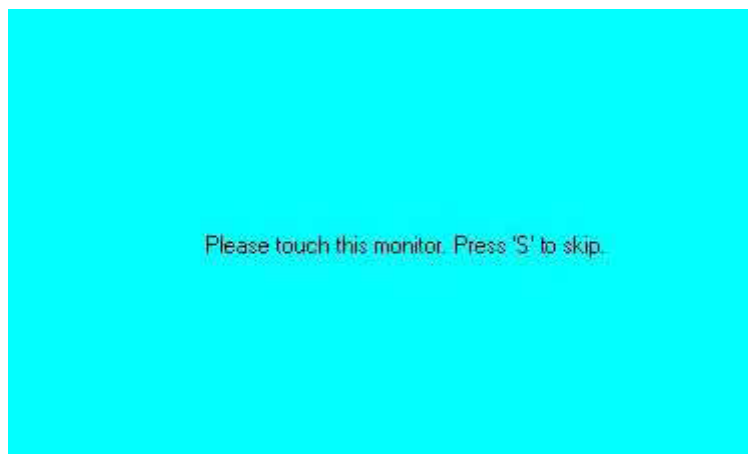


4. After the setting procedure is finished, maybe you need to calibrate for each panel and controller

NOTES:

1. If you used a single VGA output for multiple monitors, please do not use the **Multiple Monitors** function. Just follow the regular procedure for calibration on each of your desktop monitors.
2. The Rotating function is disabled if you use the Multiple Monitors function.
3. If you change the resolution of display or screen address, you have to redo **Map Touch Screens** so the system understands where the displays are.
4. If you more monitor mapping one touch screen, **Please press ‘S’ to skip mapping step.**


Tools

Draw	Tests or demonstrates the PenMount touch screen operation.
Advanced Calibration	Enable Advanced Calibration function
Right Button Icon	Enable right button function. The icon can show on Desktop or System Tray (menu bar).

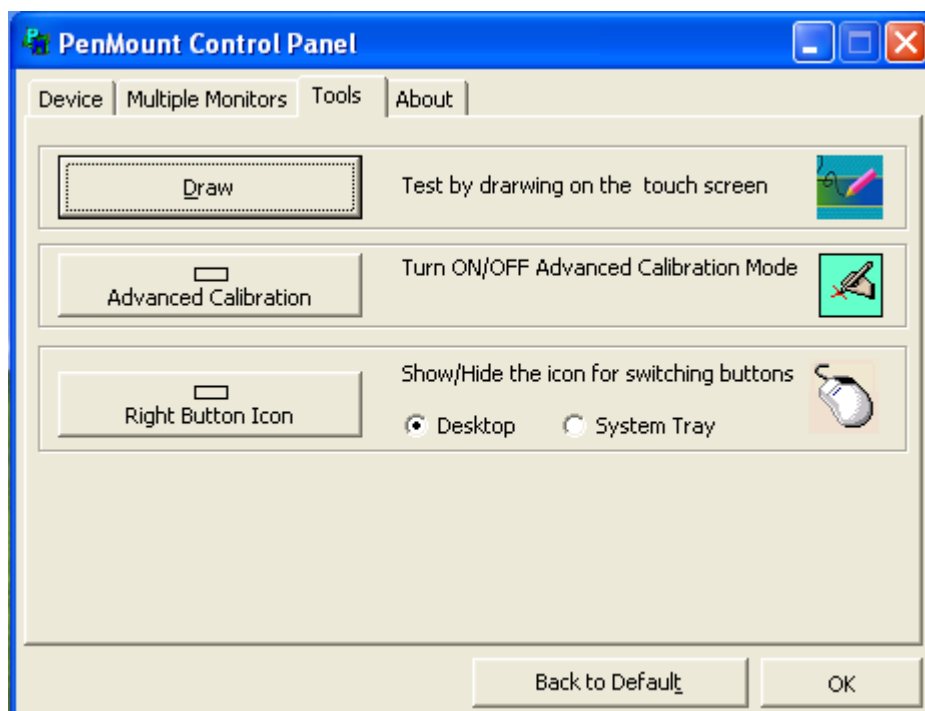

About

You can see how many devices of PenMount controller that are plugged to your system

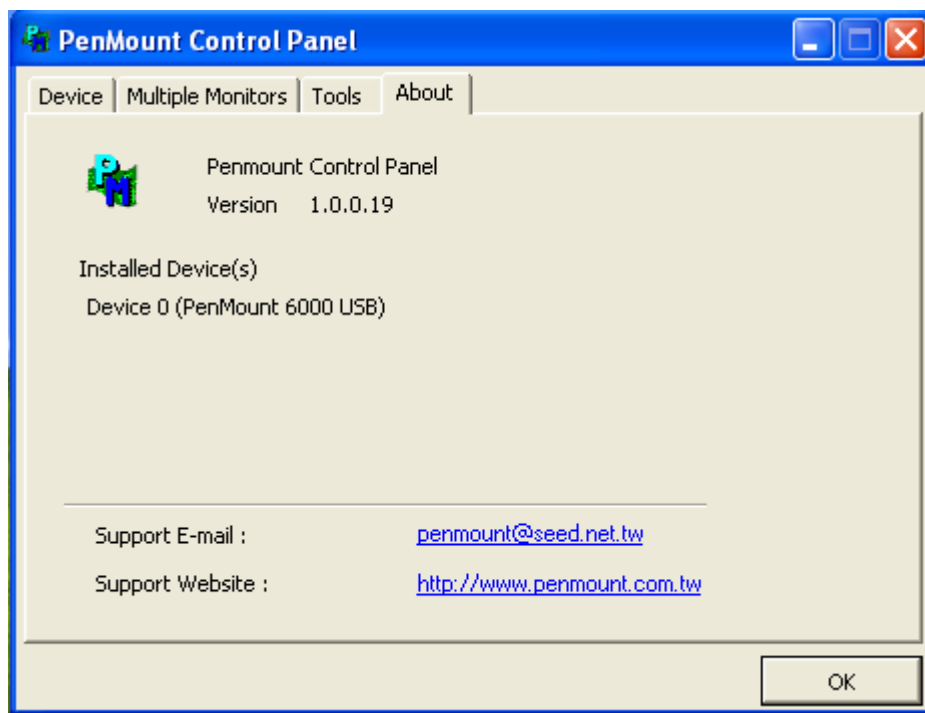


PenMount Monitor Menu Icon

The PenMount monitor icon (PM) appears in the menu bar of Windows 2000/XP system when you turn on PenMount Monitor in PenMount Utilities.



PenMount Monitor has the following function



Control Panel	Open Control Panel Windows
Beep	Setting Beep function for each device
Right Button	When you select this function, a mouse icon appears in the right-bottom of the screen.  Click this icon to switch between Right and Left Button functions.
Exit	Exits the PenMount Monitor function.

PenMount Rotating Functions


The PenMount driver for Windows 2000/XP supports several display rotating software packages.

Windows Me/2000/XP support display rotating software packages such as:

- Portrait's Pivot Screen Rotation Software
- ATI Display Driver Rotate Function
- nVidia Display Driver Rotate Function
- SMI Display Driver Rotate Function
- Intel 845G/GE Display Driver Rotate Function

Configuring the Rotate Function

1. Install the rotation software package.
2. Choose the rotate function (0°, 90°, 180°, 270°) in the 3rd party software. The calibration screen appears automatically. Touch this point and rotation is mapped.

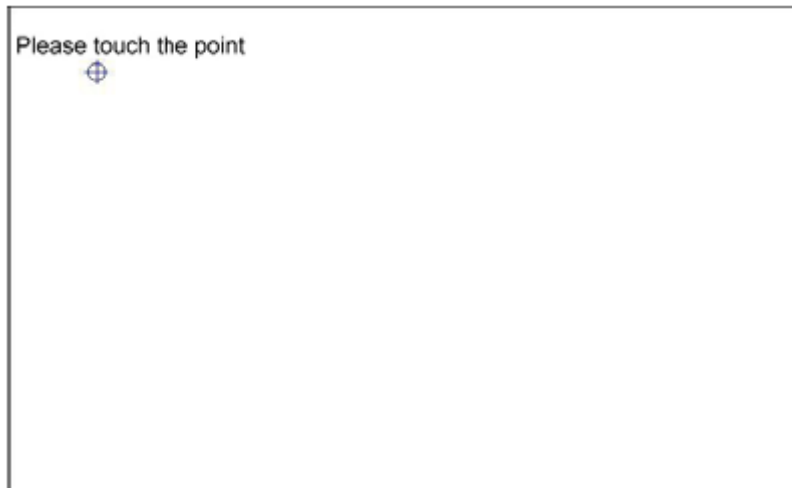

NOTE: The Rotate function is disabled if you use Monitor Mapping