
Itona TC73yy

Hardware User's Guide



VXL Instruments Ltd,
NO.17, House of Excellence,
Electronics City,
Hosur Road,
Bangalore – 560 100, INDIA
www.vxl.net

Copyright and Trademark notices

ALL RIGHTS RESERVED.

Information in this document is subject to change without notice and does not represent a commitment on the part of the manufacturer. No part of this guide may be reproduced or transmitted in any form or means, electronic or mechanical, including photocopying and recording, for any purpose, without the express written permission of the manufacturer.

Every effort has been made to make this guide as complete and as accurate as possible, but no warranty or fitness is implied. The authors and the publisher shall have neither responsibility nor liability to any person or entity with respect to loss or damages arising from the use of information contained in this guide. This disclaimer does not apply in countries where such provisions are inconsistent with local law.

All Trademarks are acknowledged.

Document Number: 600 0101 858 90 A01

First Edition: January 2008

Federal Communication Commission (FCC) Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment Off and On, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-orient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / television technician for help.

Each Thin Client is equipped with a FCC compliance label that shows only the FCC identification number. The full information of the associated label is as follows:

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Warning

- DO NOT open enclosure, Hazard voltages present inside equipment.
- Ensure that all expansion slots (on the back or side of the computer) are covered with metal retaining brackets, and tightly attached to the computer cabinet.
- Only equipment certified to comply with Class B (computer input/output devices, terminals, printer's etc.) should be attached to this equipment, and must have shielded interface cables.
- Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.
- This equipment should not be used in Electro-medical applications.
- There are no user serviceable parts inside. DO NOT open enclosure, Hazard voltages present inside equipment. DO NOT disassemble the equipment as this can nullify your warranty
- DO NOT operate this equipment in corrosive or explosive atmosphere.
- DO NOT operate this equipment outside specified temperature limits.
- This equipment must be earthed.
- The AC socket outlet shall be installed near the equipment and shall be easily accessible.
- Sound Power Level is less than 60dB (A), when measured according to ISO 7779.

Preface

Thank you for purchasing the Itona TC73yy Series Thin Client. This guide contains information to setup and use the hardware of Itona TC73yy Series.

The guide consists of the following chapters:

- **Introduction:** provides an overview of the product.
- **Installation:** contains the procedure to setup the hardware.
- **Specifications:** provides hardware, mechanical, electrical, interface and operating environment specifications.
- **Connectors and Cables:** provides detailed specifications for connectors and cables used with the product.
- **Troubleshooting:** provides solutions to problems that you may encounter while using the product.

Table of Contents

Introduction	6
Overview	6
Features	7
Optional Features	7
Installation	8
Step One: Unpack	8
Step Two: Prepare	8
Step Three: Connect accessories and power	9
Step Four: Connect to the Server	11
LAN connection through TCP/IP	11
Direct Connection through RS232	12
Dial-In Remote Connection through a Modem	12
Specifications	13
Hardware	13
Mechanical	13
Environmental Operating	13
Electrical	13
Connectors and Cables	14
Connectors	14
COM Port	14
Printer Port (Parallel)	14
10/100 LAN Port	15
Video and DVI Port	15
Mouse / Keyboard Port	16
Audio / Microphone Port	16
USB Port	16
Cables	17
10/100 LAN Cable	17
COM Port (Serial Port) Cables	17
Printer Cable	18
Troubleshooting	19

Introduction

Overview

Thin Clients are essentially terminal devices that connect to multi-user application servers operating under Citrix MetaFrame and Windows 2000/ 2003 operating systems.

This guide covers installation and hardware details of Itona TC73yy Series.



Itona TC73yy

Itona TC73yy Series deliver smart and robust solutions for Thin Client computing. They are aesthetically and ergonomically designed compact desktop, providing simultaneous full screen connectivity to Windows and UNIX application servers – a powerful business alternative to users using Win32 applications while continuing access to legacy UNIX applications.

They communicate with application servers via the ICA protocol developed by Citrix Systems Inc., Remote Desktop Protocol from Microsoft and a host of other popular connectivity protocols. Please refer to the Software User's Guide for information about connection protocols supported by your model.

Features

The product is equipped with a 10/100 Ethernet port that gives an instant connection to a multi-user Windows NT application server. Also provided are serial, parallel and video display ports. USB and PS/2 compatible keyboard/Mouse ports are available for quick setup and use.

Optional Features

- Smart Card reader
- Wireless LAN

Note: The optional features cannot be upgraded in the field. Please contact the reseller or dealer from whom you purchased the product for information about optional features.

Installation

This chapter describes hardware installation of the product.

Step One: Unpack

Unpack the unit taking care not to drop the product whilst removing from the packaging. The carton in which the product was shipped to you contains the following:

- Itona TC73yy Series Thin Client
- Pedestal Set
- Power Cord (Optional)
- Mouse (Optional)
- Hardware Installation Guide

When you open the carton, if you find any discrepancy between the contents of the carton and the above list, contact the dealer or reseller from whom you have purchased the product, immediately.



NOTE: PLEASE RETAIN THE ORIGINAL CARTON AND PACKING MATERIAL. THEY WOULD BE REQUIRED TO AVOID DAMAGE DURING TRANSIT (IF REQUIRED IN FUTURE).

Step Two: Prepare

1. The site where you want to install the product must have the following
2.
 - 100~240V AC, 1.2A, 50/60 Hz, 3-pin power Inlet for client (Itona TC73yy).



NOTE: ENSURE THAT THE POWER INLET PLUG IS PROPERLY REGULATED AND EARTHED. A FLOATING GROUND / CHASSIS COULD CAUSE AN ELECTRIC SHOCK.


- Fix the pedestals at the bottom of the Itona TC73yy.
 - Well ventilated, clean, dry and dust free atmosphere
 - Specified environmental conditions (refer to the section on specifications)
 - Table or desk of suitable size.
3. Place the product on the table in a location that provides quick and easy access to the power Inlet plug to shutdown the power in emergencies.
 4. Ensure a minimum space of 2 inches (5 cm) on all sides of the unit for efficient convection cooling.

Step Three: Connect accessories and power







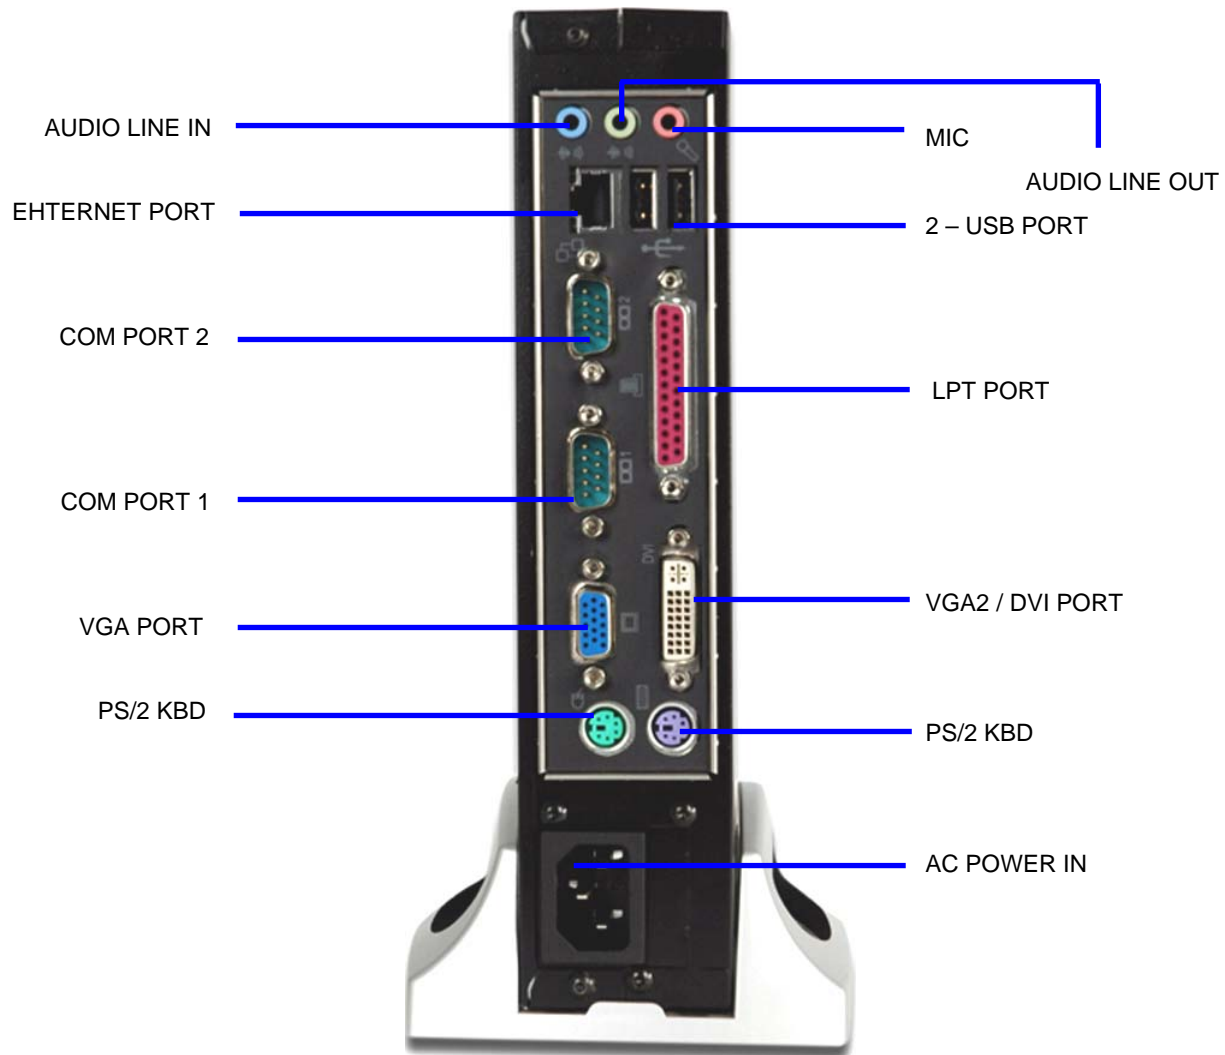





NOTE: BEFORE CONNECTING ANY CABLES, ENSURE POWER CABLE IS UNPLUGGED FROM THE UNIT. PLEASE USE 6A (MIN) / 250V AC 0.75 sq mm, H05VV-F CERTIFIED POWER CORD.

Pictures below show the various connectors available on the rear panel of the client.



Itona TC73yy
Rear view

The table below identifies the devices to be used with each connector of the client.

Instructions to connect various accessories	Connector Symbol
✓ Connect the DVI cable from your display unit to the DVI port	DVI
✓ Connect the video cable from your display unit to the video port	
✓ Connect USB devices to the USB ports	
✓ Connect external powered speakers to the audio output(LINE OUT) port	
✓ Connect an external audio device to the Microphone(LINE IN) input port	
✓ Connect microphone to the Microphone input port	
✓ Connect PS/2 keyboard to the PS/2 Keyboard port	
✓ Connect PS/2 mouse to the PS/2 Mouse port	
✓ Connect serial devices to the COM ports	
✓ Connect parallel printer to the parallel port	
✓ Connect LAN cable to the RJ45 Ethernet port	

Caution: Ensure that COM1, COM2, VGA, DVI and Parallel ports are adequately fastened with the screws provided with the cables.

Step Four: Connect to the Server


The Thin Client can be physically connected to the server/network in three ways:

- LAN connection through TCP/IP
- Direct connection through RS232
- Dial-in remote connection through a modem

LAN connection through TCP/IP


Connect one end of a 10/100/ 1000 cable to the LAN port of the client. Connect the other end to a LAN hub as shown in the figure below.

LAN Connection through TCP/IP

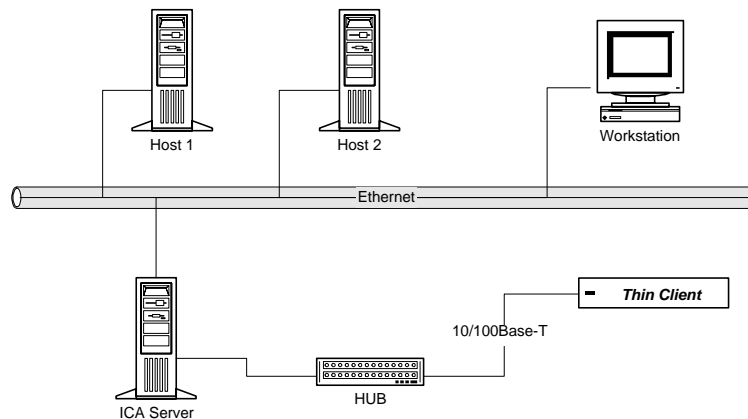

Direct Connection through RS232


Connect one end of an RS232 cross cable to a serial port of the client. Connect the other end to a serial port of the server as shown in the figure below.

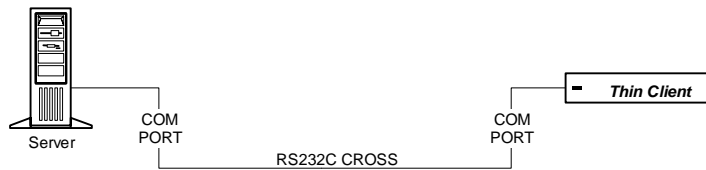

Direct Connection through RS232

Dial-In Remote Connection through a Modem

Connect one end of an RS232 straight cable to a serial port of the client. Connect the other end to a modem as shown in the figure below.

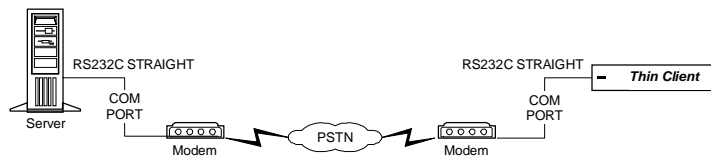

Dial-In Remote Connection through Modem

Press the power button to power up the Itona TC73yy. The front panel LED lights up and the client boots up with a BEEP sound and takes you to the Connection Manager screen. Refer to the *Software User's Guide* for configuring the client.

Specifications

Hardware

- Processor: VIA C7™ nanoBGA2 1GHz
- VGA Memory: Shared Video Memory 64MB max
- Flash : IDE 40 pin
- RAM: 128MB ~ 1GB DDRII 400/533MHz
- Smart Card reader (Optional)
- Wireless LAN (Optional)

Mechanical

Itona TC73yy

- Height: 228 mm.
- Width: 50 mm.
- Depth: 230 mm.
- Weight: 3.0 Kg (max)

Environmental Operating

- Temperature : + 5°C to +40°C
- Storage temperature: - 20° C to +65°C
- Humidity: 20% to 80% RH non-condensing

Electrical

- Line Voltage: 100V to 240V AC (+6, -10%)
- Line Frequency: 50 / 60 Hz
- Power: 30W max
- Power Inlet: 1.2A, 3-pin power plug (IEC 320)

Connectors and Cables


Connectors

The following tables provide pin details for various connectors on the rear panel of the client.

COM Port

9-pin D-type male connector. RS232C compatible, operating at 115.2K baud maximum


Pin	Signal	Description
1	DCD	Data Carrier Detect
2	RxD	Receive Data
3	TxD	Transmit Data
4	DTR	Data Terminal Ready
5	GND	Signal Ground
6	DSR	Data Set Ready
7	RTS	Request To Send
8	CTS	Clear To Send
9	NC	Not Connected



Printer Port (Parallel)

25-pin D-type female connector. ECP/EPP compatible.


Pin	Signal
1	STROBE
2 - 9	DATA 0 – 7
10	ACKNOWLEDGE
11	BUSY
12	PAPER END
15	ERROR
18 - 25	GROUND

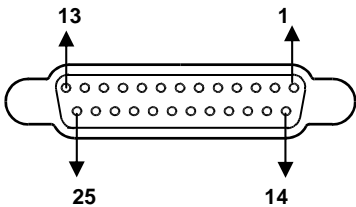

10/100/1000 LAN Port

RJ-45 modular 8-pin jack. 10/100/1000 Mbps

Pin	Signal
1	TxD+
2	TxD-
3	RxD+
6	RxD-




Video Port

15-pin D-type female connector

Pin	Signal
1	Red
2	Green
3	Blue
4	No Connection
5	GND

Pin	Signal
6	Red return GND
7	Green return GND
8	Blue return GND
9	No Connection
10	No Connection

Pin	Signal
11	No Connection
12	No Connection
13	Horizontal Sync
14	Vertical Sync
15	No Connection

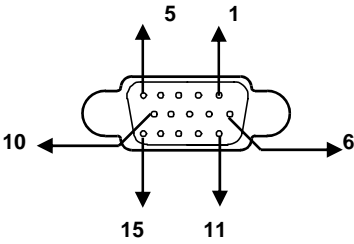


DVI Port

Pin C1 to C5 carry the analogue signal.24+ 5 pin DVI Connector.

Pin	Signal
1	TMDS Data2-
2	TMDS Data2+
3	TMDS Data2 Shield
4	No Connection
5	No Connection
6	DDC Clock
7	DDC Data
8	No Connection
9	TMDS Data1-
10	TMDS Data2+
11	TMDS Data1 Shield
12	No Connection
13	No Connection
14	+5 V Power
15	Ground(for +5V)


Pin	Signal
16	Hot Plug Detect
17	TMDS Data0-
18	TMDSData0+
19	TMDS Data0Shield
20	No Connection
21	No Connection
22	TMDS Clock Shield
23	TMDS Clock +
24	TMDS Clock <
C1	Analog Red
C2	Analog Green
C3	Analog Blue
C4	Analog Horizontal Sync
C5	Analog Ground (analog R, G & B return)

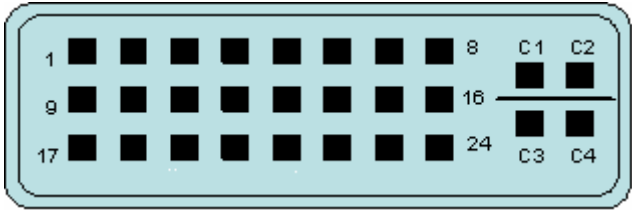

Mouse / Keyboard Port

PS/2 Mouse / Keyboard connector

Pin	Signal	Pin	Signal
1	Mouse / KBD data	4	VCC
2	NC	5	Mouse / KBD Clock
3	GND	6	NC




Audio / Microphone Port

Standard audio jacks.

USB Port 2.0

4-pin series-A receptacle. 4~ 5 ports depending on the model.


Pin	Signal
1	VCC
2	D-
3	D+
4	GND




Cables

10/100 LAN Cable

Cross Connection - (Without Hub)

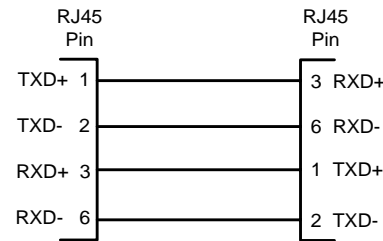


Straight Connection - (With Hub)

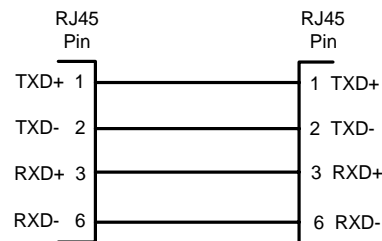


COM Port (Serial Port) Cables

Serial devices like modems and printers use 25 pin D-type connectors for RS232 connections. In order to connect an RS232 device with a 25-pin connector, 9-pin connector signals must be converted to 25-pin connector signals as shown in the following diagram.

9-pin to 25-pin Cross Connection

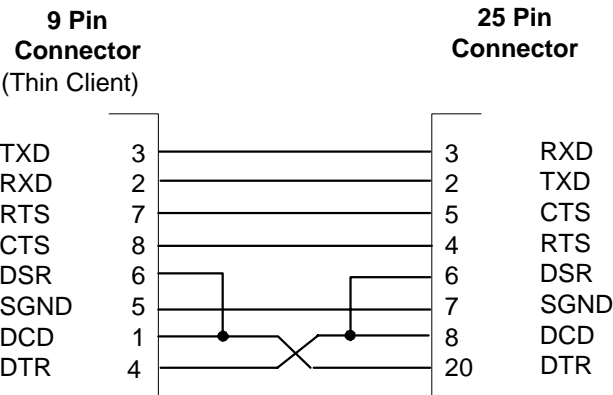


9-pin to 25-pin Straight Connection

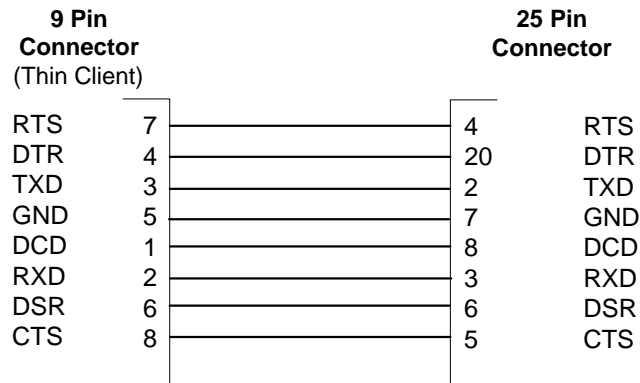

Printer Cable

The following table shows the pin connections of the Standard Centronics parallel cable. Some manufacturers change pin functions or polarity on their printers. For such printers, custom cables may be necessary. Refer to your printer manual for cabling information in such cases.

Note: Please use certified shielded cable only.

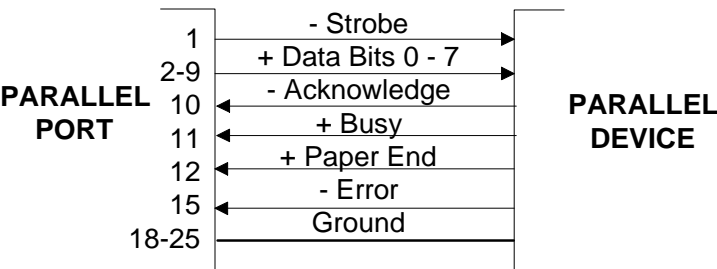

Troubleshooting

This chapter contains solutions for problems you may encounter while using the product.

<i>Problem</i>	<i>Solution</i>
<ul style="list-style-type: none">• The Power-LED on front panel does not glow when the client is switched on.	<ul style="list-style-type: none">✓ Ensure that the power cord is plugged into an AC outlet.✓ Check the fuse in the power-plug, if available.
<ul style="list-style-type: none">• There is no display, though the power-indicating LED glows.	<ul style="list-style-type: none">✓ Ensure that the video cable is properly connected.
<ul style="list-style-type: none">• The mouse (<i>or</i> keyboard) does not work when the client is switched on.	<ul style="list-style-type: none">✓ Ensure that the mouse (<i>or keyboard</i>) is plugged into the correct PS/2 port on the rear panel