



---

## Lynx™ BT Readers



## Quick Reference Guide

---

Datalogic Scanning, Inc.  
959 Terry Street  
Eugene, Oregon 97402  
Telephone: (541) 683-5700  
Fax: (541) 345-7140

An Unpublished Work - All rights reserved. No part of the contents of this documentation or the procedures described therein may be reproduced or transmitted in any form or by any means without prior written permission of Datalogic Scanning, Inc. or its subsidiaries or affiliates ("Datalogic" or "Datalogic Scanning"). Owners of Datalogic products are hereby granted a non-exclusive, revocable license to reproduce and transmit this documentation for the purchaser's own internal business purposes. Purchaser shall not remove or alter any proprietary notices, including copyright notices, contained in this documentation and shall ensure that all notices appear on any reproductions of the documentation.

Should future revisions of this manual be published, you can acquire printed versions by contacting your Datalogic representative. Electronic versions may either be downloadable from the Datalogic website ([www.scanning.datalogic.com](http://www.scanning.datalogic.com)) or provided on appropriate media. If you visit our website and would like to make comments or suggestions about this or other Datalogic publications, please let us know via the "Contact Datalogic" page.

#### **DISCLAIMER**

Datalogic has taken reasonable measures to provide information in this manual that is complete and accurate, however, Datalogic reserves the right to change any specification at any time without prior notice. Datalogic is a registered trademark of Datalogic S.p.A. in many countries and the Datalogic logo is a trademark of Datalogic S.p.A. all licensed to Datalogic Scanning, Inc. All other trademarks and trade names referred to herein are property of their respective owners.

# CONTENTS

---

Updates and Language Availability .....	iv
Using Lynx™ BT Series Readers.....	1
Charging the Batteries .....	2
Lynx™ BT Operation.....	4
Lynx™ BT Configuration .....	8
Operating Test .....	10
Lynx™ BT Default Configuration.....	11
Technical Features.....	13
Troubleshooting .....	16
Patents .....	17
Services and Support.....	17
Warranty.....	17
Compliance .....	18
Hex Numeric Table .....	23

# UPDATES AND LANGUAGE AVAILABILITY

---

## UK/US

The latest drivers and documentation updates for this product are available on Internet.

Log on to: [www.scanning.datalogic.com](http://www.scanning.datalogic.com)

## I

Su Internet sono disponibili le versioni aggiornate di driver e documentazione di questo prodotto. Questo manuale è disponibile anche nella versione italiana.

Collegarsi a: [www.scanning.datalogic.com](http://www.scanning.datalogic.com)

## F

Les versions mises à jour de drivers et documentation de ce produit sont disponibles sur Internet. Ce manuel est aussi disponible en version française.

Cliquez sur: [www.scanning.datalogic.com](http://www.scanning.datalogic.com)

## D

Im Internet finden Sie die aktuellsten Versionen der Treiber und Dokumentation für dieses Produkt. Die deutschsprachige Version dieses Handbuches ist auch verfügbar.

Adresse : [www.scanning.datalogic.com](http://www.scanning.datalogic.com)

## E

En Internet están disponibles las versiones actualizadas de los drivers y documentación de este producto. También está disponible la versión en español de este manual.

Dirección Internet: [www.scanning.datalogic.com](http://www.scanning.datalogic.com)

---

## USING LYNX™ BT SERIES READERS

---

The Lynx™ BT (Lynx™ Bluetooth®) series reader is a wireless scanner communicating in the 2.4 GHz ISM band and using the Serial Port Profile (SPP).

The Lynx™ BT series reader, paired with an OM-1000 BT cradle, builds a Cordless Reading System for the collection, decoding and transmission of decoded data. OM-1000 BT can be connected to a Host PC through a USB, RS232 or Wedge emulation cable. For details refer to the OM-1000 BT Quick Reference Guide. OM-1000 BT also serves as a battery charger for Lynx™ BT.


Together with a Bluetooth® compatible remote device, Lynx™ BT also builds a Cordless Reading System for the collection, decoding and transmission of decoded data. The Bluetooth® compatible remote device can be a PC, PDA, printer, etc with a built-in Bluetooth® device or with external Bluetooth® adapter (i.e. a Bluetooth® dongle).

**Using this Quick Reference Manual, you can initialize and start using your Lynx™ BT reader with its default values for communicating with a Bluetooth® device. To change the default values or for details about general configuration commands, refer to the Lynx™ BT Reference Manual on the configuration CD-ROM.**

Thanks to its aiming system, Lynx™ BT visually indicates the reading area and since Lynx™ BT is a powerful omni-directional reader, the orientation of the symbol is not important.


### AIMING SYSTEM

The Lynx™ BT reader uses an intelligent aiming system similar to those on cameras. By partially pulling the trigger, the aiming system indicates a field of view to be positioned over the code:

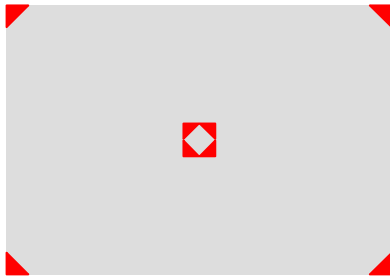

**Aiming System**


When you pull the trigger completely a red beam illuminates the code. If the aiming system is centered and the entire code is within the aiming system, you will get a good read. The field of view changes size as you move the reader closer or farther away from the code.

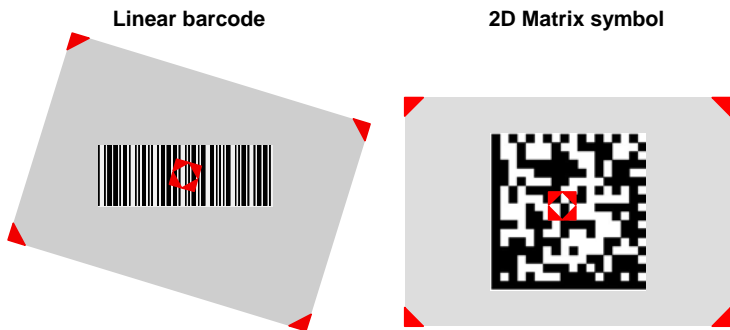

**Relative Size and Location of Aiming System Pattern**

The field of view indicated by the aiming system will be smaller when the Lynx™ BT is closer to the code and larger when it is farther from the code. Symbologies with smaller bars or elements (mil size) should be read closer to the unit. Symbologies with larger bars or elements (mil size) should be read farther from the unit.

Successful reading is signaled by an audible tone plus a good-read green led.



**NOTE** *If reading codes positioned on reflective surfaces, it may be necessary to tilt the reader with respect to the code and/or set the Camera Control parameters. For configuring the Camera Control parameters refer to the Lynx™ BT Reference Manual available on the CD-ROM.*


## CHARGING THE BATTERIES

By placing the reader into the C-1000 battery charger or the OM-1000 BT cradle it is possible to charge the Lynx™ BT batteries. Make sure the charging LED goes on.

The LEDs positioned on the battery charger signal the charge status, as described in the following table:

LED	STATUS
Charging	Red On = the battery charge is in progress.
Batt Full	Green On = the battery is completely charged.

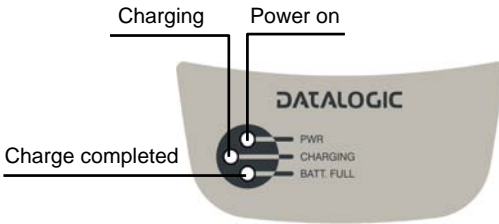

**NOTE**


*The batteries must be charged at a temperature ranging from 0° to 45 °C (+32° to +113 °F).*

For further details about LED functioning refer to the C-1000 and OM-1000 BT Quick Reference Guide.

## CHANGING THE BATTERIES

To change the batteries of your reader, unscrew the battery cover screw, replace the old battery pack with a new one of the same type, then insert the cover onto the handle and screw it back into place. (See the following figures).

To turn on the reader, press the trigger.

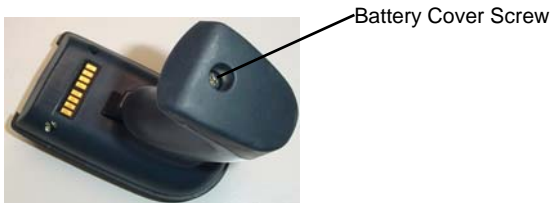**WARNING**

***Do not incinerate, disassemble, short terminals or expose to high temperature. Risk of fire, explosion. Use specified charger only. Risk of explosion if the battery is replaced by an incorrect type. Dispose of the batteries as required by the relevant laws in force.***

## POWERING THE C-1000/OM-1000 BT




**CAUTION**

*Connections should always be made with power off!*

Apply power to C-1000/OM-1000 BT by connecting a power supply unit to the connector on the rear panel of the battery charger/cradle.

C-1000/OM-1000 BT is ready to charge Lynx™ BT Series readers with Li-Ion batteries.

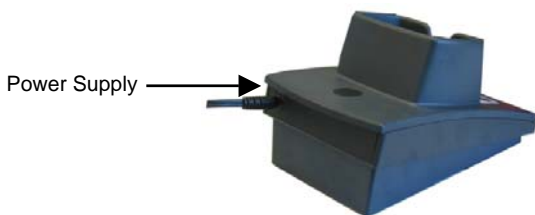

**C-1000 Power Supply Connector**

## LYNX™ BT OPERATION

---

### RADIO CONNECTION

In the Bluetooth® radio connection, the Lynx™ BT can operate as Slave or as Master.

The green LED and/or the beeper always indicate the reader radio connection status (see the table on page 5).



## STATUS INDICATORS

### Lynx™ BT Series Reader LED Functioning

LED	Behavior
Red	at Power On, blinks briefly, then a beep occurs. Then, it turns off; lights when a wrong read occurs; lights briefly when the aiming system is enabled;
Green	lights when a code has been read and decoded; blinks during binding with OM-1000 BT (see OM-1000 BT Quick Reference Guide for details); single blink every 2 seconds when BT connection is active; double blink every 2 seconds when BT connection is not active.

### Lynx™ BT Series Reader Beeper Functioning

Beeper Behavior	Condition
4 ascending tones	during radio connection initialization.
4 descending tones	upon radio disconnection.
2 beeps	upon good read of a code, when paired to OM-1000 BT cradle.
1 beep	upon good read of a code, when communicating with a BT device.

## OPERATING WITH BLUETOOTH® DEVICE

**NOTE**

*The following procedures must be performed only if using the Lynx™ BT reader with a BT device. If using the reader paired to an OM-1000 BT cradle, you must follow the configuration procedures as described in the cradle Quick Reference Guide.*

### To start using your Lynx™ BT reading system you must:

1. Have a compatible remote Bluetooth® device (with built-in Bluetooth® radio or an external Bluetooth® adapter) ready to work. See your Bluetooth® compatible device documentation.
2. Charge the Lynx™ BT battery using C-1000 charger as described in this Quick Reference manual. A full charge takes up to 4 hours with Li-Ion batteries.
3. Configure the reader as described in this Quick Reference manual under "Lynx™ BT Configuration".

### Lynx™ BT as Slave

A Lynx™ BT is Slave when it sends codes to a Master remote Bluetooth® device such as a PC, Laptop, PDA, etc, which has initialized the communication.

Once set as Slave, a Lynx™ BT reader requires no particular configuration for communication, however some radio parameters can be set to increase system performance and data transmission security, see the Lynx™ BT Reference Manual on the configuration CD-ROM. At startup the reader can only wait for the Master to initialize the radio communication.

The following is a general procedure recommended for Lynx™ BT Slave applications:

1. Power up the remote Bluetooth® Master device (e.g. Laptop or PC).
2. Power up the Lynx™ BT reader within radio range (10 meters).  
*Any modifications to the radio configuration should be made at this time before the radio connection takes place.*
3. From the remote Bluetooth® Master device, execute the Discovery procedure, (according to the procedure given in the documentation of the Bluetooth® Master device), to recognize the Lynx™ BT reader(s) within radio range.
4. Check that "**Datalogic BT Device s/n:**           " is shown among the discovered devices.
5. Request to open an SPP connection with Lynx™ BT, making sure to disable any required PIN and/or pairing parameters. Lynx™ BT is discoverable and connectable without any required PIN (default).

**NOTE**

*If the PIN of the Bluetooth® Master device cannot be disabled, use the PIN "1234". The Lynx™ BT Slave will emit four ascending tones indicating radio connection.*

After the Lynx™ BT reader indicates radio connection (see the table on page 5), you can start sending codes.

If the Master remote Bluetooth® device can support a piconet, the communication can be established with up to 7 Slave readers at the same time.

## **Lynx™ BT as Master**

A Lynx™ BT is Master when the remote Bluetooth® device is Slave, i.e. with a Bluetooth® barcode printer. Once set as Master, a Lynx™ BT reader must be configured with the address of the Slave device to which it wants to communicate.

By default, at startup the reader initializes the communication with the Slave. If the connection is successful, the reader can send codes to the Slave device.

If the connection is not successful (i.e. working out of the radio coverage area), you can attempt a connection manually by double-clicking the reader trigger. Radio connections can also be managed manually as described in the Lynx™ BT Reference Manual on the configuration CD-ROM.

During the request of radio connection or disconnection with a remote Bluetooth® Slave device, the reader emits a series of ticks.

## LYNX™ BT CONFIGURATION

---



**NOTE**

*The following procedures must be performed only if using the Lynx™ BT reader with a BT device. If using the reader paired to an OM-1000 BT cradle, you must follow the configuration procedures described in the cradle Quick Reference Guide.*

Configure the Lynx™ BT by choosing one of the two procedures below and reading the codes in the given sequence.

### LYNX™ BT AS SLAVE

1.

Restore Lynx™ BT default



2.

Set Lynx™ BT as Slave



3.

Reset Lynx™ BT



**YOUR READER IS NOW READY TO BE DISCOVERED (CONNECTED VIA RADIO) BY A BLUETOOTH® MASTER DEVICE AND READ CODES USING THE DEFAULT VALUES.**

## LYNX™ BT AS MASTER

**Note:** for the hexadecimal character selection of step 4, use the table at the end of this manual.

1. Restore Lync™ BT default



2. Set Lync™ BT as Master



3. Enter configuration



4. Set Remote Bluetooth® Device Address (slave)



+

12 characters (in HEX format) for the remote Bluetooth® device address specified in each Bluetooth® device.

5. Exit and Save configuration



6. Reset Lync™ BT



If the connection is not successful, you can attempt a connection manually by double-clicking the reader trigger.

**YOUR READER IS NOW CONFIGURED TO READ CODES USING THE DEFAULT VALUES.**

## OPERATING TEST

---

**EAN-13**



**Code 39 (Standard)**



**Code 128**



**PDF417**



**QR**



**DataMatrix (Normal)**



## LYNX™ BT DEFAULT CONFIGURATION

### DATA FORMAT – Symbology Independent Parameters

code identifier disabled, custom code identifier disabled, code length disabled, address stamping disabled, address delimiter disabled.

### DATA FORMAT – Symbology Dependent Parameters

symbology specific format = select all, symbology character substitution disabled, symbology character deletion disabled.

### CAMERA CONTROL

exposure mode = automatic, based on entire image

### POWER SAVE

illuminator power maximum, power off timeout with BT connection = 240 min, power off timeout with no BT connection = 15 min.

### READING PARAMETERS

trigger type normal, trigger level mode, flash on = 2 sec, flash off = 2 sec, beeper tone = tone 1, beeper volume = high, beeper duration = 50 ms, user defined beeper = tone 1, user defined beeper volume = high, user defined beeper duration = 100 ms, codes per scan = one code per scan, reads per cycle = one read per cycle, scan timeout = 5 sec, central code transmission enabled, order by code length disabled, order by code symbology disabled, autoscan mode disabled, autoscan aiming system enabled, autoscan hardware trigger enabled, autoscan illumination system disabled.

### IMAGE FORMATTING

#### *Image Preset 1, 2, 3, 4*

image format = JPEG, resolution = full (640 x 480), set JPEG quality factor = 50, window origin = (0,0), window dimensions = (640 x 480), brightness = 0%, contrast = 0%, zoom = 100%, color depth = 256 gray level.

### CODE SELECTION

issue identical codes enabled.

#### enabled codes

Standard Code 39: no check digit control, variable code length;

EAN 8/EAN 13 / UPC A/UPC E without ADD ON: UPCE expansion disabled

Interleaved 2/5: check digit control and transmission, variable code length

Code 128: variable code length

PDF417, DataMatrix, QR

#### disabled codes

*Code 32, Codabar, Code 93, EAN 128, RSS, Micro PDF417, Postal Codes, Maxicode, Composite Codes.*

**ADVANCED FORMATTING PARAMETERS**

format disabled

**RADIO PARAMETERS – Lynx™ BT with BT Device**

Ack/Nack protocol with BT device = none, auto-connection (for Master only) enabled, auto reconnection (for Master only) enabled, RX timeout with BT Device = 10 sec, user-friendly name = Datalogic BT Device s/n: xxxxxxxxxx (where x = Lynx™ BT serial number), authentication & encryption with BT device disabled.

**RADIO PARAMETERS – Lynx™ BT with OM-1000 BT**

Radio protocol timeout = 3 sec, beeper control for radio response = good decode & good reception, transmission mode = one way, authentication & encryption with cradle disabled, batch mode enabled.



# TECHNICAL FEATURES

## LYNX™ BT 432 / BT 432E Common Features

<b>Electrical Features</b>	
Power Source	Li-Ion battery (2150 mAh)
Recharge Time	4 hours max.
Operating Autonomy	typical 12 h (> 6000 reads)
<b>Radio Features</b>	
Bluetooth® Profile Supported	version 1.2 IEEE 802.15 (class 2) Serial Port Profile
<b>Environmental Features</b>	
Operating Temperature	0° to+ 50 °C (+32° to +122 °F)
Storage Temperature	-20° to +70 °C (-4° to +158 °F)
Humidity	0 to 95% NC
Drop Resistance	IEC 68-2-32 Test ED – 1.8 m.
<b>Mechanical Features</b>	
Dimensions	203 x 117 x 69 mm (8 x 4.6 x 2.7 inches)
Weight	340 g (12 oz.) with battery pack
<b>Decoding Capability</b>	
1D	Interleaved 2 of 5, Code39, Code32, Code128, EAN 128, Code93, UPC/EAN/JAN, Codabar, RSS
2D	PDF417, Micro PDF417, Macro PDF417, Maxicode, DataMatrix (ECC200), QR, Composite Codes
Postal Codes	POSTNET, PLANET, Japan Post, Australia Post, KIX Code, Royal Mail Code (RM4SCC)
<b>Imaging Option</b>	
Image	640 x 480 pixel format (VGA) 320 x 240 pixel format (CIF);
Graphic Format	JPEG, 256 gray levels BMP, 2, 16, 256 gray levels TIFF, 2, 16, 256 gray levels
<b>Optical Features</b>	
Sensor	640 x 480 pixel element, 2D CMOS Array
Illuminator	LED array
Wavelength	In the range 630 ~ 670 nm
Max. LED Output Power	0.896 mW
LED Safety Class	Class 1 to EN 60825-1
Aiming System	Visible Laser Diode
Wavelength	650 nm
Laser Safety Class	Class 2 - EN 60825-1; Class II CDRH
Ambient light	0 - 100000 lux (artificial)

LYNX™ BT 432

<b>Optical Features</b>			
Focus distance	115 mm		
Field of view	21.8° (H) x 16.7° (V)		
Horizontal field of view at distance ( <b>d</b> ) in mm	0.4d + 12		
Vertical field of view at distance ( <b>d</b> ) in mm	0.3d + 9		
Max Resolution	<b>Linear codes - mm (mils)</b>		<b>DataMatrix – mm (mils)</b>
	0.10 (4)		0.17 (6.6)
Depth of field*			
<b>1D (linear):</b>	<b>X-dimension mm (mils)</b>	<b>Symbol size cm (in)</b>	<b>DOF cm (in)</b>
Code39	0.13 (5)	1.2 (0.47)	8.0 to 15.0 (3.15 to 5.90)
	0.5 (20)	3.2 (1.26)	8.0 to 33.0 (3.15 to 12.99)
EAN13	0.33 (13)	3.1 (1.22)	7.5 to 24.5 (2.95 to 9.65)
<b>2D:</b>	<b>X-dimension mm (mils)</b>	<b>Symbol size cm (in)</b>	<b>DOF cm (in)</b>
POSTNET	0.5 (20)	4.0 x 0.4 (1.57 x 0.16)	11.5 to 30.0 (4.53 to 11.81)
PDF417	0.13 (5)	1.1 x 0.9 (0.43 x 0.35)	8.5 to 15.5 (3.35 to 6.10)
	0.17 (6.6)	1.4 x 1.2 (0.55 x 0.47)	7.0 to 19.0 (2.76 to 7.48)
	0.25 (10)	2.2 x 1.8 (0.86 x 0.71)	4.5 to 24.0 (1.77 to 9.45)
DataMatrix	0.19 (7.5)	0.8 x 0.8 (0.31 x 0.31)	9.0 to 13.0 (3.54 to 5.12)
	0.25 (10)	0.8 x 0.8 (0.31 x 0.31)	7.5 to 16.5 (2.95 to 6.50)
	0.38 (15)	1.0 x 1.0 (0.39 x 0.39)	6.0 to 22.0 (2.36 to 8.66)
Skew	±40°		
Pitch	±35°		
Rotation	360°		
Print Contrast (Min.)	23%		

\* Reading distances are measured from the nose of the reader.

## LYNX™ BT 432E

<b>Optical Features</b>			
Focus distance	65 mm		
Field of view	20° (H) x 15° (V)		
Horizontal field of view at distance ( <b>d</b> ) in mm	0.32 <b>d</b> + 8.67		
Vertical field of view at distance ( <b>d</b> ) in mm	0.24 <b>d</b> + 6.50		
Max Resolution	<b>Linear codes - mm (mils)</b>	<b>DataMatrix – mm (mils)</b>	
	0.05 (2)	0.10 (4)	
Depth of field*			
<b>1D (linear):</b>	<b>X-dimension mm (mils)</b>	<b>Symbol size cm (in)</b>	<b>DOF cm (in)</b>
Code39	0.076 (3)	1.2 (0.47)	5.0 to 7.5 (1.96 to 2.95)
	0.13 (5)	1.2 (0.47)	4.0 to 9.5 (1.57 to 3.74)
<b>2D:</b>	<b>X-dimension mm (mils)</b>	<b>Symbol size cm (in)</b>	<b>DOF cm (in)</b>
PDF417	0.76 (3)	0.65 x 0.55 (0.26 x 0.22)	5.0 to 8.0 (1.96 to 3.15)
	0.25 (10)	2.2 x 1.8 (0.86 x 0.71)	4.0 to 13.3 (1.57 to 5.24)
DataMatrix	0.13 (5)	0.5 x 0.5 (0.20 x 0.20)	5.0 to 7.5 (1.96 to 2.95)
	0.25 (10)	0.8 x 0.8 (0.31 x 0.31)	4.5 to 10.5 (1.77 to 4.13)
Skew	±40°		
Pitch	±35°		
Rotation	360°		
Print Contrast (Min.)	27%		

\* Reading distances are measured from the nose of the reader.

## TROUBLESHOOTING

---

### PROBLEM

A beep or a LED blink signals an interruption of the radio communication with the remote Bluetooth® device.

### SOLUTION

- It is possible that the distance from the remote Bluetooth® device is more than 10 m or that an obstacle interrupted the communication.
- Restart the radio communication.

### PROBLEM

The reader is Master and is not able to initialize radio communication with the remote Bluetooth® device Slave.

### SOLUTION

- Put the reader near the remote Bluetooth® device and try to initialize the radio communication again.
- Make sure that:
  - the remote Bluetooth® device is powered;
  - the remote Bluetooth® device is not already connected to another BT device with the same SPP.
- Repeat the remote Bluetooth® device address procedure.

### PROBLEM

The remote Bluetooth® device discovers a Lynx™ BT within its range of radio communication but is not able to communicate with it.

### SOLUTION

- Make sure that:
  - the remote Bluetooth® device has no communication protection (i.e. a password).

**PROBLEM**

The radio range seems less than 10 m.

**SOLUTION**

- Check that there are no obstacles to radio transmission between the devices.

## PATENTS

---

This product is covered by one or more of the following patents:

U.S. patents: 6,512,218 B1; 6,877,664 B1; 6,478,226 B2 and 6,442,180 B1.

Additional patents pending.

## SERVICES AND SUPPORT

---

Datalogic provides several services as well as technical support through its website. Log on to [www.scanning.datalogic.com](http://www.scanning.datalogic.com) and click on the [links](#) indicated for further information including:

- **PRODUCTS**

Search through the links to arrive at your product page where you can download specific **Manuals** and **Software & Utilities**.

- **SERVICES & SUPPORT**

- **Datalogic Services** - Warranty Extensions and Maintenance Agreements
- **Authorised Repair Centres**

- **CONTACT US**

E-mail form and listing of Datalogic Subsidiaries

## WARRANTY


---

Datalogic warranties this product against defects in workmanship and materials, for a period of 24 months from the date of shipment, provided that the product is operated under normal and proper conditions.

Datalogic has the faculty to repair or replace the product; these provisions do not prolong the original warranty term.


The warranty does not apply to any product that has been subject to misuse, accidental damage, unauthorized repair or tampering.

## COMPLIANCE

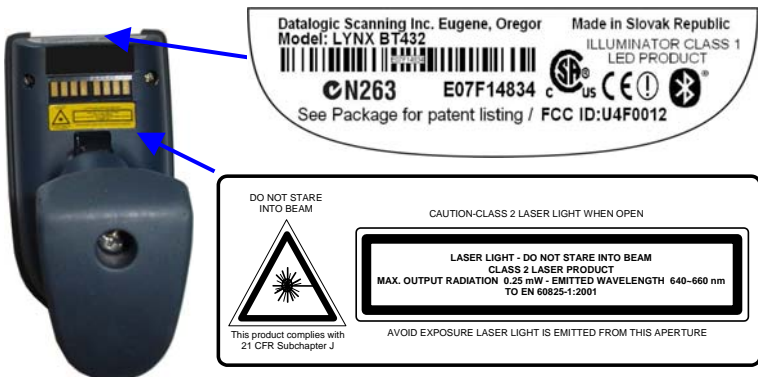

Lynx™ BT Product Labels

This device must be opened by qualified personnel only.

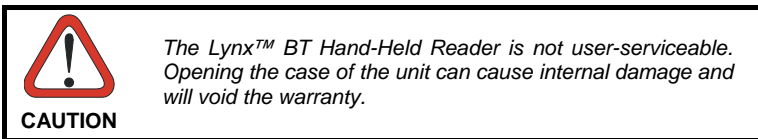

## FCC COMPLIANCE

Modifications or changes to this equipment without the expressed written approval of Datalogic could void the authority to use the equipment.

This device complies with PART 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference which may cause undesired operation.

## RADIO COMPLIANCE

Contact the competent authority responsible for the management of radio frequency devices of your country to verify the eventual necessity of a user license.

Refer to the web site <http://europa.eu.int/comm/enterprise/rte/spectr.htm> for further information.



## BLUETOOTH® APPROVAL

This product is equipped with the following certified Bluetooth module:

Product Name: Panasonic Serial Port Module  
 Bluetooth ID: B01839  
 Product ID: PAN1440, PAN1450, PAN1540, PAN1550

## WEEE COMPLIANCE



## LASER SAFETY

The Lynx™ BT hand-held reader is a Class 1 LED product regarding its Illuminator and a Class 2 laser product regarding its Aiming System.


### LED Illuminator

The use of an illuminator in the Lynx™ BT hand-held reader is a Class 1 LED product:

ILLUMINATORE LED CLASSE 1  
 AUSLEUCHTER LED KLASSE 1  
 ILLUMINATEUR A LED DE CLASSE 1  
 ILUMINADOR LED DE CLASE 1

### Aiming System

The Lynx™ BT aiming system meets the requirements for laser safety.

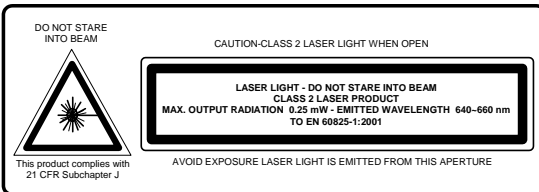

I	D	F	E
LA LUCE LASER È VISIBILE ALL'OCCHIO UMANO E VIENE EMESSA DALLA FINESTRA INDICATA NELLA FIGURA.	DIE LASER- STRAHLUNG IST FÜR DAS MENSCHLICHE AUGE SICHTBAR UND WIRD AM STRAHLAUS- TRITTSFENTSTER AUSGESENDET (SIEHE BILD)	LE RAYON LASER EST VISIBLE À L'OEIL MU ET IL EST ÉMIS PAR LA FENÊTRE DÉSIGNÉE SUR L'ILLUSTRATION DANS LA FIGURE	A LUZ LÁSER ES VISIBLE AL OJO HUMANO Y ES EMITIDA POR LA VENTANA INDICADA EN LA FIGURA.
LUCE LASER NON FISSARE IL FASCIO APPARECCHIO LASER DI CLASSE 2 MASSIMA POTENZA D'USCITA: LUNGHEZZA D'ONDA EMESSA: CONFORME A EN 60825-1 (2001)	LASERSTRAHLUNG NICHT IN DEN STRAHL BLICKEN PRODUKT DER LASERKLASSE 2 MAXIMALE AUSGANGSLEISTUNG: WELLENLÄGE: ENTSPR. EN 60825-1 (2001)	RAYON LASER EVITER DE REGARDER LE RAYON APPAREIL LASER DE CLASSE 2 PUISSANCE DE SORTIE: LONGUER D'ONDE EMISE: CONFORME A EN 60825-1 (2001)	RAYO LÁSER NO MIRAR FIJO EL RAYO APARATO LÁSER DE CLASE 2 MÁXIMA POTENCIA DE SALIDA: LONGITUD DE ONDA EMITIDA: CONFORME A EN 60825-1 (2001)


**ENGLISH**

The following information is provided to comply with the rules imposed by international authorities and refers to the correct use of your terminal.

**STANDARD LASER SAFETY REGULATIONS**

This product conforms to the applicable requirements of both CDRH 21 CFR 1040 and EN 60825-1 at the date of manufacture.

For installation, use and maintenance, it is not necessary to open the device.

 <p><b>WARNING</b></p>	<p><i>Use of controls or adjustments or performance of procedures other than those specified herein may result in exposure to hazardous visible laser light.</i></p>
--	--

The product utilizes a low-power laser diode. Although staring directly at the laser beam momentarily causes no known biological damage, avoid staring at the beam as one would with any very strong light source, such as the sun. Avoid that the laser beam hits the eye of an observer, even through reflective surfaces such as mirrors, etc.



**ITALIANO**

Le seguenti informazioni vengono fornite dietro direttive delle autorità internazionali e si riferiscono all'uso corretto del terminale.

**NORMATIVE STANDARD PER LA SICUREZZA LASER**

Questo prodotto risulta conforme alle normative vigenti sulla sicurezza laser alla data di produzione: CDRH 21 CFR 1040 e EN 60825-1.

Non si rende mai necessario aprire l'apparecchio per motivi di installazione, utilizzo o manutenzione.

**ATTENZIONE**

*L'utilizzo di procedure o regolazioni differenti da quelle descritte nella documentazione può provocare un'esposizione pericolosa a luce laser visibile.*

Il prodotto utilizza un diodo laser a bassa potenza. Sebbene non siano noti danni riportati dall'occhio umano in seguito ad una esposizione di breve durata, evitare di fissare il raggio laser così come si eviterebbe qualsiasi altra sorgente di luminosità intensa, ad esempio il sole. Evitare inoltre di dirigere il raggio laser negli occhi di un osservatore, anche attraverso superfici riflettenti come gli specchi.

**DEUTSCH**

Die folgenden Informationen stimmen mit den Sicherheitshinweisen überein, die von internationalen Behörden auferlegt wurden, und sie beziehen sich auf den korrekten Gebrauch vom Terminal.

**NORM FÜR DIE LASERSICHERHEIT**

Dies Produkt entspricht am Tag der Herstellung den gültigen EN 60825-1 und CDRH 21 CFR 1040 Normen für die Lasersicherheit.

Es ist nicht notwendig, das Gerät wegen Betrieb oder Installations-, und Wartungsarbeiten zu öffnen.

**ACHTUNG**

*Jegliche Änderungen am Gerät sowie Vorgehensweisen, die nicht in dieser Betriebsanleitung beschreiben werden, können ein gefährliches Laserlicht verursachen.*

Der Produkt benutzt eine Laserdiode. Obwohl zur Zeit keine Augenschäden von kurzen Einstrahlungen bekannt sind, sollten Sie es vermeiden für längere Zeit in den Laserstrahl zu schauen, genauso wenig wie in starke Lichtquellen (z.B. die Sonne). Vermeiden Sie es, den Laserstrahl weder gegen die Augen eines Beobachters, noch gegen reflektierende Oberflächen zu richten.

## FRANÇAIS

Les informations suivantes sont fournies selon les règles fixées par les autorités internationales et se réfèrent à une correcte utilisation du terminal.

### NORMES DE SECURITE LASER

Ce produit est conforme aux normes de sécurité laser en vigueur à sa date de fabrication: CDRH 21 CFR 1040 et EN 60825-1.

Il n'est pas nécessaire d'ouvrir l'appareil pour l'installation, l'utilisation ou l'entretien.



**ATTENTION**

*L'utilisation de procédures ou réglages différents de ceux donnés ici peut entraîner une dangereuse exposition à lumière laser visible.*

Le produit utilise une diode laser. Aucun dommage aux yeux humains n'a été constaté à la suite d'une exposition au rayon laser. Eviter de regarder fixement le rayon, comme toute autre source lumineuse intense telle que le soleil. Eviter aussi de diriger le rayon vers les yeux d'un observateur, même à travers des surfaces réfléchissantes (miroirs, par exemple).

## ESPAÑOL

Las informaciones siguientes son presentadas en conformidad con las disposiciones de las autoridades internacionales y se refieren al uso correcto del terminal.

### NORMATIVAS ESTÁNDAR PARA LA SEGURIDAD LÁSER

Este aparato resulta conforme a las normativas vigentes de seguridad láser a la fecha de producción: CDRH 21 CFR 1040 y EN 60825-1.

No es necesario abrir el aparato para la instalación, la utilización o la manutención.



**ATENCIÓN**

*La utilización de procedimientos o regulaciones diferentes de aquellas descritas en la documentación puede causar una exposición peligrosa a la luz láser visible.*

El aparato utiliza un diodo láser a baja potencia. No son notorios daños a los ojos humanos a consecuencia de una exposición de corta duración. Eviten de mirar fijo el rayo láser así como evitarían cualquiera otra fuente de luminosidad intensa, por ejemplo el sol. Además, eviten de dirigir el rayo láser hacia los ojos de un observador, también a través de superficies reflectantes como los espejos.

---

## HEX NUMERIC TABLE

---



0



1



2



3



4



5



6



7



8



9



A



B



C



D



E



F

dichiara che  
declares that the  
déclare que le  
bescheinigt, daß das Gerät  
declare que el

**LYNX BTxxx**

e tutti i suoi modelli  
and all its models  
et tous ses modèles  
und seine Modelle  
y todos sus modelos

sono conformi alle Direttive del Consiglio Europeo sottoelencate:  
are in conformity with the requirements of the European Council Directives listed below:  
sont conformes aux spécifications des Directives de l'Union Européenne ci-dessous:  
den nachstehenden angeführten Direktiven des Europäischen Rats:  
cumple con los requisitos de las Directivas del Consejo Europeo, según la lista siguiente:

**1999/5/EEC R&TTE**

---

Questa dichiarazione è basata sulla conformità dei prodotti alle norme seguenti:  
This declaration is based upon compliance of the products to the following standards:  
Cette déclaration repose sur la conformité des produits aux normes suivantes:  
Diese Erklärung basiert darauf, daß das Produkt den folgenden Normen entspricht:  
Esta declaración se basa en el cumplimiento de los productos con las siguientes normas:

**ETSI EN 301 489-17 v1.2.1, August 2002:** ELECTROMAGNETIC COMPATIBILITY AND RADIO SPECTRUM MATTERS (ERM); ELECTROMAGNETIC COMPATIBILITY (EMC) STANDARD FOR RADIO EQUIPMENT AND SERVICES; PART 17: SPECIFIC CONDITIONS FOR 2.4 GHZ WIDEBAND TRANSMISSION SYSTEMS AND 5 GHZ HIGH PERFORMANCE RLAN EQUIPMENT.

**ETSI EN 300 328 v1.6.1, November 2004:** ELECTROMAGNETIC COMPATIBILITY AND RADIO SPECTRUM MATTERS (ERM); WIDEBAND TRANSMISSION SYSTEMS; DATA TRANSMISSION EQUIPMENT OPERATING IN THE 2.4 GHZ ISM BAND AND USING WIDE BAND MODULATION TECHNIQUES; HARMONIZED EN COVERING ESSENTIAL REQUIREMENTS UNDER ARTICLE 3.2 OF THE R&TTE DIRECTIVE.

**EN 60950-1, December 2001:** INFORMATION TECHNOLOGY EQUIPMENT - SAFETY PART 1: GENERAL REQUIREMENTS

March 1st, 2007

## **Australia**

Datalogic Scanning Pty Ltd  
North Ryde, Australia  
Telephone: [61] (2) 9870 3200  
Fax: [61] (2) 9878 8688

## **France and Benelux**

Datalogic Scanning Sarl  
LES ULIS Cedex, France  
Telephone: [33].01.64.86.71.00  
Fax: [33].01.64 46.72.44

## **Germany**

Datalogic Scanning GmbH  
Darmstadt, Germany  
Telephone: 49 (0) 61 51/93 58-0  
Fax: 49 (0) 61 51/93 58 58

## **Italy**

Datalogic Scanning SpA  
Vimercate (MI), Italy  
Telephone: [39] (0) 39/62903.1  
Fax: [39] (0) 39/6859496

## **Japan**

Datalogic Scanning KK  
Shinagawa, Tokyo, Japan  
Telephone: 81 (0)3 3491 6761  
Fax: 81 (0)3 3491 6656

## **Latin America**

Datalogic Scanning, Inc  
Miami, Florida, USA  
Telephone: (305) 591-3222  
Fax: (305) 591-3007

## **Spain and Portugal**

Datalogic Scanning Sarl  
Sucursal en España  
Madrid, Spain  
Telephone: 34 91 746 28 60  
Fax: 34 91 742 35 33

## **United Kingdom**

Datalogic Scanning LTD  
Watford, England  
Telephone: 44 (0) 1923 809500  
Fax: 44 (0) 1923 809 505



[www.scanning.datalogic.com](http://www.scanning.datalogic.com)

## **Datalogic Scanning, Inc.**

959 Terry Street  
Eugene, OR 97402  
Telephone: (541) 683-5700  
Fax: (541) 345-7140