


Overview

HP recommends Windows Vista®
Business

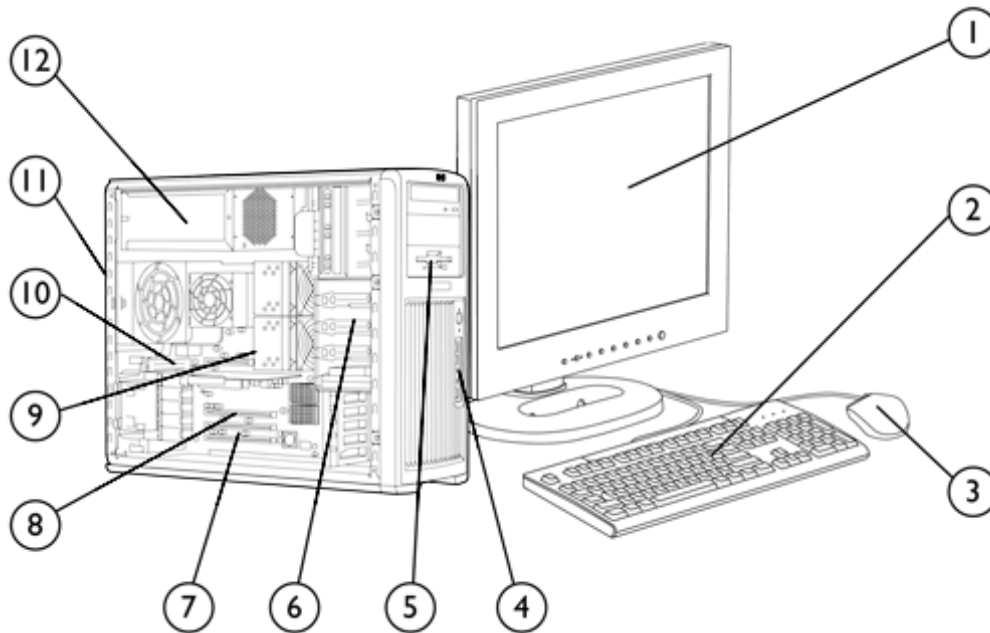

1. Monitor (sold separately)
2. Standard Keyboard (USB or PS/2)
3. Mouse (USB or PS/2)
4. Front IO: 2 USB 2.0, IEEE-1394a (standard), headphone and microphone
5. 5.25" external bay for optional diskette drive, optical drive or other 5.25"/3.5" device
6. 5 internal 3.5" bays, 3 external 5.25" bays
7. 1 PCI slot, 1 PCI-X slot, 1 PCIe x1 or x8 (selectable), 2 PCIe x8 (x4 electrically)
8. 2 PCI Express x16 Gen2 Graphics Bus
9. Dual-Core or Quad-Core Intel® Xeon® Processors
10. 8 DIMM slots (16 with riser) for DDR2 FB-DIMM memory
11. 5 USB 2.0, 1 standard serial port, 2 PS/2, 2 RJ-45, audio line in, audio line out, and microphone in, microphone, 1 IEEE-1394a
12. Choice of 800 or 1050 watt, 80 PLUS power supplies

Overview

At A Glance

- Choice of Operating Systems:
 - Microsoft Windows Vista® Business 32 or 64
 - Microsoft Windows Vista 32-bit downgrade to Microsoft Windows XP Professional x64 (expected available until August 2008)
 - Microsoft Windows Vista 64-bit downgrade to Microsoft Windows XP Professional (expected available until August 2008)
 - Red Hat Enterprise Linux WS 4 Desktop (32- or 64-Bit version)
 - HP Linux Installer Kit (see <http://www.hp.com/workstations/software/linux/> for details)
- 64-Bit Quad-Core Intel® Xeon® Processor 5400 Sequence (12 MB L2 cache) or Dual-Core Intel® Xeon® Processor 5200 Sequence (6 MB L2 cache)
- 1333 MHz Front Side Bus support
- 4-channel 667 MHz FB-DIMM memory subsystem
- Up to 128 GB memory capacity
- PCI Express I/O and PCIe x16 Gen2 graphics
- Dual integrated Broadcom 5755 Gigabit LAN on Motherboard (LoM)
- 6 channels of Serial ATA (SATA) and 8 channels of Serial Attached SCSI (SAS) 3.0 Gb/s natively supported internally; SATA RAID level 0, 1, 5 and 10 and SAS RAID level 0, 1, 10 available on motherboard (Factory integrated RAID is Microsoft Windows only)
- SATA optical drives
- High Definition integrated audio with internal speaker
- Choice of 800 or 1050 watt 80 PLUS power supply
- ENERGY STAR 4.0 compliance with energy-saving features available on selected configurations (Not supported by Linux)
- Protected by HP Services, including a 3 years parts, 3 years labor, and 3 years onsite service (3/3/3) standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.

Standard Features - Custom Components

Processor and Speed – Up to 2 of the following

Quad-Core Intel Xeon Processor with Intel® 64 Architecture

One or two Quad-Core Intel Xeon Processor 5400 Sequence, 12 MB total L2 cache (2 x 6 MB shared):*

- Quad-Core Intel® Xeon® Processor 5405/ 2.00 GHz, 1333 MHz FSB
- Quad-Core Intel® Xeon® Processor 5410/ 2.33 GHz, 1333 MHz FSB
- Quad-Core Intel® Xeon® Processor 5420/ 2.50 GHz, 1333 MHz FSB
- Quad-Core Intel® Xeon® Processor 5430/ 2.66 GHz, 1333 MHz FSB
- Quad-Core Intel® Xeon® Processor 5440/ 2.83 GHz, 1333 MHz FSB
- Quad-Core Intel® Xeon® Processor 5450/ 3.00 GHz, 1333 MHz FSB
- Quad-Core Intel® Xeon® Processor 5460/ 3.16 GHz, 1333 MHz FSB

* When ordering two processors, the second processor must be the same as the first. Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See http://www.intel.com/products/processor_number/ for details. Intel® 64 Architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel 64 Architecture. Processor will not operate (including 32-bit operation) without an Intel 64 Architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See <http://www.intel.com/technology/64bitextensions> for more information.

Dual-Core Intel Xeon Processors with Intel® 64 Architecture

One or two Dual-Core Intel Xeon Processor 5200 Sequence*

- Intel Xeon 5205/ 1.86 GHz, 6 MB L2, 1066 MHz FSB
- Intel Xeon 5250/ 3.16 GHz, 6 MB L2, 1333 MHz FSB
- Intel Xeon 5260/ 3.33 GHz, 6 MB L2, 1333 MHz FSB

* When ordering two processors, the second processor must be the same as the first. Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See http://www.intel.com/products/processor_number/ for details. Intel® 64 Architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 Architecture. Processor will not operate (including 32-bit operation) without an Intel® 64 Architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See <http://www.intel.com/technology/64bitextensions> for more information.

Operating System – One of the following

Microsoft Windows Vista Business 64*

Microsoft Windows Vista Business 32*

Microsoft Windows Vista Business 64-bit downgrade to Microsoft Windows XP Professional (expected available until August 2008)

Microsoft Windows Vista Business 32-bit downgrade to Microsoft Windows XP Professional x64 (expected available until August 2008)

HP Linux Installer Kit (see <http://www.hp.com/workstations/software/linux>):

- Red Hat Enterprise Linux Workstation 4 (Update 4 or later) (32- or 64-bit version)
- Red Hat Enterprise Linux Workstation 3 (Update 8) (32 or 64 bit version)

For detailed OS/hardware support information for linux, see:
http://www.hp.com/support/linux_hardware_matrix

Preloaded: Red Hat Enterprise Linux WS 4 (32- or 64-bit version, expected availability in CQ4 2007)

* The following components are not yet supported on Microsoft Vista Business and HP Workstations; ATI graphics, 1394b cards, dual graphics configurations, Creative SoundBlaster X-fi, RAID 5 10 or data array, memory riser.

Standard Features - Custom Components

1-5 Hard Disk Drives – Up to 5 SATA drives, 5 SAS* drives, or 6 SAS Small Form Factor (SFF)* drives	SATA Hard Drive (if 1st drive is SATA, 2nd drive can be EITHER SATA or SAS)	Windows Vista	Windows XP	Red Hat Enterprise Linux
	80 GB 7200 rpm SATA 3.0 Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
	160 GB 7200 rpm SATA 3.0 Gb/s NCQ* drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
	250 GB 7200 rpm SATA 3.0 Gb/s NCQ* drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
	500 GB 7200 rpm SATA 3.0 Gb/s NCQ* drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
	1000 GB 7200 rpm SATA 3.0 Gb/s NCQ* drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
	80 GB 10K rpm SATA NCQ* drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
	160 GB 10K rpm SATA NCQ* drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
	160 GB 10K rpm SATA NCQ** drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
	SAS Hard Drive (8 port SAS Controller included on the system board)	Windows Vistaⁱ	Windows XP	Red Hat Enterprise Linux
	146 GB 10K rpm Small Form Factor SAS 3.0 Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
	73 GB 10K rpm Small Form Factor SAS 3.0 Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
	73 GB 15K rpm SAS 3.0 Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
	146 GB 15K rpm SAS 3.0 Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
	300 GB 15K rpm SAS 3.0 Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop

* NCQ (Native Command Queuing) not supported in Red Hat Enterprise Linux

Standard Features - Custom Components

Factory Integrated		Windows Vista ⁱ	Windows XP	Red Hat Enterprise Linux
RAID on motherboard for SATA and SAS drives All RAID arrays must be less than 2 GB in size	RAID 0 Configuration - Striped Array Minimum of 2 hard drives needed. All hard drives must be identical (size/speed/type/bus/functional capabilities). Must have 2, 3 or 4 HD Drives.	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported
	RAID 0 Configuration - Data Array Minimum of 3 SATA hard drives needed. All hard drives must be identical (size/speed/type/bus/functional capabilities). At least 3 HD Drives required. May have 4th and 5th HD Drives. Drives must be the same drive (size/speed/type/functional capability).	Not factory integrated	32-Bit, 64-Bit	Not supported
	RAID 1 Configuration - Mirrored Array 2 SATA or 2 SAS hard drives required. All hard drives must be identical (size/speed/type/bus/functional capabilities).	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported
	RAID 10 Configuration - Striped/Mirrored Array 4 hard drives needed. All hard drives must be identical (size/speed/type/bus/functional capabilities). Must have 4 HD Drives.	Not factory integrated	32-Bit, 64-Bit	Not supported
	RAID 5 Configuration - Parity Array Minimum of 3 SATA hard drives needed. All SATA hard drives must be identical (size/speed/type/bus/functional capabilities). Must have 3 or 4 HD Drives. 5 HD Drives not allowed.	Not factory integrated	32-Bit, 64-Bit	Not supported

Controllers		Windows Vista ⁱ	Windows XP	Red Hat Enterprise Linux
	Integrated SATA 3.0 Gb/s controller (RAID levels 0, 1, 10, 5)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop – no hardware RAID
	Integrated SAS controller (RAID levels 0, 1, 10)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop – no hardware RAID
	HP SAS Back Panel Connector kit (Must have 4 or fewer SAS hard drives to configure this option)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop – no hardware RAID

Standard Features - Custom Components

Memory - One of the following	Windows Vista ⁱ	Windows XP	Red Hat Enterprise Linux
HP 512 MB (1x512 MB) PC2-5300F DDR2-667 ECC Fully Buffered DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
HP 1 GB (2 x 512 MB) PC2-5300F DDR2-667 ECC Fully Buffered DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
HP 2 GB (2 x 1 GB) PC2-5300F DDR2-667 ECC Fully Buffered DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
HP 4 GB (2 x 2 GB) PC2-5300F DDR2-667 ECC Fully Buffered DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
HP 8 GB (4 x 2 GB) PC2-5300F DDR2-667 ECC Fully Buffered DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
HP 16 GB (8 x 2 GB) PC2-5300F DDR2-667 ECC Fully Buffered DIMM (utilizes riser – converts 8 DIMM slots into 16)*	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
HP 32 GB (16 x 2 GB) PC2-5300F DDR2-667 ECC Fully Buffered DIMM (utilizes riser – converts 8 DIMM slots into 16)*	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
HP 64 GB (16 x 4 GB) PC2-5300F DDR2-667 ECC Fully Buffered DIMM (utilizes riser – converts 8 DIMM slots into 16)*	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
HP 128 GB (16 x 8 GB) PC2-5300F DDR2-667 ECC Fully Buffered DIMM (utilizes riser – converts 8 DIMM slots into 16)**	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop

* supported ONLY w/dual processors.

** supported ONLY w/dual processors. Expected availability in 1H 2008.

Removable storage 0 or 1 floppy drive Up to 2 optical drives	Windows Vista ⁱ	Windows XP	Red Hat Enterprise Linux
FDD Floppy drive 1.44-MB Diskette Drive*	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
Optical drives HP 16X/48X DVD-ROM SATA Drive**	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
HP 48X CD-RW/DVD Combo SATA Drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
HP 16X DVD+-RW SuperMulti SATA Drive with LightScribe***	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop

* May only order one.

** Cannot be 2nd drive.

*** LightScribe, is supported on Windows ONLY and creates a grayscale image similar to black and white photography. LightScribe media required and sold separately. Double-layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

Standard Features - Custom Components

Input Devices	Keyboard – One of the following	Windows Vista ⁱ	Windows XP	Red Hat Enterprise Linux
	PS/2 Standard Keyboard	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
	USB Standard Keyboard	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
	Mouse – One of the following			
	PS/2 2-Button Scroll Mouse (optical)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
	USB 2-Button Scroll Mouse (optical)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
	USB 3-Button Mouse (optical)	N/A	32-Bit, 64-Bit	WS 4 & 5 Desktop

Audio		Windows Vista ⁱ	Windows XP	Red Hat Enterprise Linux
	High Definition Integrated Realtek ALC262 Audio with internal speaker	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
	SoundBlaster® X-Fi™ XtremeGamer PCI Audio Card	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop (configure-to-order expected availability in March 2008)

NIC (Network Interface Controller)		Windows Vista ⁱ	Windows XP	Red Hat Enterprise Linux
	Integrated dual Broadcom 5755 Gigabit Ethernet LoM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
	Optional PCI Express Broadcom BCM5751 Gigabit Ethernet NIC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop

Standard Features - Custom Components

PCI Express Graphics	Windows Vista ⁱ	Windows XP	Red Hat Enterprise Linux
NVIDIA Quadro NVS 290 PCIe (256 MB) – 1 or 2 of these cards are supported – 2nd card can be NVS 440 (After Market Option only) or NVS 290)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
NVIDIA Quadro FX 370 PCIe (256 MB)– 1 or 2 of these cards are supported – 2nd card must match first	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
NVIDIA Quadro FX 570 PCIe (256 MB) – 1 or 2 of these cards are supported – 2nd card must match first	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
NVIDIA Quadro FX 1700 PCIe (512 MB) – 1 or 2 of these cards are supported – 2nd card must match first	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
NVIDIA Quadro FX 3500 (256 MB) – 1 or 2 of these cards are supported – 2nd card must match first	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
NVIDIA Quadro FX 4600 PCIe (768 MB) – 1 or 2 of these cards are supported – 2nd card must match first*	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop
NVIDIA Quadro FX 5600 (1.5 GB) – 1 or 2 of these cards are supported – 2nd card must match first*	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported

* Requires 1050 watt power supply

Miscellaneous	Windows Vista ⁱ	Windows XP	Red Hat Enterprise Linux
HP IEEE 1394b FireWire PCI Card	32-Bit, 64-Bit	32-Bit, 64-Bit	Not Supported
Chassis Intrusion Switch	32-Bit, 64-Bit	32-Bit, 64-Bit	N/A
HP Energy Star 4.0 Enabled Configuration	TBD	32-Bit, 64-Bit	Not Supported
HP Workstation Mouse Pad	N/A	N/A	N/A

Standard Features - Custom Components

Software	Windows Vista ¹	Windows XP	Red Hat Enterprise Linux
OS options			
Microsoft Windows Vista™ Business 64	64-Bit	N/A	N/A
OR Microsoft Windows Vista™ Business 32	32-Bit	N/A	N/A
OR Microsoft Windows Vista™ Business 64 downgrade to Microsoft Windows XP Professional x64 Edition	64-bit	64-Bit	N/A
OR Microsoft Windows Vista™ Business 32 downgrade to Microsoft Windows XP Professional SP2	32-bit	32-Bit	N/A
OR Microsoft Windows XP Professional x64 Edition	N/A	64-Bit	N/A
OR Microsoft Windows XP Professional SP2	N/A	32-Bit	N/A
OR Red Hat Enterprise Linux WS 4 & 5 Desktop (32 & 64-bit)	N/A	N/A	WS 4 & 5 Desktop
OR HP Red Hat Linux Installer Kit (includes drivers for both 32-bit & 64-bit)	N/A	N/A	WS 4 & 5 Desktop
Standard			
Alert Standard Format specification	32-Bit, 64-Bit	32-Bit, 64-Bit	N/A
HP Performance Tuning Framework	32-Bit, 64-Bit	32-Bit, 64-Bit	N/A
Roxio Easy Media Creator (CD or DVD burner)	32-Bit, 64-Bit	32-Bit, 64-Bit	N/A
Intervideo WinDVD with DVD player	32-Bit, 64-Bit	32-Bit, 64-Bit	N/A
HP Backup and Recovery	32-Bit, 64-Bit	32-Bit, 64-Bit	N/A
PDF Complete	32-Bit, 64-Bit	32-Bit, 64-Bit	N/A
Optional			
Microsoft Office 2007 Small Business Edition	32-Bit	32-Bit, 64-Bit	N/A
Microsoft Office 2007 Trial Edition	32-Bit	32-Bit, 64-Bit	N/A
HP Client Manager Software v6.2 (optional download)	32-Bit, 64-Bit	32-Bit, 64-Bit	N/A
HP ProtectTools Security	32-Bit, 64-Bit	32-Bit	N/A
Symantec AntiVirus for Vista	32-Bit, 64-Bit	N/A	N/A
Symantec AntiVirus for XP	N/A	32-Bit, 64-Bit	N/A

Standard Features - Specs

Operating System (choice)	Genuine Windows Vista™ Business 64	
	Genuine Windows Vista™ Business 32	
	Microsoft Windows Vista Business 32-bit downgrade to Microsoft Windows XP Professional (expected available through August 2008)	
	Microsoft Windows Vista Business 64-bit downgrade to Microsoft Windows XP Professional x64 Edition (expected available through August 2008)	
	OR Red Hat Enterprise Linux WS 4 64-Bit preload (32-Bit version included on recovery CD)	
	OR HP Installer Kit for Linux (includes drivers for both 32-Bit & 64-Bit OS versions of RHEL WS 4 & 5 Desktop, 4.6/5.1 or greater)	
Form Factor	Minitower	
Color	Carbonite/Alloy metallic	
PCI Slots (see system board section for more details)	<ul style="list-style-type: none"> ● 1 half-length PCI slot ● 6 full-length slots with a mechanical card guide support for a PCI card with extender bracket. ● 2 PCI Express Gen2 x16 slots ● 2 PCI Express x4 slots – with x8 connectors ● 1 PCI Express x8/x1 switchable. When in x8 mode, 8 PCIe lanes are routed from the 2nd SECOND PCIe Gen2 x16 slot leaving that slot a PCI Express x8. ● Our x8 connectors are open ended, allowing a PCIe x16 card to be seated in the slot. ● 1 PCI-X 133MHz slot 	
Bays (see storage section for more details)	Total Bays = 8	
Internal Bays	5 internal 3.5" bays (4 with acoustic dampening rail assemblies)	
External Bays	3 external 5.25" bays* *Third external 5.25" bay is not full-depth, bottom bay is limited to 200mm device depth.	
Front I/O	2 USB 2.0, 1 headphone out, Microphone, and 1 IEEE 1394a	
Rear I/O	2 IEEE-1394a, 5 USB 2.0, 1 standard serial port, PS/2 keyboard and mouse, 2 RJ-45 to integrated Gigabit LAN, 1 audio line in, 1 audio line out, 1 microphone in; audio ports can be retasked to function as line in, line out, microphone, or headphone.	
Integrated USB	1 USB 2.0 header (internal)	
Chassis Dimensions (H x W x D)	17.9 x 8.3 x 20.7 inches; 45.4 x 21.0 x 52.5 cm	
System Weight	Exact weights depend upon configuration Minimum config – 40 lb (19.5 kg) Standard config – 46 lb (21 kg) Maximum config – 62 lb (28 kg)	
Temperature	Operating	40° to 95° F (5° to 35° C)
	Non-operating	-40° to 140° F (-40° to 60° C)
Humidity	Operating	8% to 85%
	Non-operating	8% to 90%
Maximum Altitude (non-pressurized)	Operating	10,000 feet; 3,000 m
	Non-operating	30,000 feet; 9,100 m
Power Supply	Choice of: <ul style="list-style-type: none"> ● 800W 80+ Efficient wide-ranging, active Power Factor Correction ● 1050W 80+ Efficient wide-ranging, active Power Factor Correction 	

Standard Features - Specs

Interfaces Supported	<ul style="list-style-type: none">• 6-channel SATA 3.0 Gb/s Interface (6 Serial-ATA connectors on the motherboard, , 2 channels are eSATA configurable for use with eSATA AMO Kit)• 8-channel SAS interface (8 SAS connectors on the motherboard), 2 SAS connectors are capable of External SATA operation• 1 EIDE interface (1 EIDE connector), IEEE 1394, USB 2.0
Hard Drive Controller Supported	SATA and SAS controllers

After-Market Options

Processors		Part Number
	2nd Quad-Core Intel Xeon processor 5400 Series with Intel® 64 Architecture, and 12 MB of L2 cache (2x6 MB shared)	
	Quad-Core Intel® Xeon® Processor 5405/ 2.00 GHz, 1333 MHz FSB	GX569AA
	Quad-Core Intel® Xeon® Processor 5410/ 2.33 GHz, 1333 MHz FSB	GX570AA
	Quad-Core Intel® Xeon® Processor 5420/ 2.50 GHz, 1333 MHz FSB	GX571AA
	Quad-Core Intel® Xeon® Processor 5430/ 2.66 GHz, 1333 MHz FSB	GX572AA
	Quad-Core Intel® Xeon® Processor 5440/ 2.83 GHz, 1333 MHz FSB	GX573AA
	Quad-Core Intel® Xeon® Processor 5450/ 3.00 GHz, 1333 MHz FSB	GX574AA
	Quad-Core Intel® Xeon® Processor 5460/ 3.16 GHz, 1333 MHz FSB	GX575AA
	2nd Dual-Core Intel Xeon processor 5200 Series with Intel® 64 Architecture, and 6 MB of Shared L2 cache	Part Number
	Intel Xeon 5205/ 1.86 GHz, 6MB L2, 1066 MHz FSB	GX566AA
	Intel Xeon 5250/ 3.16 GHz, 6MB L2, 1333 MHz FSB	GX567AA
	Intel Xeon 5260/ 3.33 GHz, 6MB L2, 1333 MHz FSB	GX568AA
	<p>* Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See http://www.intel.com/products/processor_number/ for details. Intel® 64 Architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 Architecture. Processor will not operate (including 32-bit operation) without an Intel® 64 Architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See http://www.intel.com/technology/64bitextensions for more information.</p> <p>Quad-Core and Dual-Core are new technologies designed to improve performance of multithreaded software products and hardware-aware multitasking operating systems and may require appropriate operating system software for full benefits; check with software provider to determine suitability; Not all customers or software applications will necessarily benefit from use of these technologies.</p>	

PCI Express Graphics	Multi display solutions	Windows Vista	Windows XP	Red Hat Enterprise Linux	Part Number
	Professional 2D				
	NVIDIA Quadro NVS 290 PCIe (256 MB) – 1 or 2 of these cards are supported – 2nd card can be NVS 440 (After Market Option only) or NVS 290	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	GN502AA
	NVIDIA Quadro NVS 440 PCIe (256 MB) – 2nd card can be NVS 440 (After Market Option only) or NVS 290	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	PT453A
	Entry 3D				

After-Market Options

NVIDIA Quadro FX 370 PCIe (256 MB) – 1 or 2 of these cards are supported – 2nd card must match first	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	GP528AA
NVIDIA Quadro FX 570 PCIe (256 MB) – 1 or 2 of these cards are supported – 2nd card must match first	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	GR521AA
Mid-range 3D)				
NVIDIA Quadro FX 1700 PCIe (512 MB) – 1 or 2 of these cards are supported- 2nd card must match first	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	GP529AA
High-end 3D				
NVIDIA Quadro FX 3500 PCIe (256 MB) – 1 or 2 of these cards are supported- 2nd card must match first	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	ES357AA
NVIDIA Quadro FX 4600 PCIe (768 MB) – 1 or 2 of these cards are supported- 2nd card must match first*	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	RV706AA
NVIDIA Quadro FX 5600 (1.5 GB) – 1 or 2 of these cards are supported – 2nd card must match first *	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	GU095AA
HP 'DMS-59 to Dual VGA' Cable Kit	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	GS567AA

* Requires 1050 watt power supply

Hard Drives	SATA Hard Drive (if 1st drive is SATA, 2nd drive can be EITHER SATA or SAS)	Windows Vista	Windows XP	Red Hat Enterprise Linux	Part Number
	80 GB 7200 rpm SATA 3.0 Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	TBD
	160 GB 7200 rpm SATA 3.0 Gb/s NCQ** drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	PV944A
	250 GB 7200 rpm SATA 3.0 Gb/s NCQ** drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	EA788AA
	500 GB 7200 rpm SATA 3.0 Gb/s NCQ** drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	PV943A
	80 GB 10K rpm SATA NCQ** drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	TBD
	160 GB 10K rpm SATA NCQ** drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	TBD
	1000 GB 7200 rpm SATA 3.0 Gb/s NCQ** drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	GE262AA

After-Market Options

SAS Hard Drive (8 port SAS Controller included on the system board)

3.5" SAS Hard Drives	Windows Vista	Windows XP	Red Hat Enterprise Linux	Part Number
73 GB 15K rpm SAS 3.0 Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	EA329AA
146 GB 15K rpm SAS 3.0 Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	EA330AA
300 GB 15K rpm SAS 3.0 Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	EM174AA
2.5" SAS SFF Hard Drives				
73 GB 10K rpm SAS 3.0 Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	GE259AA
146 GB 10K rpm SAS 3.0 Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	GE261AA

1394 PCI Cards	Windows Vista	Windows XP	Red Hat Enterprise Linux	Part Number
HP IEEE 1394b FireWire 3-Port PCI Card	Not supported	32-Bit, 64-Bit	Not supported	EA327AA

Input/Output Devices	Keyboards	Windows Vista	Windows XP	Red Hat Enterprise Linux	Part Number
	HP PS/2 Standard Keyboard (Carbonite/Silver)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	DT527A
	HP USB Standard Keyboard (Carbonite/Silver)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	DT528A
	HP USB Smartcard Keyboard	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported	ED707AA
	Pointing Devices				
	HP PS/2 2-Button Scroll Mouse (Carbonite)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	DD440B
	HP USB Optical Scroll Mouse	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	DC172B
	HP USB Optical 3-Button Mouse	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	DY651A
	HP USB Optical 3-Button 2.9M OEM Mouse	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	ET424AA
	HP Space Explorer USB 3d Input Device	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported	RY429AA
	HP SpacePilot USB Intelligent Controller	32-Bit, 64-Bit	32-Bit, 64-Bit	Not Supported	EF390AA

After-Market Options

Networking	NICs	Windows Vista	Windows XP	Red Hat Enterprise Linux	Part Number
	Intel Pro/1000 PT Gigabit PCIe NIC	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	EH352AA
	Broadcom BCM5751 NetXtreme Gigabit Ethernet Controller (PCIe)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	EA833AA

Controllers		Windows Vista ¹	Windows XP	Red Hat Enterprise Linux	Part Number
	LSI MegaRAID SAS 8888ELP 8-port, PCIe SAS RAID Controller	32-Bit, 64-Bit (RAID 5, 10 not supported)	32-Bit, 64-Bit	WS 4 & 5 Desktop	GE258AA

NOTE: Hardware RAID is not supported by HP on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit <http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf> for RAID capabilities with Linux.

Memory modules	667 MHz	Windows Vista	Windows XP	Red Hat Enterprise Linux	Part Number
	HP 512 MB DDR2-667 ECC FBD RAM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	EM159AA
	HP 1 GB DDR2-667 ECC FBD RAM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	EM160AA
	HP 2 GB DDR2-667 ECC FBD RAM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	EM161AA
	HP 4 GB DDR2-667 ECC FBD RAM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	EM162AA
	HP 8 GB DDR2-667 ECC FBD RAM (requires riser board, expected availability in 1H 2008)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	GM112AA

Monitors (Supported by all Operating Systems available from HP)	TFT display	Part Number
	HP LP3065 30-inch Widescreen LCD Monitor	EZ320A4
	HP LP2465 24-inch Widescreen LCD Monitor	EF224A4
	HP LP2065 20-inch LCD Monitor	EF227A4
	HP L1965 19-inch LCD Monitor	RA373AA

After-Market Options

Removable Storage	Windows Vista	Windows XP	Red Hat Enterprise Linux	Part Number
FDD floppy drive				
1.44 MB Internal Floppy Drive (1 only)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	DY670A
Optical drives				
SATA 16X DVD-ROM Drive*	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	EW268AA
HP 48X CD-RW/DVD Combo SATA Drive*	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	EW267AA
HP 16X DVD+-RW SuperMulti SATA Drive*	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	EW269AA
Other options				
HP 16-In-1 Media Card Reader with PCI Card – available Q3	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported	EM718AA
* Cannot be 2nd drive				
** LightScribe software supported with Windows XP/Vista only. LightScribe creates a grayscale image similar to black and white photography. LightScribe media required and sold separately. Double-layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.				

Audio	Windows Vista	Windows XP	Red Hat Enterprise Linux	Part Number
HP USB Powered Speakers	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop	RD628AA
SoundBlaster X-Fi XtremeGamer Audio Card	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 4 & 5 Desktop (AMO expected availability in December 2007)	GE257AA

Other devices/kits	Part Number
HP Internal USB Port Kit	EM165AA
PCI Front and Rear Fan Kit	EM163AA
HP SAS Back Panel Connector	EM164AA

Brackets/Rack Kits	Part Number
HP xw8/9 Bulk 10 Pack PCI Hold Down Kit	EN764AA
xw8400 Slide Rack Kit IT/Broadcast	DY664A

After-Market Options


Security features	Part Number
HP Business PC Security Lock Kit	PV606AA
Kensington Security Cable & Lock	PC766A

Software	Windows Vista	Windows XP	Red Hat Enterprise Linux	Part Number
HP RGS PC 3-year Software Assurance	TBD	TBD	TBD	GN039AA
HP RGS V5 PC Edition	TBD	TBD	TBD	GN038AA
HP RGS V5 Receiver Site License	TBD	TBD	TBD	GN034AA
HP RGS V5 Workstation Edition	TBD	TBD	TBD	GN035AA
HP RGS Workstation 3-year Software Assurance	TBD	TBD	TBD	GN036AA

Memory

DDR2 ECC REGISTERED FB-DIMM MEMORY

Use only fully-buffered, PC2-5300F DIMMS (FB-DIMMs). Match DIMMs by size and type. With the exception of the single-DIMM configuration, all memory should be added in like pairs. Use HP memory only.

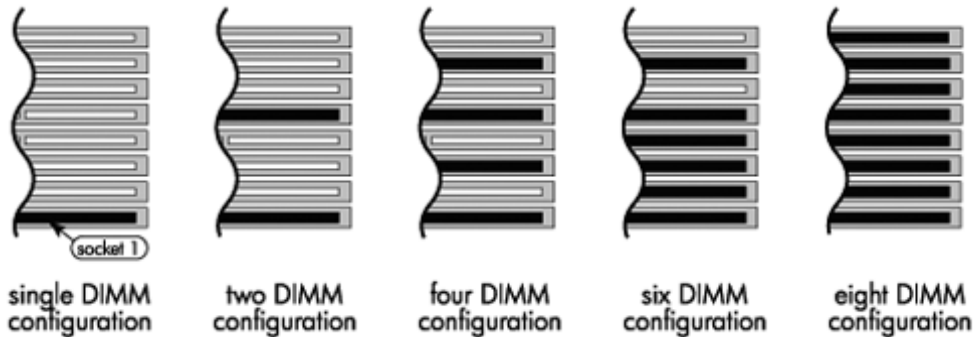

If using only one DIMM, install in socket 1 (bottom DIMM slot when rear inputs/outputs of motherboard are facing left). If using 2 DIMMs, install in sockets 1 & 5, matched by size and type. If using more than 2 DIMMs, pairs must be matched by size and type in sockets 1 and 3, 5 and 7, 2 and 4, and 6 and 8; this may require moving the DIMM in socket 5 to socket 3. If using 8 DIMMs, install in all sockets.

MAXIMUM MEMORY

Supports up to 128 GB of DDR2 Fully Buffered DIMMs (a maximum of 64 GB available at launch). Memory risers are required to support larger memory configurations (at launch, Configure-to-order HP xw8600 Workstations ordered with more than 16 GB of memory will require riser modules). Large capacity 8 GB DIMMs require the use of riser cards. No quad ranked DIMM should be used in the HP xw8600 without riser cards.

POSSIBLE MEMORY CONFIGURATIONS

Not all memory configurations possible are represented below. Also, 512 MB configurations are not supported for 64-Bit operating systems.

DIMM Size	Slot							
	1	2	3	4	5	6	7	8
512 MB	512 MB							
1 GB	1 GB							
1 GB	512 MB				512 MB			
2 GB	1 GB				1 GB			
2 GB	512 MB		512 MB		512 MB		512 MB	
4 GB	1 GB		1 GB		1 GB		1 GB	
4 GB	512 MB	512 MB	512 MB	512 MB	512 MB	512 MB	512 MB	512 MB
6 GB	1 GB	1 GB	1 GB	1 GB	1 GB		1 GB	
8 GB	2 GB		2 GB		2 GB		2 GB	
8 GB	1 GB	1 GB	1 GB	1 GB	1 GB	1 GB	1 GB	1 GB
16 GB	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB
32 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB
32 GB (requires riser cards)	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB

QuickSpecs


Memory

64 GB (requires riser cards)	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB
128 GB (requires riser cards, expected availability in 1H 2008)	8 GB	8 GB	8 GB	8 GB	8 GB	8 GB	8 GB	8 GB	8 GB	8 GB	8 GB	8 GB	8 GB	8 GB	8 GB	8 GB



Storage

Tower configuration

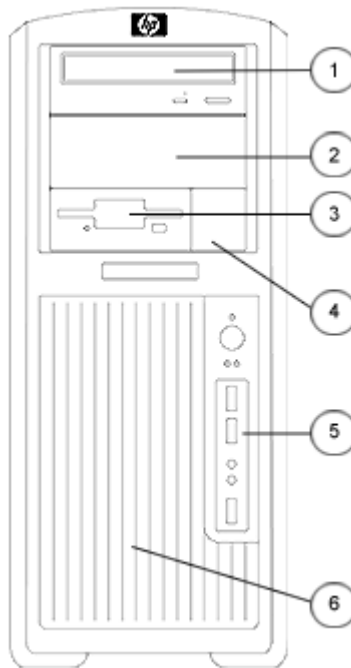

Minitower

- Optional Diskette Drive
- 5.25" Storage Drive Bays
Third external 5.25" bay is not full-depth, bottom bay is limited to 200mm device depth.
- 3.5" Storage Drive Bays with acoustic dampening rail assemblies
SFF SATA drives have 2:3 bay adapter, so they can convert 2 bays to 3 or 4 bays to 6, enabling up to 6 hard drives.
- 3.5" Storage Drive Bay

	Quantity Supported	Position Supported	Controller
Optional Diskette Drive	1	3	IDE
5.25" Storage Drive Bays Third external 5.25" bay is not full-depth, bottom bay is limited to 200mm device depth.	3	1, 2, 3	IDE
3.5" Storage Drive Bays with acoustic dampening rail assemblies SFF SATA drives have 2:3 bay adapter, so they can convert 2 bays to 3 or 4 bays to 6, enabling up to 6 hard drives.	4	5 (4 standard drive bays native)	SATA or SAS
3.5" Storage Drive Bay	1	6 (5 th drive is supported here, tools required for attach, no acoustic dampening)	SATA or SAS

SATA and SAS may be only mixed in a Windows configuration. Here are the rules for mixing hard drives:

1. The boot/data drive must be SATA to load before any SAS drive.
2. Any size or speeds may

Storage

- be chosen for drives 1-3.
3. However, hard drive 4 must be the same size/speed as hard drive 3
 4. Hard drive 5 must be the same as hard drive 4.

In non-mixed Microsoft Windows and Linux systems, rules 2 & 3 apply.

Configure-to-order RAID configs must all have the same size/speed hard drives.

Using external enclosures, an additional 8 channels of SAS can be supported if there are no other

NOTE:* Factory Integrated RAID 0 Configuration (Striped Array) and RAID 1 Configuration (Mirrored Array) requires 2 hard drives with identical speeds, capacity and interface. Hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit <http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf> for RAID capabilities with Linux.

If your first HD is a SATA drive, the 2nd must be also. Mixing of SATA and SAS is not supported under Linux.

Technical Specifications

System Board	
Chipset	Intel® 5400
Super I/O Controller	SMSC SCH5327
System Board Form Factor	SSI-EEB (E-ATX 12" x 13")
Processor Socket	Dual LGA 771
DIMM Connectors (FBD DDR2)	8 (16 with Risers)
PCI Connectors (5.0V)	1 full length 33 MHz 32-Bit
PCI-X Connectors	1 full length 133 MHz 64-Bit
PCI Express Connectors	1 PCI Express x16 Gen2 graphics slot 75W+75W 1 PCI Express x16 Gen2 (x16 or x8 selectable) 75W+75W 1 PCI Express x8 (x8 or x1 selectable) 2 PCI Express x8 (x4 electrically)
PCI Card Guide	Optional, tool-free support for all full-length cards with PCI extender
Flash ROM	Yes
Integrated Audio	High Definition Integrated Realtek ALC262 Audio with Line in, Line Out, Microphone, Headphone
CD-ROM IN (audio)	No
AUX IN (audio)	Yes
Clear CMOS Button	Yes
CPU Fan Headers	2
Chassis Fan Headers	2
Chassis Speaker Header	Yes
CMOS Battery Holder - Lithium	Yes
Hood Lock Header	Yes
Hood Sensor Header	Yes, as part of the front control panel header, connected by cable-to-switch. Cable/Switch assembly is a configure-to-order option.
Multibay Header	No
Integrated Gigabit Ethernet	2 Broadcom BCM5755 A2
Wake on LAN	Yes
Integrated Trusted Platform Module	TPM 1.2
ASF 1.0 & 2.0 (Alert Standard Format)	Yes
Integrated SATA RAID	<ul style="list-style-type: none"> ● RAID 0, 1, 10, 5 ● Supports one RAID array with 2-6 drives ● RAID 0 configuration - striped array ● RAID 0 configuration - data array ● RAID 1 configuration - mirrored array ● RAID 10 configuration - stripe of mirrors ● RAID 5 configuration - parity striping <p>NOTE: Hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID.</p>

Technical Specifications

	Please visit http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf for RAID capabilities with Linux.
Integrated SAS RAID (LSI 1068X)	<ul style="list-style-type: none"> ■ RAID 0, 1, 10 ■ Support one RAID array with 2-5(6) drives ■ Supports two RAID arrays with 2 drives each ■ RAID 0 Configuration - Striped Array ■ RAID 1 Configuration - Mirrored Array ■ RAID 10 Configuration - Stripe of Mirrors ■ External RAID arrays possible <p>NOTE: Hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID.</p> <p>Please visit http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf for RAID capabilities with Linux.</p>
SAS/SATA Connectors	6 SATA only connectors 4 SAS connectors, 2 of these SAS connectors (color coded red) can be used for External SATA (eSATA) with the appropriate eSATA After Market Option kit
IEEE 1394 Connectors	1 IEEE 1394b rear connector, 1 IEEE 1394a header for front connector (Not supported in Linux)
USB 2.0 Connectors	8 total: 5 rear, 2 on header for front connectors, 1 internal
Power Supply Headers	2x12 connector, 2x4 CPU connector, 2x3 memory connector
Power Switch, Power LED & Hard Drive LED Header	Power switch, power LED, and hard drive LED cables connect to the Control Panel connector. There is also a 2 pin header to connect a SCSI LED cable to the motherboard.
Password Clear Header	Yes

Cooling	
Power Supply Fan	92 mm x 32 mm
Memory Fan	92 mm x 25 mm (for systems without memory risers)
Processor Fan-Heatsink	80 mm x 15 mm (single or dual)
Chassis Fan (rear)	One 120 mm x 25 mm
Optional Front PCI fan	80 mm x 25 mm - not required for most workstation compute environments

Technical Specifications

Power Supply				
Power Supply	800W Custom PSU (Wide Ranging, Active PFC)		1050W Custom PSU - (Wide Ranging, Active PFC)	
Operating Voltage Range	90 - 269 VAC		90 - 269 VAC	
Rated Voltage Range	100 - 240 VAC	118 VAC	100 - 240 VAC	118 VAC
Rated Line Frequency	50/60Hz	400Hz	50/60 Hz	400Hz
Operating Line Frequency Range	47 - 66 Hz		393-407 Hz	
Rated Input Current	TBDA @ 100-127 VAC TBDA @ 200-240 VAC	TBDA @ 118 VAC	TBDA @ 100-127 VAC TBDA @ 200-240 VAC	TBDA @ 118 VAC
Heat Dissipation (Configuration and software dependent)	Typical TBD btu/hr (TBD kg-cal/hr) Maximum TBD btu/hr (TBD kg-cal/hr)		Typical TBD btu/hr (TBD kg-cal/hr) Maximum TBD btu/hr (TBD kg-cal/hr)	
Power Supply Fan	92x32 mm variable speed		92x32 mm variable speed	
Energy Star 4.0 Compliant	Yes		Yes	
80 PLUS® Compliant	Yes		Yes	
Blue Angel Compliant (<5W in S5 - Power Off)	TBD		TBD	
FEMP Standby Power Compliant @115V (<2W in S5 - Power Off, with Wake on LAN disabled)	Not supported		Not supported	
Power Consumption in ES Mode - Suspend to RAM (S3) (Instantly Available PC)	TBD		TBD	

BIOS Features	Description
PCI 3.0 Support	Full BIOS support for PCI Express through industry standard interfaces.
ASF 2.0 Compliant	Allows workstation status to be monitored on a remote console.
WMI Support	WMI is Microsoft's implementation of Web-Based Enterprise Management (WBEM) for Windows. WMI is fully compliant with the Distributed Management Task Force (DMTF) Common Information Model (CIM) and WBEM specifications.
BIOS Boot Spec 1.01 +	Provides more control over how and from what devices the workstation will boot.
Instantly Available PC	Allows for very low power consumption with quick resume time
ROM Based F10 Setup and Power-on Self Test	Review and customize BIOS settings
Remote System Installation via F12 (PXE) (remote boot from server)	Allows a new or existing system to boot over the network and download software, including the operating system
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS
ROM Revision Levels	Identifies system BIOS revision level and reports in ROM-based F10 setup. Version is stored in an industry standard memory location (SMBIOS) so that management SW applications can use and report this information

Technical Specifications

System Board Revision Level	Allows management SW to read the revision level of the system board Revision level is digitally encoded into the hardware and cannot be modified
Auto Setup when new hardware installed	System automatically detects addition of new hardware
Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control	Enable or disables serial, parallel, USB, audio, SAS and network ports
Removable Media Write/Boot Control	Prevents ability to boot from removable media on supported devices (and can disable writes to media)
Power-on Password	Prevents an unauthorized person from booting up the workstation
Setup Password	Prevents an unauthorized person from changing the workstation configuration
Replicated Setup	Saves BIOS settings to diskette or USB disk-on-key in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering ROM-based F10 setup
Memory Change Alert (requires HP Client Manager Software)	Alerts management console if memory is removed or changed
Thermal Alert (requires HP Client Manager Software)	Monitors the temperature state within the chassis. Three modes: <ul style="list-style-type: none"> ● NORMAL - normal temperature ranges ● ALERTED - excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown ● SHUTDOWN - excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs
Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console
Remote Wakeup/Shutdown	<ul style="list-style-type: none"> ● System administrators can power on, restart, and power off a client computer from a remote location. ● Enables cost-effective power consumption when the administrator needs to distribute software, perform security management, or update the ROM
ACPI (Advanced Configuration and Power Interface)	<ul style="list-style-type: none"> ● Allows the system to enter and wake from a low power mode ● Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system Supports ACPI 2.0 for full compatibility with 64-Bit operating system
Keyboard-less Operation	The system can be operated without a keyboard
SMBIOS	System Management BIOS 2.5, previously known as DMI BIOS, for system management information
Localized ROM Setup	Common BIOS image supports configuration (Setup) in 12 languages, with local keyboard mappings
Asset Tag	Allows user or MIS to set unique tag string in ROM
Ownership Tag	Allows user or MIS to set unique tag string in ROM
Memory Scrubbing	Allows memory controller to transparently correct transient ECC errors in the background
Memory Remapping	Allows system memory lost to PCI devices to be reclaimed above 4 GB, for use with operating systems that support more than 4 GB (Microsoft Windows XP 64-Bit edition, Linux)
Per-slot Control	Allows individual slot configuration (option ROM., latency)
Adaptive Cooling	Fan control parameters are set according to detected hardware configuration for optimal acoustics
Pre-boot Diagnostics	Early (pre-video) critical errors are reported via beeps and blinks on the power LED

Technical Specifications

Industry Standard	Revision Supported by the BIOS
ACPI	Advanced Configuration and Power Management Interface, Version 2.0c
ASF	Alert Standard Format Specification, Version 2.0
ATA (IDE)	AT Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b
ATAPI	ATAPI Removable Media Device BIOS Specification Version 1.0
BBS	BIOS Boot Specification v1.01
BIOS 32-Bit Services	Standard BIOS 32-Bit Service Directory Proposal v0.4
CD Boot	"El Torito" Bootable CD-ROM Format Specification Version 1.0
EDD	<ul style="list-style-type: none"> Enhanced Disk Drive Specification Version 1.1 BIOS Enhanced Disk Drive Specification Version 3.0
PCI	<ul style="list-style-type: none"> PCI Local Bus Specification, Revision 2.3 PCI Power Management Specification, Revision 1.1
PCI Express	PCI Express Base Specification, Revision 1.1
PMM	POST Memory Manager Specification, Version 1.01
SATA	<ul style="list-style-type: none"> Serial ATA Specification, Revision 1.0a Serial ATA 3.0Gb/s: Extensions to Serial ATA 1.5Gb/s, Revision 1.0
SAS	SAS specification 1.1
SMBIOS	System Management BIOS Reference Specification, Version 2.5
SPD	PC SDRAM Serial Presence Detect (SPD) Specification, Revision 1.2B
USB 1.1	Universal Serial Bus Revision 1.1 Specification
USB 2.0	Universal Serial Bus Revision 2.0 Specification

Serviceability Features of System	
Access panel	Tool-less, one-handed
Optical drives	Tool-less
Floppy drive	Drive requires screws to attach to bracket, once attached to mounting bracket, it latches tool-lessly to chassis
Hard drives	Tool-less
Expansion cards	Tool-less
Green user touch points	Yes, on tool-free internal chassis mechanisms
Color-coordinated cables and connectors	Yes
Memory	Tool-less, can be upgraded without removing any internal components
CPUs	A torx driver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less
Chassis fan removal	Tool-less
OS CD (Restore OS CD)	Restores computer to its original factory shipping Operating System - No recovery CDs will ship with Windows XP, Vista or Linux - an ISO image will be available on an HD partition.
Restore CD	Restores the computer to its original factory shipping image - Can be obtained via HP Support
ASF 2.0 support (Alert Standard Format)	Industry-standard specification for network alerting in operating system-absent environments
Dual function front power switch	Causes a fail-safe power off when held for 4 seconds
Insight Diagnostics	HP Insight Diagnostics Offline Edition
	The diagnostics utility enables you to perform testing and to view critical computer hardware and software configuration information from various sources. This utility enables you to:

Technical Specifications

	<ul style="list-style-type: none"> • Run diagnostics • View the hardware configuration of the system
	Key features and benefits
	<p>HP Insight Diagnostics simplifies the process of effectively identifying, diagnosing, and isolating the hardware issues. In addition to robust management tools, service tools can be invaluable in quickly resolving system problems. To streamline the service process and resolve problems quickly, it is necessary to have the right information available at the time that a service call is placed. The primary information requirement, which is also the one that provides the greatest insight into potential system issues, is the configuration of the system. Insight Diagnostics helps provide higher system availability. Typical uses of the Insight Diagnostics are:</p>
	<ul style="list-style-type: none"> • Testing and diagnosing apparent hardware failures • Documenting system configurations for upgrade planning, standardization, inventory tracking, disaster recovery, and maintenance • Sending configuration information to another location for more in-depth analysis

Other Deployment & Management Features	
HP Client Management Solutions	Visit http://www.hp.com/go/easydeploy
Security Features	
Access Panel Key Lock (standard)	Prevents removal of the access panel and all internal components including optical and floppy drives
Padlock (optional)	Prevents entire system theft and discourages access panel removal. 7mm diameter padlock loop at rear of system.
Kensington Cable Lock (optional)	Prevents entire system theft only. 3mm x 7mm slot at rear of system
Universal chassis clamp lock (optional)	The version without a cable discourages access panel removal and prevents theft of IO devices. The version with a cable additionally prevents entire system theft and allows multiple systems to be secured with a single cable.
Service and Support	
	On-site Warranty and Service (Note 1): This three-year, limited warranty and service offering delivers three years of on-site, next business-day (Note 2) service for parts and labor and includes free telephone support (Note 3) 8am - 5pm. Global coverage (Note 2) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering.
	NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply.
	NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.
	NOTE 3: Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

Technical Specifications

Eco-Label Certifications & Declarations	<p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> ● US Energy Star 4.0 (Not in Linux) ● US Federal Energy Management Program (FEMP) ● China Energy Conservation Program ● IT ECO declaration ● Japan PC Green label* <p><i>*NOTE: This product conforms to the examination standards (2003 version) under JEITA's 'PC Green Label System.'</i></p>
---	--

Energy Consumption							
Example Configuration #1	Processor Info	TBD					
	Memory Info	TBD					
	Graphics Info	TBD					
	Disks/Optical/Floppy	TBD					
Energy Consumption		115 VAC		230 VAC		100 VAC	
	LAN	Enabled	Disabled	Enabled	Disabled	Enabled	Disabled
	Windows Idle (S0)	TBD		TBD		TBD	
	Windows Busy Typ(S0)	TBD		TBD		TBD	
	Windows Busy Max (S0)	TBD		TBD		TBD	
	Sleep (S3)	TBD	TBD	TBD	TBD	TBD	TBD
	Off (S5)	TBD	TBD	TBD	TBD	TBD	TBD
Heat Dissipation**		115 VAC		230 VAC		100 VAC	
	LAN	Enabled	Disabled	Enabled	Disabled	Enabled	Disabled
	Windows Idle (S0)	TBD		TBD		TBD	
	Windows Busy Typ(S0)	TBD		TBD		TBD	
	Windows Busy Max (S0)	TBD		TBD		TBD	
	Sleep (S3)	TBD	TBD	TBD	TBD	TBD	TBD
	Off (S5)	TBD	TBD	TBD	TBD	TBD	TBD

Energy Consumption							
Example Configuration #2	Processor Info	TBD					
	Memory Info	TBD					
	Graphics Info	TBD					
	Disks/Optical/Floppy	TBD					
Energy Consumption		115 VAC		230 VAC		100 VAC	
	LAN	Enabled	Disabled	Enabled	Disabled	Enabled	Disabled
	Windows Idle (S0)	TBD		TBD		TBD	
	Windows Busy Typ(S0)	TBD		TBD		TBD	
	Windows Busy Max (S0)	TBD		TBD		TBD	
	Sleep (S3)	TBD	TBD	TBD	TBD	TBD	TBD
	Off (S5)	TBD	TBD	TBD	TBD	TBD	TBD

Technical Specifications

Heat Dissipation**		115 VAC		230 VAC		100 VAC	
	LAN	Enabled	Disabled	Enabled	Disabled	Enabled	Disabled
Windows Idle (S0)		TBD		TBD		TBD	
Windows Busy Typ(S0)		TBD		TBD		TBD	
Windows Busy Max (S0)		TBD		TBD		TBD	
Sleep (S3)		TBD	TBD	TBD	TBD	TBD	TBD
Off (S5)		TBD	TBD	TBD	TBD	TBD	TBD

NOTES:

* Energy Star low energy mode

** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.

Declared Noise Emissions (High and entry level configurations)				
System Configuration (Entry-level)	The entry-level configuration used for the Declared Noise Emissions for the Mini tower Desktop model is based on a "Typically Configured Desktop"			
	Processor Info	TBD		
Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)	Disks/Optical/Floppy			
		Sound Power (LWad, bels)	Deskside Sound Pressure (LpAm, decibels)	
	Idle	TBD	TBD	
	SATA Hard drive Operating (random reads - 30.3 reads/sec)	TBD	TBD	
	Floppy Drive Operating (continuous copy)	TBD	TBD	
Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)	DVD-ROM Operating (sequential reads)	TBD	TBD	
	System Configuration (High-end)	The high-end configuration used for the Declared Noise Emissions for the Mini tower Desktop model is based on a "Typically Configured Desktop"		
		Processor Info	TBD	
	Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)	Graphics Info		
		Disks/Optical/Floppy		
		Sound Power (LWad, bels)	Deskside Sound Pressure (LpAm, decibels)	
Idle		TBD	TBD	
SAS Hard drive Operating (random reads - 80 reads/sec)		TBD	TBD	
Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)	Floppy Drive Operating (continuous copy)	TBD	TBD	
	DVD-ROM Operating (sequential reads)	TBD	TBD	
	System Configuration (High-end with Memory Risers)	The high-end configuration used for the Declared Noise Emissions for the Convertible Mini tower Desktop model is based on a "Typically Configured Desktop"		
		Processor Info	TBD	
	System Configuration (High-end with Memory Risers)	Graphics Info		
Disks/Optical/Floppy				

Technical Specifications

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWad, bels)	Deskside Sound Pressure (LpAm, decibels)
		Idle	TBD
	SAS Hard drive Operating (random reads - 80 reads/sec)	TBD	TBD
	Floppy Drive Operating (continuous copy)	TBD	TBD
	DVD-ROM Operating (sequential reads)	TBD	TBD

Longevity and Upgrading	<p>This product is designed to be upgraded, possibly extending its useful life by several years. Spare parts are available throughout the warranty period and for up to 5 years after the end of production. Upgradeability features contained in the product include:</p> <ul style="list-style-type: none"> ● Intel LGA775 processor sockets ● 8 USB ports ● 1 PCI slot, 1 PCI-X slots and 5 PCI Express slots ● 8 expansion bays ● 8 -16 memory slots, depending on configuration
--------------------------------	---

Batteries	<p>This product complies with ISO standards:</p> <ul style="list-style-type: none"> ● EU Directive 91/ 157/ EEC ● EU Directive 93/ 86/ EEC ● EU Directive 98/ 101/ EEC <p>Batteries used in the product do not contain:</p> <ul style="list-style-type: none"> ● Mercury greater than 5ppm by weight ● Cadmium greater than 10ppm by weight ● Lead greater than 4000ppm by weight. <p>Battery size: CR2032 (coin cell) Battery type: Lithium</p>
------------------	--

Additional Information	<ul style="list-style-type: none"> ● This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC. ● This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC. ● Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043. ● This product contains 0% recycled materials (by wt.) ● This product is >90% recycle-able when properly disposed of at end of life. 	
Packaging Materials		
External	Cardboard carton and insert	2.70 kg
Internal	LDPE Foam	0.35 kg

Technical Specifications

Material Usage	<p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):</p> <ul style="list-style-type: none">● Asbestos● Certain Azo Colorants● Certain Brominated Flame Retardants - may not be used as flame retardants in plastics● Cadmium● Chlorinated Hydrocarbons● Chlorinated Paraffins● Formaldehyde● Halogenated Diphenyl Methanes● Lead carbonates and sulfates● Lead and Lead compounds● Mercuric Oxide Batteries● Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.● Ozone Depleting Substances● Polybrominated Biphenyls (PBBs)● Polybrominated Diphenyl Ethers (PBDEs)● Polybrominated Biphenyl Oxides (PBBOs)● Polychlorinated Biphenyl (PCB)● Polychlorinated Terphenyls (PCT)● Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.● Radioactive Substances● Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
Packaging	<p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none">● Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.● Eliminate the use of ozone-depleting substances (ODS) in packaging materials.● Design packaging materials for ease of disassembly.● Maximize the use of post-consumer recycled content materials in packaging materials.● Use readily recyclable packaging materials such as paper and corrugated materials.● Reduce size and weight of packages to improve transportation fuel efficiency.● Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.
End-Of-Life Management and Recycling	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p>

Technical Specifications

Hewlett-Packard Corporate Environmental Information	For more information about HP's commitment to the environment: [link to new HP white paper now in progress] Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html ISO 14001 certificates: http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html
--	---

Technical Specifications - Audio

High Definition Integrated Type	Integrated
Realtek ALC262 Audio	
High Definition Codec	Yes
SPDIF	No
External audio jacks	One front stereo analog microphone-in One front stereo headphone-out One rear line-in One rear line-out One rear stereo analog microphone-in
Internal audio connectors	AUX-IN line-level analog input
Retasking	NOTE: All external audio ports are retaskable as Line-In, Line-Out, Microphone-In, or Headphone-Out
Sampling	44.1kHz/48 kHz/96kHz/192kHz (output only)
Wavetable syntheses (software)	Yes - Uses OS soft wavetable
Digital audio	Yes
Analog audio	Yes
Number of channels on Line-Out (mono/stereo)	Two independent stereo outputs (Left & Right channels)
Internal audio speaker power rating	1.5 W
Internal speaker	Yes
Microphone features	Stereo Microphone supporting: Acoustic echo cancellation Noise suppression Beam forming

Technical Specifications - Controllers

<p>Opt. Sound Blaster X-Fi XtremeMusic (PCI)</p>	<p>Audio Quality</p>	<p>Total Harmonic Distortion + Noise at 1kHz (20kHz Low-pass filter) = 0.004%</p>										
	<p>Signal to Noise Ratio (SNR)</p>	<p>Signal-to-Noise Ratio (20kHz Low-pass filter, A-Weighted)</p> <ul style="list-style-type: none"> ● Stereo Output: 109dB ● Front and Rear Channels: 109dB ● Center, Subwoofer and Side Channels: 109dB 										
	<p>Sound Conversion</p>	<p>24-bit Analog-to-Digital conversion of analog inputs at 96kHz sample rate</p> <p>24-bit Digital-to-Analog conversion of digital sources at 96kHz to analog 7.1 speaker output</p> <p>24-bit Digital-to-Analog conversion of stereo digital sources at 192kHz to stereo output</p>										
	<p>Recording/Sampling Rate</p>	<p>44.1, 48 and 96kHz</p>										
	<p>ASIO 2.0 support</p>	<p>16-bit/44.1kHz, 16-bit/48kHz, 24-bit/44.1kHz 24-bit/48kHz and 24-bit/96kHz with direct monitoring</p>										
	<p>Enhanced SoundFont support</p>	<p>up to 24-bit resolution</p> <p>24-bit/96kHz</p>										
	<p>DACs</p>	<p>24-bit/192kHz</p>										
	<p>Voice Support</p>	<p>128 voices</p>										
	<p>Max. Channels in 3D Positional Audio</p>	<p>7.1</p>										
	<p>EAX® ADVANCED HD™ 5.0 support</p>	<p>Yes including EAX® MacroFX™, EAX® PurePath™ and Environment FlexiFX™</p>										
	<p>Connectors</p>	<p>FlexiJack (Performing a 3-in-1 function, Digital In / Line In / Microphone) via 3.50 mm minijack</p> <p>Line level out (Front / Rear / Center / Subwoofer / Rear Center) via 3.50 mm minijacks</p> <p>AUX_IN line-level analog input via 4-pin Molex connector on card</p> <p>One AD_Link (26 pin) connector for linking to the X-Fi I/O Console (upgrade option)</p>										
	<p>Dimensions</p>	<p>7.25 x 5 x 0.9 inches; 18.42 x 12.7 x 2.29 cm</p>										
	<p>Additional product features</p>	<table border="0"> <tr> <td style="vertical-align: top;">Movies</td> <td> <p>THX Certification</p> <p>Dolby Digital EX 6.1 Playback</p> <p>DTS-ES 6.1 Playback</p> </td> </tr> <tr> <td style="vertical-align: top;">Music</td> <td> <p>X-Fi 24-bit Crystalizer</p> <p>CMSS-3D</p> <p>SuperRip</p> </td> </tr> <tr> <td style="vertical-align: top;">Audio Creation</td> <td> <p>Pristine audio playback quality with a near transparent SRC engine</p> <p>Up to eight 24 bit hardware effects</p> <p>ASIO recording with latency as low as one millisecond</p> <p>24-bit SoundFont® sampling</p> <p>3D MIDI</p> </td> </tr> <tr> <td style="vertical-align: top;">Gaming</td> <td> <p>EAX ADVANCED HD 5.0</p> </td> </tr> <tr> <td style="vertical-align: top;">Software Bundle</td> <td> <p>Doom 3 Sound Blaster EAX patch</p> </td> </tr> </table>	Movies	<p>THX Certification</p> <p>Dolby Digital EX 6.1 Playback</p> <p>DTS-ES 6.1 Playback</p>	Music	<p>X-Fi 24-bit Crystalizer</p> <p>CMSS-3D</p> <p>SuperRip</p>	Audio Creation	<p>Pristine audio playback quality with a near transparent SRC engine</p> <p>Up to eight 24 bit hardware effects</p> <p>ASIO recording with latency as low as one millisecond</p> <p>24-bit SoundFont® sampling</p> <p>3D MIDI</p>	Gaming	<p>EAX ADVANCED HD 5.0</p>	Software Bundle	<p>Doom 3 Sound Blaster EAX patch</p>
Movies	<p>THX Certification</p> <p>Dolby Digital EX 6.1 Playback</p> <p>DTS-ES 6.1 Playback</p>											
Music	<p>X-Fi 24-bit Crystalizer</p> <p>CMSS-3D</p> <p>SuperRip</p>											
Audio Creation	<p>Pristine audio playback quality with a near transparent SRC engine</p> <p>Up to eight 24 bit hardware effects</p> <p>ASIO recording with latency as low as one millisecond</p> <p>24-bit SoundFont® sampling</p> <p>3D MIDI</p>											
Gaming	<p>EAX ADVANCED HD 5.0</p>											
Software Bundle	<p>Doom 3 Sound Blaster EAX patch</p>											

Technical Specifications - Controllers

			Entertainment Mode Audio Creation Mode Game Mode Mode Switcher Audio Console Creative MediaSource Creative MediaSource DVD-Audio Player DTS Neo:6 Settings Karaoke Player Entertainment Center Smart Recorder SoundFont Bank Manager Speaker Connection Wizard THX Setup Console Vienna SoundFont Studio Volume Panel WaveStudio Console Launcher Creative Media Toolbox Creative Diagnostics
	Minimum System Requirements	System RAM	256 MB
		Hard Disk	600MB free space Available PCI 2.1 slot for the audio card CD-ROM/CD-RW or CD/DVD-ROM required for software installation
		Operating System	Microsoft Windows XP Professional Service Pack 2 (SP2), Microsoft Windows XP Professional x64, Microsoft Windows Vista Business 32 and 64
Two Integrated PCI Express Broadcom BCM5755 NetXtreme Gigabit Ethernet Network Controller LoMs	Connector	RJ-45	
	Controller	Broadcom 5755 PCI-E LAN Controller	
	Memory	Integrated 48KB receive buffer and 8KB transmit buffer	
	Data rates supported	10/100/1000 Mbps	
	Compliance	IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control	
	Bus architecture	PCIe 1.0a	
	Data path width	X1	
	Data path speed	2.5Gbit per sec per direction transfer rate	
	Data transfer mode	Bus-master DMA	
	Hardware certifications		
	Power requirement	1.5 watts @ +3.3V AUX supply	
	Boot ROM support	Yes	
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps	

Technical Specifications - Controllers

Operating system driver support	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux 4 & 5 Desktop
Management capabilities	WOL, PXE
Alerting	ASF 2.0 (One LOM only - LAN port furthest away from the PCI slots does not support ASF 2.0)

Intel Pro/1000 GT Gigabit NIC (PCIe)	Connector	RJ-45
	Controller	Intel 82541PI Gigabit Controller
	Memory	Integrated 64 KB
	Data rates supported	10/100/1000 Mbps
	Compliance	IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	Bus architecture	PCI 2.3
	Data path width	32-Bit PCI
	Data path speed	32 bit 33/66 MHz - 266 Mb/s full duplex
	Data transfer mode	Bus-master DMA
	Hardware certifications	FCC class , BSMI B for Taiwan, VCCI B for Japan
	Power requirement	800 mA @ +5 VDC
	IEEE support	802.2 and 802.3ab
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps
		10BASE-T (full-duplex) 20 Mbps
100BASE-TX (half-duplex) 100 Mbps		
1000BASE-T, 1000 Mbps		
Environmental	Operating temperature	32° to 131° F (0° to 55° C)
	Operating humidity	85% at 131° F (55° C)
Dimensions	4.4 x 2.2 x 0.08 inches; 11.2 x 5.5 x .2 cm	
Operating system driver support	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP, Red Hat Enterprise Linux WS 3, Red Hat Enterprise Linux WS 4	
Management capabilities	ACPI, Wake on LAN, Preboot Execution Environment, WfM Baseline v2.0, DMI 2.0 support, Windows Management Instrumentation, SNMP-manageable Offline Diagnostics, Intel Boot Agent	
Kit contents	IEEE 802.1Q Virtual Local Area Network (VLANs), IEEE 802.3x Flow Control, Transmission Control Protocol (TCP), Checksum Offload, IEEE 802.1p, Intel Priority Packet II.	

Technical Specifications - Controllers

Broadcom BCM5751 NetXtreme Gigabit Ethernet Controller (PCIe)	<p>Connector RJ-45</p> <p>Controller Broadcom 5751 PCI-E 1.0a LAN Controller</p> <p>Memory Integrated 96Kb frame buffer memory</p> <p>Data rates supported 10/100/1000 Mbps</p> <p>Compliance IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control</p> <p>Bus architecture PCI-E 1.0a</p> <p>Data path width X1</p> <p>Data path speed 2.5Gbit per sec per direction transfer rate</p> <p>Data transfer mode Bus-master DMA</p> <p>Hardware certifications FCC class B, NRTL Mark Canada and United States, C-Tick for Australia, BSMI for Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia</p> <p>Power requirement 3.1 watts @ +3.3V AUX supply</p> <p>Boot ROM support Yes</p> <p>Network transfer rate 10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T, 1000 Mbps</p> <p>Environmental Operating temperature 32° to 131° F (0° to 55° C) Operating humidity 85% at 131° F (55° C)</p> <p>Dimensions 4.4 x 2.2 x 0.08 inches; 11.2 x 5.5 x 0.2 cm</p> <p>Operating system driver support Microsoft Windows Vista Business 32 and 64, Microsoft Windows 2000 and XP, Red Hat Linux 7.2, 7.3 and Red Hat Enterprise Linux 3</p> <p>Management capabilities WOL, PXE , Remote cable management</p> <p>Alerting ASF 2.0</p> <p>Kit contents Broadcom 5751, CD, Broadcom 5751 Netxtreme Gigabit PCIe NIC, drivers, quick install guide, product warranty statement</p>
LSI SAS MegaRAID® SAS 8888ELP Controller	<p>PCI Bus PCI-Express 1.0a compliant x8 lanes</p> <p>PCI data burst transfer rate Up to 3Gb/s per port</p> <p>Connectors 2 SAS SFF8088 x4 external connectors, 2 SAS 8087 x4 internal connectors</p> <p>I/O Processor/SAS controller LSI SAS1078 RAID on Chip</p> <p>Cache memory 256 DDR-2 miniDIMM cache</p> <p>RAID levels 0, 1, 5, 6</p> <p>RAID features Configure stripe size up to 1 MB Hot Spare support, including automatic rebuild Fast initialization Check consistency for background data integrity</p> <p>PCI Card Type +3.3 volt add-in card</p> <p>PCI Form Factor Low profile extended half-length 7.71" x 2.536"</p> <p>Bracket Full height and Low-profile</p>

Technical Specifications - Controllers

Certification Level	PCI-Express 1.0a	
Max. Number of SCSI Devices	240	
Environments	Operating	Storage
Temperature	32° to 140° F (0° to 60° C)	-49° to +221° F (-45° to +105° C)
MTBF	>200,000 hours	
Compliances	EMC: Class B-US (CFR 47, P15B); Canada (ICES-003); Japan (V-3/02.04); Europe (EN55022/EN55024); Australia/New Zealand (AS/NZS 3548); Safety: EN60950	
Operating system support	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional, XP Professional x64, Red Hat Enterprise Linux 4 & 5 Desktop	
Kit contents	Controller card, driver CD, LED cables, user documentation and warranty card.	

Technical Specifications - Storage

Serial ATA Hard Drives	1 TB (7,200 rpm)	Capacity	1,000,204,886,016 bytes		
		Height	1 inches; 2.54 cm		
		Width	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm		
			Interface	Up to 300 MB/s	
			Synchronous Transfer Rate (Maximum)	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
			Cache	16 MB	
			Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.8 ms
				Average	14.0 ms
				Full-Stroke	20 ms
			Rotational Speed	7,200 rpm	
			Logical Blocks	1,953,525,168	
			Operating Temperature	41° to 131°F (5° to 55°C)	
	500 GB (7,200 rpm)	Capacity	500,107,862,016 bytes		
Height			1 inches; 2.54 cm		
Width			Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm		
			Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
			Synchronous Transfer Rate (Maximum)	Up to 3.0 Gb/s	
			Cache	16 MB	
			Seek Time (typical reads, includes controller overhead, including settling)	Single Track	1.3 ms
				Average	20.0 ms
				Full-Stroke	30 ms
			Rotational Speed	7,200 rpm	
			Logical Blocks	976,773,168	
			Operating Temperature	41° to 131°F (5° to 55°C)	

Technical Specifications - Storage

250 GB (7,200 rpm)	Capacity	250,059,350,016 bytes
	Height	1 inches; 2.54 cm
	Width	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm
	Interface	Serial ATA (3.0 Gb/s) Native Command Queuing enabled
	Synchronous Transfer Rate (Maximum)	Up to 300 MB/s
	Cache	16 MB
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track 1.0 ms Average 12 ms Full-Stroke 18 ms
	Rotational Speed	7,200 rpm
	Logical Blocks	488,397,168
	Operating Temperature	41° to 131°F (5° to 55°C)

160 GB (7,200 rpm)	Capacity	160,041,885,696 bytes
	Height	1 inches; 2.54 cm
	Width	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm
	Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled
	Synchronous Transfer Rate (Maximum)	Up to 300 MB/s
	Cache	8 MB
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track 0.9 ms Average 9.3 ms Full-Stroke 18 ms
	Rotational Speed	7,200 rpm
	Logical Blocks	312,581,808
	Operating Temperature	41° to 131°F (5° to 55°C)

Technical Specifications - Storage

80 GB (7,200 rpm)	Capacity	80,026,361,856 bytes
	Height	1 inches; 2.54 cm or less
	Width	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm
	Interface	Serial ATA (3.0 Gb/s) Native Command Queuing available only in Configure-To-Order drive, not when ordered as an After Market Option).
	Synchronous Transfer Rate (Maximum)	Up to 300 MB/s
	Cache	8 MB
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track 2 ms Average 9.3 ms Full-Stroke 21 ms
	Rotational Speed	7,200 rpm
	Logical Blocks	156,301,488
	Operating Temperature	41° to 131°F (5° to 55°C)

160 GB (10k rpm)	Capacity	160,041,885,696 bytes
	Height	1 inches; 2.54 cm
	Width	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm
	Interface	Serial ATA (1.5 Gb/s), Native Command Queuing enabled
	Synchronous Transfer Rate (Maximum)	Up to 150 MB/s
	Cache	16 MB
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track 0.3 ms Average 4.6 ms Full-Stroke 10.2 ms
	Rotational Speed	10,000 rpm
	Logical Blocks	312,581,808
	Operating Temperature	41° to 131°F (5° to 55°C)

Technical Specifications - Storage

80 GB (10k rpm)	Capacity	80,026,361,856 bytes		
	Height	1 inches; 2.54 cm		
	Width	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm		
	Interface	Serial ATA (1.5 Gb/s), Native Command Queuing enabled		
	Synchronous Transfer Rate (Maximum)	Up to 150 MB/s		
	Cache	16 MB		
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 ms	
		Average	4.6 ms	
		Full-Stroke	10.2 ms	
	Rotational Speed	10,000 rpm		
	Logical Blocks	156,301,488		
	Operating Temperature	41° to 131°F (5° to 55°C)		

Serial Attached SCSI (SAS) 300 GB Hard Drives (15K rpm)	Capacity	300,000,000,000 bytes		
	Height	1.0 in (25.4mm)		
	Width	4.0 in (101.6mm)		
	Interface	SAS		
	Synchronous Transfer Rate (Maximum)	Up to 300 MB		
	Buffer	16 MB		
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.2 ms	
		Average	3.5 ms	
		Full-Stroke	6.7 ms	
	Rotational Speed	15,000 rpm		
	Logical Blocks	585,937,500 - 512 byte blocks		
Operating Temperature	50° to 95° F (10° to 35° C)			

73 GB (15K rpm)	Capacity	73,407,865,856 bytes		
	Height	1.0 in (25.4mm)		
	Width	4.0 in (101.6mm)		
	Interface	SAS		
	Synchronous Transfer Rate (Maximum)	Up to 300 MB/s		
	Buffer	16 MB		
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.27 ms	
		Average	3.5 ms	
		Full-Stroke	7.4 ms	
	Rotational Speed	15,000 rpm		

Technical Specifications - Storage

Logical Blocks 143,374,738 - 512 byte blocks
Operating Temperature 50° to 95° F (10° to 35° C)

146 GB
(15K rpm)

Capacity 146,815,737,856 bytes
Height 1.0 in (25.4mm)
Width 4.0 in (101.6mm)
Interface SAS
Synchronous Transfer Rate (Maximum) 3.0 Gb/s
Buffer 16 MB
Seek Time (typical reads, includes controller overhead, including settling)
Single Track 0.27 ms
Average 3.5 ms
Full-Stroke 7.4 ms
Rotational Speed 15,000 rpm
Logical Blocks 286,749,488 - 512 byte blocks
Operating Temperature 50° to 95° F (10° to 35° C)

Serial Attached SCSI (SAS) 146 GB
2.5" SFF Hard Drives (10K rpm)

Capacity 146,815,737,856 bytes
Height 0.583 in (14.8mm)
Width 2.76in (70mm)
Interface SAS
Synchronous Transfer Rate (Maximum) Up to 300 MB/s
Buffer 16 MB
Seek Time (typical reads, includes controller overhead, including settling)
Single Track 0.4 ms
Average 4.5 ms
Full-Stroke 8.5 ms
Rotational Speed 10,000 rpm
Logical Blocks 286,749,488 - 512 byte blocks
Operating Temperature 50° to 95° F (10° to 35° C)
Mean time between failures (MTBF) 1,600,000 hours

73 GB
(10K rpm)

Capacity 73,407,865,856 bytes
Height 0.583 in (14.8mm)
Width 2.76in (70mm)
Interface SAS
Synchronous Transfer Rate (Maximum) Up to 300 MB/s
Buffer 16 MB

Technical Specifications - Storage

Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.4 ms
	Average	4.5 ms
	Full-Stroke	8.5 ms
Rotational Speed	10,000 rpm	
Logical Blocks	143,374,738 - 512 byte blocks	
Operating Temperature	50° to 95° F (10° to 35° C)	
Mean time between failures (MTBF)	1,600,000 hours	

Technical Specifications - Input/Output Devices

HP IEEE 1394a FireWire 400 4-Port PCI Card (Windows XP and Vista Only)	Device Interface Protocol	IEEE-1394a	
	Data Rate	400 Mbps	
	Devices Supported	IEEE-1394 compliant devices	
	Bus Interface	PCI	
	Physical	PCI card with brackets for low profile and full height PCI slots.	
	Environmental	Operating temperature	50° to 131° F (10° to 55° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Relative humidity	20% to 80%
	Ports	Two IEEE1394 6-Pin Connector (Rear)	
	Minimum System Requirements	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional, Windows XP Home, not supported on Linux Pentium II 266 or faster 128-MB RAM 1-GB Hard Drive CD-ROM drive Built in sound system Available PCI slot	
	Regulatory Agency Approval	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC	

HP IEEE 1394b FireWire 800 3-Port PCI Card (Windows XP Only)	Device Interface Protocol	IEEE-1394	
	Data Rate	800 Mbps	
	Devices Supported	IEEE-1394 compliant devices	
	Bus Interface	PCI	
	Physical	PCI card with brackets for low profile and full height PCI slots.	
	Environmental	Operating temperature	50° to 131° F (10° to 55° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Relative humidity	20% to 80%
	Ports	Two IEEE-1394b bilingual 9-Pin Connector (Rear)	
	Connectors	One 10-Pin header Custom Connector (Internal)	
	Minimum System Requirements	Microsoft Windows XP Professional, Windows XP Home, not supported on Linux Pentium III 128-MB RAM 1-GB Hard Drive CD-ROM drive Built in sound system Available PCI slot	
Regulatory Agency Approval	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC		

Technical Specifications - Input/Output Devices

PS/2 OR USB Standard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 inches; 45.8 x 16.3 x 2.5 cm
	Electrical	Weight	2 lb (0.9 kg) minimum
		Operating voltage	+ 5VDC \pm 5%
	Mechanical	Power consumption	50-mA maximum (with three LEDs ON)
		ESD	CE level 4, 15-kV air discharge
		EMI - RFI	Conforms to FCC rules for a Class B computing device
		Microsoft PC 99 - 2001	Functionally compliant
		Languages	38 available
		Keycaps	Low-profile design
		Switch actuation	55-g nominal peak force with tactile feedback
		Switch life	20 million keystrokes (using Hasco modified tester)
		Switch type	Contamination-resistant switch membrane
		Key-leveling mechanisms	For all double-wide and greater-length keys
	Environmental	Cable length	6 feet; 1.8 m
		Microsoft PC 99 - 2001	Mechanically compliant
		Acoustics	43-dBA maximum sound pressure level
		Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, six surfaces
		Non-operating shock	80 g, six surfaces
		Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration	
	Drop (out of box)	26 inches; 66 cm on carpet, six-drop sequence	
	Drop (in box)	42 inches; 107 cm on concrete, 16-drop sequence	
	Operating system support	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux WS 3 and 4	
	Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
	Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	
	Kit contents	Keyboard, keyboard software media, installation guide, warranty card, safety and comfort	

HP PS/2 Optical Scroll Dimensions (H x L x W) 1.56 x 2.44 x 4.61 in (3.95 x 6.21 x 11.7 cm)

Technical Specifications - Input/Output Devices

Mouse	Weight	4.44 oz (126 g)	
	Environmental	Operating temperature	-32° to 104°F (0° to 40° C)
		Non-operating temperature	-4° to 140°F (-20° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	10% to 90% non-condensing
		Operating shock	40 g, 6 surfaces
		Non-operating shock	80 g, 6 surfaces
		Operating vibration	2 g peak acceleration
		Non-operating vibration	4 g peak acceleration
		Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face
		Electrical	Operating voltage
	Power consumption		100mA
	System consumption		PS/2 mini-din connector
	ESD		CE level 4, 15 kV air discharge
	EMI-RFI		Conforms to FCC rules for a Class B computing device
	Mechanical	Microsoft® PC99 - 2001	Functionally compliant
		Resolution	400 ± 20% DPI
		Tracking speed	10 in/s (25.4 cm/s) maximum
		Acceleration	100 in/s/s (2.54 m/s/s)
		Switch actuation	61 g nominal peak force
		Switch life	3,000,000 operations (using Hasco modified tester)
Switch type		Low force micro-switches	
Tracking mechanism life		155 mi (250 km) at average speed of 10 in/s	
Cable length		6 ft (1.8 m)	
Microsoft PC99 - 2001		Mechanically compliant	
Scroll wheel	Width	8 mm	
	Diameter	1.01 in (25.6 mm)	
	Maximum rotation speed	48 rats/sec	
	Switch type	Light force micro-switch	
	Switch life	1 million operations	
Regulatory approvals	Mechanical life	Minimum 200,000 revolutions	
	Compliant	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
Compatibility	Operating system support	Windows Vista Business 32 and 64*, Windows XP Professional, Windows XP Professional x64, Linux	

Technical Specifications - Input/Output Devices

***NOTE:** Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit:

<http://www.windowsvista.com/upgradeadvisor>.

For Windows Vista system requirements, visit:

<http://www.windowsvista.com/systemrequirements>.

HP 2-button Optical Scroll Mouse (USB)	Dimensions (H x L x W)	1.5 x 4.5 x 2.5 inches; 3.8 x 11.6 x 6.3 cm		
	Weight	0.27 lb (0.12 kg)		
	Cable length	72.8 inches; 185 cm		
	System requirements	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux 4 & 5 Desktop		
HP Optical 3-Button Mouse (USB)	Dimensions/Weight	Height	1.5 inches; 3.76 cm	
		Length	4.5 inches; 11.56 cm	
		Width	2.4 inches; 6.19 cm	
		Weight	3.80 oz (108 g)	
	Environmental	Operating temperature	32° to 104° F (0° to 40° C)	
		Non-operating temperature	-4° to 140° F (-20° to 60° C)	
		Operating humidity	10% to 90% (non condensing at ambient)	
	Mechanical	Tracking speed	6 in/s Maximum	
		Switch life	3,000,000 operations	
		Switch type	Micro-switches	
Tracking mechanism life		155 miles (250 km) at average speed of 10 in/s		
Cable length		9.5 feet; 2.9 m		
HP SpaceMouse Plus USB	Physical characteristics	Dimensions (H x W x D)	7.4 x 4.72 x 1.73 inches; 18.8 x 12.0 x 4.4 cm	
		Cap Diameter	2 x 6.5 x 6.6 mm	
		Weight	1.5 lb (0.68 kg)	
		Features	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw) Certified for leading CAD and DCC applications	
	Environmental	Operating temperature	41° to 140° F (5° to 60° C)	
		Non-operating temperature	-13° to 158° F (-25° to 70° C)	
		Operating humidity	10 to 98 % RH (non-condensing)	
	Mechanical	Non-operating humidity	10 to 98 % RH (non-condensing)	
		Buttons	11 programmable (unshifted)	
		Cap Force Range	0.2 N – 4.5 N	
		Cap Torque Range	4 Nmm to 100 Nmm	
		Resolution	8 bit	

Technical Specifications - Input/Output Devices

USB Specifications	Connector	6.56 feet; 2 m
	Cable Length	6.56 ft (2 m)
	Data Rate	16 msec
Software Drivers Available	Microsoft Windows XP Professional	
System Requirements	Disk Space	10 MB free disk space
Regulatory Approvals	UL, cUL, EN 950, EN 60950, CSA, FCC, CE Mark, TUV, CISPR 22, EN 50082, IEC 1000 4-2, IEC 1000-4-3, AS/NZS, VCCI, BSMI, C-Tick	

HP SpaceExplorer USB	Physical characteristics	Dimensions (L x W x H)	7.6 x 5.4 x 2.3 in (194 x 139 x 58mm)
		Weight	1.36 lbs (0.62 kg)
		Palmrest	Sculpted
	Mechanical	Buttons	15 reprogrammable speed keys
		Motion Controller	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw)
		Device Sensitivity	Adjustable to preference
	System Requirements	USB 1.1 or 2.0	
	Operating System Supported	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP, not supported in Linux	
	Regulatory Approvals	FCC, CE	

Technical Specifications - Optical Devices

HP 16X Max SATA DVD-ROM Drive	Form Factor	5.25-inch, half-height, tray-load		
	Orientation	Either horizontal or vertical		
	Interface type	SATA/ATAPI		
	Disc capacity	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)		
	Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)		
	Weight (max)	2.6 lb (1.2 kg)		
	Read speeds	DVD+R/-R/+RW/-RW/+R DL /-R DL	Up to 8X	
		DVD-ROM	Up to 16X	
		DVD-RAM	Up to 4X	
		CD-ROM, CD-R	Up to 48X	
	CD-RW	Up to 32X		

Removable Storage - Media Compatibility - DVD-ROM

Media	Read	Write
CD-ROM	Yes	No
CD-R	Yes	No
CD-RW	Yes	No
DVD-ROM	Yes	No
DVD-ROM DL	Yes	No
DVD-RAM	Yes	No
DVD+R	Yes	No
DVD+R DL	Yes	No
DVD+RW	Yes	No
DVD-R	Yes	No
DVD-RW	Yes	No
DVD-R DL	Yes	No
Access times (typical reads, including setting)	Random	DVD: < 140 ms (typical), CD: < 125 ms (typical)
	Full Stroke	DVD: < 250 ms (seek), CD: < 210 ms (seek)
	Cache Buffer	2 MB (minimum)
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s -default)
Power	Source	SATA DC power receptacle
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p
	DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum

Technical Specifications - Optical Devices

Environmental (all conditions non-condensing)	Temperature (operating) 41° to 122° F (5° to 50° C) Relative Humidity (operating) 10% to 90% Maximum Wet Bulb Temperature (operating) 86° F (30° C)
Operating Systems Supported	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux 4 & 5 Desktop No driver is required for this device. Native support is provided by the operating system.
Option kit contents	HP 16X Max SATA DVD-ROM Drive, Intermec WinDVD and installation guide.

HP 48X Max SATA CD-RW/DVD-ROM Combo Drive	Form Factor	5.25-inch, half-height, tray-load
	Orientation	Either horizontal or vertical
	Interface type	SATA/ATAPI
	Disc capacity	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)
	Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)
	Weight (max)	2.6 lb (1.2 kg)
	Write speed	CD-R Up to 48X CD-RW Up to 32X
	Read speeds	DVD+R/-R/+RW/-RW/+R DL /-R DL Up to 8X DVD-ROM Up to 16X CD-ROM, CD-R Up to 48X CD-RW Up to 32X
	Buffer Size	1.5MB (Min)
	Access times (typical reads, including setting)	Random DVD: < 140 ms (typical), CD: < 125 ms (typical) Full Stroke DVD: < 250 ms (seek), CD: < 210 ms (seek)
	Power	Source SATA DC power receptacle DC Power Requirement 5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p DC Current 5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum Total Drive Power (standby mode) < 2.5 Watt
	Environmental (all conditions non-condensing)	Temperature (operating) 41° to 122° F (5° to 50° C) Relative Humidity (operating) 10% to 90% Maximum Wet Bulb Temperature (operating) 86° F (30° C)

Technical Specifications - Optical Devices

Operating Systems Supported	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux 4 & 5 Desktop No driver is required for this device. Native support is provided by the operating system.
Option kit contents	HP 48X Max SATA CD-RW/DVD-ROM Combo Drive, Roxio Easy Media Creator version 9, Intervideo WinDVD, CD-R media, high-speed CD-RW media, and installation guide.

HP 16X Max SATA DVD+/-RW LightScribe Drive

Form Factor	5.25-inch, half-height, tray-load																		
Orientation	Either horizontal or vertical																		
Interface type	SATA/ATAPI																		
Disc capacity	8.5 GB DL or 4.7 GB standard																		
Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)																		
Weight (max)	2.6 lb (1.2 kg)																		
Write speed	<table> <tr> <td>DVD+R</td> <td>Up to 16X</td> </tr> <tr> <td>DVD+RW</td> <td>Up to 8X</td> </tr> <tr> <td>DVD+R DL</td> <td>Up to 8X</td> </tr> <tr> <td>DVD-R DL</td> <td>Up to 4X</td> </tr> <tr> <td>DVD-R</td> <td>Up to 16X</td> </tr> <tr> <td>DVD-RW</td> <td>Up to 6X</td> </tr> <tr> <td>DVD-RAM</td> <td>Up to 12X</td> </tr> <tr> <td>CD-R</td> <td>Up to 48X</td> </tr> <tr> <td>CD-RW</td> <td>Up to 32X</td> </tr> </table>	DVD+R	Up to 16X	DVD+RW	Up to 8X	DVD+R DL	Up to 8X	DVD-R DL	Up to 4X	DVD-R	Up to 16X	DVD-RW	Up to 6X	DVD-RAM	Up to 12X	CD-R	Up to 48X	CD-RW	Up to 32X
DVD+R	Up to 16X																		
DVD+RW	Up to 8X																		
DVD+R DL	Up to 8X																		
DVD-R DL	Up to 4X																		
DVD-R	Up to 16X																		
DVD-RW	Up to 6X																		
DVD-RAM	Up to 12X																		
CD-R	Up to 48X																		
CD-RW	Up to 32X																		
Read speeds	<table> <tr> <td>DVD-RAM</td> <td>Up to 12X</td> </tr> <tr> <td>DVD+RW, DVD-RW, DVD+R DL, DVD-R DL</td> <td>Up to 8X</td> </tr> <tr> <td>DVD-ROM, DVD+R, DVD-R</td> <td>Up to 16X</td> </tr> <tr> <td>CD-ROM, CD-R</td> <td>Up to 48X</td> </tr> <tr> <td>CD-RW</td> <td>Up to 32X</td> </tr> </table>	DVD-RAM	Up to 12X	DVD+RW, DVD-RW, DVD+R DL, DVD-R DL	Up to 8X	DVD-ROM, DVD+R, DVD-R	Up to 16X	CD-ROM, CD-R	Up to 48X	CD-RW	Up to 32X								
DVD-RAM	Up to 12X																		
DVD+RW, DVD-RW, DVD+R DL, DVD-R DL	Up to 8X																		
DVD-ROM, DVD+R, DVD-R	Up to 16X																		
CD-ROM, CD-R	Up to 48X																		
CD-RW	Up to 32X																		
Access times (typical reads, including setting)	<table> <tr> <td>Random</td> <td>DVD: < 130 ms (typical), CD: < 120 ms (typical)</td> </tr> <tr> <td>Full Stroke</td> <td>DVD: < 240 ms (seek), CD: < 200 ms (seek)</td> </tr> </table>	Random	DVD: < 130 ms (typical), CD: < 120 ms (typical)	Full Stroke	DVD: < 240 ms (seek), CD: < 200 ms (seek)														
Random	DVD: < 130 ms (typical), CD: < 120 ms (typical)																		
Full Stroke	DVD: < 240 ms (seek), CD: < 200 ms (seek)																		
Power	<table> <tr> <td>Source</td> <td>SATA DC power receptacle</td> </tr> <tr> <td>DC Power Requirement</td> <td>5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 5%-200 mV ripple p-p</td> </tr> <tr> <td>DC Current</td> <td>5 VDC - < 1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum</td> </tr> <tr> <td>Total Drive Power (standby mode)</td> <td>< 2.5 Watt</td> </tr> </table>	Source	SATA DC power receptacle	DC Power Requirement	5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 5%-200 mV ripple p-p	DC Current	5 VDC - < 1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum	Total Drive Power (standby mode)	< 2.5 Watt										
Source	SATA DC power receptacle																		
DC Power Requirement	5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 5%-200 mV ripple p-p																		
DC Current	5 VDC - < 1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum																		
Total Drive Power (standby mode)	< 2.5 Watt																		

Technical Specifications - Optical Devices

Environmental (all conditions non-condensing)	Temperature (operating) 41° to 122° F (5° to 50° C) Relative Humidity (operating) 10% to 90% Maximum Wet Bulb Temperature (operating) 86° F (30° C)
Operating Systems Supported	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux 4 & 5 Desktop No driver is required for this device. Native support is provided by the operating system. <i>* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit http://www.windowsvista.com/upgradeadvisor. For Windows Vista system requirements, visit http://www.windowsvista.com/systemrequirements.</i>
Option kit contents	HP 16X DVD+-RW SuperMulti LightScribe drive, LightScribe software, Roxio Easy Media Creator version 9, Intervideo WinDVD Software, installation guide, and DVD+R media. Software is Microsoft Windows only.

Technical Specifications - Graphics

NVIDIA Quadro NVS 440 Form Factor	ATX
256 MB Graphics Controller	Graphics Controller
	VGA controller
	Bus Type
	RAMDAC
	Memory
	Connector
	Controller clock speed
	Color planes
	Overlay planes
	Maximum pixel clock
	Multi-Monitor Support
	Single DVI Support
	Dual DVI Support
	High-definition Video Processor (HDVP)
	Available graphics drivers
	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html

NVIDIA Quadro NVS 290, 256 MB Dual Head	Form Factor	Low Profile
	Bus Type	PCIe x16
	Memory	256 MB 400MHz DDR2 SDRAM unified frame buffer, Z-buffer and Texture storage
	Connector	DMS-59, includes DMS-59 to Dual DVI-I cable. DMS-59 to Dual VGA cable available as an option.
	Display resolution support	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft® Windows®
	RAMDAC	Integrated dual 400MHz
	Color planes	32-bit color buffer
	Overlay planes	Hardware supported
	nView Architecture	Advanced multi-display desktop & application management seamlessly integrated into Microsoft Windows®.

Technical Specifications - Graphics

Multi-Monitor Support	Dual monitor support
DVI Support	DMS-59 (to dual DVI-SL)
High-definition Video Processor (HDVP)	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
Supported Graphics APIs	OpenGL 2.1 & DirectX Support; Shader Model 4.0
Available graphics drivers	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode), Linux – Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html .

NVIDIA Quadro FX 370 PCI-Express graphics controller	Form Factor	ATX
	Bus Type	PCI-Express x16
	Memory	256MB 400MHz DDR2 SDRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	DVI-I (dual-link) and DVI-I (single-link)
	Display resolution support	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link) and 3840x2400 (dual-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft® Windows®
	RAMDAC	Integrated dual 400MHz
	Architecture Features	High Resolution Anti-Aliasing PureVideo 2 engine supports AES 128-bit decryption GPU Computing (HW/SW including CUDA SDK 3D Textures LightSpeed Memory Architecture II 128-bit color precision Hardware accelerated anti-aliased points and lines Hardware OpenGL overlay planes H/W accelerated pixel readback 3rd generation occlusion culling AA on scan-out
	Power consumption	< 50 W
	Shading Architecture	Fully programmable GPU (OpenGL 2.1/DirectX 10 class) Vertex/Pixel Shader 4.0 Shading Support (HLSL, GLSL, CgFX)
	Supported Graphics APIs	OpenGL 2.1 & SM4.0 and DirectX10 Support

Technical Specifications - Graphics

Available graphics drivers Microsoft Windows Vista 32 and 64, Microsoft Windows XP, Linux – Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site:
http://welcome.hp.com/country/us/eng/software_drivers.html.

NVIDIA Quadro FX 570 PCI-Express graphics controller	Form Factor	ATX
	Bus Type	PCI-Express x16
	Memory	256MB 400MHz DDR2 SDRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	DVI-I (dual-link) and DVI-I (single-link)
	Display resolution support	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link) and 3840x2400 (dual-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft® Windows®
	RAMDAC	Integrated dual 400MHz
	Architecture Features	High Resolution Anti-Aliasing PureVideo 2 engine supports AES 128-bit decryption GPU Computing (HW/SW including CUDA SDK 3D Textures LightSpeed Memory Architecture II 128-bit color precision Hardware accelerated anti-aliased points and lines Hardware OpenGL overlay planes H/W accelerated pixel readback 3rd generation occlusion culling AA on scan-out
	Power consumption	<60 W
	Shading Architecture	Fully programmable GPU (OpenGL 2.1/DirectX 10 class) Vertex/Pixel Shader 4.0 Shading Support (HLSL, GLSL, CgFX)
	Supported Graphics APIs	OGL 2.1 & SM4.0 and DirectX10 Support
Available graphics drivers	Microsoft Windows Vista 32 and 64, Microsoft Windows XP, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site: http://welcome.hp.com/country/us/eng/software_drivers.html .	

Technical Specifications - Graphics

NVIDIA Quadro FX 1700 PCI-Express graphics controller	Form Factor	ATX
	Bus Type	PCI-Express x16
	Memory	512 MB 4000MHz DDR2 SDRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	DVI-I (dual-link) and DVI-I (single-link)
	Display resolution support	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link) and 3840x2400 (dual-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft® Windows®
	RAMDAC	Integrated dual 400MHz
	Architecture Features	High Resolution Anti-Aliasing PureVideo 2 engine supports AES 128-bit decryption GPU Computing (HW/SW including CUDA SDK 3D Textures LightSpeed Memory Architecture II 128-bit color precision Hardware accelerated anti-aliased points and lines Hardware OpenGL overlay planes H/W accelerated pixel readback 3rd generation occlusion culling AA on scan-out
	Power consumption	<75 W
	Shading Architecture	Fully programmable GPU (OpenGL 2.1/DirectX 10 class) Vertex/Pixel Shader 4.0 Shading Support (HLSL, GLSL, CgFX)
	Supported Graphics APIs	OGL 2.1 & SM4.0 and DirectX10 Support
	Available graphics drivers	Microsoft Windows Vista 32 and 64, Microsoft Windows XP, Linux – Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site: http://welcome.hp.com/country/us/eng/software_drivers.html .

Technical Specifications - Graphics

ATI FireGL V5600 PCI-Express graphics controller	Form factor	ATX
	Graphics controller	R520
	Bus Type	PCI-Express x16
	Memory	512 MB of unified frame buffer, Z-buffer and Texture storage and a 128-bit Ring-Bus memory controller
	Connectors	Two dual-link DVI connectors with analog/digital outputs
	Maximum resolution	Dual Link digital support for 3840 x 2400 @ 60Hz. Ideal for 30-inch widescreen displays.
	RAMDAC	Dual 10-bit per channel 400MHz
	Ring Bus memory controller	<ul style="list-style-type: none"> • 512-bit internal ring bus for highly efficient memory reads • Programmable intelligent arbitration logic
	Display output	<ul style="list-style-type: none"> • Up to 16-bit per RGB color component High Dynamic Range output (HDR) • Programmable piecewise linear gamma correction, color correction, and color space conversion (10-bits per color)
	Shading architecture	<ul style="list-style-type: none"> • Supports Full Shader Model 4.0 • 120 shader processing unit
	Supported graphics APIs	DirectX 10 and OpenGL 2.1 advanced
	Available graphics drivers	<p>Microsoft Windows XP Professional qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html HP-tested Windows XP and Linux</p> <p>Microsoft Windows Vista 32 and 64, Microsoft Windows XP, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site: http://welcome.hp.com/country/us/eng/software_drivers.html</p>
	Option kit contents	PCA with ATX bracket, DVI to VGA converters, CD and manual.
NVIDIA Quadro FX 3500 PCI-Express graphics controller	Form Factor	ATX
	Graphics Controller	NVIDIA NV71GL-U
	Bus Type	PCI-Express x16
	Memory	256MB 700MHz GDDR3 SDRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	2 dual-link DVI-I + 3-pin Mini DIN stereo output
	Display resolution support	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link) and 3840x2400 (dual-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft® Windows®
	Maximum Resolution	Dual DVI-I output - drives dual digital displays at resolutions up to 1920x1200 @ 60Hz (single-link) and 3840x2400 @ 24Hz (dual-link). Internal 400MHz RAMDACs - drives dual analog displays up to 2048x1536 @ 75Hz each
	RAMDAC	Dual 400MHz integrated
	Architecture Features	256-bit memory interface 128-bit IEEE floating-point precision graphics pipeline

Technical Specifications - Graphics

	<ul style="list-style-type: none"> 128-bit color precision 12-bit sub-pixel precision 8x FSAA at 1920x1200, 4x at 2048x1536, rotated grid FSAA sampling algorithm Hardware accelerated anti-aliased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes 3rd generation occlusion culling 3D volumetric texture support Quad-buffered stereo Dual Link DVI enabling driving digital displays up to 3840x2400 (24Hz) SLI Link
Shading Architecture	<ul style="list-style-type: none"> Fully programmable GPU (OpenGL 2.0/DirectX 9.0c class) Long fragment programs (unlimited instructions) Long vertex programs (unlimited instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
Supported Graphics APIs	<ul style="list-style-type: none"> OpenGL 2.0 ICD with immediate mode support for all OGL primitive types DirectX 9.0c
Available Graphics Drivers	<ul style="list-style-type: none"> Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site: http://welcome.hp.com/country/us/eng/software_drivers.html.

NVIDIA Quadro FX 4600 (768 MB)	Graphics Controller	NVIDIA Quadro FX 4600 Workstation GPU
	Bus Type	PCI Express x16
	RAMDAC	Dual 400 MHz integrated
	Memory	768 MB GDDR3 SDRAM unified graphics memory
	Connectors	2 Dual-Link DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output, DVI-I to VGA adapters included
	Multi-monitor Support	Dual integrated display controllers supporting up to 2048x1536 @ 75Hz (analog) or 3840x2400 @ 41Hz (digital) on both displays
	NVIDIA Quadro FX 4600 Architecture	<ul style="list-style-type: none"> 384-bit memory interface 67.2 GB/sec. memory bandwidth Full 128-bit floating point color precision 12-bit subpixel precision 65,536 fragment instruction 65,536 vertex instruction 3D volumetric textures Single-system powerwall Hardware accelerated antialiased points & lines Hardware OpenGL® overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware two-sided lighting 3rd-generation occlusion culling

Technical Specifications - Graphics

		OpenGL quad-buffered stereo Hardware-Accelerated Pixel Read-Back
Shading Architecture		16 textures per pixel in fragment programs Window ID clipping functionality Hardware accelerated line stippling Fully programmable GPU (OpenGL2.0/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
High Level Shader Languages		Optimized compiler for Cg and Microsoft® HLSL OpenGL 2.0 and DirectX 9.0c support Open source compiler
High-Resolution Antialiasing		12-bit subpixel sampling precision enhances AA quality Rotated-grid full-scene antialiasing (RG FSAA) 16x FSAA dramatically reduces visual aliasing artifacts or "jaggies" at resolution up to 1920x1200
Display Resolution Support		Dual Dual Link DVI-I output-drives digital displays at resolutions up to 3840 x 2400 @ 41Hz Internal 400 MHz DACs - Two analog displays up to 2048x1536 @ 75 Hz each
nView Architecture		Advanced multi-display desktop & application management seamlessly integrated into Microsoft Windows®.
Supported Graphics APIs		OpenGL 2.0 ICD with immediate mode support for all OGL primitive types DirectX 9.0c
Available Graphics drivers		Microsoft Windows XP Professional, Microsoft Windows Vista Professional, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site: http://welcome.hp.com/country/us/eng/software_drivers.html
NVIDIA Quadro FX 5600 PCI-Express graphics controller	Form Factor	ATX
	Bus Type	PCI Express x16
	Memory	1.5 GB 1350MHz GDDR3 SDRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	DVI-I (dual-link) and DVI-I (dual-link) Stereo
	Display resolution support	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link) and 3840x2400 (dual-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft® Windows®
	RAMDAC	Integrated dual 400MHz
	Architecture Features	G-Sync/SDI support SLI Frame Rendering High Resolution Anti-Aliasing PureVideo 2 engine supports AES 128-bit decryption GPU Computing (HW/SW including CUDA SDK)

Technical Specifications - Graphics

	3D Textures
	LightSpeed Memory Architecture II
	128-bit color precision
	Hardware accelerated anti-aliased points and lines
	Hardware OpenGL overlay planes
	H/W accelerated pixel readback
	3rd generation occlusion culling
	AA on scan-out
Power consumption	< 170 W
Shading architecture	Fully programmable GPU (OpenGL 2.1/DirectX 10 class) Vertex/Pixel Shader 4.0 Shading Support (HLSL, GLSL, CgFX)
Supported graphics APIs	OpenGL 2.1 & SM4.0 and DirectX10 Support
Available graphics drivers	Microsoft Windows Vista 32 and 64, Microsoft Windows XP - Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site: http://welcome.hp.com/country/us/eng/software_drivers.html .

Technical Specifications - Monitors

HP L1965 19-inch LCD Panel
Monitor

Type	Active matrix, thin film transistor (TFT)
Viewable Image Area (diagonal)	19 inches; 48.25 cm maximum viewable
Screen Opening (WxH)	14.9 x 12.0 inches; 38.0 x 30.5 cm
Viewing Angle (typical)	178 degrees horizontal/178 degrees vertical (10:1 minimum contrast ratio)
Brightness (typical)	300 nits (cd/m ²)
Contrast Ratio (typical)	1000:1 (typical)
Response Rate (typical)	6 ms (typical gray to gray)**
Pixel Pitch	0.294 mm
Color Depth Support	16.7 million colors
Backlight Lamp Life (to half brightness)	50K hours

*NOTE: All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

**NOTE: 20 ms rise and fall

Video/Other Inputs

Plug and Play	Yes (supports VESA DDC2B and DDC/CI; PC2001 compliant)
Self Powered USB 2.0 Hub	One upstream, four downstream ports (cable included)
Input Signal	Two DVI-I connectors (VGA analog or digital)
Input Impedance	75 ohms \pm 2%
Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green (activated through on-screen display)

Signal Interface/Performance

Video Cable	One DVI-D to DVI-D, and 1 DVI-I to VGA cables
Video Cable Length	71 in (1.8 m)
Horizontal Frequency	24 to 83 kHz
Vertical Frequency	48 to 76 Hz
Native Resolution	1280 x 1024 @ 75 Hz analog 1280 x 1024 @ 60 Hz digital
Maximum Resolution (Analog)	1280 x 1024 @ 75 Hz analog
Maximum Resolution (Digital)	1280 x 1024 @ 75 Hz digital
Preset VESA Graphic Modes (non-interlaced)	640 x 480 @ 60 Hz, 72 Hz, 75 Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz, 72 Hz, 75 Hz 1024 x 768 @ 60 Hz, 70 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75 Hz
Preset MAC Mode	832 x 624 @ 75 Hz 1152 x 870 @ 75 Hz
Preset VGA Mode	640 x 480 @ 60 Hz, 72 Hz

Technical Specifications - Monitors

	Preset SUN Mode	1152 x 900 @ 76 Hz
	Fail Safe Mode	Yes (limits out of range signal messages)
	Maximum Pixel Clock Speed	140 MHz
	User Programmable Modes	Yes, 15
	Anti-Glare	Yes
	Anti-Static	Yes
	AssetControl	Yes (accessible on HP Compaq Business Desktops featuring Intelligent Manageability)
	Default Color Temperature	Yes (6500k, 9300k, SRGB, Custom User)
On Screen Display (OSD) Controls	Buttons or Switches	Power on/off; 3-button OSD; second level OSD buttons include dual-input switch, dedicated auto adjust switch
	Languages	English, Spanish, French, German, Netherlands, Italian, Japanese, Simplified Chinese
	User Controls	Size and Positioning Contrast Brightness Clock, Clock Phase Selectable Color Temperature Serial Number Mode Displayed Sleep Timer Input Selection Factory Reset
Power	Power Supply	Auto-ranging, 90 to 265 VAC; internal power supply
	Input Power	100 ~ 240 VAC
	Nominal Current	1.5 A maximum
	Frequency	50 ~ 60 Hz
	Typical Power Consumption	< 35 watts
	Maximum	< 55 watts
	Power Saving	< 2 watts
	Off Mode	0 watts (when master power switch is in the off position)
	Power Cable Length	74.8 in (1.9 m); non-captive
Mechanical	Dimensions (H x W x D)	Unpacked with stand 14.85 min to 18.79 max x 15.9 x 8.78 inches (37.72 min to 47.72 max x 40.39 x 22.29 cm)
		Base Area 8.78 x 11.88 inches (Footprint D x W) (22.29 x 30.18 cm)
		Panel only (without stand) (H x W x D) 12.96 x 15.9 x 2.4 inches (32.91 x 40.39 x 6.1 cm)

Technical Specifications - Monitors

	Weight	Unpacked with stand	15.6 lbs (7.06 kg)
		Unpacked without stand	9.26 lbs (4.19 kg)
		Packaged	20.5 lbs (9.27 kg)
	Bezel Width	12.5 mm left and right, 12.75 mm top and bottom	
	Tilt Range	-4 degrees to +30 degrees	
	Swivel Range	± 45 degrees horizontal swivel	
	Height Adjustable	Yes (4 in/100mm adjustment range)	
	Pivot Rotation	Yes, 90 degrees	
	Base	Ships attached and is removable	
Environmental	Temperature – Operating	41° to 95° F (5° to 35° C)	
	Temperature – Non-operating	-4° to 140° F (-20° to 60° C)	
	Humidity – Operating	20% to 80%	
	Humidity – Non-operating	5% to 95%	
	Altitude – Operating	0 to 12,000 ft (0 to 3,658 m)	
	Altitude – Non-operating	0 to 40,000 feet; 0 to 12,192 m	
Environmental Data	Eco-Label Certifications and Declarations	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:	

- US Energy Star
- CECP

Energy Consumption (in accordance with US Energy Star test method)	AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz	AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz	AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz
Normal Operation	35.7 watts	35.6 watts	35.1 watts
Sleep	1.08 watts	1.14watts	1.23 watts
Off	0.93 watts	0.94 watts	0.92 watts
Heat Dissipation*	100 VAC, 50 Hz	115 VAC, 60 Hz	230 VAC, 50 Hz
Normal Operation	121.7 BTU/hr	121.4 BTU/hr	119.7 BTU/hr
Sleep	3.68 BTU/hr	3.89 BTU/hr	4.19 BTU/hr
Off	3.17 BTU/hr	3.21 BTU/hr	3.14 BTU/hr

*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Longevity and Upgrading	Upgradeability features contained in the product include: One upstream and four downstream USB ports
Ergonomics	The monitor meets the ergonomic requirement of EN-ISO 13406-2 for flat panel displays.
Additional Information	This product is in compliance with the Restrictions of Hazardous Substances (RoHS) Directive, 2002/95/EC.

Technical Specifications - Monitors

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive, 2002/96/EC.

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

Display meets the requirement for low frequency electromagnetic fields per MPR-II, TCO, and prEN50279 A/B/C.

This product contains 100% recycled materials (by wt.)

This product is 100% recyclable when properly disposed of at end of life.

Packaging Materials

- Corrugated - 0.955 kg
- Plastic (other) - 0.055 kg
- Polystyrene - 0.24 kg

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at

http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances

Technical Specifications - Monitors

		<ul style="list-style-type: none"> • Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
	Packaging	<p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none"> • Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials. • Eliminate the use of ozone-depleting substances (ODS) in packaging materials. • Design packaging materials for ease of disassembly. • Maximize the use of post-consumer recycled content materials in packaging materials. • Use readily recyclable packaging materials such as paper and corrugated materials. • Reduce size and weight of packages to improve transportation fuel efficiency. • Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.
	End-of-life Management and Recycling	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p>
	Hewlett-Packard Corporate Environmental Information	<p>For more information about HP's commitment to the environment: Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html ISO 14001 certificates: http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html</p>
Options	HP Silver Flat Panel Speaker Bar	<p>Powered directly by the monitor or PC, seamlessly attaches to the monitor's bezel to bring full multimedia support to select HP flat panel monitors. Features include dual speakers with full sound range and external jack for headphones. Sold separately, part number EE418AA. For more information, refer to the HP Flat Panel Speaker Bar QuickSpecs.</p>
Other	Accessories Included	<p>One DVI-D to DVI-D cable, one DVI-I to VGA cable, one USB cable, and CD-ROM with Pivot Pro software, HP Display Assistant software, and HP Display LiteSaver software.</p>
	Software	<p>Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or</p>

Technical Specifications - Monitors

keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.

HP Display Assistant is a software utility that allows monitor adjustment, color calibration, and security/asset management using the Display Data Channel Command Interface (DDC/CI) protocol of the connected desktop PC.

HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.

User Guide Languages	English, Bahasa, B. Portuguese, French, LA Spanish, Korean, Simplified Chinese, Traditional Chinese, Japanese, Danish, Dutch, Finnish, German, Italian, Norwegian, Swedish, Greek, Polish, Russian, Slovenian, Turkish
Warranty Languages	English
Color	Carbonite, two-tone carbonite and silver (EMEA only)
VESA Mounting	Yes (swing arm/wall mount not included); base must be removed for mounting options)
VESA External Mounting	Yes (standard 4 hole pattern, 100 mm)
Kensington Lock-ready	Yes
Certification and Compliance	Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MPR-II Compliant, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft® Windows® Certification
Compatibility	VESA Video Signal Standard (VSI) Compliant video cards have been tested and proven compatible for use with the HP LP1965 Flat Panel Monitor. Recommended for use with HP products.
Service and Warranty	Three years parts, labor, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion. With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.

HP LP2065 20-inch LCD Panel Monitor

Type	20-inch Active Matrix TFT (thin film transistor)
Viewable Image Area (diagonal)	20.1 inches; 51 cm
Screen Opening (W x H)	16.2 x 12.17 inches; 41.1 x 30.9 cm



Technical Specifications - Monitors

	Viewing Angle (typical)*	Up to 178° horizontal/178° vertical (10:1 minimum contrast ratio)
	Brightness (typical)*	Up to 300 nits (cd/m2)
	Contrast Ratio (typical)*	Up to 800:1
	Response Rate (typical)*	8 ms (gray to gray), 16 ms (rise + fall)
	Pixel Pitch	0.255 mm
	Color Depth Support	16.7 million colors
	Backlight Lamp Life (to half brightness)	45K hours
On Screen Display (OSD) Controls	Buttons or Switches	Input select, auto adjust/OSD up, OSD down, OSD menu select, power
	Languages	English, French, German, Spanish, Italian, Dutch, and Japanese
	User Controls	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, input selection, image control (including scaling), and factory reset
	Signal Interface/ Performance	
	Horizontal Frequency	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input for modes with pixel clock less than 157 MHz)
	Vertical Frequency	48 to 85 Hz (VGA input); 30 to 92 KHz (DVI input for modes with pixel clock less than 157 MHz)
	Native Resolution	1600 x 1200 @ 60 Hz (recommended)
	Preset VESA Graphic Modes (non-interlaced)	1600 x 1200 @ 60 Hz, 75 Hz (VGA input) 1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz 1280 x 960 @ 60 Hz 1152 x 900 @ 66 Hz 1024 x 768 @ 60 Hz, 75 Hz, 85 Hz 800 x 600 @ 60 Hz, 85 Hz 640 x 480 @ 60 Hz, 75 Hz, 85 Hz
	Text Mode	720 x 400 @ 70 Hz
	Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
	Sun Mode	1152 x 900 @ 66 Hz
	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)
	User Programmable Modes	Yes, 10
	Anti-Glare	Yes
	Anti-Static	Yes
	Default Color Temperature	6500 K
Video Input	Plug and Play	Yes

Technical Specifications - Monitors

	Input Signal	Four connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, and one s-video						
	Self Powered USB 2.0 Hub	One upstream, four downstream ports (cable included)						
	Input Signal	Two DVI-I connectors (dual VGA analog or dual digital input possible)						
	Input Impedance	75 ohms \pm 10%						
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green						
	Video Cable	Two VGA to DVI-I; two DVI-D to DVI-I						
	Video Cable Length	5.9 feet; 1.8 m						
Power	Input Power	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz						
	Frequency	47.5 to 63 Hz						
	Typical Power Consumption	55 watts (without USB ports); 70 watts (USB ports fully loaded)						
	Maximum	< 75 W						
	Power Saving	< 2 watts						
	Power Cable Length	5.9 feet; 1.8 m						
Mechanical	Dimensions (H x W x D)	<table border="0"> <tbody> <tr> <td>Unpacked with stand</td> <td>16.7 to 21.8 x 17.4 x 8.67 in 42.5 to 55.5 x 44.3 x 22.0 cm</td> </tr> <tr> <td>Unpacked w/o stand (head only)</td> <td>13.58 x 17.4 x 3.42 in 34.5 x 44.3 x 8.7 cm</td> </tr> <tr> <td>Packaged</td> <td>11.77 x 22.2 x 16.77 in 29.9 x 56.4 x 42.6 cm</td> </tr> </tbody> </table>	Unpacked with stand	16.7 to 21.8 x 17.4 x 8.67 in 42.5 to 55.5 x 44.3 x 22.0 cm	Unpacked w/o stand (head only)	13.58 x 17.4 x 3.42 in 34.5 x 44.3 x 8.7 cm	Packaged	11.77 x 22.2 x 16.77 in 29.9 x 56.4 x 42.6 cm
Unpacked with stand	16.7 to 21.8 x 17.4 x 8.67 in 42.5 to 55.5 x 44.3 x 22.0 cm							
Unpacked w/o stand (head only)	13.58 x 17.4 x 3.42 in 34.5 x 44.3 x 8.7 cm							
Packaged	11.77 x 22.2 x 16.77 in 29.9 x 56.4 x 42.6 cm							
	Weight	<table border="0"> <tbody> <tr> <td>Unpacked</td> <td>With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)</td> </tr> <tr> <td>Packaged</td> <td>26.3 lb (11.95 kg)</td> </tr> </tbody> </table>	Unpacked	With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)	Packaged	26.3 lb (11.95 kg)		
Unpacked	With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)							
Packaged	26.3 lb (11.95 kg)							
	Tilt Range	-5° to + 25° vertical tilt						
	Swivel Range	-45° to + 45°						
	Height Adjustable	Yes, range 5.1 inches; 13.0 cm						
	Pivot Rotation	Yes						
	Base	Detachable, ships attached						
Environmental	Temperature – Operating	46° to 95° F (10° to 35° C)						
	Temperature – Non-operating	6° to 140° F (-10° to 60° C)						
	Humidity – Operating	20% to 80% non-condensing						
	Humidity – Non-operating	5% to 85%						

Technical Specifications - Monitors

	Altitude – Operating	+12,000 feet; +3,657.6 m
	Altitude – Non-operating	+40,000 feet; +12,192 m
Options	HP Silver Flat Panel Speaker Bar - Part number: EE418AA	Powered directly by the monitor or the PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and external jack for headphones. Sold separately. For more information, refer to the HP Silver Flat Panel Speaker Bar QuickSpec.
Other	Accessories Included	VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #1 or 2 (DVI-I analog) connector. DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #1 or #2 (DVI-I digital) connector.
	User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	Software	HP Display Assistant Utility makes it possible to adjust displays settings through the PC using two-way communication via DDCI. HP Display Lite Saver allows ability to power up and down display at predetermined hours of the day to save power and backlight life. Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
	User Guide Languages	English
	Warranty Languages	English
	Color	Carbonite/Silver
	VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
	Kensington Lock-Ready	Yes
Certification and Compliance		Canadian Requirements/CSA, CE Marking, CISPR Requirements, Energy Star 3.0 Compliant, FCC Approval, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval,, MPR-II Compliant, PC2001 Compliant, PC99 Certified, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification (Microsoft Windows 98, Microsoft Windows 2000, and Microsoft Windows XP)
Compatibility		Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.

Technical Specifications - Monitors

Service and Warranty	Three years parts, labor, and on-site service. 24-hour 365-day 1-800 technical support. Replacement options include 2nd business day on-site service or next business day direct replacement. With direct replacement, HP will ship a replacement display product directly to you. Using the shipping labels provided, return your failed display to HP. Certain restrictions and exclusions apply. For details, contact HP Customer Support.
-----------------------------	---

HP LP2465 24-inch Widescreen LCD Monitor	Panel	Type	24-inch Active Matrix TFT (thin film transistor)
		Viewable Image Area (diagonal)	24 inches; 60.96 cm
		Screen Opening (W x H)	20.47 x 12.83 inches; 52.0 x 32.6 cm
		Viewing Angle (typical)*	178° H/ 178° V (10:1 minimum contrast ratio)
		Brightness (typical)*	500 nits (cd/m ²)
		Contrast Ratio (typical)*	1000:1
		Response Rate (typical)*	8 ms (typical gray to gray)
		Pixel Pitch	0.270 mm
		Color Depth Support	16.7 million colors
		Backlight Lamp Life (to half brightness)	50K hours
	<i>*Response time 13 ms rise and fall, 6 ms gray to gray.</i>		
On Screen Display (OSD) Controls	Buttons or Switches	Input Select, Auto Adjust, OSD Up, OSD Down, OSD Menu Select, Power	
	Languages	English, French, German, Spanish, Italian, Japanese, Dutch	
	User Controls	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset	
Signal Interface/ Performance	Horizontal Frequency	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	Vertical Frequency	48 to 85 Hz (VGA and DVI input)	
	Native Resolution	1920 x 1200 @ 60 Hz (recommended) (native aspect ratio of 16:10)	
	Preset VESA Graphic Modes (non-interlaced)	1920 x 1200 @ 60 Hz	
		1600 x 1200 @ 60 Hz, 75 Hz	
		1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz	
1280 x 960 @ 60 Hz			
	1152 x 900 @ 66 Hz		
	1024 x 768 @ 60 Hz, 75 Hz, 85 Hz		
	800 x 600 @ 60 Hz, 75 Hz		
	640 x 480 @ 60 Hz, 75 Hz		
	Text Mode	720 x 400 @ 70 Hz	

Technical Specifications - Monitors

	Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz		
	Sun Mode	1152 x 900 @ 66 Hz		
	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)		
	User Programmable Modes	Yes, 20		
	Anti-Glare	Yes		
	Anti-Static	Yes		
	Default Color Temperature	6500 K		
Video/Other Inputs	Plug and Play	Yes		
	Self Powered USB 2.0 Hub	One upstream, four downstream ports (located on side of monitor, cable included)		
	Input Signal	Two DVI-I (VGA analog and digital) inputs		
	Input Impedance	75 ohms \pm 10%		
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green		
	Video Cable	VGA to DVI-I; DVI-D to DVI-D		
Power	Video Cable Length	5.9 ft (1.8 m)		
	Input Power	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz		
	Frequency	47.5 to 63 Hz		
	Typical Power Consumption	75 watts		
	Maximum Power Saving	< 110 watts		
	Power Cable Length	6.2 ft (1.9 m)		
Mechanical	Dimensions (H x W x D)	Unpacked w/ stand	14.6 (min) to 19.7 (max) x 22 x 9.1 in (37.1 (min) to 50.1 (max) x 55.4 x 23.2 cm)	
		Unpacked w/o stand (head only)	14.4 x 22 x 3.7 in 36.6 x 55.84 x 9.2 cm	
		Packaged	11.7 x 22.1 x 25.6 in 29.8 x 56.0 x 65.1 cm	
	Weight	Unpacked	23.6 lbs (10.7 kg)	
		Packaged	23.6 lbs (10.7 kg)	
	Tilt Range	-5° to + 25° vertical		
	Swivel Range	-45° to + 45°		
	Height Adjustable	Yes, range 5.1 inches; 130 mm		
	Pivot Rotation	Yes		
	Base	Detachable, ships detached		
Environmental	Temperature –	46° to 95° F (10° to 35° C)		

Technical Specifications - Monitors

	Operating	
	Temperature –	6° to 140° F (-10° to 60° C)
	Non-operating	
	Humidity – Operating	20% to 80% non-condensing
	Humidity –	5% to 85%
	Non-operating	
	Altitude – Operating	+12,000 ft (+3,657.6 m)
	Altitude –	+40,000 ft (+12,192 m)
	Non-operating	
Other	Accessories Included	VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector DVI-D to DVI-D cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector
	Software	Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese. HP Display Assistant is a software utility that allows monitor adjustment, color calibration, and security/asset management using the Display Data Channel Command Interface (DDC/CI) protocol of the connected desktop PC. HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.
	User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	Warranty Languages	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	Color	Carbonite/silver
	VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
	Kensington Lock-Ready	Yes
Options	HP Silver Flat Panel	Powered directly by the monitor or PC, the
	Speaker Bar - Part	Speaker Bar seamlessly attaches to the monitor's

Technical Specifications - Monitors

	number: EE418AA	lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and an external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec.
Certification and Compliance		Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification (Microsoft Windows 98, Microsoft Windows 2000, and Microsoft Windows XP)
Compatibility		Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
Service and Warranty		Three years parts, labor, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion. With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.

HP LP3065 30-inch Widescreen LCD Monitor	Panel	Type	30.0-inch Wide Format Active Matrix TFT (thin film transistor)	
		Viewable Image Area (diagonal)	29.77 in (75.623 cm)	
		Screen Opening (W x H)	25.3 x 15.8 in (64.3 x 40.3 cm)	
		Viewing Angle (typical)*	Up to 178° H/ 178° V (10:1 minimum contrast ratio)	
		Brightness (typical)*	300 nits (cd/m2)	
		Contrast Ratio (typical)*	1000:1	
		Response Rate (typical)*	12 ms (8 ms average gray to gray)	
		Pixel Pitch	0.250 mm	
		Color Depth Support	16.7 million colors	
		Backlight Lamp Life (to half brightness)	40K hours	
		Color Gamut	92% of NTSC	
	On Screen Display (OSD) Controls	Buttons or Switches		Input select, brightness up, brightness down, power
		User Controls		Brightness, input selection
Signal Interface/	Horizontal Frequency		100 KHz	

Technical Specifications - Monitors

Performance	Vertical Frequency	60 Hz	
	Native Resolution	2560 x 1600 @ 60 Hz (native aspect ratio of 16:10)	
	Pixel Clock Speed	275 MHz	
	Anti-Glare	Yes	
	Anti-Static	Yes	
	Default Color Temperature	6500 K	
	Video/Other Inputs	Plug and Play	Yes
Self Powered USB 2.0 Hub		One upstream, four downstream ports (located on side of monitor, cable included)	
Input Signal		Three dual-link DVI-D inputs (Windows PC and graphics card that supports DVI ports with dual-link digital bandwidth and VESA DDC standard for plug-and-play setup requires a DVI-D dual-link graphic card that supports WQXGA (2560 x 1600) resolution.)	
Power	Video Cable	Two dual-link DVI cables	
	Video Cable Length	5.9 ft (1.8 m)	
	Input Power	Auto-Ranging, 100 to 240 VAC; internal power supply, 50 Hz/60 Hz	
	Typical Power Consumption	118 watts	
	Maximum Power Saving	< 2 watts	
Mechanical	Power Cable Length	5.9 ft (1.8 m)	
	Dimensions (H x W x D)	Unpacked w/ stand	19.3 to 23.2 x 27.2 x 9.5 in (49.0 to 59.0 x 69.2 x 24.0 cm)
		Unpacked w/o stand (head only)	17.9 x 27.2 x 3.3 in (45.5 x 69.2 x 8.4 cm)
		Packaged	22.4 x 31.1 x 14.9 in (56.8 x 79.0 x 37.8 cm)
	Weight	Unpacked	30.6 lbs (13.9 kg)
	Tilt Range	-5° to + 30° vertical	
	Swivel Range	-45° to + 45°	
	Height Adjustable	Yes, range 5.1 in (100 mm)	
	Pivot Rotation	No	
	Base	Detachable, ships detached	
Environmental	Temperature – Operating	46° to 95° F (10° to 35° C)	
	Temperature – Non-operating	6° to 140° F (-10° to 60° C)	

Technical Specifications - Monitors

	Humidity – Operating	20% to 80% non-condensing		
	Humidity – Non-operating	5% to 85%		
	Altitude – Operating	+12,000 ft		
	Altitude – Non-operating	+40,000 ft		
Environmental Data	Eco-Label Certifications and Declarations	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:		
		<ul style="list-style-type: none"> ● US Energy Star ● US Federal Energy Management Program (FEMP) ● IT Eco Declaration ● TCO 03 ● Taiwan Green Mark ● CECP ● Korea Eco-label ● EPEAT - Silver 		
	Energy Consumption (in accordance with US Energy Star test method)	AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz	AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz	AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz
	Normal Operation	102.8 watts	101.7 watts	100.4watts
	Sleep¹	2 watts	2 watts	2 watts
	Off	0.05 watts	0.06 watts	0.25 watts
	Heat Dissipation²	AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz	AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz	AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz
	Normal Operation	350.8 BTU/hr	347.0 BTU/hr	342.6 BTU/hr
	Sleep	6.8 BTU/hr	6.8 BTU/hr	6.8 BTU/hr
	Off	0.2 BTU/hr	0.2 BTU/hr	0.9 BTU/hr
	NOTES	<p>¹This sleep status ignore the input sync signal check cycle when metering the model in sleep mode.</p> <p>²Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.</p>		
	Longevity and Upgrading	Upgradeability features contained in the product include: One upstream and four downstream USB ports		
	Ergonomics	The monitor meets the ergonomic requirement of EN-ISO 13406-2 for flat panel displays.		
	Additional Information	This product is in compliance with the Restrictions of Hazardous Substances (RoHS) Directive, 2002/95/EC.		

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive, 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the SILVER level, see www.epeat.net.

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

Display meets the requirement for low frequency electromagnetic fields per MPR-II, TCO, and prEN50279 A/B/C.

This product contains 0% recycled materials (by wt.)

This product is 97.6% recyclable when properly disposed of at end of life.

Packaging Materials

- Corrugated Paper 2.19 kg
- PE-LD Bags 0.09 kg
- EPS Molded Foam 1.07 kg

RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may

- not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

Technical Specifications - Monitors

	Hewlett-Packard Corporate Environmental Information	For more information about HP's commitment to the environment: Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html ISO 14001 certificates: http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html
Other	Accessories Included	Two dual link DVI-D to DVI-D cables - connects the graphic card's DVI-D digital connector to the monitor's input (DVI-D digital) connectors; power cord
	Software	HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.
	User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	Warranty Languages	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
Options	Color	Carbonite
	VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
	Kensington Lock-Ready	Yes
	HP Flat Panel Speaker Bar - Part number: EE418AA	Powered directly by the monitor or PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and an external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec.
Certification and Compliance	Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals.	
Compatibility	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.	

Technical Specifications - Monitors

Service and Warranty

Three years parts, labor, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion. With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.

© Copyright 2007 Hewlett-Packard

The information contained herein is subject to change without notice.

All rights reserved. Microsoft, Windows, Windows Vista, and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Linux is a registered trademark of Linus Torvalds in the United States and other countries. Intel and Xeon are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Warranty - year(s) Protected by HP Services, including a 3 years parts, 3 years labor, and 3 years onsite service (3/3/3) standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.