



UNITED STATES STOVE COMPANY



"Keeping America Warm Since 1869"



**VENT-FREE FIREPLACE INSERT
MODEL VF30I**

Vent-Free, Fireplace Insert



Model VF30I

by United States Stove Company

FEATURES

- 99.7% efficient.
- 30,000 BTU Output.
- Available in either Natural Gas or LP Gas.
- For use in masonry or factory-built fireplaces only.
- Realistic, high-tech, ceramic fiber logs that give the texture and aesthetics of real wood.
- Thermostat controlled for maximum comfort and efficiency.
- Equipped with an enclosed double rotor, 120 CFM blower with rheostat control.
- Smooth, charcoal gray finish, designed to blend with any decor.
- Brass trim standard on the top and bottom of firebox opening.
- Piezo, matchless ignition.
- Front access panel for ease of operation.
- Made of 18 gauge steel to ensure quality and reliability of installation and continued use.
- ODS (Oxygen Depletion Sensor) pilot for safe operation.
- 100% Safety Pilot
- Weight: 106 lbs.

MINIMUM/MAXIMUM SIZE OF FIREPLACE FOR GAS INSERT

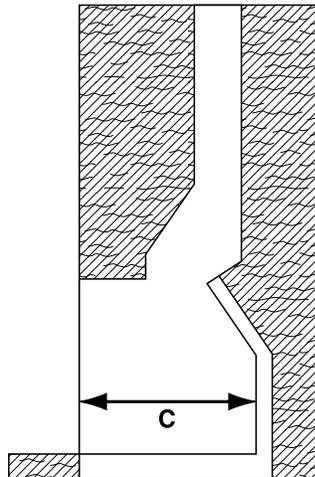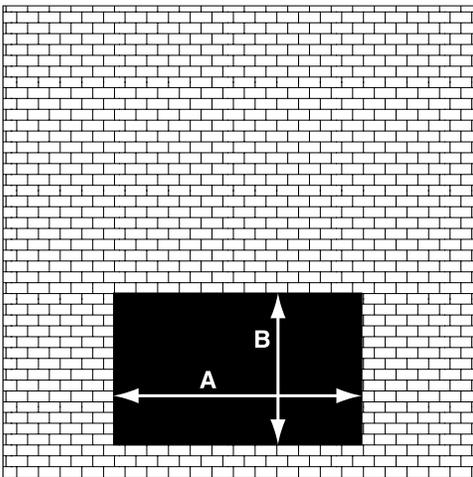

DIMENSION	MINIMUM	MAXIMUM
A - Width	25	44
B - Height	22 ¹ / ₂ "	32
C - Depth	13	24

Limited Warranty

Five (5) Years on firebox

1 Year on electrical components,
burner, logs, pilot assembly



UNITED STATES STOVE COMPANY

P.O. BOX 151 • SOUTH PITTSBURG, TN 37380 • (423) 837-2100

Keeping America Warm Since 1869



Note: All photographs are for illustrative purposes only and are not meant to be a guide for actual installation. All safety regulations with respect to combustible materials and surfaces must be followed. See installation manual for specifics. Dimensions and specifications are subject to change without notice. Contact local building or fire official about restrictions and installation inspection requirements.