

KitchenAid® 36" Professional Dual Fuel Convection Range


PRODUCT MODEL NUMBERS

KDRP462L
KDRP463L

Gas supply: Use 3/4" (1.9 cm) rigid pipe gas supply line to the range location. A smaller size pipe on longer runs may result in insufficient gas supply. With L.P. gas, piping or tubing size can be 1/2" (1.3 cm) minimum. If local codes permit, it is recommended that new flexible metal tubing, design-certified by CSA, 4-5 feet (122-152.4 cm) long, 5/8-inch (1.6 cm) I.D., be used for connecting the range to the rigid gas supply line. A 1/2" (1.3 cm) male pipe thread is needed for connection to pressure regulator female pipe threads. An individual manual shutoff valve must be located in the same room, but external to the range.

Electrical: A four-wire or three-wire, single phase, 240-volt, 60-Hz, AC only, electrical supply is required on a separate 30-amp circuit, fused on both sides of the line. A time-delay fuse or circuit breaker is recommended.

OVERALL DIMENSIONS

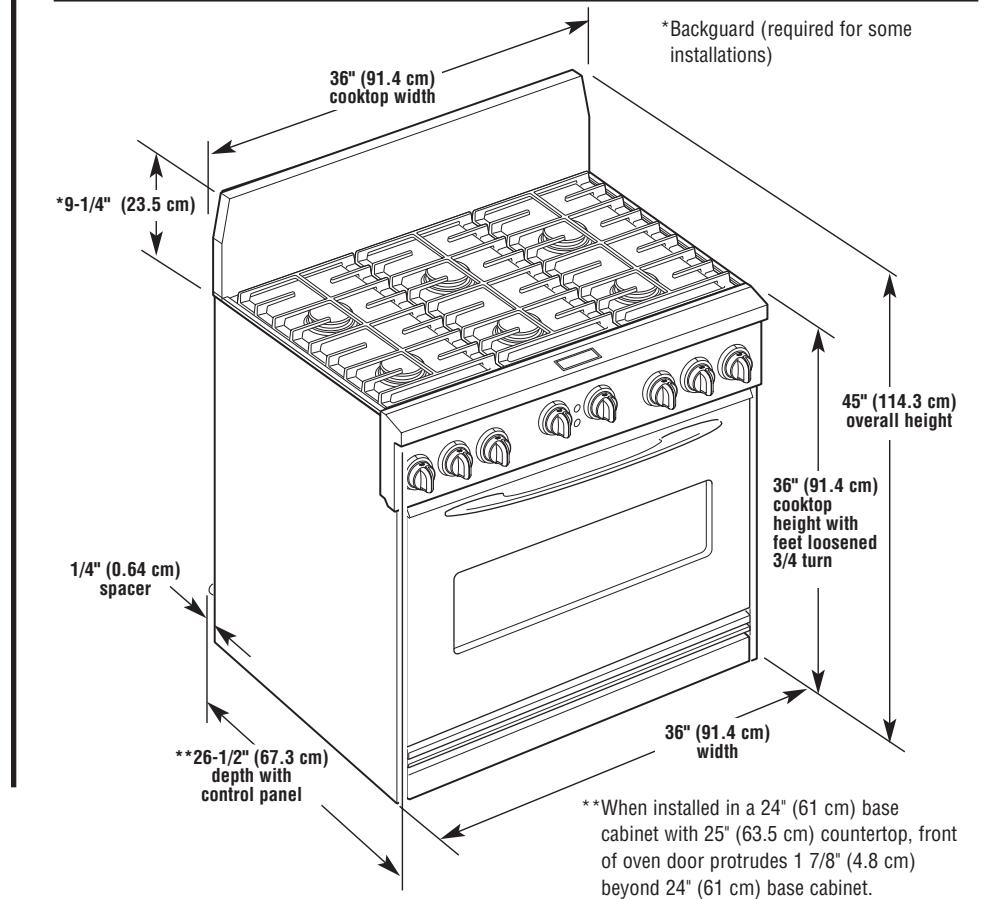

CABINET OPENING DIMENSIONS

Cabinet opening dimensions shown are for 25" (63.5 cm) countertop depth, 24" (61 cm) base cabinet depth and 36" (91.4 cm) countertop height.

