


Overview

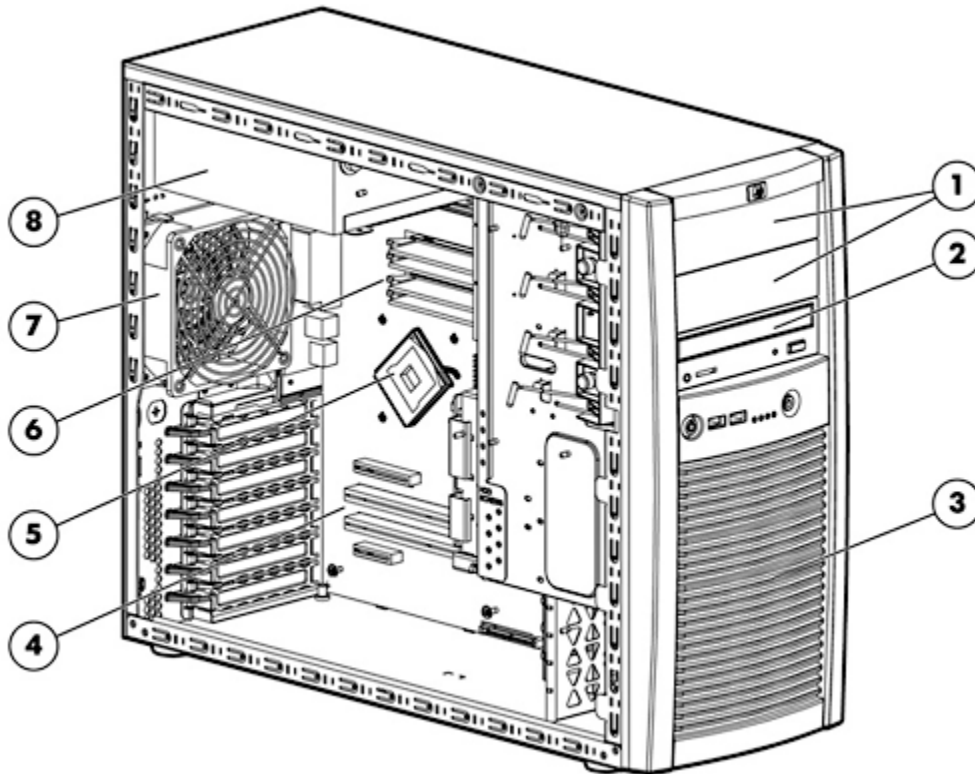

- | | |
|--|---|
| 1. Removable Media Bays | 5. Processor Socket (Intel® Pentium® D or Pentium® 4) |
| 2. 48x IDE (ATAPI) CD-ROM | 6. Four DIMM Sockets for up to 8GB DDR2 memory |
| 3. Four Hot-Plug Drive Bays | 7. System Fan |
| 4. Four Expansion Slots (Two PCI-X, Two PCI Express) | 8. 370W Power Supply |

What's New

- Support for Dual-core Intel® Pentium® D 900 Series processors with 2 x 2M cache

Overview

At A Glance

The HP ProLiant ML310 G3 is an affordable, single processor tower server designed to provide the solid network foundation essential to fuel thriving small offices. Dual-core Intel Pentium D or Pentium 4 processing power combines with industry-leading management and essential data protection features for a secure, affordable platform that helps you run your business efficiently.

- **Processors:**
 - Supports a single Intel® Pentium® D 800 or 900 Series, Pentium® 4 600 Series, or Celeron D® 300 Series processor
 - 800MHz Front Side Bus (FSB)
 - Intel E7230 Chipset
- **Memory:**
 - Up to 8GB of PC2-4200 533MHz unbuffered DDR2 SDRAM with advanced ECC capabilities and optional interleaving
- **Storage Controller:**
 - SCSI Models: Single Channel U320 SCSI Adapter in PCI-X slot
 - SATA Models: Four Channel embedded SATA Controller
- **Internal Drive Support:**
 - Supports up to four hot plug U320 SCSI, SAS, or SATA hard drives for up to 3TB internal storage
 - SCSI models support U320 SCSI drives
 - SATA models support SAS and SATA hard drives
- **Network Controller:**
 - Embedded NC320i PCIe Gigabit Server Adapter
- **Expansion Slots:**
 - 4 Total: (2) PCI-X 64-bit/100MHz; (2) PCI Express
- **USB 2.0 Ports:**
 - 5 Total: 2 front; 2 rear accessible ports; 1 internal
- **Management:**
 - Integrated Lights-Out 2 (iLO 2) management controller
 - ROM Based Setup Utility (RBSU) and PXE support
- **Form Factor:**
 - 5U Tower
 - Optional Tower-to-Rack Enabling Kit available
- **Warranty:**
 - Protected by HP Services and a worldwide network of resellers and service providers. One year, Next Business Day, on-site limited global warranty

Standard Features

| | |
|--|--|
| Processor One of the following | Dual-core Intel® Pentium® D 940 (3.2 GHz/800 - 2 x 2MB L2) |
| | NOTE: See "Configuration Information - Factory Integrated Models" section |
| | Dual-core Intel® Pentium® D 930 (3.0 GHz/800 - 2 x 2MB L2) |
| | Dual-core Intel® Pentium® D 920 (2.8 GHz/800 - 2 x 2MB L2) |
| | NOTE: See "Configuration Information - Factory Integrated Models" section |
| | Intel® Pentium® 4 650 (3.4 GHz/800 - 2M L2) |
| | Intel® Pentium® 4 640 (3.2 GHz/800 - 2M L2) |
| Cache Memory One of the following depending on Model | Integrated 2 x 2MB level 2 ECC cache (Pentium D 900 Series models) |
| | Integrated 2 x 1MB level 2 ECC cache (Pentium D 800 Series models) |
| | Integrated 2MB level 2 ECC cache (Pentium 4 models) |
| | Integrated 256KB level 2 ECC cache (Celeron D models) |

| | |
|--|--|
| Cache Memory One of the following depending on Model | Integrated 2 x 2MB level 2 ECC cache (Pentium D 900 Series models) |
| | Integrated 2 x 1MB level 2 ECC cache (Pentium D 800 Series models) |
| | Integrated 2MB level 2 ECC cache (Pentium 4 models) |
| | Integrated 256KB level 2 ECC cache (Celeron D models) |

| | |
|--------------------------|--------------|
| Memory Protection | Advanced ECC |
|--------------------------|--------------|

| | | |
|---------------|----------|---|
| Memory | Type | PC2-4200 unbuffered DDR2 SDRAM (533MHz) |
| | Standard | 512 MB (1 x 512 MB) |
| | Maximum | 8 GB |

| | |
|---------------------------|---|
| Network Controller | Embedded NC320i PCIe Gigabit Server Adapter |
|---------------------------|---|

| Expansion Slots | Slot Number | Bus Speed | Maximum Card Length | Hot Plug | Connector Type |
|-----------------|-------------|------------------------|---------------------|----------|----------------|
| | 4 | PCI Express x4 | 12.3 | No | x8 |
| | 3 | 64-bit/100MHz PCI-X | 12.3 | No | 3.3V |
| | 2 | 64-bit/100MHz PCI-X | 12.3 | No | 3.3V |
| | 1 | PCI Express x1 | 12.3 | No | x1 |

| | |
|---|--|
| Storage Controllers One of the following depending on Model | The HP ProLiant ML310 G3 offers both SCSI and Serial models. SCSI models support U320 SCSI hard drives. Serial models support Serial Attached SCSI (SAS) and Serial ATA (SATA) hard drives. Use of SAS hard drives in Serial models requires installation of a SAS controller or HBA. Single Channel Ultra320 SCSI Adapter (in PCI-X slot) (SCSI Models) |
| | Integrated four port SATA controller with integrated SATA RAID 0, 1 (SATA Models) |
| | NOTE: Use of the embedded SATA RAID feature requires installation of a driver from a floppy drive. The supported floppy drive can be a USB floppy drive, half-height internal floppy drive, or virtual floppy via Integrated Lights-Out 2 (iLO 2). |
| | NOTE: See the "Storage" section of these QuickSpecs for information on controllers and cables required to support SATA and SAS hard drive configurations |

Standard Features

| | | |
|----------------|----------------|---------------------------------|
| Storage | Optical Drive | 48x IDE (ATAPI) CD-ROM Drive |
| | Diskette Drive | Optional 1.44 MB Diskette Drive |

NOTE: A diskette device is required to configure the embedded SATA RAID feature.

| | | | |
|---------------------------------|----------------------|-------|---------------------|
| Maximum Internal Storage | Hot Plug SCSI | 1.2TB | 4 x 300GB U320 SCSI |
| | Hot Plug SAS (3.5") | 1.2TB | 4 x 300GB SAS |
| | Hot Plug SATA (3.5") | 3.0TB | 4 x 750GB SATA |

NOTE: See the "Storage" section of these QuickSpecs for information on controllers and cables required to support SATA and SAS hard drive configurations

| | | |
|------------------------------|--------------------------|--|
| Interfaces | Parallel | 1 |
| | Serial | 1 (Optional second serial port available) |
| | Pointing Device (Mouse) | 1 |
| | Graphics | 1 |
| | Keyboard | 1 |
| | USB 2.0 Ports | 5 total: 2 front; 2 rear; 1 internal |
| | | NOTE: Please see the following URL for additional information regarding USB support: http://h18004.www1.hp.com/products/servers/platforms/usb-support.html . |
| | Dedicated USB | 1 (available for USB tape connectivity) |
| | Network RJ-45 (Ethernet) | 1 |
| iLO 2 Remote Management port | 1 | |

| | |
|-----------------|--|
| Graphics | Integrated ATI ES1000 Video Controller with 16-MB SDRAM Video Memory |
|-----------------|--|

| | |
|--------------------|---|
| Form Factor | 5U Tower Optional Tower-to-Rack Enabling Kit available |
|--------------------|---|

Standard Features

ProLiant Essentials Foundation Pack Software

HP Systems Insight Manager

HP Systems Insight Manager (HP SIM) provides a unified, secure and extensible environment to centrally manage servers, storage and other infrastructure devices across multiple operating system platforms.

Through a single management view, HP SIM provides core management services that include device discovery and identification, event views, health monitoring, inventory data collection, software version control and reporting. HP SIM is built on industry standards and is extensible with value-added ProLiant Essentials, Integrity Essentials and Storage Essentials software to meet individual management needs. For more details on HP SIM visit <http://www.hp.com/go/hpsim>.

HP SIM provides organizations with the following benefits:

- Simplifies and consolidates infrastructure lifecycle management using task and query based functionality
- Provides the foundation for infrastructure automation and virtualization
- Enables IT management based on business processes not hardware platforms
- Lowers infrastructure maintenance cost and frees resources for innovation
- Maximizes resource utilization with virtualization technologies
- Provides a central point of integration between infrastructure and Enterprise management tools such as HP OpenView

Insight Management Agents

Insight Management Agents should be installed on all HP servers to present system instrumentation, health and configuration information into HP Systems Insight Manager and the HP System Management Homepage. The HP System Management Homepage aggregates systems data from Insight Management Agents and other HP management tools, providing a consolidated browser-based interface for managing individual servers.

Insight Management Agents and The HP System Management Homepage are included on ProLiant Support Packs, and can also be installed using the server profiles provided with the ProLiant Essentials Rapid Deployment Pack. For additional information about the Management Agents and the HP System Management Homepage please visit the management Web site at <http://www.hp.com/servers/manage>.

SmartStart

SmartStart is a tool that simplifies server setup, providing a rapid way to deploy consistent server configurations. For more information, please visit the SmartStart Web site at <http://www.hp.com/servers/manage>.
Latest SmartStart version supported: SmartStart 7.5
Minimum SmartStart version supported: SmartStart 7.4

Subscriber's Choice

Subscriber's Choice Driver and Support Alerts/Notifications is a web-based email subscription service that provides automatic delivery of software and driver change notifications for ProLiant products. Sign up at <http://www.hp.com/go/subscriberschoice> and customize your profile to receive various new alerts as they become available, on a weekly or monthly basis.

Standard Features

| | |
|--|---|
| ROMPaaS, support software, and configuration utilities | The latest software, drivers, and firmware fully optimized and tested for your ProLiant server and options available in SmartStart or downloadable from Software and Drivers download pages, linked from the SmartStart website at http://www.hp.com/servers/smartstart . |
| Integrated Lights-Out 2 Standard (iLO 2) | Standard remote management functionality that enables remote control of system power and access to the system serial console and event logs regardless of server status. Firmware preinstalled on servers. Also, updates downloadable from the Software and Drivers web pages and on the ProLiant Software Maintenance Pack. |
| Survey Utility and diagnostics utilities | The most advanced configuration analysis, reporting and troubleshooting utilities used by HP and at your fingertips, available in SmartStart. |
| Optional ProLiant Essentials Value Packs | Optional software offerings that selectively extend the functionality of an Adaptive Infrastructure to address specific business problems and needs: <ul style="list-style-type: none"> ● Intelligent Networking Pack - detects and analyzes network bottlenecks or broken network linkages and steers traffic to the optimum route based on network conditions, plus it provides an extra layer of protection. The virus throttle feature of the solution slows the propagation of fast spreading virus. ● Vulnerability and Patch Management Pack - identifies and remediates software security vulnerabilities due to missing patches as well operating system configurations that can be exploited by viruses, worms, and other blended threats. ● Virtual Machine Management Pack - provides central management and control of virtual machines from Microsoft and VMware. Integrated approach provides the ability to manage both physical and virtual resources from a single management console. ● Server Migration Pack - The Server Migration Pack automates the manual processes required for migrating servers between physical or virtual platforms (P2V, V2P, and V2V). |
| Optional Remote Management Packs | <ul style="list-style-type: none"> ● Integrated Lights-Out Advanced Pack - upgrades the Integrated Lights-Out processor to full virtual presence and control with graphical console and virtual media. |

NOTE: Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to <http://www.hp.com/servers/proliantessentials> or the various ProLiant Essentials Value Pack product QuickSpecs for more information.

NOTE: For more information regarding ProLiant Essentials Software, please see the following URL: <http://www.hp.com/servers/proliantessentials>

Industry Standard Compliance

ACPI V1.0b Compliant
 PCI 3.0 Compliant
 PCI-X 1.0 Compliant
 PCI-Express 1.0a Compliant
 PXE Support
 WOL Support
 Microsoft Logo certifications
 Novell Logo certifications
 USB 2.0

Standard Features

| | |
|--------------------------------------|--|
| Manageability | <p>HP Systems Insight Manager Online ROM Flash Utility Automatic Server Recovery-2 (ASR-2) Drive Parameter Tracking (with Smart Array Controller) Dynamic Sector Repairing (with Smart Array Controller) Pre-Failure Warranty (covers processors, memory and SCSI and SAS hard drives) BIOS Serial Console</p> |
| Security | <p>Power-on password Setup password Diskette boot control Power switch security</p> |
| Server Power Cords | <p>All models ship with one 1.8m (6 foot) standard low-line, country specific power cord. Localized cables included with geographic specific models in other world regions.</p> |
| UPS and PDU Power Cord Matrix | <p>Please see the UPS and PDU cable matrix that lists cable descriptions, requirements, and specifications for UPS and PDU units: ftp://ftp.compaq.com/pub/products/servers/ProLiantstorage/power-protection/powercordmatrix.pdf.</p> |
| Power Specifications | <p>To review typical system power ratings use the Active Answers Power Calculator at: http://h30099.www3.hp.com/configurator/powercalcs.asp</p> |
| Power Supply | <p>370 Watt PFC (Power Factor Correcting)</p> |
| System Fans | <p>1 - Non-hot plug, Non-redundant system fan NOTE: Does not include fans in CPU heatsink or power supply.</p> |
| Required Cabling | <p>For required cabling information, refer to the Cabling Matrix at http://h18000.www1.hp.com/products/servers/ProLiantML310/.</p> |
| OS Support | <p>Microsoft Windows Server 2003 (Standard Web Edition) Microsoft Small Business Server 2003 Microsoft Windows 2000 Server Novell NetWare Red Hat Enterprise Linux SUSE Linux Enterprise Server SCO OpenServer</p> <p>NOTE: For a more complete and up-to-date listing of supported OSs and versions, please visit our OS Support Matrix at: http://www.hp.com/go/supportos NOTE: For an up-to-date listing of the latest drivers available for the HP ProLiant ML310, please see: http://h18023.www1.hp.com/support/files/server/us/index.html. NOTE: For more Linux OS support & certification information, please visit our the ProLiant & Bladestystem Server Linux matrix http://h18004.www1.hp.com/products/servers/linux/hpLinuxcert.html NOTE: For more complete and up-to-date information on how to buy server operating systems from HP please visit the OS product site at: http://h18004.www1.hp.com/products/servers/software/OEM.html NOTE: For more information on HP's Certified and Supported ProLiant Servers, please visit the VMware Server Support Matrix at:</p> |

Standard Features

<http://h18004.www1.hp.com/products/servers/software/vmware/hpvmwarecert.html>

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSA1000, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to <http://www.hp.com/go/factory-express>.

Rack and Rack Options Rack Cabinets:

- For information regarding Rack Cabinets, please see the following URL:
<http://www.hp.com/go/rackandpower>

KVM Switches, Serial Console Servers, Rackmount Monitors, Keyboards:

- For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL:
<http://www.hp.com/go/kvm>.

HP Enterprise Configurator

The HP eCo-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance.

HP ProLiant Smart Buys (NA only)

The HP Smart Buy program offers mainstream business solutions at competitive prices with excellent availability and superior HP quality. It offers a wide range of industry-leading HP products at compelling prices, allowing you to receive richer configurations with additional options.

NOTE: ProLiant Smart Buys are available in NA only. For detailed specification information on ProLiant Smart Buys please click on the following link:

<ftp://ftp.compaq.com/pub/products/servers/smartbuys.pdf>

Standard Features

Service and Support

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of resellers and service providers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Additional support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services or customized service agreements.

NOTE: Server Warranty includes 3 year Parts, 3 year Labor, 3-year on-site support. Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

HP Care Pack services include coverage for the HP branded hardware options qualified for the server, purchased at the same time or afterward, internal to the enclosure, as well as 22" and smaller external monitors and tower UPS options up to 3kVA; these items will be covered at the same service level and for the same coverage period as the server. Coverage of UPS Battery is not included, standard warranty terms & conditions apply. For servers or storage systems installed within a rack, service also covers all HP qualified rack options installed within the same rack.

HP services provide continuous care and support expertise with committed response designed to meet your IT and business needs.

To fully capitalizing on your HP ProLiant servers' capabilities requires a service partner who thoroughly understands your server technology and systems environment. HP Services, an industry leader in provision of multi vender support solutions provides a range of support services designed to meet the varying needs of business. Whether an SMB or large global corporation HP has a ProLiant server support offer to help you speedily deploy and maximize system uptime.

Enhanced Care - Minimum recommended service support offer designed to ensure customers have access to expert assistance, whenever they need it.

- *4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years*

Continuous Care - Recommended service delivering cost-effective support options designed to extend HP Services committed response and guaranteed fix times, designed to speed problem identification and resolution.

- *6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years*

Total Care - Highest HP Support service level recommend to help increase IT performance and availability with comprehensive, integrated hardware and software services

- *Support Plus 24 - Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays*

Deployment Services - HP Installation and Start Up services designed to take time, risk, and worry out of the deployment of ProLiant servers - and free customers IT support staff to focus on what they do best, their business.

- *Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays*

NOTE: For a complete listing of service offerings and information visit: <http://www.hp.com/services/proliantservices>
<http://www.hp.com/go/proliant/carepack>

Models

NOTE: In addition to the models listed below, ProLiant Smart Buys are also available in North America. For detailed specification information on ProLiant Smart Buys please click on the following link:

<ftp://ftp.compaq.com/pub/products/servers/smartbuys.pdf>.

Hot Plug SCSI Models

| | | |
|--|---------------------------|---|
| ML310T03 p930 HP-SCSI 410191-xx1 | Processor(s) | Dual-core Intel Pentium D 930 (3.0 GHz/800) |
| | Cache Memory | 2 x 2MB L2 |
| | Memory | 512 MB (1 x 512 MB) |
| | Network Controller | Embedded NC320i PCIe Gigabit Server Adapter |
| | Storage Controller | Single Channel Ultra320 SCSI Adapter (in PCI-X slot) |
| | Hard Drives | None ship standard (up to 4 hot plug SCSI drives supported) |
| | Internal Storage | 1.2TB maximum hot plug SCSI |
| | Optical Drive | 48x IDE (ATAPI) CD-ROM Drive |
| | Diskette Drive | None ship standard (Optional 1.44 MB Diskette Drive) |
| | Form Factor | Tower (5U) (Tower to Rack Enabling Kit available) |

| | | |
|--|---------------------------|---|
| ML310T03 p650 HP-SCSI 393459-xx1 | Processor(s) | Intel Pentium 4 650 (3.4 GHz/800) |
| | Cache Memory | 2MB L2 |
| | Memory | 512 MB (1 x 512 MB) |
| | Network Controller | Embedded NC320i PCIe Gigabit Server Adapter |
| | Storage Controller | Single Channel Ultra320 SCSI Adapter (in PCI-X slot) |
| | Hard Drives | None ship standard (up to 4 hot plug SCSI drives supported) |
| | Internal Storage | 1.2TB maximum hot plug SCSI |
| | Optical Drive | 48x IDE (ATAPI) CD-ROM Drive |
| | Diskette Drive | None ship standard (Optional 1.44 MB Diskette Drive) |
| | Form Factor | Tower (5U) (Tower to Rack Enabling Kit available) |

| | | |
|--|---------------------------|---|
| ML310T03 p640 HP-SCSI 394320-xx1 | Processor(s) | Intel Pentium 4 640 (3.2 GHz/800) |
| | Cache Memory | 2MB L2 |
| | Memory | 512 MB (1 x 512 MB) |
| | Network Controller | Embedded NC320i PCIe Gigabit Server Adapter |
| | Storage Controller | Single Channel Ultra320 SCSI Adapter (in PCI-X slot) |
| | Hard Drives | None ship standard (up to 4 hot plug SCSI drives supported) |
| | Internal Storage | 1.2TB maximum hot plug SCSI |
| | Optical Drive | 48x IDE (ATAPI) CD-ROM Drive |
| | Diskette Drive | None ship standard (Optional 1.44 MB Diskette Drive) |
| | Form Factor | Tower (5U) (Tower to Rack Enabling Kit available) |

Models

Hot Plug Serial Models (SATA/SAS)

NOTE: Embedded controller does not support hot plug nor LED status.

| | | |
|--|---------------------------|--|
| ML310T03 p930 HP-SATA/SAS 410192-xx1 | Processor(s) | Dual-core Intel Pentium D 930 (3.0 GHz/800) |
| | Cache Memory | 2 x 2MB L2 |
| | Memory | 512 MB (1 x 512 MB) |
| | Network Controller | Embedded NC320i PCIe Gigabit Server Adapter |
| | Storage Controller | Integrated four port SATA controller with integrated SATA RAID 0, 1 NOTE: Use of the embedded SATA RAID feature requires installation of a driver from a floppy drive. The supported floppy drive can be a USB floppy drive, half-height internal floppy drive, or virtual floppy via Integrated Lights-Out 2 (iLO 2). |
| | Hard Drives | None ship standard (up to 4 hot plug SATA or SAS drives supported) NOTE: See the "Storage" section of these QuickSpecs for information on controllers and cables required to support SATA or SAS drive configurations |
| | Internal Storage | 3.0TB maximum (hot plug SATA) |
| | Optical Drive | 48x IDE (ATAPI) CD-ROM Drive |
| | Diskette Drive | None ship standard (Optional 1.44 MB Diskette Drive) |
| | Form Factor | Tower (5U) (Tower to Rack Enabling Kit available) |

| | | |
|--|---------------------------|--|
| ML310T03 p650 HP-SATA/SAS 393460-xx1 | Processor(s) | Intel Pentium 4 650 (3.4 GHz/800) |
| | Cache Memory | 2MB L2 |
| | Memory | 512 MB (1 x 512 MB) |
| | Network Controller | Embedded NC320i PCIe Gigabit Server Adapter |
| | Storage Controller | Integrated four port SATA controller with integrated SATA RAID 0, 1 NOTE: Use of the embedded SATA RAID feature requires installation of a driver from a floppy drive. The supported floppy drive can be a USB floppy drive, half-height internal floppy drive, or virtual floppy via Integrated Lights-Out 2 (iLO 2). |
| | Hard Drives | None ship standard (up to 4 hot plug SATA or SAS drives supported) NOTE: See the "Storage" section of these QuickSpecs for information on controllers and cables required to support SATA or SAS drive configurations |
| | Internal Storage | 3.0TB maximum (hot plug SATA) |
| | Optical Drive | 48x IDE (ATAPI) CD-ROM Drive |
| | Diskette Drive | None ship standard (Optional 1.44 MB Diskette Drive) |
| | Form Factor | Tower (5U) (Tower to Rack Enabling Kit available) |

Models

ML310T03 p640 HP-SATA/SAS
394321-xx1

| | |
|---------------------------|--|
| Processor(s) | Intel Pentium 4 640 (3.2 GHz/800) |
| Cache Memory | 2MB L2 |
| Memory | 512 MB (1 x 512 MB) |
| Network Controller | Embedded NC320i PCIe Gigabit Server Adapter |
| Storage Controller | Integrated four port SATA controller with integrated SATA RAID 0, 1 NOTE: Use of the embedded SATA RAID feature requires installation of a driver from a floppy drive. The supported floppy drive can be a USB floppy drive, half-height internal floppy drive, or virtual floppy via Integrated Lights-Out 2 (iLO 2). |
| Hard Drives | None ship standard (up to 4 hot plug SATA or SAS drives supported) NOTE: See the "Storage" section of these QuickSpecs for information on controllers and cables required to support SATA or SAS drive configurations |
| Internal Storage | 3.0TB maximum (hot plug SATA) |
| Optical Drive | 48x IDE (ATAPI) CD-ROM Drive |
| Diskette Drive | None ship standard (Optional 1.44 MB Diskette Drive) |
| Form Factor | Tower (5U) (Tower to Rack Enabling Kit available) |

| | | |
|-------------------------|-------|-----------|
| Country Code Key | XX=00 | NA |
| | XX=01 | Australia |
| | XX=03 | UK |
| | XX=04 | Germany |
| | XX=05 | France |
| | XX=29 | Japan |
| | XX=37 | AP |
| | XX=42 | EURO |
| | XX=AA | PRC |
| | XX=AB | Taiwan |

Configuration Information - Factory Integrated Models (North America only)

NOTE: For Configure to Order requirements within EMEA region, please consult local Sales Contact.

NOTE: All configure-to-order servers must start with a CTO Chassis. Use the following section to order a server customized to your requirements with options integrated at the factory. The options you select in steps 2 and 3 will be integrated with the base configuration you select in step 1. Additional options selected in Step 4 will also be integrated when applicable.

NOTE: Standard models of this product offering (see previous section of this document) do not support HP Factory Express Server Configuration Level 1.

NOTE: FIO indicates that this option only available as a Factory Installable Option.

Step 1: Base Configuration

| | | |
|---------------|--|------------|
| Models | HP ProLiant ML310 G3 CTO Chassis HP-SCSI | 393494-B21 |
| | HP ProLiant ML310 G3 CTO Chassis HP-SATA/SAS | 393495-B21 |
| | Factory Integrated Models ship with: | |
| | Embedded NC320i PCIe Gigabit Server Adapter | |
| | Integrated Four Channel SATA Controller (HP-SATA/SAS chassis only) | |
| | 370 Watts, PFC (Power Factor Correcting) | |
| | Keyboard and Mouse | |

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

| | | |
|-------------------------|---|------------|
| Processors | Intel Celeron D 331 (2.66 GHz/533 - 256K cache), FIO | 406032-L21 |
| | Intel Pentium D 920 (2.8 GHz/800 - 2 x 2MB L2) DC, FIO | 410115-L21 |
| | Intel Pentium D 930 (3.0 GHz/800 - 2 x 2MB L2) DC, FIO | 410116-L21 |
| | Intel Pentium D 940 (3.2 GHz/800 - 2 x 2MB L2) DC, FIO | 410117-L21 |
| | Intel Pentium 4 630 (3.0 GHz/800 - 2M L2), FIO | 402051-L21 |
| | Intel Pentium 4 640 (3.2 GHz/800 - 2M L2), FIO | 402052-L21 |
| | Intel Pentium 4 650 (3.4 GHz/800 - 2M L2), FIO | 402053-L21 |
| Base Memory | 2048 MB Unbuffered Advanced ECC PC2-4200 DDR2 (1 x 2048 MB) | 393354-B21 |
| | 1024 MB Unbuffered Advanced ECC PC2-4200 DDR2 (1 x 1024 MB) | 390824-B21 |
| | 512 MB Unbuffered Advanced ECC PC2-4200 DDR2 (1 x 512 MB) | 390825-B21 |
| Optical Drive | CD-RW/DVD-ROM Combo Drive Option Kit | 331346-B21 |
| | 16X DVD-ROM Drive Option Kit (Carbon) | 217053-B21 |
| | HP DVD±R/RW 16X Half Height | 383974-B21 |
| Base Hard Drives | Hot Plug U320 SCSI Drives | |
| | NOTE: For use in Hot Plug SCSI base configurations P/N 393494-B21. | |
| | HP 300GB U320 10K Universal HDD | 350964-B22 |
| | HP 146GB U320 10K Universal HDD | 286716-B22 |
| | HP 72GB U320 10K Universal HDD | 286714-B22 |
| | HP 300GB U320 15K Universal HDD | 411089-B22 |
| | HP 146GB U320 15K Universal HDD | 347708-B22 |
| | HP 36GB U320 15K Universal HDD | 286776-B22 |
| | HP 72GB U320 15K Universal HDD | 286778-B22 |
| | Hot Plug SATA Drives | |
| | NOTE: For use in Hot Plug SATA/SAS base configurations P/N 393495-B21. | |
| | HP 750GB 1.5G SATA 7.2K 3.5" HDD | 432341-B21 |
| | HP 500GB 1.5G SATA 7.2K 3.5" HDD | 395473-B21 |
| | HP 250GB 1.5G SATA 7.2K 3.5" HDD | 349239-B21 |
| | HP 160GB 1.5G SATA 7.2K 3.5" HDD | 349238-B21 |

Configuration Information - Factory Integrated Models (North America only)

| | |
|---|------------|
| HP 80GB 1.5G SATA 7.2K 3.5" HDD | 349237-B21 |
| Hot Plug SAS Drives | |
| NOTE: For use in Hot Plug SATA/SAS base configurations P/N 393495-B21. | |
| HP 300GB 3G SAS 15K 3.5" SP HDD | 431944-B21 |
| HP 146GB 3G SAS 15K 3.5" SP HDD | 375872-B21 |
| HP 72GB 3G SAS 15K 3.5" SP HDD | 375870-B21 |
| HP 36GB 3G SAS 15K 3.5" SP HDD | 375868-B21 |

Step 3: Choose Additional Factory Integratable Options

Controllers

Ultra320 SCSI HBAs and Controllers

NOTE: A U320 SCSI HBA or Controller is required if SCSI hard drives are selected.

| | |
|----------------------------|------------|
| HP U320 SCSI FIO HBA ALL | 358700-B21 |
| Smart Array 641 Controller | 291966-B21 |
| Smart Array 642 Controller | 291967-B21 |

SAS HBAs and Controllers

NOTE: A SAS HBA or Controller is required if SAS hard drives are selected. SAS HBAs and Controllers support both SAS and SATA hard drives.

| | |
|---|------------|
| HP 8 Internal Port SAS HBA with RAID | 347786-B21 |
| HP Smart Array P600/256 BBWC Controller | 337972-B21 |

SATA Controller

| | |
|--------------------------------|------------|
| HP 6-port SATA RAID Controller | 372953-B21 |
|--------------------------------|------------|

Hard Drive Cables

| | |
|---|------------|
| HP 4-port SATA/SAS cable (target fan cable) | 389653-B21 |
|---|------------|

NOTE: This cable is required when the HP 6-port SATA RAID controller is installed on hot plug SATA/SAS models of the ML310 G3. See the "Storage" section of these QuickSpecs for information on controllers and cables required to support SATA drive configurations.

Modems

| | |
|-------------------------------------|------------|
| Agere 2006 PCI Hi-Speed 56K Sof FIO | 440519-B21 |
|-------------------------------------|------------|

NOTE: This part number must be used for factory integration. For field integration (or as an additional "ship along" option) choose EK694AA.

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Options" section below.

Options

NOTE: Some options may not be factory configurable. Please contact your local sales representative for additional information.

ProLiant Essentials Value Pack Software

NOTE: Single Server Licenses are designed for use with a single server. Single Server Licenses contain one license with a unique license activation key and documentation. Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to <http://www.hp.com/servers/proliantessentials> or the various ProLiant Essentials Value Pack product QuickSpecs for more information.

ProLiant Essentials Intelligent Networking Pack

ProLiant Essentials Intelligent Networking Pack - Windows Edition, Single Server License 436225-B21

NOTE: For use with a single server. Contains one license with a unique license activation key and documentation.

NOTE: For additional ProLiant Intelligent Networking Pack License Kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12062_div/12062_div.HTML

ProLiant Essentials Intelligent Networking Pack - Linux Edition, Single Server License 436229-B21

NOTE: For additional ProLiant Intelligent Networking Pack License Kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12327_div/12327_div.HTML

ProLiant Essentials Virtualization Management Software

ProLiant Essentials Virtual Machine Management Pack, Single-Server License 435661-B21

ProLiant Essentials Server Migration Pack, Single-Migration License 435663-B21

NOTE: Contains one license, enabling 1 server migration, with a unique license activation key and documentation.

NOTE: This license allows 1 server to be migrated from a physical server to a virtual machine. Or this license can be used to migrate a virtual machine from one virtualization layer i.e. VMware GSX to a different virtualization layer such as VMware ESX or Microsoft Virtual Server 2005.

NOTE: For additional ProLiant Essentials Virtualization Management Software License Kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12328_div/12328_div.HTML

ProLiant Essentials Vulnerability and Patch Management Pack

ProLiant Essentials Vulnerability and Patch Management Pack, Single-Server License 371645-B21

NOTE: For additional ProLiant Vulnerability and Patch Management Pack License Kits, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12111_div/12111_div.HTML

NOTE: For more information regarding ProLiant Essentials Software, please see the following URL: <http://www.hp.com/servers/proliantessentials>.

Remote Management

Integrated Lights-Out Advanced Pack

Integrated Lights-Out Advanced Pack, 1 server 263825-B21

Featuring: Sophisticated virtual administration features for ultimate control of servers in the data centers and remote sites.

NOTE: For additional Integrated Light-Out Advanced Pack License Kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/11052_div/11052_div.HTML

Options

| | | |
|--------------------------------|---|------------|
| Memory (SDRAM DIMMs) | 2048 MB Unbuffered Advanced ECC PC2-4200 DDR2 (1 x 2048 MB) | 393354-B21 |
| | 1024 MB Unbuffered Advanced ECC PC2-4200 DDR2 (1 x 1024 MB) | 390824-B21 |
| | 512 MB Unbuffered Advanced ECC PC2-4200 DDR2 (1 x 512 MB) | 390825-B21 |

| | | |
|-----------------------|---------------------------------------|------------|
| Optical Drives | 16X DVD-ROM Drive Option Kit (Carbon) | 217053-B21 |
| | CD-RW/DVD-ROM Combo Drive Option Kit | 331346-B21 |
| | HP DVD±R/RW 16X Half Height | 383974-B21 |

| | | |
|------------------------|--------------------------------|------------|
| Diskette Drives | 1.44MB Floppy Drive Option Kit | 379257-B21 |
|------------------------|--------------------------------|------------|

| | | |
|------------------------|---|------------|
| Serial Port Kit | HP ProLiant Second Serial port option kit | 390390-B21 |
|------------------------|---|------------|

| | | |
|--------------------|--|------------|
| Hard Drives | Ultra320 - Universal Hot Plug (SCSI Hot Plug Models Only) | |
| | HP 300GB U320 10K Universal HDD | 350964-B22 |
| | HP 146GB U320 10K Universal HDD | 286716-B22 |
| | HP 72GB U320 10K Universal HDD | 286714-B22 |
| | HP 300GB U320 15K Universal HDD | 411089-B22 |
| | HP 146GB U320 15K Universal HDD | 347708-B22 |
| | HP 72GB U320 15K Universal HDD | 286778-B22 |
| | HP 36GB U320 15K Universal HDD | 286776-B22 |

NOTE: Please see the [Ultra320 Universal Hot Plug QuickSpecs](#) for additional technical information on the hard drives. Support details, please see the following:

http://h18000.www1.hp.com/products/quickspecs/11531_div/11531_div.HTML
(Worldwide)

Serial-Attached SCSI (SAS) Hot Plug Hard Drive (SATA/SAS Hot Plug Models Only)

| | |
|---------------------------------|------------|
| HP 300GB 3G SAS 15K 3.5" SP HDD | 431944-B21 |
| HP 146GB 3G SAS 15K 3.5" SP HDD | 375872-B21 |
| HP 72GB 3G SAS 15K 3.5" SP HDD | 375870-B21 |
| HP 36GB 3G SAS 15K 3.5" SP HDD | 375868-B21 |

Serial-ATA (SATA) Hot Plug Hard Drive (SATA/SAS Hot Plug Models Only)

| | |
|----------------------------------|------------|
| HP 750GB 1.5G SATA 7.2K 3.5" HDD | 432341-B21 |
| HP 500GB 1.5G SATA 7.2K 3.5" HDD | 395473-B21 |
| HP 250GB 1.5G SATA 7.2K 3.5" HDD | 349239-B21 |
| HP 160GB 1.5G SATA 7.2K 3.5" HDD | 349238-B21 |
| HP 80GB 1.5G SATA 7.2K 3.5" HDD | 349237-B21 |

NOTE: Please see the [Hard Drive QuickSpecs](#) for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature:

http://h18000.www1.hp.com/products/quickspecs/11940_div/11940_div.HTML
(Worldwide)

Options

Hard Drive Cables HP 4-port SATA/SAS cable (target fan cable) 389653-B21

NOTE: This cable is required when the HP 6-port SATA RAID controller is installed on hot plug SATA/SAS models of the ML310 G2. See the "Storage" section of these QuickSpecs for information on controllers and cables required to support SATA drive configurations.

Storage Controllers

SCSI Controllers

NOTE: The following Storage Controllers are qualified for SCSI drives only. They do not support SATA or SAS Drives.

NOTE: In compliance with the European Union's Reduction of Hazardous Substances (RoHS) initiative, the Smart Array 641, 642, 6402, and 6404 RAID controllers will not be installed in ProLiant ML310 G3 servers sold on or after July 1, 2006. Installation of these options into the ProLiant ML310 G3 would create a non-compliant server configuration.

Smart Array 6402/128 Controller 273915-B21

Smart Array 6404/256 Controller 273914-B21

Smart Array 641 Controller 291966-B21

Smart Array 642 Controller 291967-B21

128-MB BBWC (Battery-Backed Write Cache) Enabler 351580-B21

NOTE: Supports the Smart Array E200 Controller, Smart Array 641 Controller, and Smart Array 642 Controller.

Ultra320 Expansion Module for SA-6402 273911-B21

64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 374654-B21

SCSI HBA

HP SC11Xe Host Bus Adapter 412911-B21

NOTE: Please see the following QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/11587_div/11587_div.HTML
(Smart Array 6400 Series)

http://h18000.www1.hp.com/products/quickspecs/12067_div/12067_div.HTML
(Smart Array 641)

http://h18000.www1.hp.com/products/quickspecs/12069_div/12069_div.HTML
(Smart Array 642)

http://h18000.www1.hp.com/products/quickspecs/11943_div/11943_div.HTML
(Single Channel SCSI HBA)

http://h18000.www1.hp.com/products/quickspecs/12566_div/12566_div.HTML
(SC11Xe HBA)

SAS Controllers

Smart Array E200 Controller

HP Smart Array E200/64MB Controller 409180-B21

HP Smart Array E200/128 BBWC Controller 411508-B21

128-MB BBWC (Battery-Backed Write Cache) Enabler 351580-B21

NOTE: Supports the Smart Array E200 Controller, Smart Array 641 Controller, and Smart Array 642 Controller.

Smart Array P400 Controller

HP Smart Array P400/256MB Controller 405132-B21

HP Smart Array P400/512MB BBWC Controller 411064-B21

Smart Array P400 Battery Attach Kit 417836-B21

NOTE: This option kit contains a 24" battery cable and adhesive material for installing a battery into the server if a Smart Array P400 is integrated outside of the factory. For all solutions, please refer to the server QuickSpecs and User's Manual for detailed installation instructions.

Options

Battery-backed write cache upgrade 383280-B21
NOTE: For Smart Array P400 Controller only.

512MB Battery-backed cache upgrade 405148-B21
NOTE: For Smart Array P400 Controller only.

Smart Array P600 Controller

Smart Array P600/256 BBWC Controller 337972-B21

512MB DDR BBWC Upgrade 372538-B21
NOTE: For Smart Array P600 Controller only.

NOTE: Please see the following QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/12460_div/12460_div.HTML
(Smart Array E200 Controller)

http://h18000.www1.hp.com/products/quickspecs/12400_div/12400_div.HTML
(Smart Array P400 Controller)

http://h18000.www1.hp.com/products/quickspecs/12247_div/12247_div.HTML
(Smart Array P600 Controller)

SAS HBA

HP SC44Ge Host Bus Adapter 416096-B21

HP 8 Internal Port SAS HBA with RAID 347786-B21

NOTE: Please see the HBA QuickSpecs for additional information: 347786-B21

http://h18004.www1.hp.com/products/quickspecs/12617_div/12617_div.html
(SC44Ge HBA)

http://h18004.www1.hp.com/products/quickspecs/12332_div/12332_div.html
(8 Internal Port SAS HBA)

SATA Controller

HP 6-port SATA RAID Controller 372953-B21

NOTE: See the "Storage" section of these QuickSpecs for information on controllers and cables required to support SATA drive configurations.

NOTE: Please see the following QuickSpecs for additional information:

http://h18004.www1.hp.com/products/quickspecs/12091_div/12091_div.html
(6-port SATA RAID Controller)

NOTE: In compliance with the European Union's Reduction of Hazardous Substances (RoHS) initiative, the HP 6-port SATA RAID Controller will not be installed in ProLiant ML310 G3 servers sold on or after July 1, 2006. Installation of this option into the ProLiant ML310 G3 would create a non-compliant server configuration.

Communications

HP NC110T PCI Express Gigabit Server Adapter 434905-B21

HP NC150T PCI 4-port Gigabit 1000T Combo Switch Adapter 367132-B21

HP NC340T PCI-X 4-port 1000T Gigabit Server Adapter 391661-B21

HP NC360T PCI Express Dual Port Gigabit Server Adapter 412648-B21

NOTE: When either the standard NC7761 or the NC1020 is teamed with other HP NICs, Jumbo Frames and LSO features are automatically disabled.

2006 Agere PCI high-speed international soft modem EK694AA

Options

Tape Drives

NOTE: For the complete listing of Tape Drive offerings for this server, please visit:
<http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html>

For recommended tape drive offerings for this ProLiant server see the following:

USB Tape Drives

HP StorageWorks DAT 40 USB Internal Tape Drive (Carbonite) DW022A

HP StorageWorks DAT 72 USB Internal Tape Drive (Carbonite) DW026A

Internal and Rack-Mount Ultrium Tape Drives

HP StorageWorks Ultrium 232 Internal Tape Drive (Carbonite) DW064A

HP StorageWorks Ultrium 448 Internal Tape Drive (Carbonite) DW016A

HP StorageWorks 1U Rack-mount kit with one Ultrium 448 (Carbonite) DW028B

NOTE: Please see the HP StorageWorks Ultrium Tape Drive QuickSpecs for additional options such as controllers, media, and other related items:
http://h18006.www1.hp.com/products/quickspecs/11739_div/11739_div.html
 (Worldwide)

For an up-to-date listing of the latest O/S and software support details for HP Ultrium tape drives, please visit: <http://www.hp.com/go/connect>.

Internal DAT Drives

HP StorageWorks DAT 72 SCSI Internal Tape Drive (Carbon) Q1522B

NOTE: Please see the DAT Tape Drive QuickSpecs for controllers, media, and other options:

http://h18000.www1.hp.com/products/quickspecs/11883_div/11883_div.HTML
 (Worldwide)

http://h18006.www1.hp.com/products/quickspecs/12128_div/12128_div.html
 (Worldwide)

For an up-to-date listing of the latest O/S and software support details for HP DAT drives, please visit: <http://www.hp.com/go/connect>.

Rack-Mount Tape Drive Enclosures

HP StorageWorks 1U SCSI Rack-Mount kit A7445B

NOTE: The 1U Rack-Mount Kit can support up to (2) half-height tape drives and is compatible with multiple Single-Ended and LVD SCSI tape drives including the DAT 24, DAT 40, DAT 72, DLT VS80, DLT VS160, Ultrium 215, Ultrium 232, Ultrium 448 and Ultrium 920 tape drives.

HP StorageWorks 1U USB Rack-Mount Kit A8007A

NOTE: The 1U USB Rack-Mount Kit can support up to (2) half-height tape drives and is compatible with the DAT 24 USB, DAT 40 USB and DAT 72 USB tape drives.

HP StorageWorks 3U Rack-mount kit 274338-B22

NOTE: The 3U Rack-mount Kit can support up to (2) full-height or (4) half-height tape drives and compatible with multiple LVD SCSI tape drives including DAT 40, DAT 72, DLT VS160, SDLT 320, SDLT 600, Ultrium 232, Ultrium 460, Ultrium 448, Ultrium 920 and Ultrium 960 tape drives.

NOTE: Please see the Rack-Mount Tape Drive Kits QuickSpecs for additional information regarding these kits:

http://h18000.www1.hp.com/products/quickspecs/10854_div/10854_div.HTML
 (Worldwide)

Options

Tape Autoloaders

HP StorageWorks DAT Autoloader

HP StorageWorks DAT 72x10 tape autoloader AE313A

HP StorageWorks 1/8 Tape Autoloader

HP StorageWorks 1/8 Ultrium 920 G2 Tape Autoloader AH165A

HP StorageWorks 1/8 Ultrium 448 G2 Tape Autoloader AH164A

HP StorageWorks 1/8 Ultrium 232 G2 Tape Autoloader AH163A

HP StorageWorks 1/8 G2 Tape Autoloader Rack Kit AH166A

NOTE: Required to install the 1/8 G2 Autoloaders in a standard 19-inch rack; includes rails and rackmount instructions

NOTE: Please reference the 1/8 Tape Autoloader QuickSpecs at <http://www.hp.com/go/automation> for additional information needed to create a complete solution; reference current compatibility information at <http://www.hp.com/go/ebs>

Tape Libraries

HP StorageWorks MSL2024 Tape Library

HP StorageWorks MSL2024 1 Ultrium 960 Drive Library AG115A

HP StorageWorks MSL2024 1 Ultrium 960 4GB FC Drive Library AG326B

HP StorageWorks MSL2024 1 Ultrium 920 Drive Library AH169A

HP StorageWorks MSL2024 2 Ultrium 920 Drive Library AH170A

HP StorageWorks MSL2024 1 Ultrium 448 Drive Library AG116A

HP StorageWorks MSL2024 2 Ultrium 448 Drive Library AG117A

HP StorageWorks MSL4048 Tape Library

HP StorageWorks MSL4048 1 Ultrium 448 Drive Library AG320A

HP StorageWorks MSL4048 2 Ultrium 448 Drive Library AG321A

HP StorageWorks MSL4048 1 Ultrium 920 Drive Library AH171A

HP StorageWorks MSL4048 2 Ultrium 920 Drive Library AH172A

HP StorageWorks MSL4048 1 Ultrium 960 Drive Library AG322A

HP StorageWorks MSL4048 1 Ultrium 960 4GB FC Drive Library AG324B

HP StorageWorks MSL4048 2 Ultrium 960 Drive Library AG323A

HP StorageWorks MSL4048 2 Ultrium 960 4GB FC Drive Library AG325B

HP StorageWorks MSL6000 Tape Library

Ultrium 960 technology

HP StorageWorks MSL6030 1 Ultrium 960 Dr LVDS Library AD606B

HP StorageWorks MSL6030 1 Ultrium 960 Dr FC Library AD608B

HP StorageWorks MSL6030 2 Ultrium 960 Dr LVDS Library AD607B

HP StorageWorks MSL6030 2 Ultrium 960 Dr FC Library AD609B

Ultrium 460 technology

HP StorageWorks MSL6030 1 Ultrium 460 Dr LVDS Library AD598B

HP StorageWorks MSL6030 1 Ultrium 460 Dr FC Library AD600B

HP StorageWorks MSL6030 2 Ultrium 460 Dr LVDS Library AD599B

HP StorageWorks MSL6030 2 Ultrium 460 Dr FC Library AD601B

NOTE: Please reference the MSL2024, MSL4048, and MSL6000 Tape Library QuickSpecs at <http://www.hp.com/go/automation> for additional information needed to create a complete solution; reference current compatibility information at <http://www.hp.com/go/ebs>.

Options

| | | |
|---|---|---------|
| HP Data Protector Express Software | HP DP Express Backup Server Upgrade for ProLiant Software | BB117AP |
| | HP DP Express Package for Microsoft Small Business Server | BB118AA |

NOTE: Please see the [HP Data Protector Express QuickSpecs](http://h18000.www1.hp.com/products/quickspecs/12337_div/12337_div.html) for additional information regarding the purchase of HP Data Protector Express software:
http://h18000.www1.hp.com/products/quickspecs/12337_div/12337_div.html
 (Worldwide)

NOTE: To obtain a free licensed copy of HP Data Protector Express for ProLiant edition software, please visit the "Protect Your Data" link accessible from your ProLiant server's System Management Homepage (SMH) software (SmartStart 7.5 or later).

| | | |
|---|-----------------------------------|------------|
| Uninterruptible Power Systems – Tower Supply | HP T500 UPS 120 V (US) | 361475-001 |
| | HP T750 UPS, Low Voltage (NA/JPN) | 378439-D71 |
| | HP T750 UPS, High Voltage (INTL) | 378439-B31 |
| | HP, T1000 UPS NA | AF403A |
| | HP, T1000 UPS JPN | AF404A |
| | HP, T1000 UPS INTL | AF405A |
| | HP, T1500 UPS NA | AF406A |
| | HP, T1500 UPS JPN | AF407A |
| | HP, T1500 UPS INTL | AF408A |
| | HP, R/T 2200 UPS NA | AF409A |
| | HP, R/T 2200 UPS JPN | AF410A |
| HP, R/T 2200 UPS INTL | AF411A | |

| | | |
|------------------|---|------------|
| Rack Kits | ProLiant Rack Enabling Kit (RoHS Compliant) | 417705-B21 |
| | <p>NOTE: This is a 5U Rack Enabling Kit that supports the HP ProLiant ML110 and HP ProLiant ML310 servers.</p> <p>NOTE: Support for racks with round or square mounting holes (including all Compaq and HP Rack System /E and HP Systems), with an adjustment range of 24" - 36".</p> | |

| | | |
|--------------|--|------------|
| Other | Internal to External SCSI Cable Option Kit (HD68) | 159547-B22 |
| | Internal to External SCSI Cable Option Kit (VHDCI) | 333370-B21 |

| | | |
|--------------------|--|------------|
| USB Options | USB Optical Scroll Mouse (Carbonite) | DD441B |
| | HP USB 04 Standard Keyboard | DT528A#xxx |
| | USB 2.0 4-port HUB | DG954A |
| | HP 1GB Drive Key II- USB 2.0 Flash Drive | AG382AA |
| | HP 512MB DriveKey II- USB Flash Drive | ED516AA |

Options

Service and Support Offerings (HP Care Pack Services)

Hardware Services On-site Service

| | |
|---|--------|
| Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic | U4445E |
| 4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic | U4446E |
| 4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic | U4447E |
| 6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic | U4448E |

Installation & Start-up Services

| | |
|--|--------|
| Hardware Installation, Electronic | U4456E |
| Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays, Electronic | U4457E |

Support Plus

| | |
|--|--------|
| Onsite HW support, 8am-9pm, M-F, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 8am-9pm, M-F 2hr response time excl. HP holidays, Electronic | U4458E |
|--|--------|

Support Plus 24

| | |
|--|--------|
| Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic | U4459E |
| Onsite HW support 24x7, 4hr response and SuSE Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic | U6306E |
| Onsite HW support 24x7, 4hr response and Red Hat ES Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic | U8328E |

NOTE: For more information, customer/resellers can contact <http://www.hp.com/services/carepack>.

Memory

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

HP ProLiant ML310 G3 Models

Standard Memory

All HP ProLiant ML310 G3 models ship with unbuffered, Advanced ECC PC2-4200 DDR2 SDRAM running at 533MHz. Standard models include a single 512 MB DIMM. Factory Integrated Models include the memory capacity of your choice.

Standard Memory Replaced with Optional Memory

Up to 8 GB memory is available with the optional installation of four 2 GB PC2-4200 Unbuffered Advanced ECC DDR2 SDRAM DIMM kits.

DIMM upgrades do not need to be installed in pairs although installation of pairs (an equal size DIMM for each channel) provides the best performance. The BIOS will detect the DIMM population and initialize the system accordingly as follows:

- Single-channel mode - DIMMs installed for one channel only
- Dual-channel asymmetric mode - DIMMs installed for both channels but of unequal channel capacities.
- Dual-channel interleaved mode (recommended) - DIMMs installed for both channels and offering equal channel capacities, providing the highest performance.


The first DIMM should be installed in Socket 1. A DIMM should not be installed in Socket 2 without a DIMM in Socket 1. Likewise a DIMM should not be installed in Socket 4 without a DIMM in Socket 3. A DIMM need not be installed in Socket 2 in order to install a DIMM in Socket 3.

Table 3-1 shows some of the suggested memory configurations for these systems.

NOTE: Table 3-1 does not list all possible configurations. Balanced-capacity, dual-channel loading yields best performance.

| Channel A | | Channel B | | Total | Mode |
|-----------|----------|-----------|----------|--------|--------------------------|
| Socket 1 | Socket 2 | Socket 3 | Socket 4 | | |
| 512 MB | none | none | none | 512 MB | Single-channel |
| 512 MB | none | 512 MB | none | 1 GB | Dual-channel interleaved |
| 1 GB | none | none | none | 1 GB | Single-channel |
| 1 GB | none | 1 GB | none | 2 GB | Dual-channel interleaved |
| 1 GB | 1 GB | 1 GB | none | 3 GB | Dual-channel asymmetric |
| 1 GB | 1 GB | 1 GB | 1 GB | 4 GB | Dual-channel interleaved |
| 1 GB | 1 GB | 2 GB | 2 GB | 6 GB | Dual-channel interleaved |
| 2 GB | 2 GB | 2 GB | 2 GB | 8 GB | Dual-channel interleaved |

Storage

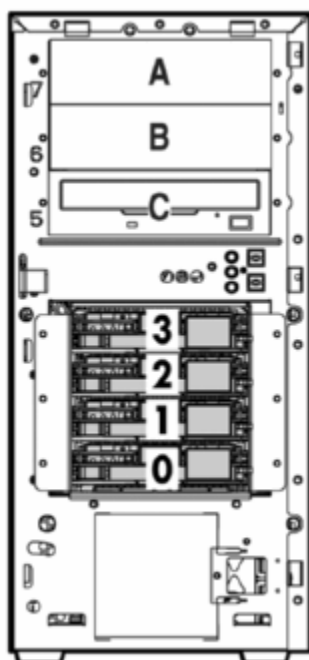

A, B Removable Media Bays (1.6" each)

C 48x IDE (ATAPI) CD-ROM

0, 1, 2, 3 Four Hot Plug Hard Drive Bays

Drive Support

| | Quantity Supported | Position Supported | Controller |
|--------------------------|--------------------|--------------------|------------------------|
| Removable Media | | | |
| 1.44-MB Diskette Drive | Up to 1 | A, B, or C | Integrated |
| IDE (ATAPI) CD-ROM Drive | Up to 2 | A, B, or C | Integrated IDE (ATAPI) |
| DVD-ROM Drive Option Kit | Up to 2 | A, B, or C | Integrated IDE (ATAPI) |

Hard Drives

Hot Plug Ultra320 SCSI - (Hot Plug SCSI models only)

| | Quantity Supported | Position Supported | Controller |
|----------------|--------------------|--------------------|--|
| 300GB U320 10K | Up to 4 | 0-3 | Single Channel Ultra320 SCSI Adapter (SCSI Models) |
| 146GB U320 10K | | | Smart Array 6404/256 Controller |
| 72GB U320 10K | | | Smart Array 6402/256 Controller |
| 300GB U320 15K | | | Smart Array 641 Controller |
| 146GB U320 15K | | | Smart Array 642 Controller |
| 72GB U320 15K | | | |
| 36GB U320 15K | | | |

Hot Plug SAS - (Hot Plug SATA/SAS Models Only)

| | Quantity Supported | Position Supported | Controller |
|--------------------------|--------------------|--------------------|--------------------------------------|
| 300GB 3G SAS 3.5" 15K SP | Up to 4 | 0-3 | Smart Array P600/256 BBWC Controller |
| 146GB 3G SAS 3.5" 15K | | | HP 8 Internal Port SAS HBA with RAID |

Storage

SP
72GB 3G SAS 3.5" 15K
SP
36GB 3G SAS 3.5" 15K
SP

NOTE: Use of SAS hard drives in SATA/SAS models requires installation of the controllers listed above.

Hot Plug SATA - (Hot Plug SATA/SAS Models Only)

| | Quantity Supported | Position Supported | Controller |
|----------------------|--------------------|--------------------|--------------------------------------|
| 750GB 1.5G SATA 7.2K | Up to 4 | 0-3 | Integrated four port SATA Controller |
| 500GB 1.5G SATA 7.2K | | | HP 6-port SATA RAID controller |
| 250GB 1.5G SATA 7.2K | | | Smart Array P600/256 BBWC Controller |
| 160GB 1.5G SATA 7.2K | | | HP 8 Internal Port SAS HBA with RAID |
| 80GB 1.5G SATA 7.2K | | | |

NOTE: Hot plug capability and drive LED status support requires installation of the HP 6-port SATA RAID Controller, the Smart Array P600 Controller, or a SAS HBA.

NOTE: The HP 4-port SATA/SAS target fan cable (P/N 389653-B21) is required when the HP 6-port SATA RAID controller (P/N 372953-B21) is installed.

Tape Drives, Tape Autoloaders & Tape Libraries

NOTE: For an up-to-date listing of the latest O/S Support details for each of the Tape Drives listed below, please see the following:

<http://h18000.www1.hp.com/products/quickspecs/Division/10233.html> (Worldwide)

NOTE: For an up-to-date listing of the latest O/S Support details for each of the Tape Autoloaders and Tape Libraries listed below, please see the following:

<http://h18000.www1.hp.com/products/quickspecs/Division/10809.html> (Worldwide)

NOTE: For complete listing of tape drive offerings see

<http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html>

For recommended tape drive offerings for this ProLiant server see the following:

| | Position Supported | Controller | Controller Part Number |
|--|--------------------|--|------------------------|
| HP StorageWorks Tape Drives, Internal DAT 24 USB DAT 40 USB DAT 72 USB | A or B | USB 2.0 Port | N/A |
| HP StorageWorks Tape Drives, External DAT 24 USB DAT 40 USB DAT 72 USB | External | USB 2.0 Port | N/A |
| HP StorageWorks Tape Drives, Internal Ultrium 232 Ultrium 448 Ultrium 920 DAT 40 DAT 72 DLT VS160 | A or B | 64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 | 374654-B21 |

Storage

| | | | |
|--|----------|--|------------|
| HP StorageWorks Tape Drives, Internal Ultrium 460 Ultrium 960 SDLT 600 | A and B | 64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 | 374654-B21 |
| HP StorageWorks Tape Drives, External Ultrium 232 Ultrium 448 Ultrium 460 Ultrium 920 Ultrium 960 DAT 40 DAT 72 DLT VS160 SDLT 600 | External | 64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 | 374654-B21 |
| HP StorageWorks Autoloaders, External DAT 72x10 Autoloader 1/8 G2 Tape Autoloader | External | 64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 | 374654-B21 |
| HP StorageWorks SCSI Rack-Mount Tape Drive Enclosures 1U Rack-Mount Kit 3U Rack-Mount Kit | External | 64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 | 374654-B21 |
| HP StorageWorks USB Rack-Mount Tape Drive Enclosures 1U Rack-Mount Kit | | USB 2.0 Port | N/A |
| HP StorageWorks Tape Libraries, External MSL2024 (Ultrium 448, Ultrium 920 and 960-based) MSL4048 (Ultrium 448, Ultrium 920 and 960-based) MSL6000 (Ultrium 960 and 460-based) MSL6000 (SDLT 600-based) | | Please consult the EBS connectivity matrix at http://www.hp.com/go/ebs for detailed connectivity information. | N/A |

Technical Specifications

| | | | | |
|--|---|--|--------------------------------|--|
| System Unit | Dimensions (HxWxD) | 17.0 x 7-7/8 x 22 in (43.0 x 20.0 x 55.0 cm) | | |
| | Weight (approximate) | 37 lb (16.8 kg) | | |
| | Input Requirements (per power supply) | Range Line Voltage | 100-127V and 200-240V | |
| | | Normal Line Voltage | 115 to 230 VAC | |
| | Line Frequency | 50 to 60 Hz | | |
| | Rated Input Current | < 6A RMS at 90VAC with maximum load | | |
| | BTU Rating | 1,560 BTU | | |
| | SCSI Connectors (SCSI Models only) | One internal HD68 connectors | | |
| | | NOTE: Support for either one internal or one external SCSI channel is available. To use the channel for external connection, order an internal-to-external SCSI cable option kit (PN 159547-B22 or 333370-B21). | | |
| | Power Supply Output Power | Rated Steady-State Power | 350W | |
| | | Maximum Peak Power | 370W | |
| | Temperature Range | Operating | 50° to 93° F (10° to 35° C) | |
| | | Shipping | -40° to 150° F (-40° to 66° C) | |
| Relative Humidity (non-condensing) | Operating | 20% to 80% | | |
| | Non-operating | 5% to 90% | | |
| Acoustic Noise | Idle (Fixed Disk Drives Spinning) | | | |
| | | L WAd (BELS) | 5.7 | |
| | | L pAm (dBA) | 40 | |
| | Operating (Random Seeks to Fixed Disks) | | | |
| | L WAd (BELS) | 5.7 | | |
| | L pAm (dBA) | 40 | | |

| | | | |
|---|-------------------------------|-----------------|--|
| 48X Max IDE (ATAPI) CD-ROM Drive | Disk | Applicable Disk | CD-ROM, CD-XA, CD-DA (Mode 1, Mode 2, Form 1 and 2) Photo CD (Single and Multi-session) Mixed Mode (Audio and Data combined) CD-R |
| | | Capacity | 540 MB (Mode 1, 12 cm) 650 MB (Mode 2, 12 cm) |
| | Block Size | Mode 1 | 2,048 bytes |
| | | Mode 2 | 2,340 bytes, 2,336 bytes |
| | | CD-DA | 2,352 bytes |
| | | CD-XA | 2,328 bytes |
| | Interface | IDE (ATAPI) | |
| | Access Times (typical) | Random | <100 ms |
| | | Full-Stroke | <150 ms |
| | Data Transfer Rate | Sustained | 3000 to 7200 KB/s (20X to 48X) |
| | | Burst | 150 KBps to 7,200 KBps |
| | | Bus Rate | 16.7 MBps |
| | Cache Buffer | 128 KB | |

Technical Specifications

| | | |
|--------------------------------|------------------|--|
| Start-up Time (typical) | < 7seconds | |
| Stop Time | < 4seconds | |
| Laser Parameters | Type | Semiconductor Laser GaA1As |
| | Wave Length | 780 ± 25 nm |
| Operating Conditions | Temperature | 41° to 113° F (5° to 45° C) |
| | Humidity | 10% to 80% |
| Dimensions | (HxWxD, maximum) | 1.7 x 5.85 x 8.11 in (4.29 x 14.86 x 20.60 cm) |
| | Weight | 2.09 lb (0.95 kg) |

| | | |
|--|--|--|
| Embedded NC320i PCIe Network Interface Gigabit Server Adapter Compatibility | 10Base-T/100Base-TX/1000Base-TX | |
| | IEEE 802.3 10Base-T | |
| | IEEE 802.3ab 1000Base-T | |
| Data Transfer Method | Single lane (x1), 100MHz PCI Express Reference Clock | |
| | Network Transfer Rate | 10Base-T (Half-Duplex) 10 Mb/s |
| | 10Base-T (Full-Duplex) | 20 Mb/s |
| | 100Base-TX (Half-Duplex) | 100 Mb/s |
| | 100Base-TX (Full-Duplex) | 200 Mb/s |
| | 1000Base-TX (Half and Full-Duplex) | 2000Mb/s |
| | Connector | RJ-45 |
| Cable Support | 10Base-T | Categories 3, 4 or 5 UTP; up to 328 ft (100 m) |
| | 10/100/1000Base-TX | Category 5 UTP; up to 328 ft (100 m) |

| | | |
|--|---|--|
| Integrated 4 Channel SATA Controller (SATA Models only) | Drives Supported | Up to 4 SATA hard drives (1 drive/channel) |
| | Channels | 4 |
| | Storage Capacity | 2 TB |
| | Maximum SATA Channel Transfer Rate | 150 MB/s per channel |
| | SATA Protocols | SATA-1a |
| | Internal SATA Connectors | One 4-lane connector (all four channels) |
| | RAID levels supported | RAID 0, RAID 1 |

Technical Specifications

| | | |
|---|---|--|
| Single Channel Ultra320 SCSI Adapter (SCSI Models only) | Drives Supported | Up to 15 SCSI devices Wide |
| | Data Transfer Method | 64-bit/100-MHz PCI bus-master |
| | SCSI Channel Transfer Rate | 320 MB/s per channel |
| | Maximum Transfer Rate per PCI Bus (peak) | 1033 MB/s per channel |
| | SCSI Protocols | Ultra320, Wide Ultra3, Wide Ultra2, Wide Ultra SCSI-3, Fast-Wide SCSI-2, and Fast SCSI-2 Fast SCSI-2 |
| | Electrical Protocol | Low Voltage Differential (LVD) |
| | SCSI Termination | Active Termination |
| | External SCSI Connectors | None NOTE: To implement an external SCSI connection, install an optional controller or internal-to-external SCSI option kit (part number 159547-B22 for HD68 or 333370-B21 for VHDCI). |
| | Internal SCSI Connectors | One 68-Pin Wide Ultra SCSI-3 connectors |

© Copyright 2007 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1 GB = 1 billion bytes. Actual formatted capacity is less.