



Intel® Desktop Board DZ75ML-45K

Optimized for Intel® -K Processors

microATX Form Factor

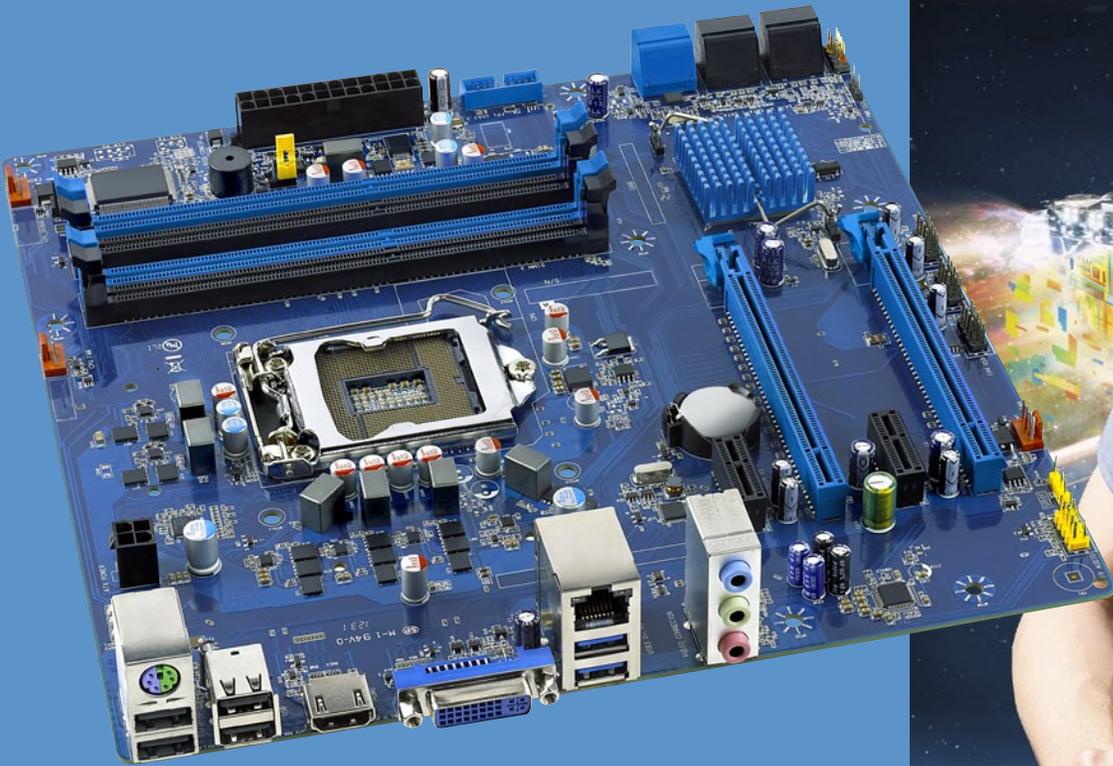

PRODUCT BRIEF

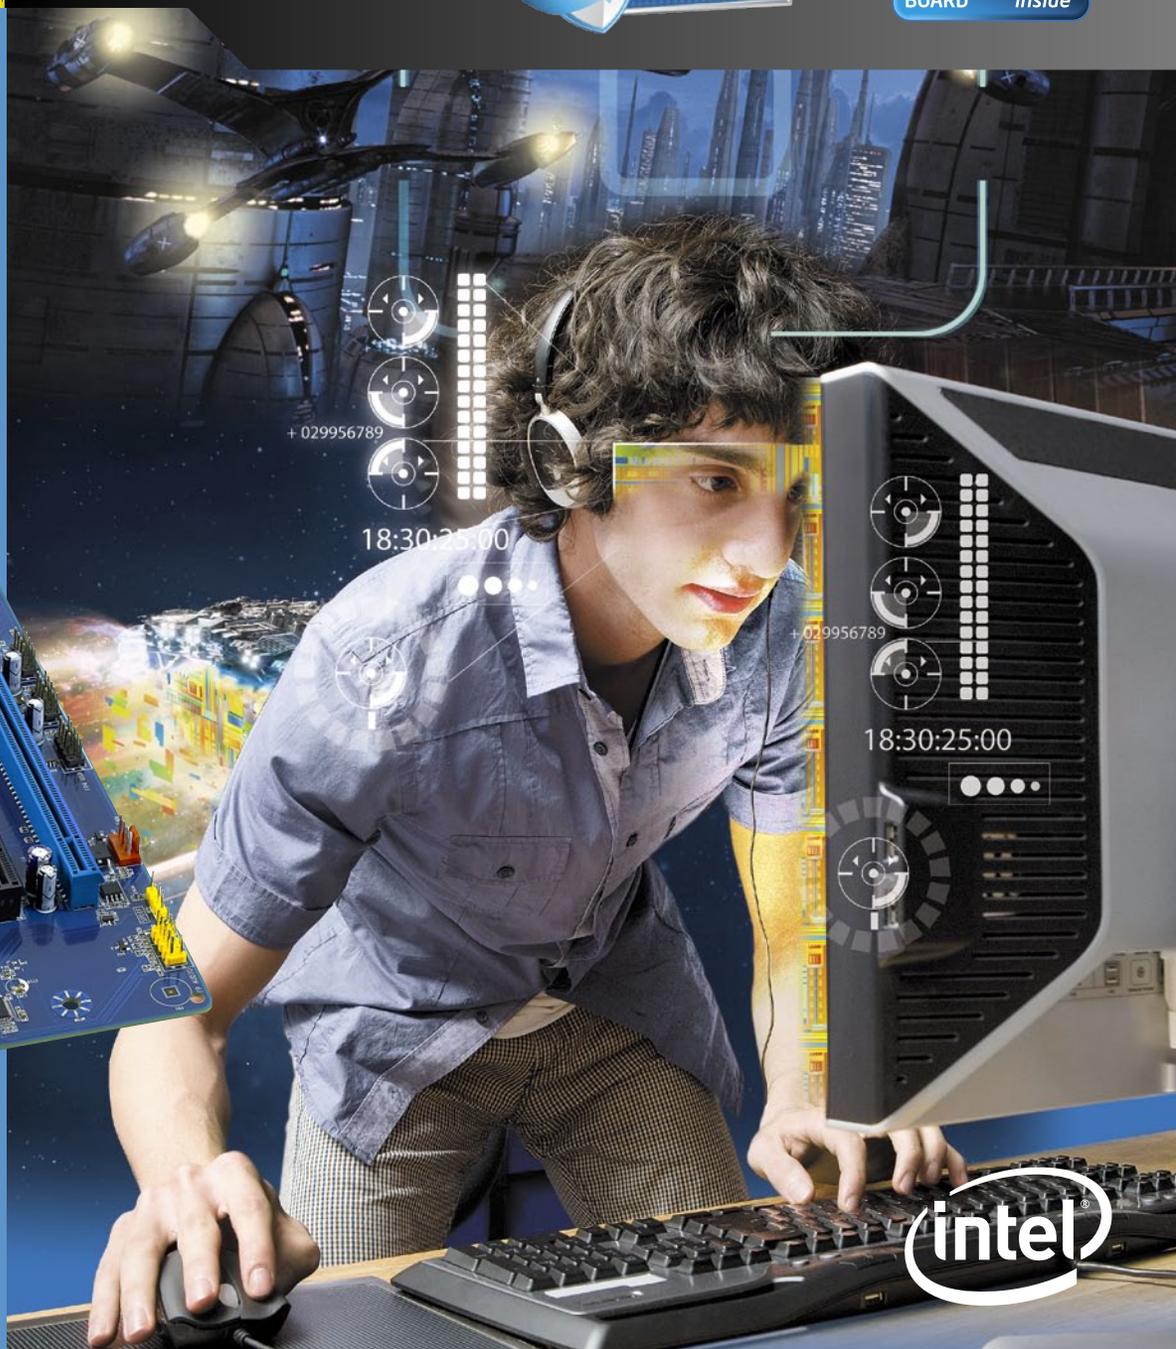

Intel® Desktop Board DZ75ML-45K

Optimized for Intel® -K Processors!

Introducing the Intel® Desktop Board DZ75ML-45K. Optimized for Intel® -K processors and equipped with full capability Intel® Visual BIOS for maximum overclocking performance and best experience.

Supports the 2nd and 3rd generation Intel® Core™ processors in the LGA1155 package

Once again with the introduction of the Intel® Desktop Board DZ75ML-45K Intel is offering a great board at a very attractive price point for gamers and overclockers. In combination with the new Intel® Visual BIOS, this board will surely satisfy all of the needs of the performance enthusiasts. As a member of the newly introduced -K Series Intel® Desktop Boards, the DZ75ML-45K is optimized to take full advantage of the Intel® -K processors. Combination of very sophisticated power delivery design and ease of performance tuning and overclocking of the Core, Graphics, and memory offered by the Intel® Visual BIOS make the DZ75ML-45K an ideal board for the Intel® -K processors. Intel® -K Series Desktop Board PLUS Intel® -K processor EQUALS performance.

INTEL® VISUAL BIOS Advanced Overclocking

The new Intel® Visual BIOS offers graphical interface and animated controls which allow you to configure settings faster and take full advantage of your Intel® -K processors. Intel® Visual BIOS allows easy overclocking of Core, Graphics, and Memory. Intel Visual BIOS operates by your choice of touch screen, keys, or mouse. All controls are literally at your fingertips, in a format you can visualize. When your quest for ultimate performance takes you to extremes, choose the Intel® Desktop Board DZ75ML-45K here and Intel® Visual BIOS.

Power and Responsiveness for the Hottest New Games

The advanced power and overclocking¹ capabilities of the DZ75ML-45K board coupled with other significant technologies such as Intel® Fast Boot technology and Intel® Power Supervisor technology make this the board of choice for cost conscious gamers and media creation enthusiasts alike. Intel® Fast Boot Technology reduces system boot times to mere seconds while the Intel® Power Supervisor technology actively monitors the system power to ensure system protection. Other premium features include GPU Virtualization Software with Lucid* MVP, HDMI and DVI-I video connectors, one PCIe* 3.0 x16 connector for external graphics and a second PCIe x16 (x4 electrical) to support CrossFireX* dual graphics.




DZ75ML-45K solution includes:

- ATX compliant I/O shield
- SATA cables
- Board and back panel I/O layout stickers
- Quick reference guide
- Intel® Express Installer

Capability	Software included
Utilities	<ul style="list-style-type: none"> ▪ Intel® Integrator Tool Kit ▪ Intel® Desktop Utilities
Productivity	<ul style="list-style-type: none"> ▪ Splashtop* Remote Desktop
Antivirus	<ul style="list-style-type: none"> ▪ McAfee* Antivirus Plus
GPU Virtualization	<ul style="list-style-type: none"> ▪ Lucid* Virtu MVP Software

Intel® Desktop Board DZ75ML-45K

Features and Benefits

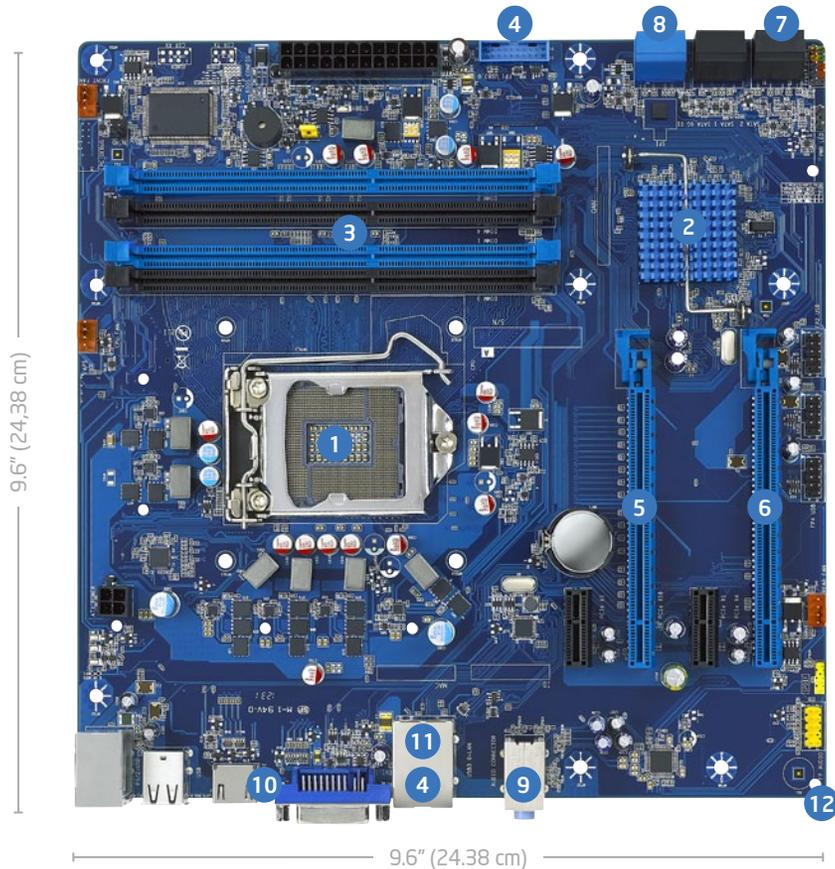

- 1 Support for the Intel® Core™ i7 processor in the LGA 1155 package. Optimized for the Intel® -K Processors. Features Intel® Turbo Boost Technology², Intel® Hyper-Threading Technology³ for exceptional performance and scalability.
- 2 Intel® Z75 Express Chipset: Features Overclocking¹ Support.
- 3 Four DIMM slots: Designed to support overclocked¹ DDR3 2400MHz + O.C.⁴ memory, delivering up to 32 GB/s memory bandwidth.
- 4 Four Super-Speed USB 3.0 ports (2 external, 2 via internal header), ten USB 2.0 ports (4 external, 6 via internal headers).
- 5 PCI Express 3.0* × 16 slot.
- 6 PCI Express* x16 (x4 electrical) and 2 PCI Express* x1 connectors.
- 7 Two SATA 6.0 Gb/s ports, four SATA 3.0 Gb/s ports.
- 8 Intel® Rapid Storage Technology: Performance and reliability with support for RAID 0, 1, 5, 10.
- 9 8 Channel (5.1+2) Intel® High Definition Audio⁵ Enables high-quality integrated audio that rivals the performance of high-end discrete solutions.
- 10 HDMI* and DVI-I Video Connectors.
- 11 Intel® Gigabit Ethernet LAN: Features onboard 10/100/1000 Mb/s Ethernet LAN connectivity.
- 12 microATX (9.6" × 9.6") Form Factor.



OPTIMIZED FOR INTEL®-K PROCESSORS
Intel® Desktop Board optimized for Intel® -K processors for maximum overclocking¹ performance and best experience.



INTEL® FAST BOOT TECHNOLOGY
Go from system off to Windows* in mere seconds.



POWER SUPERVISOR
Active monitoring of power ensures system protection.

Intel® Desktop Board DZ75ML-45K

Technical Specifications



PROCESSOR

Processor Support

- Optimized for Intel® -K processors. Supports 2nd and 3rd Generation Intel® Core™, and other Intel® processors in the LGA1155 package

CHIPSET

Intel® Z75 Express Chipset

- Intel® Z75 PCH
- Intel® Rapid Storage Manager (RAID 0, 1, 5, 10)

PERIPHERAL CONNECTIVITY

- Two SATA 6.0 Gb/s ports
- Four SATA 3.0 Gb/s ports
- Four SuperSpeed USB 3.0 ports with 5.0 Gb/s link speed (two back panel and two via internal headers)
- Ten Hi-Speed USB 2.0 ports (four back panel ports and six ports via internal headers)

SYSTEM BIOS

- 64 Mb Flash EEPROM with Intel® Platform
- Innovation Framework for EFI Plug and Play
- Advanced configuration and power interface
- V3.0b, SMBIOS2.5
- Intel® Express BIOS update support

HARDWARE MANAGEMENT FEATURES

- Processor fan speed control
- Front and rear system chassis fan speed control
- Voltage and temperature sensing
- Fan sensor inputs used to monitor fan activity
- ACPI-compliant power management support

INTEL® PRO 10/100/1000 NETWORK CONNECTION

- Low-power design

EXPANSION CAPABILITIES

- One PCI Express® 3.0 x16 connector
- One PCI Express® 2.0 x16 connector (x4 Electrical)
- Two PCI Express® 2.0 x1 connector

AUDIO

- 5.1 + 2 Intel® High Definition Audio⁵
- Three stack analog audio ports plus internal S/PDIF headers

VIDEO

- HDMI* and DVI-I Video connectors for Intel® processors with Intel® HD Graphics

SYSTEM MEMORY

Memory Capacity

- Four 240-pin DIMM connectors supporting up to four double-sided DIMMs
- Maximum system memory up to 32 GB⁶ using 8 GB double-sided DIMMs

Memory Types

- DDR3 2400MHz + O.C. SDRAM memory support
- Non-ECC Memory
- Dual- or single-channel operation support

Memory Voltage

- Memory voltage control from 1.2 V to 1.8 V
- 1.5 V standard JEDEC voltage

JUMPERS AND FRONT PANEL CONNECTORS

Jumpers

- Jumper access for BIOS maintenance mode

Front Panel Connectors

- Reset, HD LED, Power LEDs, power on/off
- Front-panel audio header

Other Connectors

- Chassis intrusion detect header

MECHANICAL

Board Style

- microATX

Board Size

- 9.6" x 9.6" (24.38 cm x 24.38 cm)

Baseboard Power Requirements

- ATX 12 V

ENVIRONMENT

Operating Temperature

- 0° C to +55° C

Storage Temperature

- 20° C to +70° C

REGULATIONS AND SAFETY STANDARDS

United States

- UL 60950-1

Canada

- CAN/CSA-C22.2 No. 60950-1

Europe

- (Low Voltage Directive 2006/95/EC)
- EN 60950-1

International

- IEC 60950-1

EMC REGULATIONS (CLASS B)

United States

- FCC CFR Title 47, Chapter I, Part 15, Subparts A/B

Canada

- ICES-003

Europe

- (EMC Directive 2004/108/EC)
- EN 55022 and EN 55024

Australia/New Zealand

- EN 55022

Japan

- VCCI V-3, V-4

South Korea

- KN-22 and KN-24

Taiwan

- CNS 13438

International

- CISPR 22

ENVIRONMENTAL COMPLIANCE

Europe

- Europe RoHS (Directive 2002/95/EC)
- WEEE (Directive 2002/96/EC)

China

- China RoHS

1 Warning: Altering clock frequency and/or voltage may (i) reduce system stability and useful life of the system and processor; (ii) cause the processor and other system components to fail; (iii) cause reductions in system performance; (iv) cause additional damage; and (v) affect system data integrity. Intel has not tested, and does not warrant, the operation of the processor beyond its specifications.

2 Intel® Turbo Boost Technology requires a PC with a processor with Intel Turbo Boost Technology capability. Intel Turbo Boost Technology performance varies depending on hardware, software, and overall system configuration. Check with your PC manufacturer on whether your system delivers Intel Turbo Boost Technology. See www.intel.com/technology/turboboost for more information.

3 Intel® Hyper-Threading Technology requires a computer system with a processor supporting HT Technology and an HT Technology-enabled chipset, BIOS, and operating system. Performance will vary depending on the specific hardware and software you use. For more information including details on which processors support HT Technology, see www.intel.com/info/hyperthreading.

4 Maximum peak memory bandwidth requires four DDR 3 modules to be populated in each of the blue memory slots. DDR 3 2400 memory support on this motherboard requires advanced knowledge of BIOS and memory tuning; individual results may vary. For specific supported memory for this motherboard, please visit www.intel.com/products/motherboard/ for more details.

5 Intel® High Definition Audio requires a system with an appropriate Intel® chipset and a motherboard with an appropriate codec and the necessary drivers installed. System sound quality will vary depending on actual implementation, controller, codec, drivers, and speakers. For more information about Intel® HD Audio, refer to www.intel.com/design/chipsets/ndaudio.html.

6 System resources and hardware (such as PCI and PCI Express*) require physical memory address locations that can reduce available addressable system memory. This could result in a reduction of as much as 1 GB or more of physical addressable memory being available to the operating system and applications, depending on the system configuration and operating system.

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL® PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT.

Intel products are not intended for use in medical, life-saving, or life sustaining applications. Intel may make changes to specifications and product descriptions at any time, without notice.

All products, dates, and figures specified are preliminary based on current expectations, and are subject to change without notice. Availability in different channels may vary.

Actual Intel® Desktop Board may differ from the image shown.

* Other names and brands may be claimed as the property of others.

Copyright © 2012 Intel Corporation 09/12/FB/MED/PDF 327986-001US

For ordering information, visit

www.intel.com

For the most current product information, visit

www.intel.com/go/idb

