

## WHIRLPOOL BRAND COMMERCIAL DRYERS

### 1/3 HP MOTOR

1/3 HP motor with overload protection.

### THERMOSTAT

Single operating thermostat for simple accurate temperature control.



### IMPROVED AIRFLOW SYSTEM

Whirlpool® commercial dryers have a new

Blower Housing Wave Insert to increase air velocity up to 10%. This increases efficiency, heating element lifespan, and improves fabric care.\*

\*Results per Whirlpool dryer testing conducted 7/03–8/04

### LARGE CAPACITY METERCASE

Larger coinbox for reduced collections.



### LARGE 7.0 CU. FT. DRUM CAPACITY

The increased capacity allows for large loads of clothes to tumble and spread, saving you and your customers drying time and expense.



### LARGE LINT FILTER

Top mounted lint filter.



### SIDE SWING DOOR

For convenient access, the wide-opening side-swing door can be opened a full 180°.

## COMMERCIAL DRYER

Featuring Factory Installed Coin Slide and Coin Box



### CEM2940TQ — 29" Electric Dryer CGM2941TQ — 29" Gas Dryer with Factory Installed Coin Slide & Coin Box

#### 90 DAY FACTORY LABOR WARRANTY!!

- Large 7.0 Cu. Ft. Drum Capacity
- Push Button Controls with Stainless-Look Console
- 3 Cycles: Regular/Heavy (High Heat), Permanent Press (Medium Heat), and Knits/Delicates (Low Heat)
- 3 Timing Cycles Possible with Included Cams\*
- Large, Removable, Top-Mounted Lint Screen
- 180 Degree Wide-Opening Reversible Side-Swing Door
- Powdered Paint Top, Door and Cabinet for Years of Reliable Service
- Electric Model Features Element Rated at 5600 Watts, 240 Volt
- Gas Model Features a 22K BTU Burner
- Motor: 1/3 HP with Built-In Overload Protector; Centrifugal Switch Turns Off Heating Element when Motor Stops
- Easy-to-Follow Console Instructions
- Power Cord Sold Separately (Electric Model Only)
- 8 Quarter Coin Slide Capacity, Set Your Dry Price from \$0–\$2 Per Cycle (\$1 factory preset)
- **90 Day Labor/2 Year Limited Parts Only Warranty\*\***

\*45 minute timing cam installed, 30 & 60 minute cams included

\*\*Call 1-800-NO-BELTS for warranty details.

To locate a distributor near you, please visit  
[www.whirlpoolcommerciallaundry.com/distributor](http://www.whirlpoolcommerciallaundry.com/distributor), or call 1-800-NO-BELTS.


# COMMERCIAL DRYER SPECIFICATIONS

## SINGLE DRYER SPECIFICATIONS

MODEL NUMBER	CEM2940TQ <sup>††</sup>	CGM2941TQ <sup>†</sup>
<b>GENERAL INFORMATION</b> Stainless steel look Push Button console, white enamel drum, powdered paint finish cabinet and top, removable lint filter, improved meter case.	Metercase Model Factory Installed Coin Slide and Coin Box, \$1.00 Factory Preset \$0-2 per Cycle,	Metercase Model Factory Installed Coin Slide and Coin Box, \$1.00 Factory Preset \$0-2 per Cycle,
<b>ELECTRICAL REQUIREMENTS</b>	3-Wire Nominal 240/208V, 60 Hz., A.C. Standard 30-amp Breaker/Fuse Branch Circuit per Dryer (subject to local codes)	Nominal, 120V, 60Hz., A.C., Standard 15-amp Breaker/Fuse Branch Circuit per Dryer (subject to local codes)
<b>MOTOR</b>	<sup>1</sup> / <sub>3</sub> HP Single Speed Motor with Built-In Overload Protector 5.9-amps Max Rating	<sup>1</sup> / <sub>3</sub> HP Single Speed Motor with Built-In Overload Protector 5.9-amps Max Rating
<b>HEATER TYPE</b>	<b>ELECTRIC</b>	<b>GAS**</b>
<b>HEATER/BURNER RATING</b> (Add 500 watts approx for motor on all dryer models)	Heater Rated at 5600 Watts	22,000 BTUH Natural Gas
<b>OPERATIONAL AMPERAGE</b> (Does not include control or gas valve)	Motor—4.0-amps No load Heater—23.33-amps @ 240V 27.33 Total	Motor—4.0-amps No load
<b>DIMENSIONS</b> See Illustrations	42.875"H*, 29"W, 27.75"D	42.875"H*, 29"W, 27.75"D
<b>SHIPPING WEIGHT (EST.)</b>	147 Lbs.	147 Lbs.
<b>DRUM VOLUME</b>	7.0 Cu. Ft.	7.0 Cu. Ft.

\*(height at meter case top) \*\*Burner orifices are available for manufactured, natural, mixed, and LP gas with varying BTU ratings. †LP Conversion Kit: 49572  
<sup>††</sup>Power cords on electric models sold separately Energy information is available online at [www.whirlpoolcommerciallaundry.com/products](http://www.whirlpoolcommerciallaundry.com/products).

Dimensions are for planning purposes only. For complete information, see installation instructions packed with product.

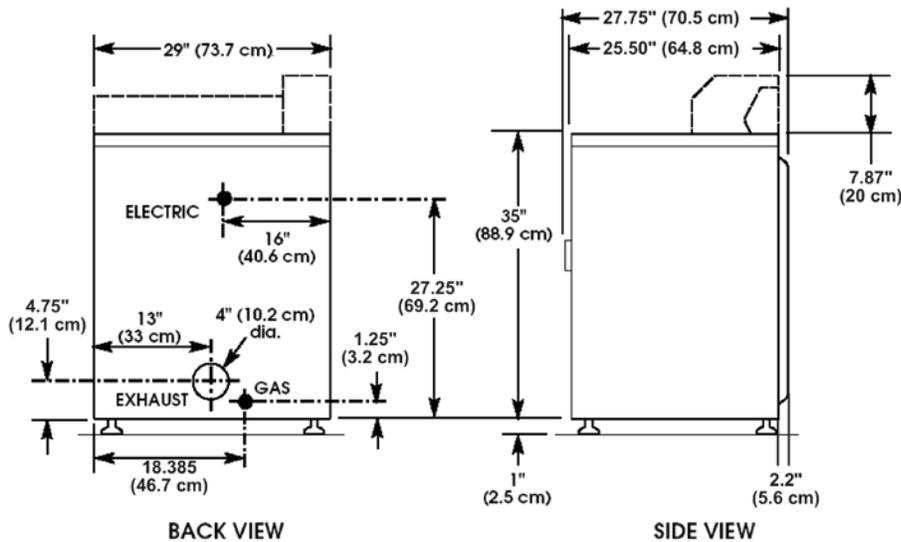

## Exhaust Information

All dryers require the equivalent of a 4-inch diameter exhaust duct. Rigid metal duct is recommended. Failure to properly exhaust the dryer will result in improper operation.

# of 90° Turns	4" Hood	2 1/2" Hood
<b>Maximum Length of 4" Diameter Rigid metal Duct</b>		
0	64 Ft.	58 Ft.
1	54 Ft.	48 Ft.
2	44 Ft.	38 Ft.
3	35 Ft.	29 Ft.
4	27 Ft.	21 Ft.
<b>Maximum Length of 4" Diameter Rigid metal Duct</b>		
0	36 Ft.	28 Ft.
1	31 Ft.	23 Ft.
2	27 Ft.	19 Ft.
3	25 Ft.	17 Ft.
4	23 Ft.	15 Ft.

From Whirlpool Corporation — A World Leader in Laundry Products

<http://www.whirlpoolcommerciallaundry.com>

TORX is a registered Trademark of Textron Industries, Inc.

®Registered trademark/™Trademark of Whirlpool, U.S.A.

©2008 Whirlpool Corporation. All rights reserved.

Whirlpool Corporation • Benton Harbor, Michigan 49022 U.S.A.

