

LAVA SP-PCle

PCle Bus 16550 Serial Board and EPP Parallel Port Board

Features & Benefits

- Adds one 9-pin 16550 UART serial port and one EPP parallel port to PCIe equipped PCs
- Serial port is capable of a maximum throughput rate of 115.2 kbps
- One 25-pin EPP parallel port
- Easy Plug and Play installation—automatically selects next available IRQ and I/O addresses
- Includes LAVA Com Port Redirect Utility for renaming Com ports—allows for backward compatibility with software that supports Com 1-4 only
- Compatible with any RS-232 serial or parallel peripheral
- LAVA Lifetime Warranty


Connectors

- One DB-9 male RS-232
- One DB-25 female EPP

System Requirements

- PCIe host slot (1x, 2x, 4x, 8x, 16x)
- Windows OS

Drivers ship with product. For updated software support visit www.lavalink.com.

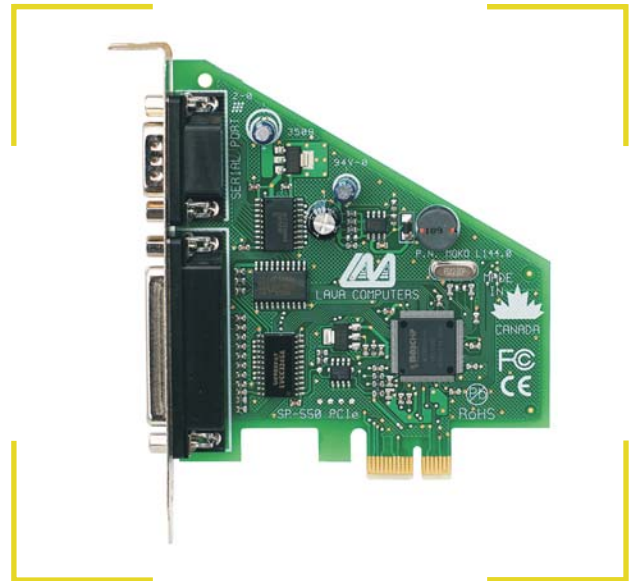

Copyright ©
LAVA Computer MFG Inc.
Printed in Canada.
Specifications subject
to change without notice.

