

# TECHNICAL GUIDE



Heating and Air Conditioning

## PREDATOR<sup>TM</sup> MAGNUM

**HIGH EFFICIENCY**

**SINGLE PACKAGE AIR CONDITIONERS AND  
SINGLE PACKAGE GAS/ELECTRIC UNITS**

DJ 150

12-1/2 NOMINAL TONS



### DESCRIPTION

YORK<sup>®</sup> Predator<sup>™</sup> Magnum is a convertible single package unit with a common footprint cabinet and common roof curb for 12-1/2 ton models. All units have two compressors with independent refrigeration circuits to provide 2 stages of cooling. The units were designed for light commercial applications and can be easily installed on a roof curb, slab, or frame.

All Predator<sup>™</sup> Magnum units are self-contained and assembled on rigid full perimeter base rails allowing for 3-way forklift access and overhead rigging. Every unit is completely charged, wired, piped, and tested at the factory to provide a quick and easy field installation.

All units are convertible between side and down airflow. Independent economizer designs are used on side and down discharge applications, as well as all tonnage sizes.

Predator<sup>™</sup> Magnum units are available in the following configurations: cooling only, cooling with electric heat, and cooling with gas heat. Electric heaters are available only as field-installed accessories.

*Tested in accordance with:*



## TABLE OF CONTENTS


DESCRIPTION . . . . . 1  
 FEATURES . . . . . 5  
 FACTORY INSTALLED OPTIONS . . . . . 7  
 FIELD INSTALLED ACCESSORIES . . . . . 8

### LIST OF FIGURES

<u>Fig. #</u>		<u>Pg. #</u>
1	PREDATOR™ MAGNUM COMPONENT LOCATION . . . . .	5
2	UNIT 4 POINT LOAD . . . . .	19
3	UNIT CENTER OF GRAVITY . . . . .	19
4	UNIT 6 POINT LOAD . . . . .	19
5	UNIT DIMENSIONS . . . . .	20
6	PREDATOR™ MAGNUM ROOF CURB DIMENSIONS . . . . .	21
7	SUNLINE™ TO PREDATOR™ MAGNUM TRANSITION ROOF CURBS . . . . .	21
8	BOTTOM DUCT OPENINGS (FROM ABOVE) . . . . .	22
9	SIDEFLOW DUCT DIMENSIONS . . . . .	22
10	DOWNFLOW ECONOMIZER HOOD DETAIL . . . . .	23
11	COOLING UNIT WITH GAS HEAT WIRING 230 V. DIAGRAM . . . . .	24
12	COOLING UNIT W/WO ELECTRIC HEAT WIRING DIAGRAM . . . . .	25
13	COOLING UNIT WITH GAS HEAT WIRING 460, 575 & 50 HZ DIAGRAM . . . . .	26

### LIST OF TABLES

<u>Tbl. #</u>		<u>Pg. #</u>
1	ACCESSORIES . . . . .	9
2	PRODUCT NOMENCLATURE . . . . .	10
3	AIRFLOW ABBREVIATIONS . . . . .	11
4	INSTALLATION ABBREVIATIONS . . . . .	11
5	ADDITIONAL OPTIONS ABBREVIATIONS . . . . .	11
6	PHYSICAL DATA . . . . .	12
7	DJ 150 (12-1/2 TON) CAPACITY RATINGS . . . . .	13
8	UNIT VOLTAGE LIMITATIONS . . . . .	13
9	DJ 150 (12-1/2 TON) - COOLING CAPACITY TABLE . . . . .	14
10	DJ 150 (12-1/2 TON) - ELECTRICAL DATA . . . . .	15
11	ELECTRIC HEAT MULTIPLIERS . . . . .	15
12	BLOWER PERFORMANCE 12-1/2 TON SIDE DUCT . . . . .	16
13	BLOWER PERFORMANCE 12-1/2 TON DOWNSHOT . . . . .	17
14	ADDITIONAL STATIC RESISTANCE . . . . .	18
15	INDOOR BLOWER SPECIFICATIONS . . . . .	18
16	4 POINT LOAD WEIGHT . . . . .	19
17	6 POINT LOAD WEIGHT . . . . .	19
18	UNIT WEIGHT . . . . .	19
19	UNIT CLEARANCES . . . . .	20

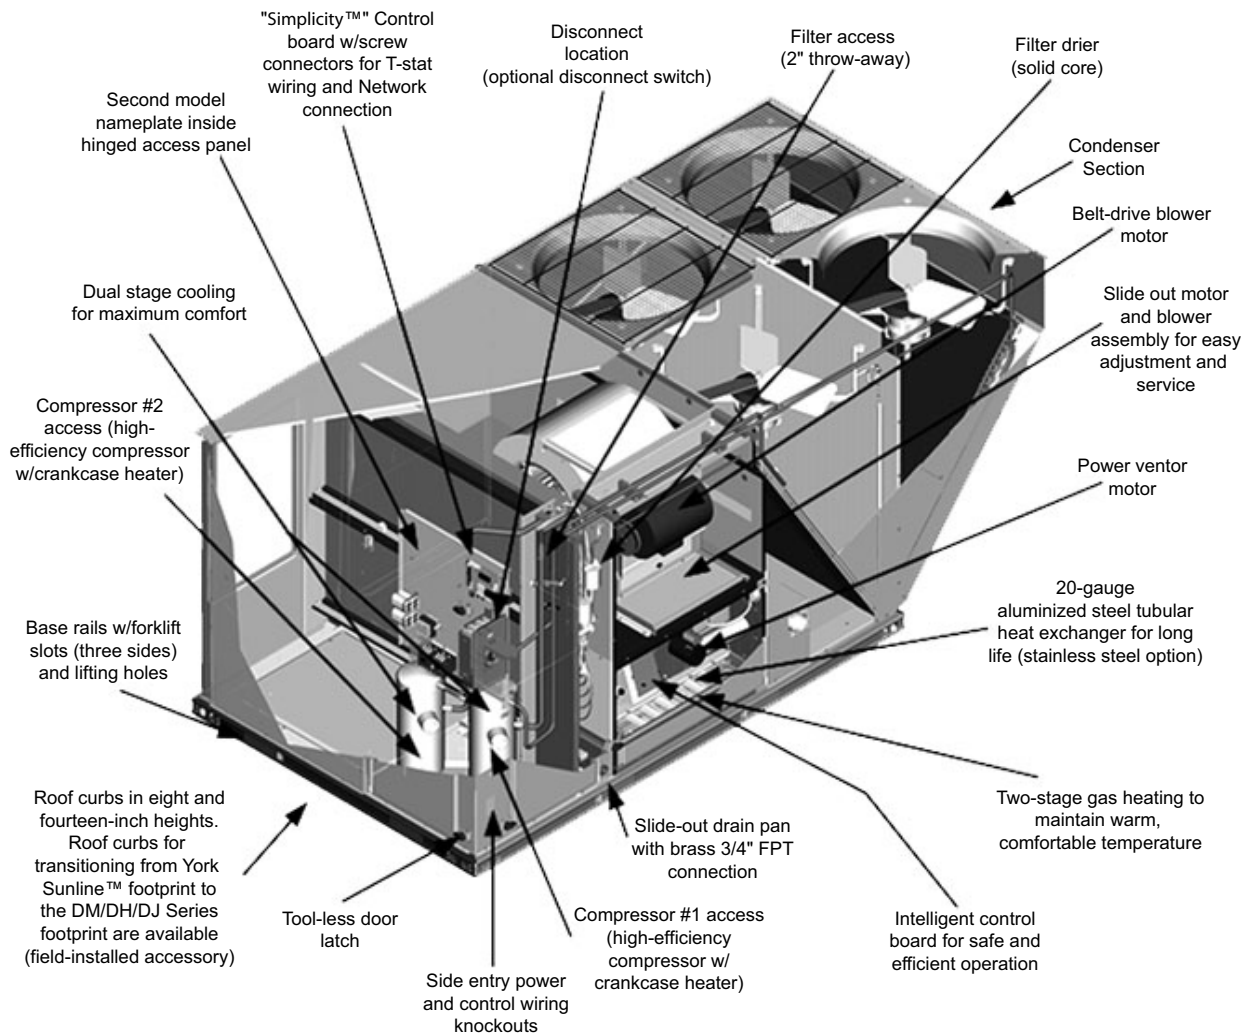

**FIGURE 1 : PREDATOR™ MAGNUM COMPONENT LOCATION**

## FEATURES

- **High Efficiency** – High efficiency units are rated at 10.8 EER. Gas/electric units have electronic spark ignition and power vented combustion with steady state efficiencies of 80%. These efficiencies meet or exceed all legislated minimum levels and provide low operating costs.
- **Service Friendly** – The Predator™ Magnum incorporates a number of enhancements which improve serviceability.

The motor and blower slide out of the unit as a common assembly. This facilitates greater access to all the indoor airflow components, thus simplifying maintenance and adjustment.

Service time is reduced through the use of hinged, tool-less panels. Such panels provide access to frequently inspected components and areas, including the control box, compressors, filters, indoor motor & blower, and the heating section. The panels are screwed in place at the factory to prevent access by children or other unauthorized persons. It is recommended that the panels be secured with screws once service is complete.

Service windows have been placed in both condenser section walls. Rotation of the cover allows easy access to the condenser coils for cleaning or inspection.

Both the unit control board and ignition control board utilize flash codes to aid in diagnosis of unit malfunctions. Unique alarm codes quickly identify the source of the unit alarm.

All units use the same standard filter size. This standardization removes any confusion on which filter sizes are needed for replacement.

The non-corrosive drain pan slides out of the unit to permit easy cleaning. The drain pan is accessed by removing the drain pan cover plate on the rear of the unit. Once the plate is removed, the drain pan slides out through the rear of the unit.

All Predator™ Magnum units have a second model nameplate located inside the control access door. This is to prevent deterioration of the nameplate through weathering.

- **Environmentally Aware** – For improved Indoor Air Quality, foil faced insulation is used exclusively throughout the units.
- **Balanced Heating** – The Predator™ Magnum offers “Ultimate Heating Comfort” with a balance between 1<sup>st</sup> and 2<sup>nd</sup> stage gas heating. The first stage of a gas heat Predator™ Magnum unit provides 60% of the heating capacity. Balanced heating allows the unit to better maintain desired temperatures.
- **Convertible Airflow Design** – The side duct openings are covered when they leave the factory. If a side supply/return is desired, the installer simply removes the two side duct covers from the outside of the unit and installs them over the down shot openings. No panel cutting is required. Convertible airflow design allows maximum field flexibility and minimum inventory.
- **System Protection** – Suction line freezestats are supplied on all units to protect against loss of charge and coil frosting when the economizer operates at low outdoor air temperatures while the compressors are running. Every unit has solid-core liquid line filter-driers and high and low-pressure switches. Internal compressor protection is standard on all compressors. Crankcase heaters are standard on reciprocating compressors. Scroll compressors do not require crankcase heaters.
- **Advanced Controls** - Simplicity™ control boards have standardized a number of features previously available only as options or by utilizing additional controls.
  - **Low Ambient** - An integrated low-ambient control allows all units to operate in the cooling mode down to 0°F outdoor ambient without additional assistance. Optionally, the control board can be programmed to lockout the compressors when the outdoor air temperature is low or when free cooling is available.
  - **Anti-Short Cycle Protection** - To aid compressor life, an anti-short cycle delay is incorporated into the standard controls. Compressor reliability is further ensured by programmable minimum run times. For

testing, the anti-short cycle delay can be temporarily overridden with the push of a button.

- **Fan Delays** - Fan on and fan off delays are fully programmable. Furthermore, the heating and cooling fan delay times are independent of one another. All units are programmed with default values based upon their configuration of cooling and heat.
- **Phase Monitor** - This accessory monitors the incoming power to the unit and protects the unit from phase loss and reversed phase rotation (Standard on units with scroll compressors).
- **Safety Monitoring** - The control board monitors the high and low-pressure switches, the freezestats, the gas valve, if applicable, and the temperature limit switch on gas and electric heat units. The unit control board will alarm on ignition failures, compressor lockouts and repeated limit switch trips.
- **Nuisance Trip Protection and Strikes** - To prevent nuisance trouble calls, the control board uses a “three times, you’re out” philosophy. The high and low-pressure switches and the freezestats must trip three times within two hours before the unit control board will lock out the associated compressor.
- **On Board Diagnostics** - Each alarm will energize a trouble light on the thermostat, if so equipped, and flash an alarm code on the control board LED. Each high and low-pressure switch alarm as well as each freezestat alarm has its own flash code. The control board saves the five most recent alarms in memory, and these alarms can be reviewed at any time. Alarms and programmed values are retained through the loss of power.
- **Reliable** – From the beginning – All units undergo computer automated testing before they leave the factory. Units are tested for refrigerant charge and pressure, unit amperage, and 100% functionality. For the long term – All Predator™ units are painted with a long lasting, powder paint that stands up over the life of the unit. The paint used has been proven by a 750 hour salt spray test.
- **Flexible Placement** – All models and configurations share the same cabinet/footprint and thus the same roof curb. You have the flexibility to set one curb and choose the correct tonnage size and heating option after the internal loads have been determined.

To further simplify planning and installation, Predator™ Magnum cabinets are designed to fit your roof. With the optional roof curb, the unit ductwork is designed to fit around 24” on-center joists or between 48” on-center joists.

The drain pan can be rotated to drain to either the front or the rear of the unit. Additionally, the drain pan can be fitted to drain through the roof curb. As it is sometimes difficult to have a level installation, the drain pan features a generous slope to ensure proper drainage.

- **Full Perimeter Base Rails** – The permanently attached base rails provide a solid foundation for the entire unit

and protect the unit during shipment. The rails offer forklift access from 3 sides, and rigging holes are available so that an overhead crane can be used to place the units on a roof.

- **Easy Installation** – Gas and electric utility knockouts are supplied in the unit underside as well as the side of the unit. A clearly identified location is provided to mount a field supplied electrical disconnect switch. Utility connections can be made quickly and with a minimum amount of field labor.

All units are shipped with 2" throw-away filters installed.

- **Wide Range of Indoor Airflows** – All indoor fan motors are belt-drive type providing maximum flexibility to handle most airflow requirements. For high static applications, factory installed alternate indoor fan motors are available. With the optional indoor fan motor, all units can supply nominal airflow at a minimum of 1.5" ESP.
- **Warranty** - All models include a 1-year limited warranty on the complete unit. Compressors and electric heater elements each carry a 5-year warranty. Aluminized steel and stainless steel tubular heat exchangers carry a 10-year warranty.

## FACTORY INSTALLED OPTIONS

YORK® offers several equipment options/accessories factory installed, for the Predator™ line.

- **Alternate Indoor Blower Motor** - For applications with high restrictions, units are offered with optional indoor motors that provide higher static output and/or higher airflow, depending upon the installer's needs.
- **Coil Guard** - Customers can purchase a coil guard kit to protect the condenser coil from damage. Additionally, this kit stops animals and foreign objects from entering the space between the inner condenser coil and the main cabinet. This is not a hail guard kit.
- **Convenience Outlet** - (Non-Powered) - This option locates a 120V GFCI single-phase outlet with cover on the corner of the unit housing the compressors. The installer must provide the 120V single-phase power source and wiring. Factory installed option only.
- **Dirty Filter Switch** - This kit includes a differential pressure switch that energizes the fault light on the unit thermostat, indicating that there is an abnormally high pressure drop across the filters. Factory installed option or field installed accessory.
- **Disconnect Switch** - For gas heat units, a HACR breaker sized to the unit is provided. For cooling units with electric heat, a switch sized to the largest electric heat available for the particular unit is provided. Factory installed option only.
- **Downflow Economizer** - (With barometric relief) - The economizer is provided with a single enthalpy input. The economizer is 2% low leakage type. The economizers are shipped installed and wired. The installer needs only

assemble and mount the outdoor air hood. The economizer has spring return, fully modulating damper actuators and is capable of introducing up to 100% outdoor air. As the outdoor air intake dampers open, the return air dampers close. The changeover from mechanical refrigeration to economizer operation is regulated by the standard single enthalpy input. There is an optional input dual dry bulb available. To meet regulated air standards, the economizer control accepts an optional CO<sub>2</sub> input for demand ventilation.

With single enthalpy input, the economizer control monitors outdoor air. The dual enthalpy kit provides a second input used to monitor the return air. With a dual input kit installed, the economizer control compares the values of the two enthalpy or temperature inputs and positions the dampers to provide the maximum efficiency possible.

- **Sideflow Economizer** - (Without barometric relief) - All features as the downflow economizer exist except you must order the barometric relief separately.
- **Motorized Outdoor Air Damper** - The motorized outdoor air damper includes a slide-in/plug-in damper assembly with an outdoor air hood and filters. The outdoor air dampers open to the preset position when the indoor fan motor is energized. The damper has a range of 0% to 100% outdoor air entry. Factory installed option or field installed accessory.
- **Power Exhaust** (Downflow only) - This accessory installs in the unit with a down flow economizer. Power exhaust plugs into the connector in the unit bulkhead.
- **Smoke Detectors** - The smoke detectors stop operation of the unit by interrupting power to the control board if smoke is detected within the air compartment.
- **Stainless Steel Heat Exchanger** - For applications in corrosive environments, this option provides a full stainless steel heat exchanger assembly.
- **Technicoat Condenser Coils** - The condenser coils are coated with a phenolic coating for protection against corrosion due to harsh environments.
- **Technicoat Evaporator Coil** - The evaporator coil is coated with a phenolic coating for protection against harsh environments.
- **Novar® BAS Control** - The Novar® ETC-3 building automation system controller is factory installed. Includes supply air sensor, return air sensor, dirty filter indicator switch, and air proving switch.
- **Johnson Controls BAS Control** - The Johnson Control YK-UNT-1126 building automation system controller is factory installed. Includes supply air sensor, return air sensor, dirty filter indicator switch, and air proving switch.
- **CPC BAS Control** - The Computer Process Controls Model 810-3060 ARTC Advanced Rooftop building automation system controller is factory installed. Includes supply air sensor, return air sensor, dirty filter indicator switch, and air proving switch.

- **Honeywell BAS Control** - The Honeywell W7750C building automation system controller is factory installed. Includes air supply sensor, return air sensor, dirty filter indicator switch, and air proving switch.
- **BAS Ready Economizer** - The economizer is provided with a Belimo actuator that requires a 0-10V DC input from an external source (i.e., field installed building automation system controller). Barometric relief or power exhaust options are available. The economizer is 2% low leakage type with spring return and fully modulating dampers capable of introducing up to 100% outside air. Also include 2" pleated filters.

## FIELD INSTALLED ACCESSORIES

YORK® offers several equipment options/accessories for field installation, for the Predator™ Magnum line.

- **-60°F Gas Heat Kit** - For installations which require gas heat units to perform in low ambient temperatures, a gas section heating kit is available. This kit provides electric heat in the gas heat controls section to ensure the gas valve and controls will continue to function properly at extremely low temperatures.
- **Barometric Relief** - Zero to 100% capacity barometric relief damper for use with sideflow economizer.
- **Burglar Bars** - Mount in the supply and return openings to prevent entry into the duct work.
- **CO<sub>2</sub> Sensor** - Senses CO<sub>2</sub> levels and automatically overrides the economizer when levels rise above the preset limits.
- **Coil Guard** - Field installed decorative wire coil guard.
- **Dirty Filter Switch** - This kit includes a differential pressure switch that energizes the fault light on the unit thermostat, indicating that there is an abnormally high pressure drop across the filters.
- **Enthalpy Accessory Control Kit** - This kit contains the required components to convert a single enthalpy economizer to dual enthalpy.
- **Economizer (Downflow with barometric relief)** - Economizer with relief damper and single enthalpy input (2% low leakage damper).  
Spring return fully modulating motor capable of introducing up to 100% outside air. For power exhaust, add the power exhaust accessory.
- **Economizer (Horizontal)** - Horizontal economizers are designed to install in the lower return section on the side of the unit. It is specifically designed for horizontal return applications. **1EH0408 barometric relief/power exhaust hood must be purchased separately.** The horizontal economizer is available with standard single enthalpy control. Dual enthalpy may be added by installing the dual enthalpy kit.
- **Electric Heaters** - The electric heaters range from 18 kW to 54kW and are available in all the voltage options of the base units. All heaters are dual staged. Cooling units include an adapter panel for easy installation of the electric heaters. Necessary hardware and connectors are included with the heaters. All heaters are intended for single point power supply.
- **Flue Exhaust Extension Kit** - In locations with wind or weather conditions which may interfere with proper exhausting of furnace combustion products, this kit can be installed to prevent the flue exhaust from entering nearby fresh air intakes.
- **Gas Heat High Altitude Kit** - This kit converts a gas heat unit to operate at high altitudes, 2,000 to 6,000 feet. Conversion kits are available for natural gas and propane.
- **Gas Heat Propane Conversion Kit** - This kit converts a gas-fired heater from natural gas to propane. It contains the main burner orifices and gas valve replacement springs.
- **Hail Guard** - This kit includes a sloped hood which installs over the outside condenser coil and prevents damage to the coil fins from hail strikes. Field installed accessory only.
- **Manual Outdoor Air Damper** - Like the motorized outdoor air damper, each manual outdoor air damper includes a slide-in damper assembly with an outdoor air hood and filters. Customers have a choice of dampers with ranges of 0% to 100% or 0% to 35% outdoor air entry.
- **Power Exhaust** - This accessory installs in the unit with a down flow economizer. Power exhaust plugs into the connector in the unit bulkhead. **You must purchase 1EH0408 barometric relief/power exhaust hood when applying to a sideflow application.**
- **Roof Curbs** - The roof curbs have insulated decks and are shipped disassembled. The roof curbs are available in 8" and 14" heights.  
For applications with security concerns, burglar bars are available for the duct openings of the roof curbs.
- **Roof Curb Adaptor Single Piece Adapter (10" High)** - Roof curbs for transitioning from Sunline™ units to Predator™ Magnum. Fits 7.5 to 12.5 Sunline™ roof curbs only.
- **Smoke Detectors** - The smoke detectors stop operation of the unit by interrupting power to the control board if smoke is detected within the air compartment.
- **Thermostat** - The units are designed to operate with 24-volt electronic and electro-mechanical thermostats. All units (with or without an economizer) operate with two-stage heat/two-stage cool or two-stage cooling only thermostats, depending upon unit configuration.
- **Motorized Outdoor Air Damper** - The motorized outdoor air damper includes a slide-in/plug-in damper assembly with an outdoor air hood and filters. The outdoor air dampers open to the preset position when the indoor fan motor is energized. The damper has a range of 0% to 100% outdoor air entry. Factory installed option or field installed accessory.

**TABLE 1: ACCESSORIES**

<b>Part Number</b>	<b>Description</b>	<b>Weight</b>
1RC0470	Roof Curb, 8" Height	-
1RC0471	Roof Curb, 14" Height	-
1RC0472	Roof Curb, Transition (7.5 T through 12.5 T)	-
2TP04511825	Electric Heat 18kW 230V	-
2TP04512425	Electric Heat 24kW 230V	-
2TP04513625	Electric Heat 36kW 230V	-
2TP04515425	Electric Heat 54kW 230V	-
2TP04511846	Electric Heat 18kW 460V	-
2TP04512446	Electric Heat 24kW 460V	-
2TP04513646	Electric Heat 36kW 460V	-
2TP04515446	Electric Heat 54kW 460V	-
2TP04511858	Electric Heat 18kW 575V	-
2TP04512458	Electric Heat 24kW 575V	-
2TP04513658	Electric Heat 36kW 575V	-
2TP04515458	Electric Heat 54kW 575V	-
1FA0411	Manual Outside Air Damper - 0-35%	-
1FA0412	Manual Outside Air Damper - 0-100%	-
2MD04702724	Motorized Damper Accy	-
2EE04705024	Economizer, Downflow Accy 6.5-12.5T w/Barometric Relief	124 lbs
2PE04703246	Power Exhaust Accy - 460V	-
2PE04703258	Power Exhaust Accy - 575V	-
2PE04703225	Power Exhaust Accy - 230V	-
2EC04700924	Dual Enthalpy Control Accy	-
1EH0407	Power Exhaust (Duct Mount) Hood w/ Barometric Relief	25 lbs
2EE04705124	Economizer, Sideflow Accy 6.5-12.5T without Barometric Relief	97 lbs
2AQ04700424	CO2 Unit Accessory	-
2AQ04700324	CO2 Space Accessory	-
2SD04700224	Duct Smoke Detector Accy for Supply or Return	-
1CG0422	Coil Guard (Electric / Electric & HP models)	-
1CG0423	Coil Guard (Gas / Electric models)	-
1BD0408	Burglar Bars	-
1GP0404	Gas Piping Kit	-
1NP0441	Propane Conversion Kit	-
1HA0442	High Altitude Kit for Natural Gas	-
1HA0443	High Altitude Kit for Propane Gas	-
1FE0411	Flue Exhaust Extension Kit	-
1EH0408	Barometric Relief Hood, Sideflow	-
2BC04700106	-60F Heat Kit 230V	-
2BC04700151	-60F Heat Kit 460V	-
2BC04700154	-60F Heat Kit 575V	-
1FL0402	Permanent Filter Kit	-

**D J 150 N 15 A 2 A AA 3****TABLE 2: PRODUCT NOMENCLATURE**

Model #	Model Number Description	Options		
<b>D</b>	Product Category	D = Air Conditioner, Single Package		
<b>J</b>	Product Identifier	J = High Efficiency		
<b>150</b>	Nominal Cooling Capacity MBH	150 = 12-1/2 Ton		
<b>N</b>	Heat Type	C = Cooling Only	N = Natural Gas, Aluminized Steel	S = Natural Gas, Stainless Steel
<b>15</b>	Nominal Heating Capacity	00 = No Heat Installed	15 = 150 MBH Output Gas Heat	20 = 200 MBH Output Gas Heat
<b>A</b>	Airflow	A = SM B = SM/VEC/BR C = SM/VEC/PE D = SM/MD (Downflow only) E = SM/Horiz EC L = SM/BAS VEC/BR/2" Pleated Filters M = SM/BAS VEC/PE/2" Pleated Filters	N = High Static Motor P = High Static Motor/VEC/BR Q = High Static Motor/VEC/PE R = High Static Motor/MD(Downflow only) S = High Static Motor/Horiz EC	Y = High Static Motor/BAS VEC/BR/2" Pleated Filters Z = High Static Motor/BAS VEC/BR/2" Pleated Filters
<b>2</b>	Voltage	2 = 208/230-3-60	4 = 460-3-60	5 = 575-3-60
<b>A</b>	Installation Options	A= None B = 1 C = 2 D = 1 & 2 E = 3 F = 4	G = 1 & 3 H = 1 & 4 J = 1, 2 & 3 K = 1, 2 & 4 L = 1, 3 & 4	M = 1, 2, 3 & 4 N = 2 & 3 P = 2 & 4 Q = 2, 3 & 4 R = 3 & 4
<b>AA</b>	Additional Options	AA = None AC = CG AD = DFS AG = CG & DFS CA = CC, DFS & APS CC = CC, DFS, APS & CG CE = CC, DFS, APS, TCC CG = CC, DFS, APS, TCC & CG CJ = CC, DFS, APS & TEC CL = CC, DFS, APS, TEC, & CG CN = CC, DFS, APS & TEC CQ = CC, DFS, APS, TEC & CG JA = JC, DFS & APS JC = JC, DFS, APS & CG JE = JC, DFS, APS & TCC JG = JC, DFS, APS, TCC & CG JJ = JC, DFS, APS & TEC	JL = JC, DFS, APS, TEC & CG JN = JC, DFS, APS & TEC JQ = JC, DFS, APS, TEC & CG HA = HC, DFS & APS HC = HC, DFS, APS, & CG HE = HC, DFS, APS & TCC HG = HC, DFS, APS, TCC & CG HJ = JC, DFS, APS & TEC HL = HC, DFS, APS, TEC & CG HN = HC, DFS, APS & TEC HQ = HC, DFS, APS, TEC & CG NA = NC, DFS & APS NC = NC, DFS, APS & CG NE = NC, DFS, APS & TEC NG = NC, DFS, APS, TCC & CG NJ = NC, DFS, APS & TEC	NL = NC, DFS, APS, TEC & CG NN = NC, DFS, APS & TEC NQ = NC, DFS, APS, TEC & CG TA = TCC TC = TCC & CG TD = TCC & DFS TG = TCC, CG & DFS TJ = TEC TL = TEC & CG TM = TEC & DFS TQ = TEC, CG & DFS TS = TEC & TCC TU = TEC, TCC & CG TV = TEC, TCC & DFS TY = TEC, TCC, CG & DFS
<b>3</b>	Product Generation	3 = Third Generation		



**TABLE 3: AIRFLOW ABBREVIATIONS**

ABBREVIATION	MEANING
BR	Barometric Relief
EC	Economizer
VEC	Vertical Economizer
MD	Motorized Damper
PE	Power Exhaust
SM	Standard Motor
BAS	Building Automation System

**TABLE 5: ADDITIONAL OPTIONS ABBREVIATIONS**

ABBREVIATION	MEANING
CC	CPC Controller
CG	Coil Guard
DFS	Dirty Filter Switch
HC	Honeywell Controller
JC	Johnson Controls Controller
NC	Noval <sup>®</sup> Controller
TCC	Technicoat Condenser Coil
TEC	Technicoat Evaporator Coil

**TABLE 4: INSTALLATION ABBREVIATIONS**

ABBREVIATION	MEANING
1	Disconnect
2	Convenience Outlet
3	Smoke Detector Supply Air
4	Smoke Detector Return Air

TABLE 6: PHYSICAL DATA

Component		Model DJ 150 (12-1/2)
Evaporator Blower	Blower, Centrifugal (Dia. X Wd. in.)	15 x 15
	Motor, Standard (HP)	3
	Motor, Optional (HP)	5
Evaporator Coil	Rows	4
	Fins per Inch	15
	Height (in.)	40
	Face Area (ft. <sup>2</sup> each)	13.2
Condenser Fan (4 per Unit)	Propeller Dia. (in., each)	24
	Motor (HP, each)	1/3
	CFM, Nominal (each)	3000
Condenser Coil (2 per unit)	Rows (each)	2
	Fins per Inch	20
	Height (in., each)	44
	Face Area (ft. <sup>2</sup> each)	14.5
Refrigerant Charge	System 1 (lb./oz.)	11/0
	System 2 (lb./oz.)	11/8
Compressors	Quantity	2
	Type	Scroll
Air Filters	Size (Wd. x Ht. x Thickness in.)	25x20x2
	Number Per Unit	4

**TABLE 7: DJ 150 (12-1/2 TON) CAPACITY RATINGS**

Size (Tons)	Model	Cooling Capacity ARI Ratings *			CFM	Sound Rating (dB)†	Nominal Electric Heat Capacity‡ (kW)	Gas Heat Capacity				Gas Line Size (in. OD)
		MBH	EER	IPLV				Input (MBH)	Output (MBH)	Seasonal Efficiency (%)	Temp. Rise (°F)	
150 (12-1/2)	Cooling Only						-	-	-	-	-	-
	Electric Heat	144	10.8	11.2	3750	86	18, 24, 36 54	-	-	-	-	-
	Gas Heat						-	180	144	80	10-40	3/4
	Gas Heat						-	240	192	80	25-55	3/4

\* Rated at 95°F ambient 80°F dry bulb and 67°F wet bulb.

† Rated in accordance with ARI 270 standard.

‡ See Table 11.

**TABLE 8: UNIT VOLTAGE LIMITATIONS**

POWER RATING	MIN.	MAX.
208/230-3-60	187	252
460-3-60	432	504
575-3-60	540	630



**TABLE 10: DJ 150 (12-1/2 TON) - ELECTRICAL DATA**

Model		Compressors		OD Fan Motors	Motor, Supply Blower FLA		Pwr Exh Motor	Electric Heater Model No.	Rated kW	Minimum Circuit Ampacity		MCA with Power Exhaust Amps		Max Fuse Size * Amps		Max Fuse Size w/ Pwr. Exh. * Amps	
Tonnage	Voltage	RLA each	LRA each	FLA each	3 HP	5 HP	FLA			3 HP	5 HP	3 HP	5 HP	3 HP	5 HP	3 HP	5 HP
12 1/2	208	20.0	146	1.5	10.9	16.1	5.5	None	-	61.9	67.1	67.4	72.6	80	80	80	90
								2TP04511825	13.5	61.9	67.1	67.4	73.8	80	80	80	90
								2TP04512425	18.0	76.1	82.6	83.0	89.5	80	90	90	90
								2TP04513625	25.5	102.1	108.6	109.0	115.5	110	110	110	125
								2TP04515425	40.6	154.5	161.0	161.4	167.9	175	175	175	175
	230	20.0	146	1.5	10.9	16.1	5.5	None	-	61.9	67.1	67.4	72.6	80	80	80	90
								2TP04511825	18.0	67.8	74.3	74.6	81.1	80	80	80	90
								2TP04512425	24.0	85.8	92.3	92.7	99.2	90	100	100	100
								2TP04513625	34.0	115.9	122.4	122.7	129.2	125	125	125	150
								2TP04515425	54.0	143.5	150.0	150.4	156.9	175	175	175	175
	460	8.4	73	0.8	5.3	8.1	2.2	None	-	27.4	30.2	29.6	32.4	35	35	35	40
								2TP04511846	18.0	33.7	37.2	36.4	39.9	35	40	40	40
								2TP04512446	24.0	42.7	46.2	45.5	49.0	45	50	50	50
								2TP04513646	34.0	57.7	61.2	60.5	64.0	60	70	70	70
								2TP04515446	54.0	71.6	75.1	74.3	77.8	80	90	80	90
	575	6.7	60	0.6	4.1	6.0	1.8	None	-	21.6	23.5	23.4	25.3	25	30	30	30
								2TP04511858	18.0	26.8	29.2	29.0	31.4	30	30	30	35
								2TP04512458	24.0	34.0	36.4	36.2	38.6	35	40	40	40
								2TP04513658	34.0	46.0	48.4	48.3	50.6	50	50	50	60
								2TP04515458	54.0	57.1	59.5	59.3	61.7	70	70	70	70

**NOTES FOR TABLES 12 AND TABLE 13:**

- Blower performance includes dry coil and 2" throwaway filters.
- Blower performance for gas heat includes the maximum number of heat tubes available for each tonnage.

ESP (External Static Pressure) given is that available for the supply and return air duct system. All internal resistances have been deducted from the total static pressure of the blower.

**TABLE 11: ELECTRIC HEAT MULTIPLIERS**

VOLTAGE		kW Cap. Multiplier
NOMINAL	RATING	
240	208	0.75
	230	0.92
480	460	0.92
600	575	0.92

**NOTE:** Electric heaters are rated at nominal voltage. Use this table to determine the electric heat capacity for heaters supplied at lower voltages.

**TABLE 12: BLOWER PERFORMANCE 12-1/2 TON SIDE DUCT**

CFM	External Static Pressure																				
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6		1.8		2.0		
	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts
3700	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
3800	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
3900	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
4000	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
4100	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
4200	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
4300	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
4400	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
4500	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
4600	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
4700	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
4800	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
4900	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
5000	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
5100	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
5200	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
5300	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
5400	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
5500	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
5600	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
5700	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
5800	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
5900	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
6000	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
6100	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
6200	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

High Horsepower Option Required

**TABLE 13: BLOWER PERFORMANCE 12-1/2 TON DOWNSHOT**

CFM	External Static Pressure																										
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6		1.8		2.0								
	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts						
3700	908	1.99	1853	957	2.12	1976	1004	2.27	2112	1050	2.42	2258	1094	2.59	2412	1136	2.76	2571	1177	2.93	2733	1217	3.11	2896			
3800	875	1.96	1831	926	2.09	1946	974	2.23	2077	1020	2.38	2220	1065	2.54	2372	1108	2.71	2530	1151	2.89	2693	1191	3.06	2856	1231	3.24	3021
3900	893	2.06	1918	943	2.19	2044	990	2.34	2183	1036	2.50	2332	1080	2.67	2489	1123	2.84	2652	1165	3.02	2817	1205	3.20	2983	1244	3.38	3149
4000	911	2.16	2012	960	2.30	2147	1007	2.46	2294	1052	2.63	2449	1096	2.80	2611	1138	2.98	2777	1179	3.16	2945	1219	3.34	3113	1258	3.52	3280
4100	878	2.13	1984	929	2.27	2113	977	2.42	2256	1023	2.59	2410	1068	2.76	2571	1111	2.94	2737	1153	3.12	2906	1194	3.30	3076	1233	3.48	3245
4200	897	2.23	2080	947	2.38	2219	995	2.54	2371	1040	2.72	2531	1084	2.89	2697	1127	3.08	2867	1168	3.26	3039	1208	3.44	3211	1247	3.63	3381
4300	915	2.34	2184	965	2.50	2332	1012	2.67	2491	1056	2.85	2657	1100	3.03	2828	1142	3.22	3001	1183	3.41	3175	1223	3.59	3348	1261	3.78	3520
4400	934	2.46	2294	983	2.63	2451	1029	2.81	2617	1073	2.99	2788	1116	3.18	2963	1157	3.37	3139	1198	3.56	3315	1237	3.74	3490	1275	3.93	3662
4500	953	2.59	2411	1001	2.76	2577	1046	2.95	2749	1090	3.14	2925	1132	3.33	3103	1173	3.52	3281	1212	3.71	3459	1251	3.90	3634	1288	4.08	3807
4600	972	2.72	2536	1019	2.91	2708	1063	3.10	2886	1106	3.29	3066	1148	3.48	3247	1188	3.68	3428	1227	3.87	3606	1266	4.06	3782	1303	4.24	3955
4700	991	2.86	2667	1036	3.05	2846	1081	3.25	3029	1123	3.45	3212	1164	3.64	3396	1204	3.84	3578	1242	4.03	3758	1280	4.22	3933	1316	4.40	4106
4800	1009	3.01	2806	1054	3.21	2990	1098	3.41	3177	1139	3.61	3364	1180	3.81	3549	1219	4.00	3732	1257	4.20	3912	1294	4.39	4088	1330	4.57	4260
4900	1028	3.17	2951	1072	3.37	3141	1115	3.57	3331	1156	3.78	3520	1196	3.98	3707	1234	4.17	3891	1272	4.37	4071	1309	4.56	4246	1344	4.74	4417
5000	1047	3.33	3103	1090	3.54	3297	1132	3.74	3491	1172	3.95	3682	1211	4.15	3870	1250	4.35	4054	1287	4.54	4233	1323	4.73	4407	1358	4.91	4577
5100	1066	3.50	3263	1108	3.71	3460	1149	3.92	3656	1189	4.13	3848	1227	4.33	4037	1265	4.53	4221	1302	4.72	4399	1338	4.91	4572	1372	5.09	4740
5200	1084	3.68	3430	1126	3.89	3629	1167	4.11	3827	1205	4.31	4020	1243	4.51	4208	1281	4.71	4391	1317	4.90	4569	1352	5.09	4740	1388	5.27	4900
5300	1103	3.87	3603	1144	4.08	3805	1184	4.29	4003	1222	4.50	4196	1259	4.70	4384	1296	4.90	4566	1331	5.09	4745	1366	5.27	4900	1401	5.45	5050
5400	1122	4.06	3784	1162	4.28	3987	1201	4.49	4185	1238	4.70	4378	1275	4.90	4565	1311	5.09	4745	1356	5.27	4900	1391	5.45	5050	1426	5.63	5200
5500	1141	4.26	3971	1180	4.48	4175	1218	4.69	4373	1255	4.90	4564	1291	5.10	4750	1346	5.27	4900	1381	5.45	5050	1416	5.63	5200	1451	5.81	5350
5600	1160	4.47	4166	1198	4.69	4369	1235	4.90	4566	1271	5.10	4756	1326	5.27	4900	1371	5.45	5050	1406	5.63	5200	1441	5.81	5350	1476	5.99	5500
5700	1178	4.69	4368	1216	4.90	4569	1253	5.11	4765	1301	5.27	4900	1366	5.45	5050	1416	5.63	5200	1451	5.81	5350	1486	5.99	5500	1521	6.17	5650
5800	1197	4.91	4576	1234	5.12	4776	1271	5.27	4900	1326	5.45	5050	1381	5.63	5200	1431	5.81	5350	1466	5.99	5500	1501	6.17	5650	1536	6.35	5800
5900	1216	5.14	4792	1252	5.33	4992	1291	5.54	5176	1341	5.75	5350	1401	5.94	5500	1451	6.13	5650	1486	6.31	5800	1521	6.49	5950	1556	6.67	6100
6000	1234	5.36	5008	1270	5.54	5192	1311	5.75	5350	1361	5.94	5500	1421	6.13	5650	1471	6.31	5800	1506	6.49	5950	1541	6.67	6100	1576	6.85	6250
6100	1252	5.57	5224	1288	5.75	5392	1331	5.94	5500	1381	6.13	5650	1441	6.31	5800	1491	6.49	5950	1526	6.67	6100	1561	6.85	6250	1596	7.03	6400
6200	1270	5.78	5440	1306	5.94	5592	1351	6.13	5650	1401	6.31	5800	1461	6.49	5950	1511	6.67	6100	1546	6.85	6250	1581	7.03	6400	1616	7.21	6550

High Horsepower Option Required  
 Motor Efficiency 0.8  
 Std HP Motor 3

**TABLE 14: ADDITIONAL STATIC RESISTANCE**

CFM	Cooling Only*	Economizer† ‡	Electric Heat KW†			
			18	24	36	54
3700	0.20	0.04	0.18	0.21	0.22	0.26
3900	0.23	0.04	0.20	0.23	0.24	0.28
4100	0.25	0.04	0.22	0.25	0.26	0.31
4300	0.28	0.05	0.24	0.28	0.29	0.34
4500	0.30	0.05	0.26	0.30	0.31	0.37
4700	0.33	0.05	0.29	0.33	0.34	0.40
4900	0.36	0.05	0.31	0.35	0.37	0.43
5100	0.39	0.06	0.34	0.38	0.40	0.46
5300	0.42	0.06	0.37	0.41	0.43	0.49
5500	0.45	0.06	0.40	0.44	0.46	0.53
5700	0.48	0.06	0.43	0.47	0.49	0.56
5900	0.52	0.07	0.46	0.50	0.53	0.59
6100	0.56	0.07	0.49	0.53	0.56	0.62
6300	0.60	0.07	0.53	0.56	0.59	0.65

\* Add these resistance values to the available static resistance in the respective Blower Performance Tables.

† Deduct these resistance values from the available external static pressure shown in the respective Blower Performance Table.

‡ The pressure drop through the economizer is greater for 100% outdoor air than for 100% return air. If the resistance of the return air duct system is less than 0.25 IWG, the unit will deliver less CFM during full economizer operation.

**TABLE 15: INDOOR BLOWER SPECIFICATIONS**

MODEL	MOTOR					MOTOR SHEAVE			BLOWER SHEAVE			BELT
	HP	RPM	Eff.	SF	Frame	Datum Dia. (in.)	Bore (in.)	Model	Datum Dia. (in.)	Bore (in.)	Model	
DJ150	3	1725	80%	1.15	56	3.4 - 4.4	7/8	1VM50	7.0	1	AK74	A54
	5	1725	87%	1.15	184T	4.3 - 5.3	1 1/8	1VP56	6.7	1	BK77	BX55



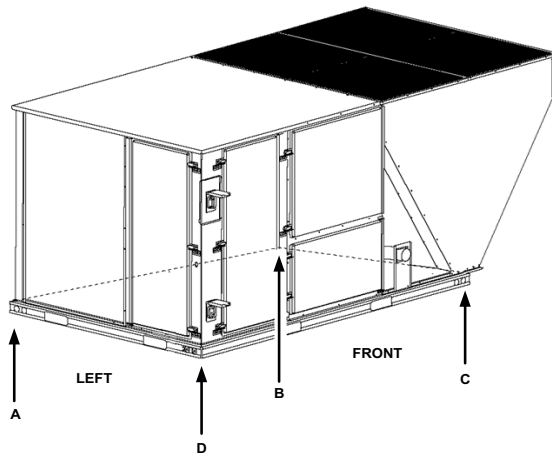


FIGURE 2 : UNIT 4 POINT LOAD

TABLE 16: 4 POINT LOAD WEIGHT

Model	Location (lbs.)			
	A	B	C	D
DJ150	282	323	424	371

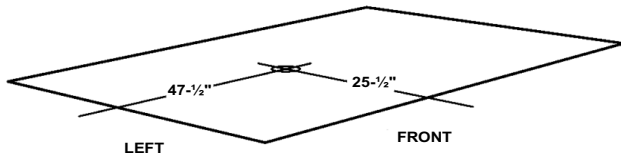


FIGURE 3 : UNIT CENTER OF GRAVITY

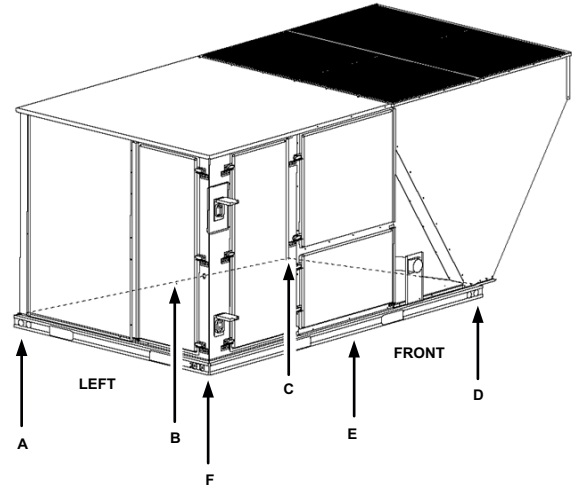


FIGURE 4 : UNIT WITH 6 POINT LOAD

TABLE 17: 6 POINT LOAD WEIGHT

Model	Locations (lbs.)					
	A	B	C	D	E	F
DJ150	184	201	220	289	264	242

TABLE 18: UNIT WEIGHT

Model	Shipping Weight (lbs.)	Operating Weight (lbs.)
DJ150	1415	1400


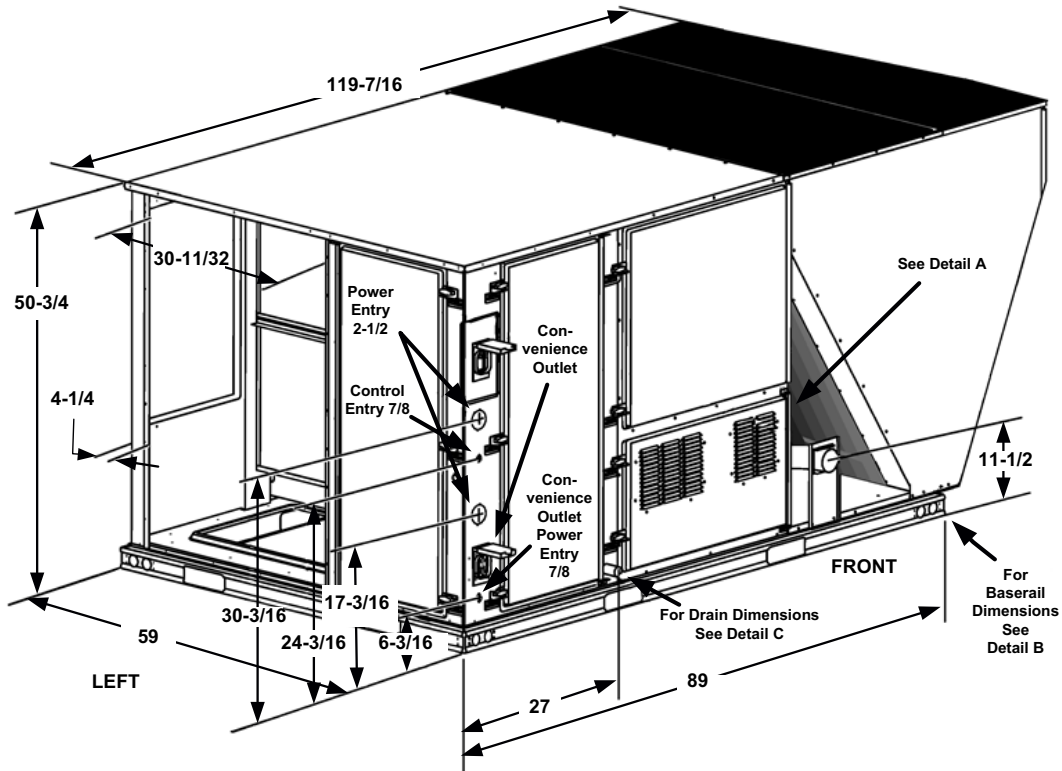


FIGURE 5 : UNIT DIMENSIONS

DETAIL A

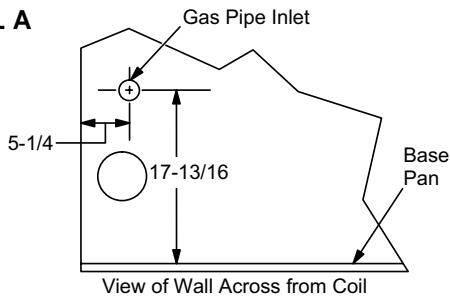

DETAIL B


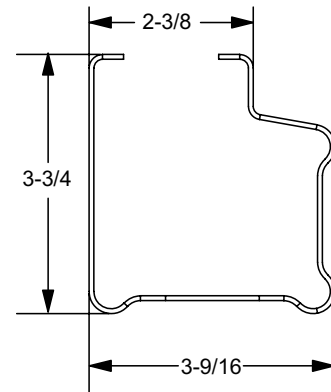



TABLE 19: UNIT CLEARANCES

Top*	72"	Right	12"
Front	36"	Left	36"
Rear†	36"	Bottom‡	0"


- \* Units must be installed outdoors. Overhanging structure or shrubs should not obstruct condenser air discharge outlet.
- † To remove the slide-out drain pan, a rear clearance of 60" is required. If space is unavailable, the drain pan can be removed through the front by separating the corner wall.
- ‡ Units may be installed on combustible floors made from wood or class A, B or C roof covering materials.

DETAIL C

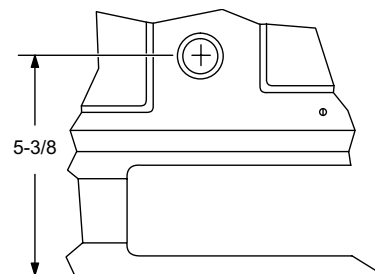

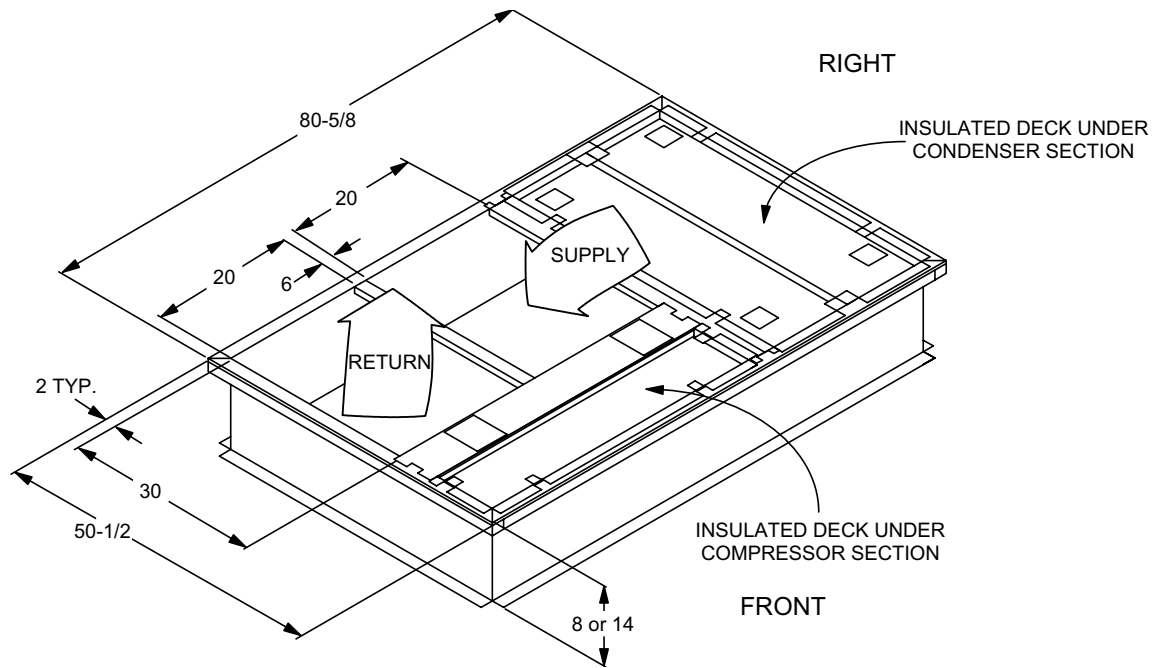

**FIGURE 6 : PREDATOR™ MAGNUM ROOF CURB DIMENSIONS**

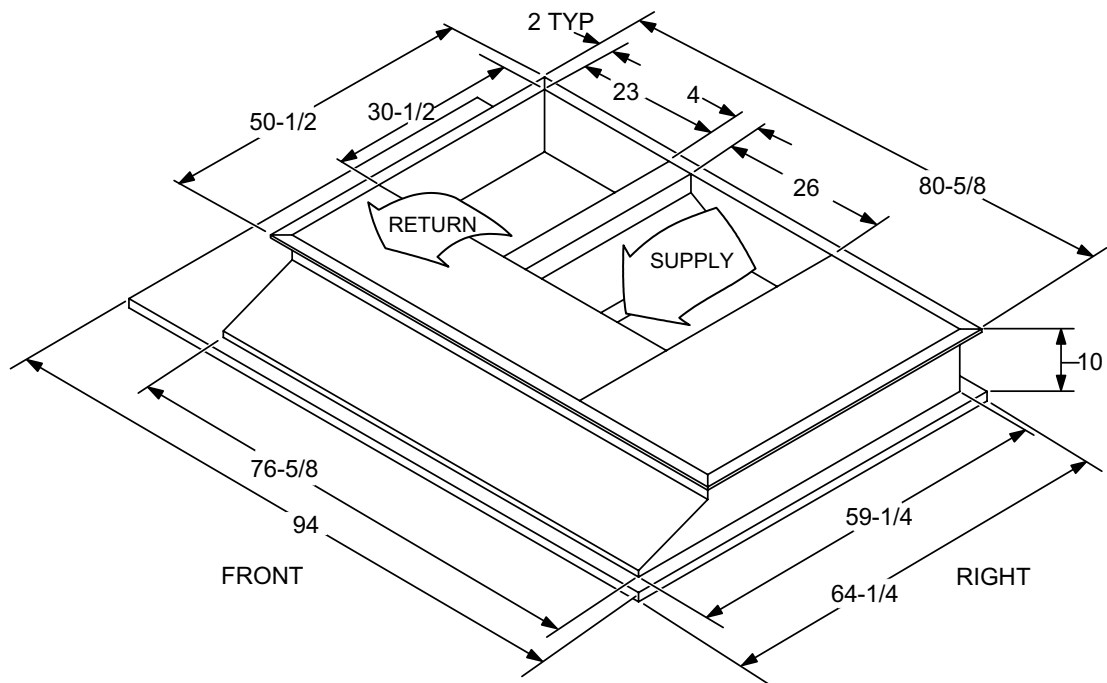

**FIGURE 7 : SUNLINE™ TO PREDATOR™ MAGNUM TRANSITION ROOF CURBS**

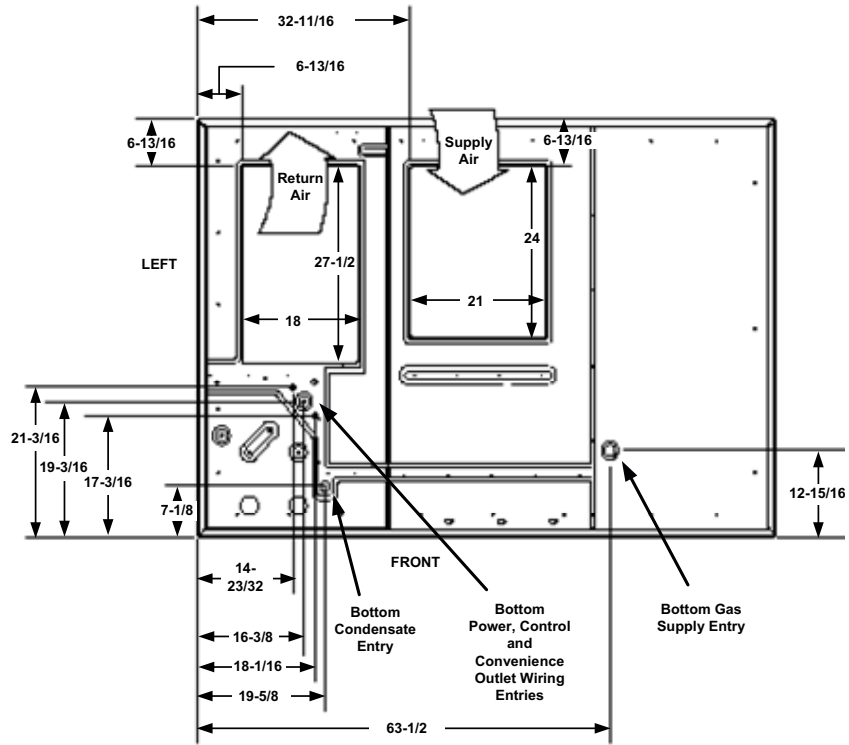


FIGURE 8 : BOTTOM DUCT OPENINGS (FROM ABOVE)


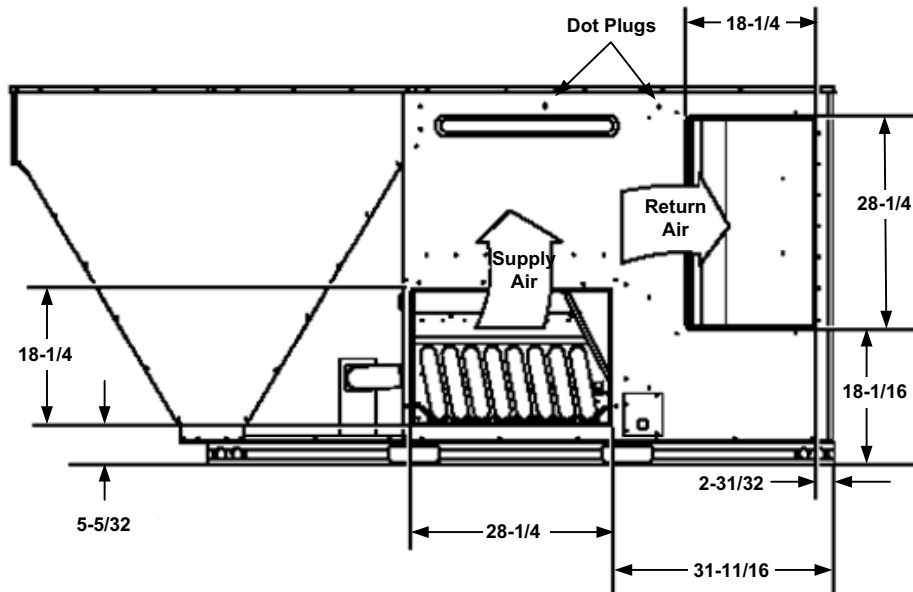


FIGURE 9 : SIDEFLOW DUCT DIMENSIONS

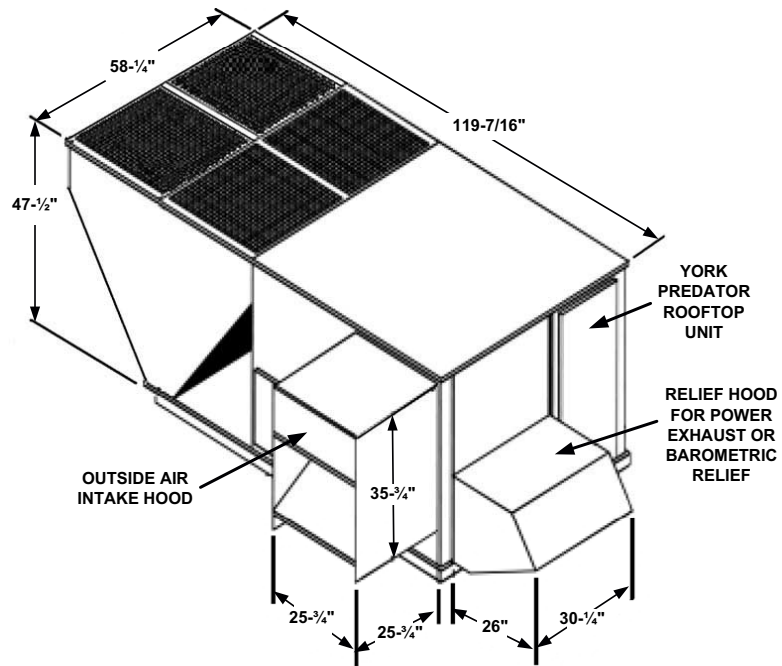

**FIGURE 10 : DOWNFLOW ECONOMIZER HOOD DETAIL**

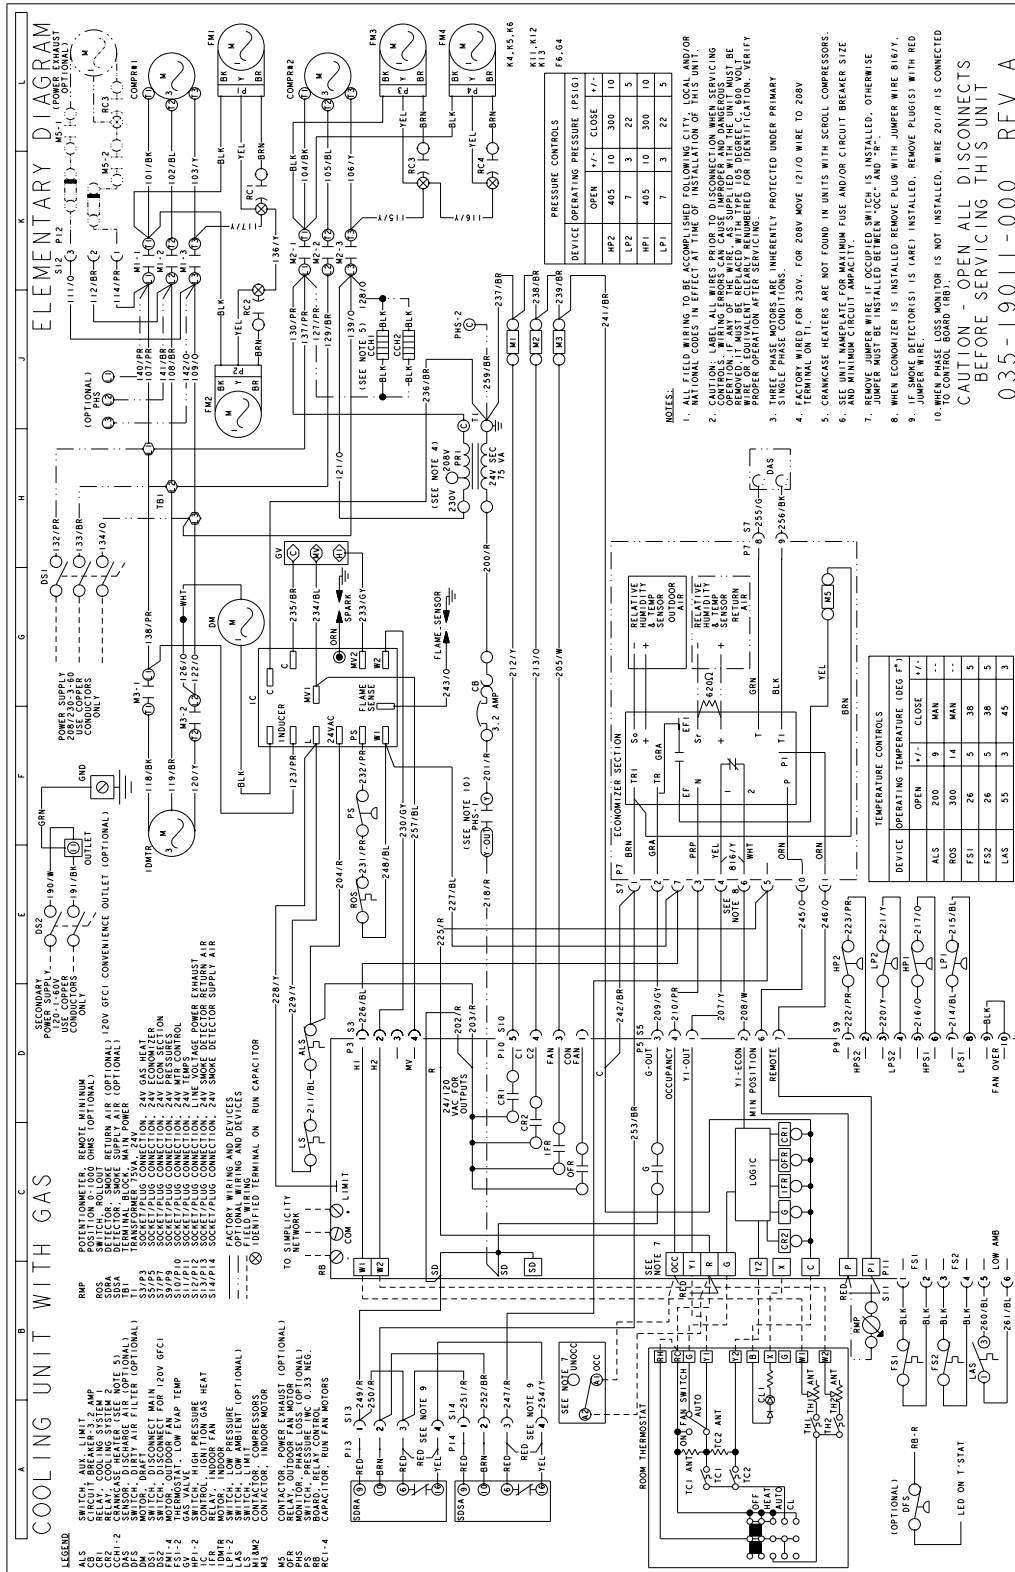


FIGURE 11 : COOLING UNIT WITH GAS HEAT WIRING 230 V. DIAGRAM

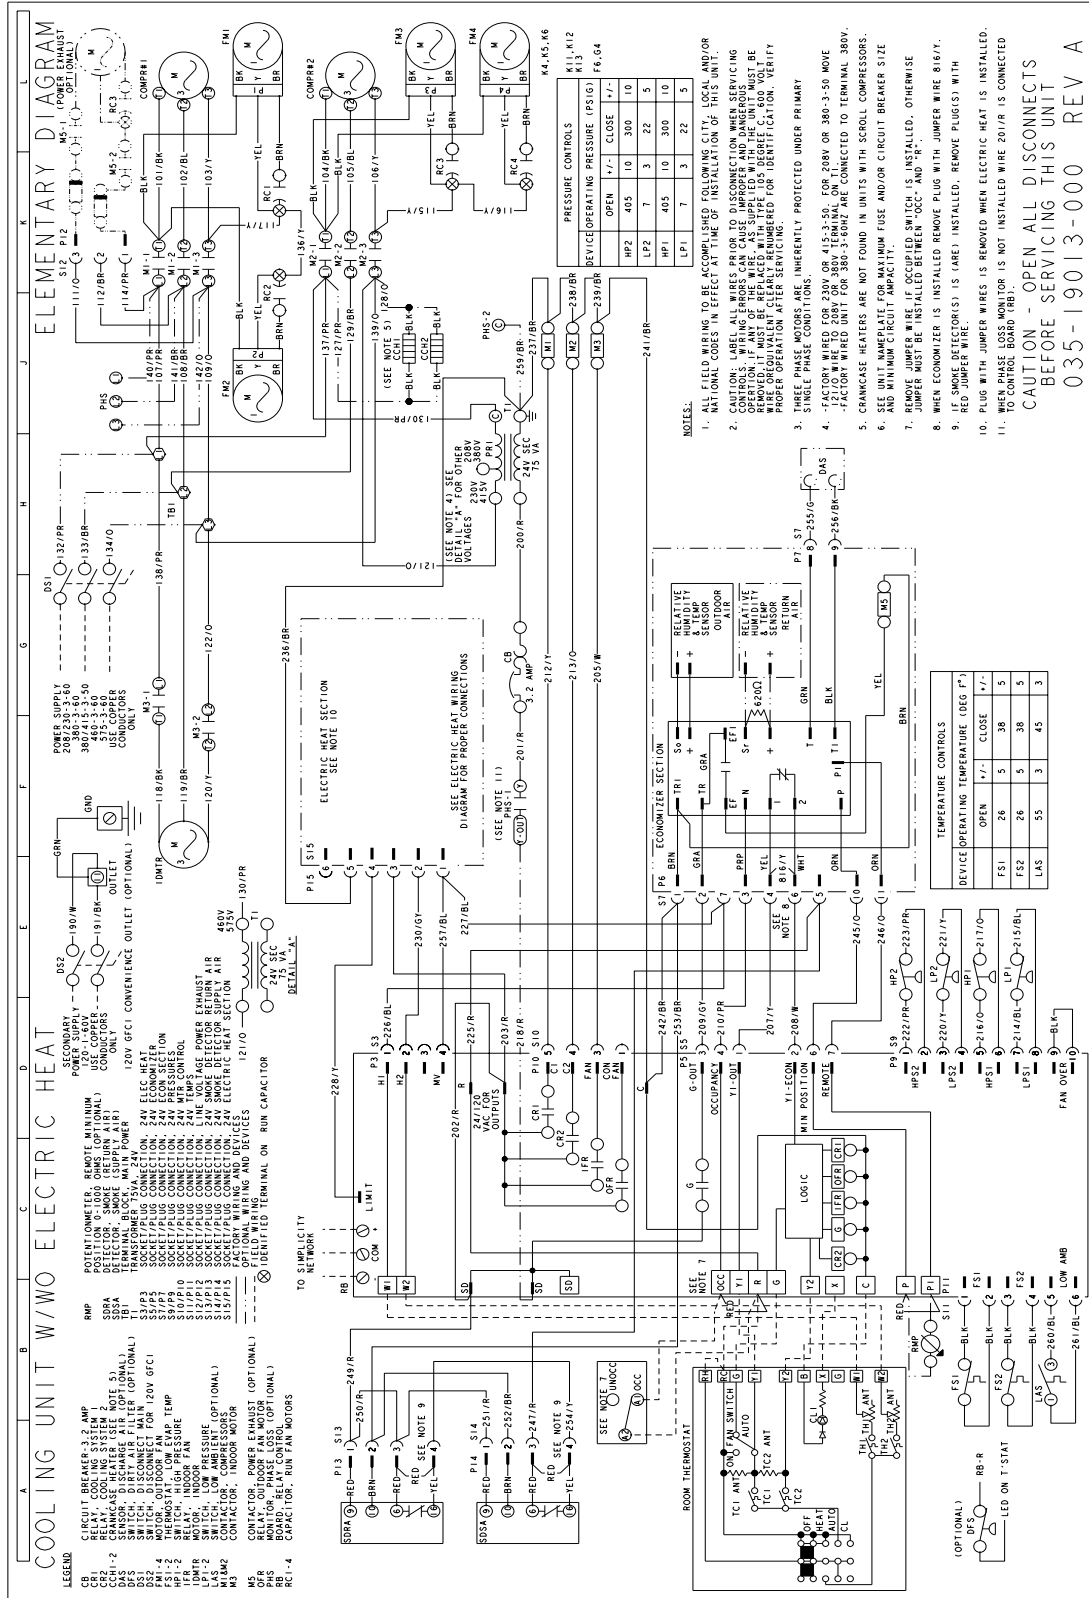


FIGURE 12 : COOLING UNIT W/WO ELECTRIC HEAT WIRING DIAGRAM

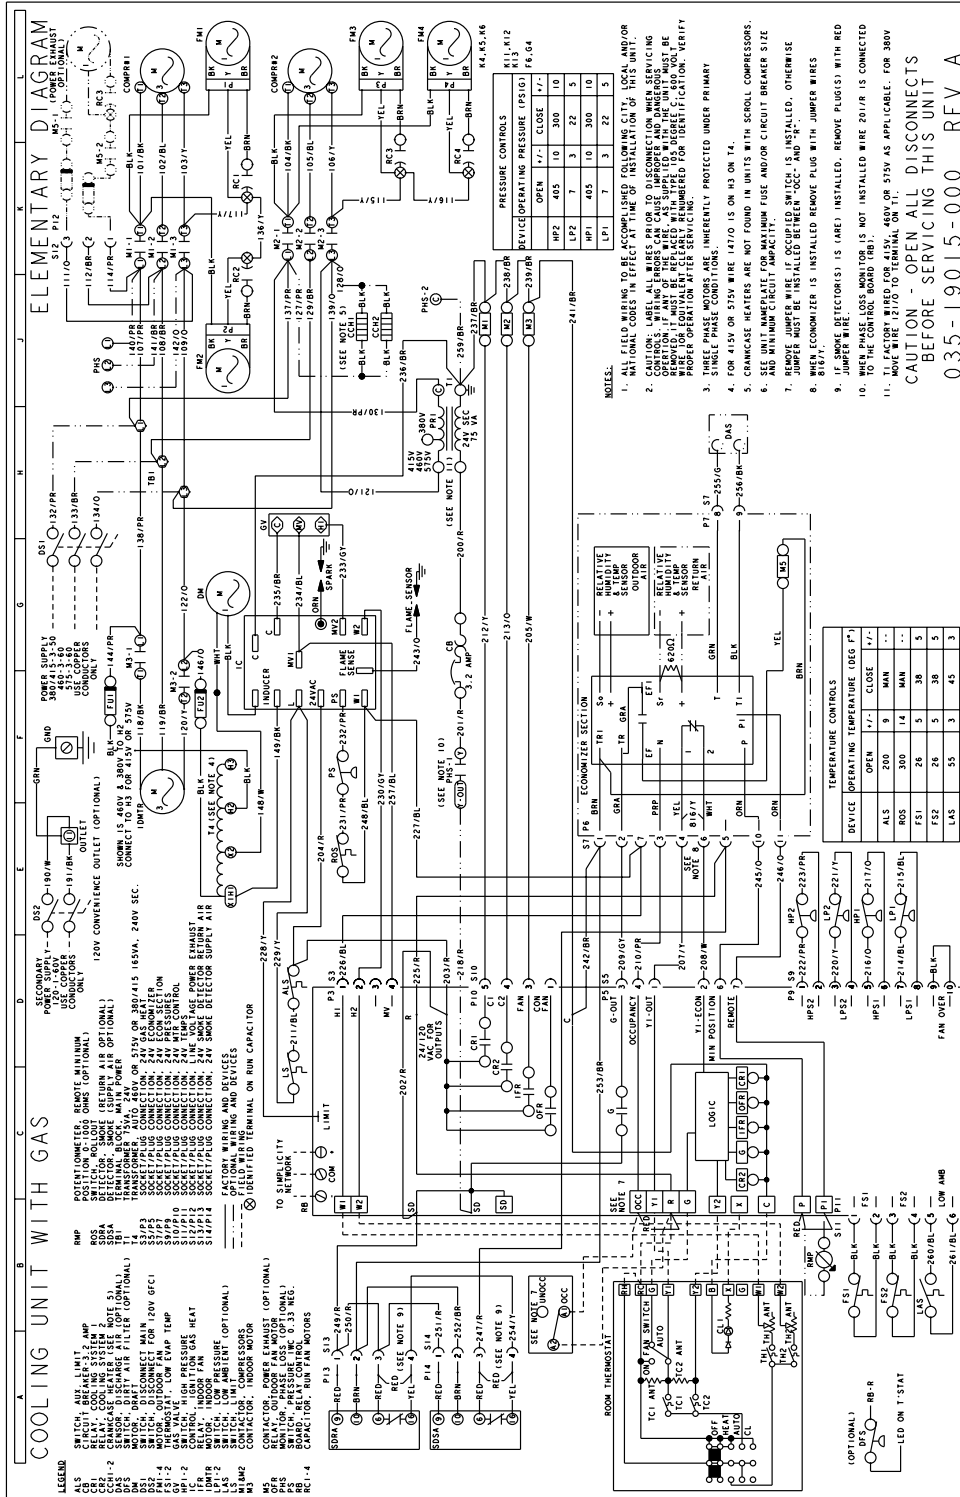


FIGURE 13 : COOLING UNIT WITH GAS HEAT WIRING 460, 575 & 50 HZ DIAGRAM



## MECHANICAL SPECIFICATIONS

### SINGLE PACKAGE AIR COOLED GAS/ELECTRIC UNITS FOR 12.5 NOMINAL TONS PREDATOR™ MAGNUM - DJ 150 10.8 EER

#### GENERAL

Units shall be manufactured by York International Unitary Products Group in an ISO 9001 certified facility. YORK® Predator™/Magnum units are convertible single packages with a common footprint cabinet and common roof curb for all 12-1/2 ton models. All units have two compressors with independent refrigeration circuits to provide 2 stages of cooling. The units were designed for light commercial applications and can be easily installed on a roof curb, slab, or frame. All Predator™ units are self-contained and assembled on rigid full perimeter base rails allowing for 3-way forklift access and overhead rigging. Every unit is completely charged, wired, piped, and tested at the factory to provide a quick and easy field installation. All units are convertible between side and down airflow. Independent Predator™/Magnum Economizer designs are used on side and down discharge applications, as well as all tonnage sizes. Predator™/Magnum units are available in the following configurations: cooling only, cooling with electric heat, and cooling with gas heat. Electric heaters are available as field-installed accessories.

#### DESCRIPTION

Units shall be factory assembled, single package, (Elec/Elec, Gas/Elec), designed for outdoor installation. Units shall have a minimum EER of 10.8. They shall have built in field convertible duct connections for down discharge supply/return or horizontal discharge supply/return and be available with factory installed options or field installed accessories. The units shall be factory wired, piped and charged with R-22 refrigerant and factory tested prior to shipment. All unit wiring shall be both numbered and color coded. The cooling performance shall be rated in accordance with DOE and ARI test procedures. Units shall be CSA certified to ANSI Z21.47 and UL 1995/CAN/CSA No. 236-M90 standards.

#### UNIT CABINET

Unit cabinet shall be constructed of G90 galvanized steel with exterior surfaces coated with a non-chalking, powder paint finish, certified at 750 hours salt spray test per ASTM-B117 standards. Indoor blower sections shall be insulated with 1/2" thick insulation coated on the airside. Aluminum foil faced insulation shall be used in the unit's compartments and be fastened to prevent insulation from entering the air stream. Cabinet doors shall be hinged with tool-less access for easy servicing and maintenance. Full perimeter base rails shall be provided to assure reliable transit of equipment, overhead rigging, fork truck access and proper sealing on roof curb applications. Disposable 2" filters shall be furnished and be accessible through hinged access door. Fan

performance measuring ports shall be provided on the outside of the cabinet to allow accurate air measurements of evaporator fan performance without removing panels or creating bypass of the coils. Condensate pan shall be slide out design, constructed of a non corrosive material, internally sloped and conforming to ASHRAE 62-B9 standards. Condensate connection shall be a minimum of 3/4" I.D. female and be rigid mount connection.

#### INDOOR (EVAPORATOR) FAN ASSEMBLY

Fan shall be a belt drive assembly and include an adjustable pitch motor pulley. Job site selected brake horsepower shall not exceed the motors nameplate horsepower rating plus the service factor. Units shall be designed to operate within the service factor. Fan wheel shall be double inlet type with forward curve blades, dynamically balanced to operate smoothly throughout the entire range of operation. Airflow design shall be constant volume. Bearings shall be sealed and permanently lubricated for longer life and no maintenance. Entire blower assembly and motor shall be slide out design.

#### OUTDOOR (CONDENSER ) FAN ASSEMBLY

The outdoor fans shall be of the direct drive type, discharge air vertically, have aluminum blades riveted to corrosion resistant steel spider brackets and shall be dynamically balanced for smooth operation. The outdoor fan motors shall have permanently lubricated bearings internally protected against overload conditions and staged independently. A cleaning window shall be provided on two sides of the units for coil cleaning.

#### REFRIGERANT COMPONENTS

Compressors: A. shall be scroll type, direct drive, internally protected with internal high-pressure relief and over temperature protection. The hermetic motor shall be suction gas cooled and have a voltage range of + or - 10% of the unit nameplate voltage. B. Shall have internal spring isolation and sound muffling to minimize vibration and noise, and be externally isolated on a dedicated, independent mounting.

Coils: A. evaporator and condenser coils shall have aluminum plate fins mechanically bonded to seamless internally enhanced copper tubes with all joints brazed. Special Phenolic coating shall be available as a factory option. B. Evaporator and condenser coils shall be of the direct expansion, draw-thru design.

Refrigerant Circuit and Refrigerant Safety Components shall include: A. Independent fixed-orifice or thermally operated expansion devices. B. Solid core filter drier/strainer to elimi-

nate any moisture or foreign matter. C. Accessible service gage connections on both suction and discharge lines to charge, evacuate, and measure refrigerant pressure during any necessary servicing or troubleshooting, without losing charge. D. The unit shall have two independent refrigerant circuits, equally split in 50% capacity increments.

Unit Controls: A. unit shall be complete with self-contained low-voltage control circuit protected by a resettable circuit breaker on the 24-volt transformer side. B. Unit shall incorporate a lockout circuit which provides reset capability at the space thermostat or base unit, should any of the following standard safety devices trip and shut off compressor: (1) loss-of-charge/Low-pressure switch, (2) high-pressure switch, (3) freeze-protection thermostat, evaporator coil. C. If any of the above safety devices trip, a LED (light-emitting diode) indicator shall flash a diagnostic code that indicates which safety switch has tripped. D. Unit shall incorporate "AUTO RESET" compressor over temperature, over current protection. E. Unit shall operate with conventional thermostat designs and have a low voltage terminal strip for easy hook-up. F. Unit control board shall have on-board diagnostics and fault code display. G. Standard controls shall include anti-short cycle and low voltage protection, and permit cooling operation down to 0 °F. H. Control board shall monitor each refrigerant safety switch independently. I. Control board shall retain last 5 fault codes in non volatile memory, which will not be lost in the event of a power loss.

### **GAS HEATING SECTION (IF EQUIPPED)**

Heat exchanger and exhaust system shall be constructed of aluminized steel or optional stainless steel. Shall be designed with induced draft combustion with post purge logic, energy saving direct spark ignition, and redundant main gas valve. The heat exchanger shall be of the tubular type, constructed of T1-40 aluminized steel (or optional 304 stainless steel) for corrosion resistance and allowing minimum mixed air entering temperature of 40 °F. Burners shall be of the in-shot type, constructed of aluminum-coated steel. All gas piping shall enter the unit cabinet at a single location, through either the side or bottom, without any field modifications. An integrated control board shall provide timed control of evaporator fan functioning and burner ignition. Heating section shall be provided with the following minimum protection: A. Primary and auxiliary high-temperature limit switches. B. Induced draft pressure sensor. C. Flame roll out switch (manual reset). D. Flame proving controls. Unit shall have two independent stages of capacity (60% 1<sup>st</sup> stage, 100% 2<sup>nd</sup> stage).

### **ELECTRIC HEATING SECTION (IF REQUIRED)**

An electric heating section, with nickel chromium elements, shall be provided in a range of 9 thru 54 KW, offering two stages of capacity all sizes. The heating section shall have a primary limit control(s) (automatic reset) to prevent the heating element system from operating at an excessive temperature. The Heating Section assembly shall slide out of the unit for easy maintenance and service. Units with Electric Heating Sections shall be wired for a single point power supply with branch circuit fusing (where required).

### **UNIT OPERATING CHARACTERISTICS**

Unit shall be capable of starting and running at 125 °F outdoor temperature, exceeding maximum load criteria of ARI Standard 210/240. The compressor, with standard controls, shall be capable of operation down to 0 °F outdoor temperature. Unit shall be provided with fan time delay to prevent cold air delivery before heat exchanger warms up. (Gas heat only).

### **ELECTRICAL REQUIREMENTS**

All unit power wiring shall enter unit cabinet at a single factory provided location and be capable of side or bottom entry to minimize roof penetrations and avoid unit field modifications. Separate side and bottom openings shall be provided for the control wiring.

### **STANDARD LIMITED WARRANTIES**

Compressor – 5 Years, Heat Exchanger – 10 Years, Elect. Heat Elem. – 5 Years, Parts – 1 Year

### **FACTORY INSTALLED OPTIONAL OUTDOOR AIR (Shall be made available by either/or):**

1. **ELECTRONIC ENTHALPY AUTOMATIC ECONOMIZER** – Outdoor and return air dampers that are interlocked and positioned by a fully-modulating, spring-return damper actuator. The maximum leakage rate for the outdoor air intake dampers shall not exceed 2% when dampers are fully closed and operating against a pressure differential of 0.5 IWG. A unit-mounted potentiometer shall be provided to adjust the outdoor and return air damper assembly to take in outdoor air to meet the minimum ventilation requirement of the conditioned space during normal operation. During economizer operation, a mixed-air temperature control shall modulate the outdoor and return air damper assembly to prevent the supply air temperature from dropping below 55 °F. Changeover from compressor to economizer operation shall be provided by an integral electronic enthalpy control that feeds input into the basic module. The outdoor intake opening shall be covered with a rain hood that matches the exterior of the unit. Water eliminator/filters shall be provided. Simultaneous economizer/compressor operation is also possible. Dampers shall fully close on power loss. Available with barometric relief or power exhaust.
2. **MOTORIZED OUTDOOR AIR DAMPERS** – Outdoor and return air dampers that are interlocked and positioned by a 2-position, spring-return damper actuator. The maximum leakage rate for the outdoor air intake dampers shall not exceed 2% when dampers are fully closed and operating against a pressure differential of 0.5 IWG. A unit-mounted potentiometer shall be provided to adjust the outdoor and return air damper assembly to take in

the design CFM of outdoor air to meet the ventilation requirements of the conditioned space during normal operation. Whenever the indoor fan motor is energized, the dampers open up to one of two pre-selected positions – regardless of the outdoor air enthalpy. Dampers return to the fully closed position when the indoor fan motor is de-energized. Dampers shall fully close on power loss.

#### **ADDITIONAL FACTORY INSTALLED OPTIONS**

**ALTERNATE INDOOR BLOWER MOTOR** – For applications with high restrictions, units are available with optional indoor blower motors that provide higher static output and/or higher airflow.

**CONVENIENCE OUTLET** – Unit can be provided with an optional 120VAC GFCI outlet with cover on the corner of the unit housing the compressors.

**DIRTY FILTER SWITCH** – This kit includes a differential pressure switch that energizes the fault light on the unit thermostat, indicating that there is an abnormally high-pressure drop across the filters.

**BREAKER**– A HACR breaker can be factory installed on the gas heat unit.

**DISCONNECT SWITCH**- A disconnect can be factory installed on a cooling only unit.

**STAINLESS STEEL HEAT EXCHANGER** – For applications in a corrosive environment, this option provides a full stainless steel heat exchanger assembly.

**SMOKE DETECTOR** – A smoke detector can be factory mounted and wired in the supply and/or return air compartments.

#### **OTHER PRE-ENGINEERED ACCESSORIES AVAILABLE**

**ROOF CURB** - 14” and 8” high, full perimeter knockdown curb, with hinged design for quick assembly.

**BAROMETRIC RELIEF DAMPER** – (Unit mounted – Downflow, Ducted Mounted – Sideflow) – Contains a rain hood, air inlet screen, exhaust damper and mounting hardware. Used to relieve internal air pressure through the unit during economizer operation.

**PROPANE CONVERSION KIT** – Contains new orifices and gas valve springs to convert from natural to L.P. gas.

**-60 °F GAS HEAT KIT** – Provides an electric heat kit for the gas compartment for use in extreme low ambient conditions.

**ECONOMIZER** (Downflow and Sideflow)

**POWER EXHAUST** – (Unit mount – Downflow, Duct mount – Sideflow)

Subject to change without notice. Printed in U.S.A.  
Copyright © by Unitary Products 2003. All rights reserved.

036-21484-001-B-0103  
Supersedes: 036-21484-001-A-0902

---

**Unitary  
Products  
Group**

**5005  
York  
Drive**

**Norman  
OK  
73069**