








Electro-Voice®
TELEX/EVI Audio
600 Cecil Street
Buchanan, Michigan 49107
Phone: 616-695-6831
FAX: 616-695-4743

SERVICE DATA

T351 (1121-2763)

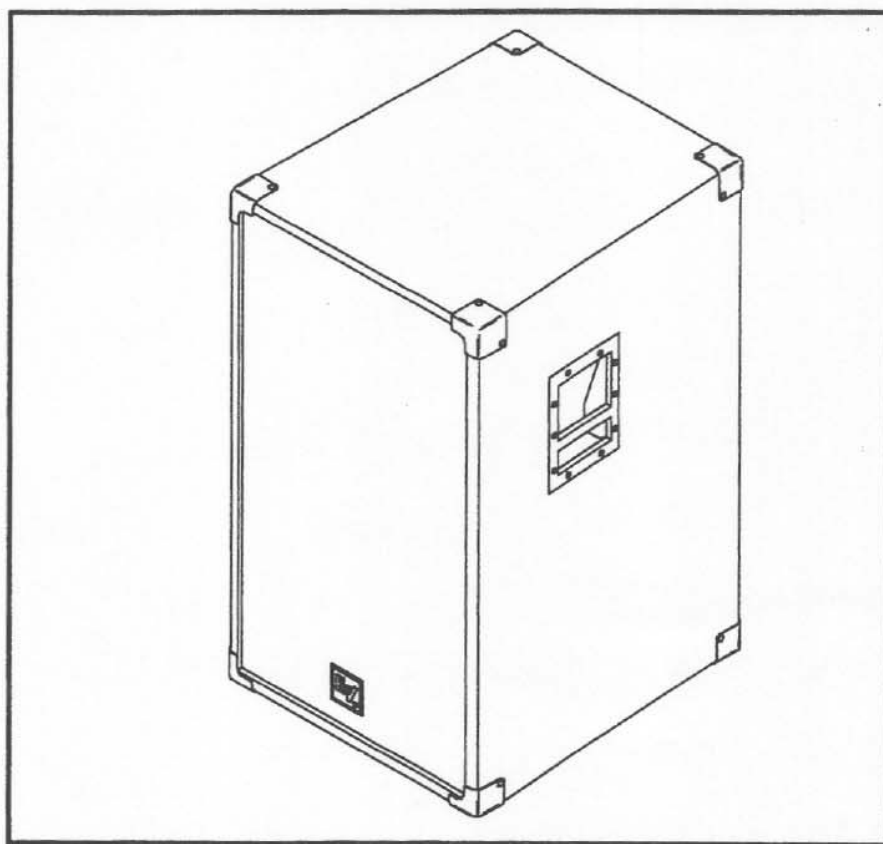

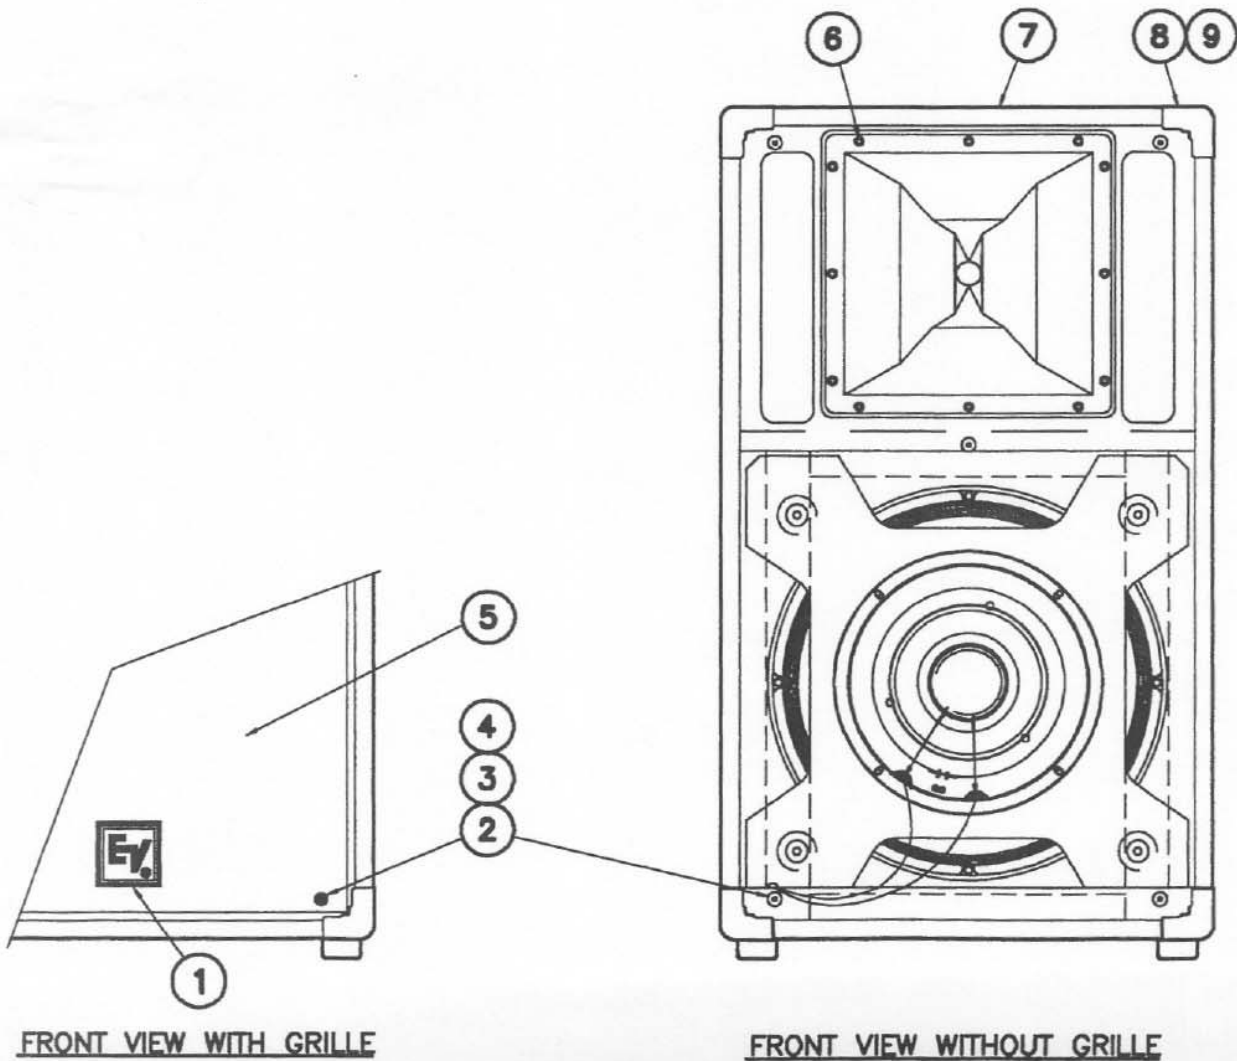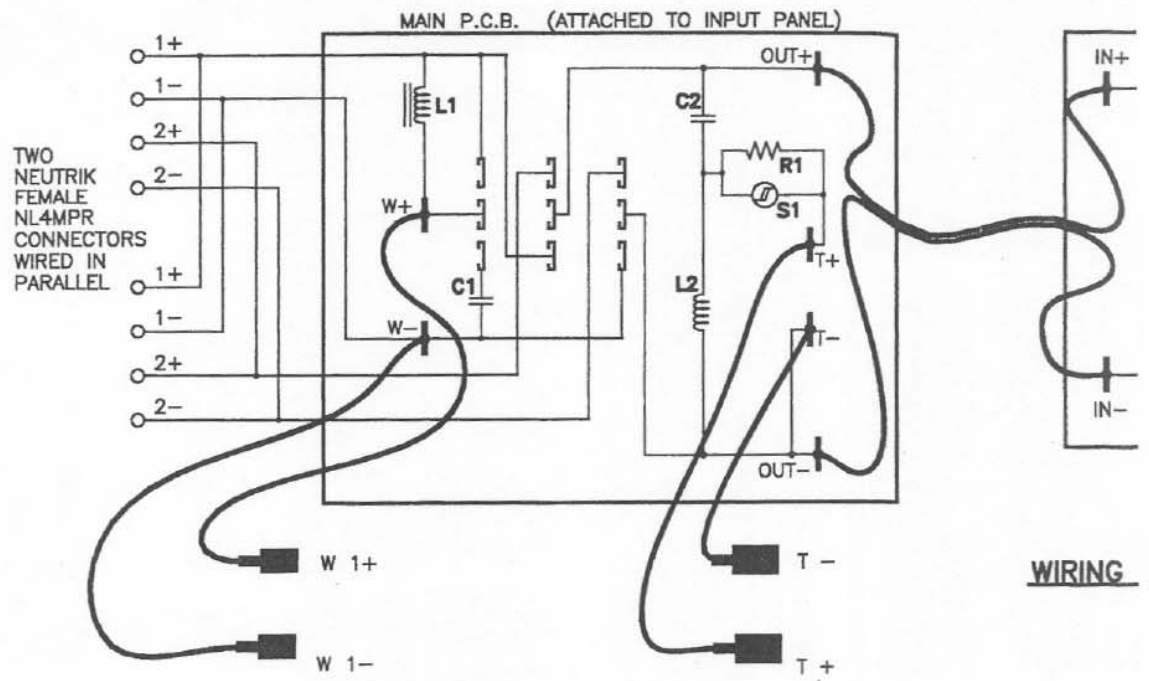

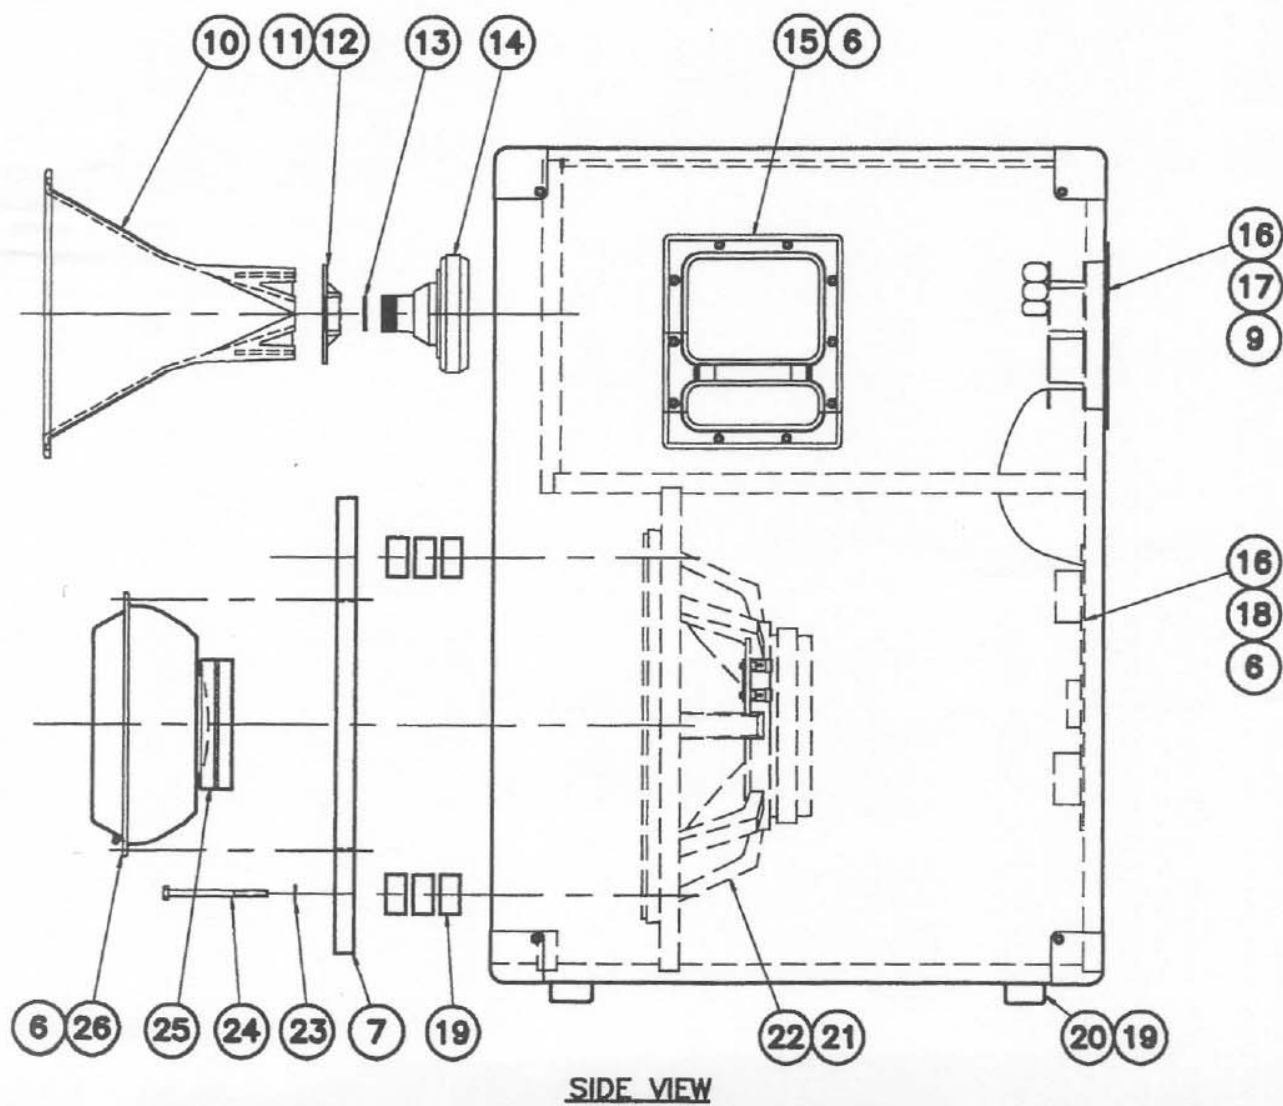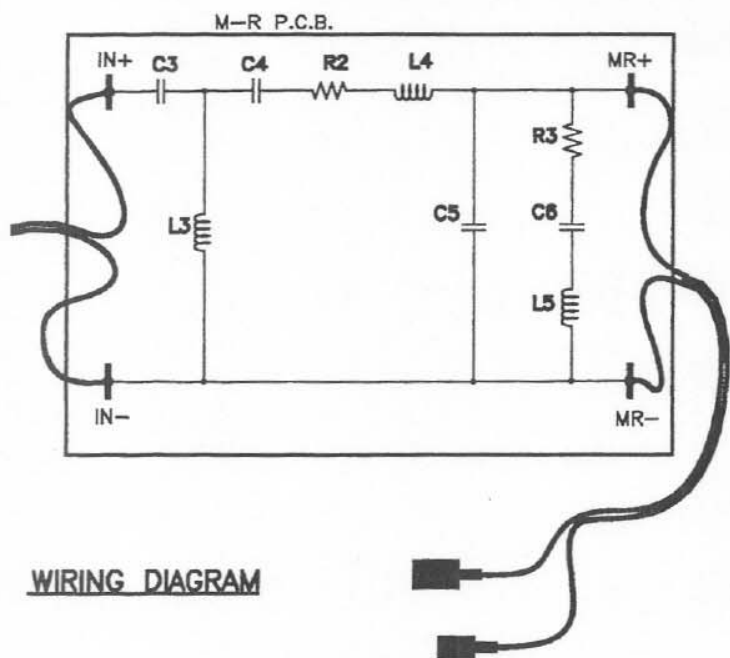

PARTS LIST			
QUANTITIES SHOWN ARE FOR ONE COMPLETE UNIT			
ITEM	PART NO.	QTY.	DESCRIPTION
1	49040	1	NAMEPLATE, EV LOGO, 2 1/2 SQ, WHITE
2	63272 CP	5	SCR, #8 x 2 1/4, FLT HD, XREC, WOOD, BLK
3	38768	5	WASHER, #8 C'SUNK, FINISHING, BLK NYLON
4	20543	5	SPACER, STAND-OFF, BLK
5	73144	1	GRILLE, T351
6	62978 CP	45	SCR, #10-16 x 1", OVL HD, XREC, STL, BLK ZINC
7	83822	1	ENCLOSURE S/A
8	20349	8	GUARD, CORNER, STL
9	63075 CP	24	SCR, #8-15 x 3/4, OVL HD, XREC, TYPE A, STL
10	73155	1	HORN, HP64M, INJ MOLDED, 60 x 40
11	20548 A	1	FLANGE, DRIVER MOUNTING
12	63282 CP	2	SCR, #10-16 x 2, PAN HD, PHLPS, HI-LO
13	38701	1	GASKET, 1.3 x .94 x 1/16T, VELUTEX
14	833-0990	1	DRIVER
15	20559	2	HANDLE, LAFRANCE, AMP SIDE SET
16	83883	1	CROSSOVER S/A, T351
17	533396	1	LABEL, INSTRUCTION, T351
18	28322	2	TAPE, FOAM, CLOSED CELL, .50 x .079 THK. x 11 IN.
19	28261	16	FEET, RUBBER, 1.5 D x .75, LVEL 79-RW
20	63035 CP	4	SCR, #10-16 x 1", PAN HD, XREC
21	815-2810	1	WOOFER, DL15-XT
22	63179 CP	4	SCR, 1/4-20 x 1 1/4, HEX SKT HD, CAP
23	38843 CP	4	WASHER, 9/16 OD x 5/32 ID x 1/16 THK, FLT
24	63342 DB	4	SCR, 1/4-20 x 3 3/4, HEX SKT HD CAP, GRD 8, STL, BLK
25	70259	2	BATTING, FIBERGLAS, 5" DIA. x 1/2 THK.
26	1803-2737	1	MIDRANGE, VENTED, NGM
CROSSOVER ITEM NO'S		QTY.	DESCRIPTION
C1	83883-C1	1	50 uF ±10% 150 VOLT (MIN.), 4.0 AMP, POLYESTER
C2	83883-C2	1	1.0 uF ±5% 200 VOLT (MIN.), 3.0 AMP, POLYPROPYLENE
C3	83883-C3	1	20 uF ±10% 200 VOLT (MIN.), 3.0 AMP, POLYESTER
C4	83883-C4	1	24 uF ±10% 200 VOLT (MIN.), 3.0 AMP, POLYESTER
C5	83883-C5	1	9 uF ±10% 200 VOLT (MIN.), 3.0 AMP, POLYESTER
C6	83883-C6	1	84 uF ±10% 200 VOLT (MIN.), 3.0 AMP, BIPOLAR ELECTROLYTIC
L1	83883-L1	1	6 mh ±5% DCR < 0.4 OHMS, IRON CORE 16 GA.
L2	83883-L2	1	0.5 mh ±5% DCR < 0.90 OHMS, AIR CORE
L3	83883-L3	1	3.25 mh ±5% DCR < 0.9 OHMS, AIR CORE
L4	83883-L4	1	1.6 mh ±5% DCR < 0.90 OHMS, AIR CORE
L5	83883-L5	1	3.25 mh ±5% DCR < 0.90 OHMS, AIR CORE
R1	46815	1	10 OHM, 20 WATT, 10%, SPACED OFF P.C. BOARD .25" MIN.
R2	83883-R2	1	5 OHM, 100 WATT, 10%, SPACED OFF P.C. BOARD .25" MIN.
R3	83883-R3	1	8 OHM, 20 WATT, 10%, SPACED OFF P.C. BOARD .25" MIN.
S1	56232	1	RAYCHEM RXE050
		1	