

 **FUJIFILM**
OFFICIAL IMAGING SPONSOR



digital
Tools for the imagination.

**2.0 MEGA
PIXELS**
3× ZOOM

New

DIGITAL CAMERA
FinePix 2600 Zoom



*The Perfect Match for
Your Lifestyle!*

FinePix

Hot Performance with a Cool Easy-to-Use Design!

The FinePix 2600 Zoom is a sleek, easy to use, high-performance, affordable digital camera designed to let you 'point-and-shoot'. Its small size makes it a perfect fit for your pocket and the palm of your hand. Since it is ready to shoot right after switching on the camera, you won't miss out on any chances. Its 2.0-megapixel CCD, precision 3X optical zoom lens and multitude of functions capture your special moments.



Fine mode, 1600 x 1200 pixels, 1/350 sec, f/3.4, ISO 100 equivalent

2.0-megapixel CCD

With its 2.0 million square pixels*, the 1/2.7-inch CCD delivers high resolution (1600 x 1200 pixels) for sharper and more lifelike images. The CCD offers a high S/N ratio that makes subjects look smooth and natural.

* Total number of pixels: 2.11 million pixels

High-performance Zooming



The FinePix 2600 Zoom sports a high-performance Fujinon optical zoom lens that delivers the equivalent of a 38 – 114mm range on a 35mm camera.

Its precise auto-focus system assures sharp, focused images in an instant. The FinePix 2600 Zoom also offers digital zoom enlarging up to 2.5X (in 640 x 480 pixel mode). Combined with the 3X optical zoom, this gives a total magnification effect of 7.5X, making it easier to take the shots you want with the detail you need.

Easy to Use



The FinePix 2600 Zoom comes with two AA Ni-MH batteries, a battery charger and a 16MB SmartMedia™ card so you can start taking pictures right away.

This camera makes it easy to take great-looking pictures simply by pressing the shutter button. Fully automatic operation controls all parameters for shooting quality pictures; the auto focus function provides sharp images, auto exposure automatically selects the optimum aperture and shutter speeds, intelligent auto white balance detects the type of lighting and adjusts accordingly, while full flash modes are provided including red-eye reduction. For extremely close-up shots, the Macro Mode lets you move in as close as 10cm.

Video Clip Capability



The FinePix 2600 Zoom has a movie recording feature*. Now you can capture all the fun in up to 20 seconds of video.

* Without sound

Wide



38mm

Wide-angle setting
(1600 x 1200 pixels)

Actual Size



DIGITAL CAMERA
FinePix 2600 Zoom

3X Zoom



114mm

3X optical zoom setting
(1600 x 1200 pixels)

Digital Zoom



285mm

Digital 2.5X Zoom Mode with
3X optical zoom setting
(640 x 480 pixels)



Enjoyable Playback Function



Simulated LCD display image

The FinePix 2600 Zoom's 1.8-inch color LCD makes picture-taking easier and more enjoyable, allowing you to view pictures or movies immediately after taking them. The FinePix 2600 Zoom offers some impressive image playback options; in addition to Single Frame Playback, the 5X Zoom Playback brings out fine details and the Multi-Frame Playback displays nine different images simultaneously on the screen.

Easy Connection with PCs



The USB connection and the included FinePixViewer software make it easy to download picture or movie files to your PC for viewing the images. Connecting the camera to the PC causes the software to automatically start up. The FinePixViewer also lets you connect to Fujifilm's Internet services*, while the included "Picture-Hello**" utility software turns the FinePix 2600 Zoom into a Webcam.

* The contents of this service will differ depending on the country in which you live.
** Picture-Hello can be used between certain types of FinePix cameras with PC camera functions.



Simulated display image

Low Power Consumption

The FinePix 2600 Zoom utilizes two Ni-MH (Nickel Metal Hydride) AA batteries. Reflecting a thorough reassessment of power consumption efficiency, the FinePix 2600 Zoom is capable of taking a maximum of 300 shots in standard usage* or approx. 6,000 shots in succession** when the provided batteries are fully charged.

* When the LCD monitor is set to "Off", taking shots in 1M Normal mode at 30 second intervals, half of them with the flash set to "Off".

** When shooting successively for 3 hours in VGA mode with the LCD monitor and flash set to "Off".

Sample images in this brochure were taken with the FinePix 2600 Zoom. (Excepting product shots)

All focal distances shown above are 35mm camera equivalent.

FUNCTIONS



SPECIFICATIONS

DIGITAL CAMERA FinePix 2600 ZOOM

CCD sensor 1/2.7-inch square pixel CCD with RGB filter
(Total number of pixels: 2.11 million pixels)

Number of effective pixels 2.0 million pixels

Image file size 1600 × 1200 / 1280 × 960 / 640 × 480 pixels

File format Still image: JPEG (Exif Ver 2.1)
Movie: AVI (Motion JPEG)
* Design rule for Camera File system compliant/DPOF-compatible

Storage media SmartMedia™ Cards (3.3V, 2 – 128MB)

Number of images

Modes	Still (1600 × 1200 pixels)			Movie
	Fine	Normal	Basic	
Image quality modes				
MG-4S	4	9	19	23 sec.
MG-8S	10	19	39	47 sec.
MG-16S/SW	20	39	75	94 sec.
MG-32S/SW	41	79	152	191 sec.
MG-64S/SW	82	159	306	385 sec.
MG-128SW	166	319	613	774 sec.

The data sizes and numbers of available shots will vary slightly depending on the type of subject.
Fujinon optical 3X zoom lens (Equivalent to 38 – 114mm on a 35mm camera)

Lens Fujinon optical 3X zoom lens (Equivalent to 38 – 114mm on a 35mm camera)

Focal distance Normal: Approx. 0.8m/2.6ft. to infinity
Macro: Approx. 10cm/3.9in. to 0.8m/2.6ft.

Aperture F3.5/F8.7

Viewfinder Real-image optical viewfinder

Exposure control 64-zone TTL metering, Program AE
(Exposure compensation in the Manual mode)

Sensitivity Equivalent to ISO 100

Shutter speeds 1/2 to 1/1,000 sec. (combined with mechanical shutter)

White balance Automatic
Manual [Fine, Shade, Fluorescent light (Daylight), Fluorescent light (Warm white), Fluorescent light (Cool white), Incandescent light]

Flash Auto flash using flash control sensor
Flash mode: Auto, Red-eye Reduction, Forced Flash, Suppressed Flash, Slow Syncro
Effective range: Wide Approx. 0.2 – 3.0m/0.7 – 9.8ft
Telephoto Approx. 0.8 – 3.0m/2.6 – 9.8ft

LCD monitor 1.8-inch D-TFD (72,000 pixels)

Interface USB

Power source 2 AA-size Ni-MH rechargeable batteries
AC power adapter (optional)
(Alkaline batteries are not recommended.)

Dimensions 99.8 (W) × 65.0 (H) × 53.9 (D) mm/3.9 (W) × 2.6 (H) × 2.1 (D) in.

Weight Approx. 200g/ 7.0oz (excluding batteries)


Other Functions

Digital zoom 2.5X (640 × 480 mode), 1.25X (1280 × 960 mode)
Movie recording 320 × 240 pixels, 10 frames/sec, up to 20 sec, without sound
Playback Single Frame (with max. 5X Playback Zoom)/9 Multi-frame
Internet-conferencing Webcam function with "PictureHello"
Others POWER SAVE mode, Self-timer, DPOF

Accessories included
16MB SmartMedia™ card
2 AA-size Ni-MH batteries
Battery charger
Hand strap
USB cable
CD-ROM
• USB driver
• FinePixViewer
• DP Editor
• Apple QuickTime 4.0
• VideoImpression

Specifications are subject to change without notice.

SYSTEM CONFIGURATION

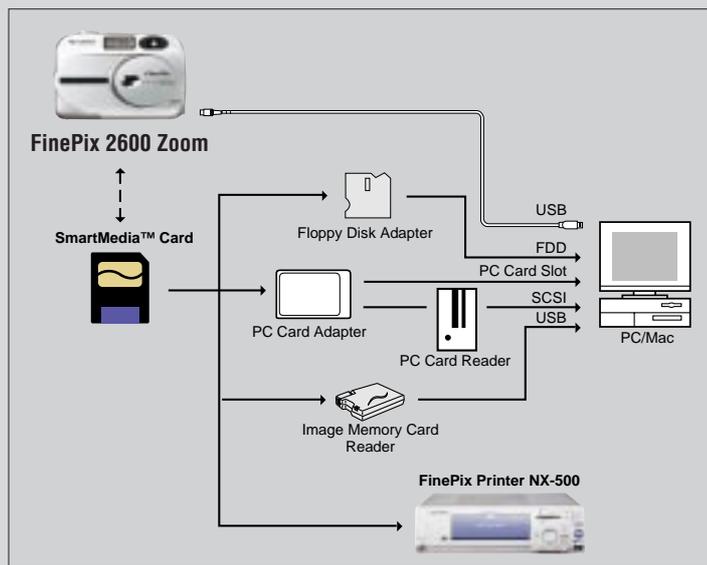

OPTIONAL ACCESSORIES



Image Memory Card
MG-4S
MG-8S
MG-16S/SW
MG-32S/SW
MG-64S/SW
MG-128SW



AC Power Adapter
AC-3V



Floppy Disk Adapter
FD-A2



Battery Charger with Battery
BK-NH
• Charged in approx. 2 hours,
• With Euro type or UK type plug



PC Card Adapter
PC-AD3



Rechargeable Battery
2HR-3UF
• 2 × AA-type Ni-MH



Image Memory Card Reader
SM-R2



Soft Case
SC-FX26

Apple is a registered trademark of Apple Computer Inc.
QuickTime is a trademark of Apple Computer Inc.
All other trademarks are the property of their respective holders.

For more information on the full range of Fujifilm digital products, please visit our Website: <http://www.fujifilm.co.uk>

FUJIFILM

FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME, MINATO-KU, TOKYO 106-8620, JAPAN

Ref. No. EB-111E (SK-00-08-DT-MW) Printed in Japan © 2000 Fuji Photo Film Co., Ltd.