

**LIMITED 90-DAY CONSUMER WARRANTY  
LIMITED TWO-YEAR CONSUMER WARRANTY WITH PURCHASE AND INSTALLATION BY A  
PRECISION POWER AUTHORIZED DEALER**

Precision Power promises to the original purchaser, to repair or replace this product with a new or refurbished unit (at Precision Power's sole and absolute discretion) should it prove to be defective in workmanship or material under normal use, for a period of **\*two-years** from the date of purchase from the Precision Power authorized dealer, **PROVIDED** the product was purchased and installed by a Precision Power authorized dealer. During this **\*two-year** period, there will be no charge for product repair or replacement, **PROVIDED** the unit is returned to Precision Power, return shipping pre-paid, along with the required proof of installation, the bill of sale or other dated proof of purchase, and the consumer's contact information.

If the unit is installed by anyone other than a Precision Power authorized dealer, the warranty period will be **90-days** from the date of purchase. This warranty is non-transferable and does not apply to any unit that has been modified or used in a manner contrary to its intended purpose, and does not cover damage to the unit caused by installation or removal of the unit. During this **90-day** period, there will be no charge for the repair or replacement **PROVIDED** the unit is returned to Precision Power, return shipping prepaid, along with the bill of sale or other dated proof of purchase and the consumer's contact information.

This warranty is void if the product has been damaged by accident or unreasonable use, neglect, improper service or other causes not arising out of defects in materials or construction. This warranty does not cover the elimination of externally generated static or noise, or the correction of antenna problems or weak reception, damage to speakers, accessories, electrical systems, cosmetic damage or damage due to negligence, misuse, failure to follow operating instructions, accidental spills or customer applied cleaners, damage due to environmental causes such as floods, airborne fallout, chemicals, salt, hail, lightning or extreme temperatures, damage due to accidents, road hazards, fire, theft, loss or vandalism, damage due to improper connection to equipment of another manufacturer, modification of existing equipment, or Product which has been opened or tampered for any reason. Units which are found to be damaged by abuse resulting in thermally damaged voice coils are not covered by this warranty but may be replaced at the absolute and sole discretion of Precision Power. Unit must be returned to Precision Power, postage pre-paid, with bill of sale or other dated proof of purchase bearing the following information: consumer's name, telephone number, and address, authorized dealer's name and address, and product description. **Please contact Precision Power warranty office at 800-724-1377 or repairs@precisionpower.com to obtain a Return Authorization number prior to shipping the product.**

Note: This warranty does not cover labor costs for the removal and reinstallation of the unit. **IN ORDER FOR THE TWO-YEAR WARRANTY TO BE VALID, YOUR UNIT MUST BE SHIPPED WITH PROOF OF INSTALLATION BY A PRECISION POWER AUTHORIZED DEALER. ALL UNITS RECEIVED BY PRECISION POWER FOR WARRANTY REPAIR WITHOUT PROOF OF PRECISION POWER AUTHORIZED DEALER INSTALLATION AND PURCHASE WILL BE COVERED BY THE LIMITED 1 YEAR WARRANTY.**

**BY PURCHASING THIS PRODUCT, ALL WARRANTIES INCLUDING BUT NOT LIMITED TO EXPRESS WARRANTY, IMPLIED WARRANTY, WARRANTY OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, AND WARRANTY OF NON-INFRINGEMENT OF INTELLECTUAL PROPERTY ARE EXPRESSLY EXCLUDED TO THE MAXIMUM EXTENT ALLOWED BY LAW, AND PRECISION POWER NEITHER ASSUMES NOR AUTHORIZES ANY PERSON TO ASSUME FOR IT ANY LIABILITY IN CONNECTION WITH THE SALE OF THE PRODUCT. PRECISION POWER HAS ABSOLUTELY NO LIABILITY FOR ANY AND ALL ACTS OF THIRD PARTIES INCLUDING ITS AUTHORIZED DEALERS OR INSTALLERS. BY PURCHASING THIS PRODUCT, THE CONSUMER AGREES AND CONSENTS THAT ALL DISPUTES BETWEEN THE CONSUMER AND PRECISION POWER SHALL BE RESOLVED IN ACCORDANCE WITH CALIFORNIA LAWS IN LOS ANGELES COUNTY, CALIFORNIA.** Some states do not allow limitation on how long an implied warranty lasts. In such states, the limitation or exclusions of this Limited Warranty may not apply. Some states do not allow the exclusion or limitation of incidental or consequential damages. In such states, the exclusion or limitation of this Limited Warranty may not apply to you. This Limited Warranty gives you specific legal rights, and you may have other rights which vary from state to state.

# PrecisionPower®

## Absolutely State of the Art Mobile Audio™

## 2010 SEDONA SERIES COMPONENTS

### S2.65C


**You're smart enough to buy these Sedona Series Components,  
be smart enough to read this manual...**



# Contents

|  |    |
|--|----|
| Introduction.....                                | 3  |
| Practice Safe Sound!<br>What's In the Box        |    |
| Installation.....                                | 4  |
| Tools of the Trade<br>Speaker Mounting Locations |    |
| Door Mounting.....                               | 5  |
| Rear Deck Mounting<br>Installing the Mid-bass    |    |
| Installing the Mid-bass (cont.).....             | 6  |
| Surface Mounting the Tweeter.....                | 7  |
| Flush Mounting the Tweeter, Fixed Panel.....     | 8  |
| Flush Mounting the Tweeter, Removable.....       | 9  |
| Installing the Crossover.....                    | 10 |
| Crossover Wiring Diagram.....                    | 11 |
| Limited Consumer Warranty.....                   | 12 |

## SEDONA PASSIVE CROSSOVER (COVERS REMOVED) WIRING DIAGRAM

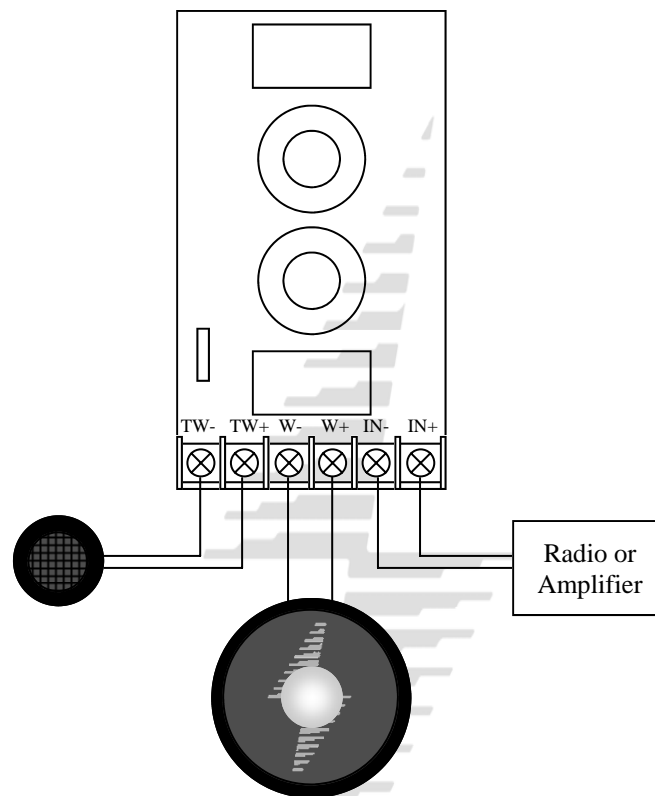

|                                  |                 |
|----------------------------------|-----------------|
| Nominal Impedance                | 4 Ohm           |
| Power Handling (continuous/peak) | 100w            |
| Frequency Response               | 70-20kHz        |
| Sensitivity (1w/1m)              | 92db            |
| Woofer Mounting Depth            | 2.25" (2 1/4")  |
| Woofer Mounting Diameter         | 5.625" (5 5/8") |
| Tweeter Mounting Depth           | .875" (7/8")    |

## INSTALLING THE CROSSOVER

**Step 1:** Find a location for the crossover away from any factory or aftermarket electrical wires. It is recommended to mount the passive crossover close to the amplifier.

**Step 2:** Remove top cover of crossover housing. Don't lose it.

**Step 3:** Mark the mounting holes with a marking pen.

**Step 4:** Remove crossover and pre-drill mounting holes using a 1/8" drill bit.

**WARNING: Window mechanisms, electrical wires, and other expensive car parts have a nasty habit of hiding where you least expect. CHECK BEFORE YOU DRILL!**

**Step 5:** Mount the crossover using the supplied #8 screws.

**Step 6:** There are two sets of connections on the crossover. The input terminals (IN) should be connected to the source (radio or amplifier). The woofer terminals (W) should be connected to the midrange speaker. The tweeter terminals (TW) should be connected to the tweeter. Be sure to observe the correct polarity. Changing the polarity of the tweeter may be necessary for optimum sound quality.

**Step 7:** Re-install the crossover cover.

## INTRODUCTION

Thank you for your purchase of this Sedona Series Component Loudspeaker System from PrecisionPower™. Our engineers have combined state of the art materials such as formed polypropylene cones and mylar dome tweeters with cutting edge industrial design to achieve competition-ready performance levels.

## PRACTICE SAFE SOUND!

Continuous exposure to sound pressure levels over 100dB may cause permanent hearing loss. High power automotive sound systems can generate sound pressure levels in excess of 130dB. When playing your system at high levels, please use hearing protection and prevent long term exposure.

## WHAT'S IN THE BOX

Your new Sedona Series component speaker kit includes all the necessary mounting hardware and cables for a basic installation:

| Quantity | Description                            |
|----------|--|
| 1        | Installation and Operation Manual      |
| 2        | Mylar Tweeters                         |
| 2        | Tweeter flush mount hardware kits      |
| 2        | Tweeter surface mount hardware kits    |
| 2        | Component woofers                      |
| 2        | Passive crossovers                     |
| 4        | Speaker cables (speakers to crossover) |
| 2        | Grilles                                |

## INSTALLATION

The performance of your new Precision**Power** Component Loudspeaker system is directly proportional to the quality of installation. Care taken during the installation process will be rewarded with years of satisfying performance. If you are unsure about your installation capabilities, please refer to your local Authorized Precision**Power** Dealer for technical assistance. If you decide to install the speaker system yourself, please read the entire owner's guide before beginning your installation.

## TOOLS OF THE TRADE

Listed below are tools you may wish to have on hand before starting your installation. Having the proper tools will make the installation much easier. Some of these tools are necessities, some will just make the job easier.

- Marking Pen
- Electric Drill
- 1/4" Drill Bit
- 1/8" Drill Bit
- 3/8" Drill Bit
- Hole Saw Arbor
- 4<sup>3</sup>/<sub>4</sub>" Hole Saw (5<sup>1</sup>/<sub>4</sub>" woofer install.)
- 5<sup>3</sup>/<sub>4</sub>" Hole Saw (6<sup>1</sup>/<sub>2</sub>" woofer install.)
- 1<sup>3</sup>/<sub>4</sub>" Hole Saw (for flush mount tweeter install.)
- Phillips Screwdriver
- Volt/Ohm Meter (Optional)
- Assorted Tin Snips
- Wire Cutters
- Wire Crimpers
- Wire Strippers
- Razor Knife (Optional)

## FINDING SPEAKER MOUNTING LOCATIONS

Choosing the correct speaker locations can have a significant effect on the sound quality of the system. There are many different considerations for choosing the locations that best suit your needs. The locations must be large enough for the speakers to fit without interfering with other vehicle parts such as window mechanisms, etc. Care is needed to ensure that the location you have chosen will not affect any of the mechanical or electrical operations of the vehicle. If minimal intrusion in your vehicle is desired, factory speaker locations may be the ticket for you. Placing the speaker in the factory location can often give you very desirable results. Alternative locations to consider include mounting in customized kick panels, rear decks, or side panels.

## FLUSH MOUNTING THE TWEETER FIXED PANELS

**Step 1:** Determine the tweeter mounting location, then route the wires from the crossover to the tweeter location.

**Step 2:** Mark the center point of the tweeter location.

**Step 3:** If using a hole saw, first drill a pilot hole, then cut out the hole using a standard 2-1/8" hole saw.

**Step 4:** If not using a hole saw, use either the cardboard packaging for the tweeters or the surface mount trim ring as a template to mark the proper size hole. Cut out the hole.

**Step 5:** Remove the tweeter from the flush mount housing and insert the proper length machine bolt through the center hole of the housing.

**Step 6:** Connect the speaker wires observing the correct polarity.

**Step 7:** Screw the bolts in until the tweeter housing is firmly mounted to the panel. (Make sure the arrow at the rear of the tweeter housing is pointing in the desired direction.)

**Step 8:** Insert the tweeter into the housing and attach trim ring.

## **FLUSH MOUNTING THE TWEETER REMOVABLE PANELS**

**Step 1:** Determine the tweeter mounting location, then route the wires from the crossover to the tweeter location.

**Step 2:** Mark the center point of the tweeter location.

**Step 3:** If using a hole saw, first drill a pilot hole, then cut out the hole using a standard 2-1/8" hole saw.

**Step 4:** If not using a hole saw, use either the cardboard packaging for the tweeters or the surface mount trim ring as a template to mark the proper size hole. Cut out the hole.

**Step 5:** With the tweeter assembled, route the wires through the hole and the pressure ring and slip the pressure ring over the tweeter assembly.

**Step 6:** Align the tweeter so the logo faces the desired direction then push the pressure ring on to the rear of the tweeter assembly until the tweeter is snugly mounted to the panel.

**Step 7:** Connect the speaker wires observing the correct polarity and re-assemble the panel.

## **DOOR MOUNTING**

When considering possible speaker locations in the doors, be sure to check the operation of the window mechanism and all other moving parts inside the door. Most vehicles use a stabilizer stop bar in between the door and the door jamb. This bar prevents the door from opening too far, but may intrude into the speaker mounting area when the door is closed. Many do-it-yourself installers overlook this and check for speaker clearance only when the door is fully open.

## **REAR DECK MOUNTING**

In rear deck installations, check the operation of the trunk suspension springs or tension bars. These tension bars can move when opening and closing the trunk and can exert a great deal of force against anything that obstructs their movement, such as a speaker basket or motor assembly. In addition, try to avoid locating the speakers too close to the back edge of the rear deck. Installing the rearmost screws may not be possible without the removal of the rear window.

## **INSTALLING THE MID-BASS**

**Step 1:** Determine where the speaker will be mounted. Make sure there is a flat area large enough for the speaker to fit properly. An uneven mounting surface can damage the driver and limit the bass performance of your Sedona Series component system.

**Step 2:** Check to make sure the mounting location you have chosen for the speaker will not interfere with the operation of the vehicle.

**Step 3:** Using the supplied template guide, mark the hole with a pen. [Skip this step if using correctly sized factory locations]

**Step 4:** [Skip this step if using correctly sized factory locations] Cut the hole for the speaker. A hole can be cut either with a pair of metal tin snips, an air or jig saw, or with a hole saw corresponding to the size of the woofer listed below.

- 5 5/8" Hole Saw (6½" woofer installation)

**WARNING: Window mechanisms and electrical wires and other expensive car parts have a nasty habit of hiding where you least expect. CHECK BEFORE YOU DRILL!**

**Step 5:** Run the speaker wire to the speakers. Make sure to keep wires away from sharp metal or other edges. When passing through metal, use a protective grommet.

**Step 6:** Turn the speaker backwards against the surface & mark the mounting holes with a pen.

**Step 7:** Pre-drill mounting holes using a 1/8" drill bit.

**WARNING: Window mechanisms and electrical wires and other expensive car parts have a nasty habit of hiding where you least expect. CHECK BEFORE YOU DRILL!**

**Step 8:** Pull the wire through the speaker opening and connect to the speaker. Be sure to observe proper midrange polarity during this process.

**Step 9:** To mount the speaker, the speaker is placed through the grille ring from the front. Place the speaker and the grille ring in the installation hole. Align the mounting screw holes and drive in the four mounting screws. Push the perforated metal grille back into the grille ring.

## **SURFACE MOUNTING THE TWEETER**

**Step 1:** Determine the tweeter mounting location, then route the wires from the crossover to the tweeter location.

**Step 2:** Place the surface mount housing against the panel and mark the two holes at the rear of the housing.

**Step 3:** Drill the smaller center hole using a 1/8" drill bit. This is the mounting screw hole.

**Step 4:** Drill the larger off-center hole using a 3/8" drill bit, insert a grommet and route the speaker wire from the crossover through the grommet.

**Step 5:** After removing the surface mount tweeter assembly trim ring, route the tweeter wires through the larger hole in the housing and connect to the speaker wires from the crossover.

**Step 6:** Insert the excess speaker wire into the hole and position the housing so the housing will not pinch the wires after final mounting.

**Step 7:** Attach the housing using the supplied screws of the correct length for a solid mount.

**Step 8:** Insert the tweeter into the housing and attach the trim ring.