

Philips
LCD widescreen monitor

19.1" wide

WXGA+

190CW7CS



Best value for money widescreen LCD monitor

Enjoy more with this big widescreen! Experience multiple viewing experiences on a single screen with the Philips 190CW7's fast response time and convenient dual DVI and VGA connectors - all in one easy-to-use, highly affordable package.

Outstanding front of screen performance

- Empowered for Windows Vista
- Big, wide screen: IM, write mail, watch videos on one screen
- 5ms fast response time
- WXGA+, wide format 1440 x 900 resolution for sharper display
- sRGB ensures colour matching between display and printouts

Green design

- For your safety: Aerospace composite fire retardant case
- Lead-free design safeguards our environment
- Power consumption below the industry average

Great convenience

- Dual input accepts both analogue VGA and digital DVI signals
- One-touch brightness and contrast controls
- Embedded power supply eliminates external power adaptors
- Auto adjustment for perfect picture display with one touch

PHILIPS

sense and simplicity

Highlights

Windows Vista ready

Philips Vista-ready monitors are empowered for vibrant, exciting display of this new, visually sophisticated and demanding Windows operating system, designed to enhance your entertainment experience, make you more productive and help you control your computing experience at home and in the office, making viewing, finding and organising information for work or play quick, efficient and easy.

Widescreen design

A wide screen has a wider aspect ratio for displaying more entertainment or information to have more fun and get more done.

5ms on/off response time


On-Off response time is the period required for a liquid crystal cell to go from active (black) to inactive (white) and back to active (black) again. It is measured in milliseconds. Faster is better: Lower response time means faster transitions and, therefore, results in fewer visible image artefacts in the display of transition of texts and graphics. On-Off response time is a more important measure in the display of business content like documents, graphs and photos.

WXGA+ 1440 x 900 resolution

WXGA+ or Wide Extended Graphics Array plus is a standard indicating a graphics monitor's ability to display up to the resolutions 1440 by 900 pixels and supports

simultaneous display of more than one million colours. WXGA allows monitors to be non-interlaced for better display performance and increased colour accuracy.

sRGB ready

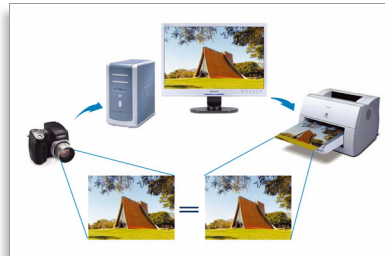

sRGB is an industry standard that ensures the best possible match between the colours displayed on your screen and those in your printouts.

Flame retardant cabinet

PC/ABS plastic composite is the industry's best and toughest flame-retardant casing material; and is a space-age compound deployed in the aerospace and automotive industries as well as in fire detectors that is compliant with most stringent fire safety standards.


Lead-free

Lead-free display products are designed and produced in compliance with strict European Community Restriction of Hazardous Substances (RoHS) standards that restrict lead and other toxic substances that can harm the environment.

Lower power consumption

Reduction of the electrical power required to operate a device.

Dual input

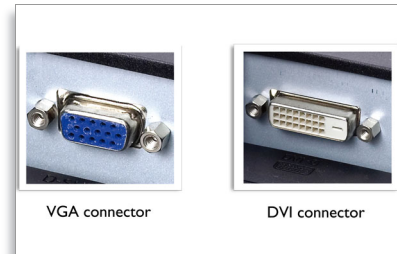

Dual input provides connectors to accommodate input of both analogue VGA and digital DVI signals.

Brightness and contrast button

Conveniently located buttons on the front bezel that provide one-touch brightness and contrast adjustments.

Embedded power supply

An embedded power supply is a power adaptor built into the body of a display device that replaces a bulky external power adaptor.

One-touch auto adjustment

The auto adjustment key restores optimal screen position, phase and clock settings with the press of a single button - without navigation through OSD menus and control keys.



Specifications

Picture/Display

- LCD panel type: 1440 x 900 pixels, Anti-glare polarizer, RGB vertical stripe
- Panel Size: 19.1" / 48.1 cm
- Effective viewing area: 410.4 x 256.5 mm
- Pixel pitch: 0.285 x 0.285 mm
- Brightness: 300 cd/m²
- Contrast ratio (typical): 850:1
- Display colours: 16.7 M
- Viewing angle: 170° (H) / 160° (V), @ C/R > 10
- Response time (typical): 5 ms
- Maximum Resolution: 1440 x 900 @ 75 Hz
- Recommended Resolution: 1440 x 900 @ 60 Hz
- Video Dot Rate: 140 MHz
- Horizontal Scanning Frequency: 30 - 83 kHz
- Vertical Scanning Frequency: 55 - 75 Hz
- sRGB

Connectivity

- Signal Input: Analogue (VGA), DVI-D
- Video Sync Input Signal: Composite Sync, Separate Sync, Sync on Green

Convenience

- Convenience Enhancements: On-screen Display
- Monitor Controls: Auto, Brightness (Left), Contrast (Right), Menu (OK), Power On/Off
- OSD Languages: English, French, German, Italian, Russian, Spanish
- Other convenience: Kensington lock compatible
- Plug & Play Compatibility: DDC 2B, Windows 98/ME/2000/XP/Vista
- Regulatory Approvals: CE Mark, E2000, EMC, Energy Star, FCC-B, UL, CSA, MPRII, TCO '99, TÜV/GS, TÜV Ergo
- Tilt: -5° to 20°

Accessories

- Included Accessories: AC Power Cord, VGA cable
- User Manual

Dimensions

- Box dimensions (W x H x D): 520 x 392 x 190 mm
- Box dimensions in inch (W x H x D): 20.5 x 15.4 x 7.5 inch
- Set dimensions (W x H x D): 438.5 x 310.4 x 60.5 mm
- Set dimensions in inch (W x H x D): 17.3 x 12.2 x 2.4 inch
- Set dimensions with stand (W x H x D): 438.5 x 358 x 211 mm
- Set dimensions with stand in inch (W x H x D): 17.3 x 14.1 x 8.3 inch
- MTBF: 50,000 (excl. CCFL 40,000) hrs
- Relative Humidity: 20% - 80%
- Temperature range (operation): 0°C to 40°C
- Temperature range (storage): -20°C to 60°C
- Product weight (+stand): 5 kg
- Product weight (+stand) (lb): 11 lb
- Weight incl. Packaging: 6.7 kg
- Weight incl. Packaging (lb): 14.8 lb

Power

- Complies with: E2000, Energy Star
- Consumption: 36W (Typical)
- Off Mode: < 1 W
- Power LED indicator: Operation - green, Stand by/ sleep - Amber
- Power supply: Built-in, 100-240VAC, 50/60Hz



Issue date 2009-08-06

Version: 4.0.15

12 NC: 8639 000 17256
EAN: 87 10895 98978 7

© 2009 Koninklijke Philips Electronics N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips
Electronics N.V. or their respective owners.

www.philips.com