

The FlexScan L551 offers a number of thoughtful functions for both corporate and home users. Auto Setup eliminates the need to make manual adjustments, and a light sensor reads the surrounding light conditions and continually adjusts panel brightness for optimum viewing comfort. The supplied stand has a small footprint, and to further save space, the monitor can be mounted on a movable arm or wall bracket.


- 1280 × 1024 native resolution
- 300 cd/m² brightness
- 450:1 contrast ratio
- 16 ms response time
- 5-year warranty



FEATURES

BrightRegulator

This function keeps the screen at the ideal brightness level under all lighting conditions. A sensor on the front panel takes readings of the ambient brightness and signals the backlight to adjust the screen brightness accordingly.

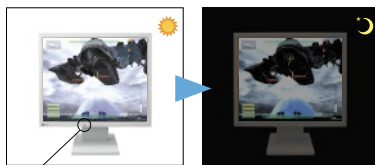

BrightRegulator sensor

Auto Setup

When the monitor detects an analog signal, it automatically adjusts basic screen settings, including clock, phase, position, and size. You don't have to make manual adjustments and are assured of optimal screen settings right after startup.

Flexible Mounting

With its slim body and thin bezel design, the FlexScan L551 occupies a minimum amount of space on the desktop. The monitor complies with VESA mounting standards, so it can be removed from the stand and mounted on a movable arm or wall bracket.



sRGB Mode

Applies the international sRGB color space, enabling color matching with applications and peripherals like scanners, printers and digital cameras with a corresponding setting.


FlexScan L551

17" Color LCD Monitor




Brightness Stabilization

At startup or upon wakeup, an EIZO-patented drift correction function quickly stabilizes the brightness level. In addition, a sensor measures the backlight brightness and compensates for brightness fluctuations caused by the ambient temperature and the passage of time.



Product Information Display

The model name, serial number, and total usage time are all accessible in the OSD menu.



Customer Assurance

Complies with leading industry standards, including TCO'03 and TÜV Ergonomics. It also conforms to EIZO's own strict Eco Products 2004 environmental criteria for design, manufacture, packaging, and usage, including the introduction of lead-free solder and chrome-free steel plates.




Accessories

A variety of accessories are available to enhance convenience and flexibility, including height adjustable stands, mounting arms, and a panel protector. For detailed information, please see www.eizo.com/products/accessories/



Panel protector includes both glossy (left) and non-glare surfaces.

Dimensions

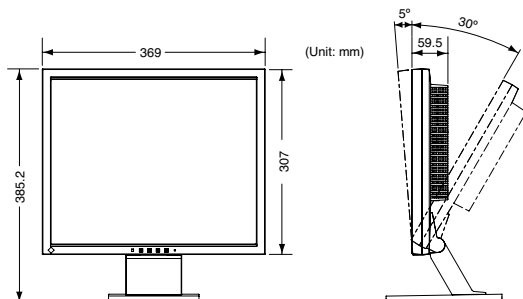

Specifications

Panel	Size and Type	43 cm (17") TFT color LCD panel
	Viewing Angles (H, V)	160°, 150° (at contrast ratio of 5:1)
	Brightness / Contrast	300 cd/m ² / 450:1
	Response Time	16 ms (typical)
	Native Resolution	1280 × 1024
	Active Display Size (H × V)	338 × 270 mm
	Viewable Image Size	Diagonal: 432 mm
	Pixel Pitch	0.264 × 0.264 mm
	Display Colors	16.19 million (maximum)
Available Cabinet Colors		Gray, Black
Dot Clock		135 MHz
Scanning Frequency (H, V)		Analog: 24.8 – 80 kHz, 50 – 75.1 Hz
Input Signals		Analog: RGB Analog
Input Terminals		D-Sub mini 15 pin
Plug & Play		VESA DDC 2B
Power	Power Requirements	AC 100 – 120 V, 200 – 240 V: 50 / 60 Hz
	Power Consumption	35 W (maximum)
	Power Save Mode	Less than 1 W
Physical Specifications	Tilt / Swivel / Pivot	30° Up, 5° Down / – / –
	Dimensions (W × H × D)	With Stand: 369 × 385.2 × 192 mm Without Stand: 369 × 307 × 59.5 mm
	Net Weight	With Stand: 4.0 kg Without Stand: 3.2 kg
Auto Brightness Functions		Auto Brightness Stabilization, BrightRegulator
Auto Adjustment Functions		Auto Setup, Range Adjustment
Display Mode Options		sRGB, Custom
Screen-Manager OSD Adjustment Functions	Screen Adjustment	Clock, Phase, Position
	Color Adjustment	Gain, Temperature (off, 6,500 K, 9,300 K)
	Power Save Settings	Analog: VESA DPMS (Auto), Off Timer
	Other Settings	Product Information (product name, serial number, operating time), Adjustment Lock, Languages (English, French, German, Italian, Japanese, Spanish, Swedish), Reset
Certifications and Standards		TCO'03 (gray), TCO'99 (black), TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, c-Tick, CE, CB, UL (cTUVus), CSA (cTUVus), FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA ENERGY STAR®, CCC, EIZO Eco Products 2004
Supplied Accessories		AC power cord, signal cable (D-Sub mini 15 pin – D-Sub mini 15 pin), EIZO LCD Utility Disk (PDF user's manual, ICC Profile), 4 screws for mount option, warranty registration card
Warranty		Five Years ¹

¹ The usage time is limited to 30,000 hours or less, and the warranty period of the LCD panel and backlight is limited to three years from the date of purchase. With current LCD technology, a panel may contain a limited number of missing or flickering pixels.