


MODULIZER[®] PRO DSP1224P

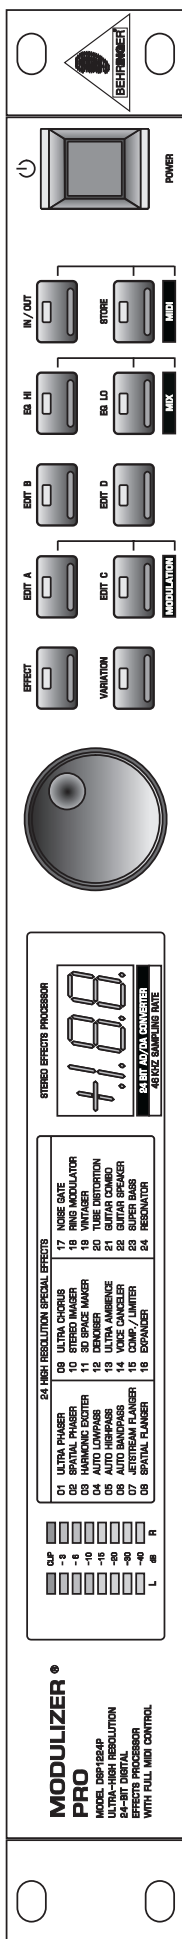

Technical Specifications


Version 1.0 March 2001

ENGLISH



MODULIZER PRO

Ultra-high performance digital multi-effects processor powered by a 24-bit high-speed digital signal processor (DSP)



- ▲ Cutting edge effects such as 3D Processor, Stereo Imager, Lo-Fi, Super Bass, Ring Modulator, Voice Canceled etc.
- ▲ 24 breathtaking effects such as Ultra Phaser, Harmonic Exciter, Auto Filter, Jetstream Flanger, Ultra Compressor, Guitar Combo, Speaker Emulation Resonator and more
- ▲ Hundreds of effect variations plus two individual parameters and separate low and high EQ section
- ▲ True stereo processing performance allows separation of left and right channels in the stereo field for open-sounding enhancement of the sound sources
- ▲ Free MODULIZER design software allows for total remote control via PC (download at www.behringer.com)
- ▲ 24-bit A/D and D/A converters with 64/128 times oversampling for ultra-high headroom and resolution
- ▲ Internal 24-bit processing with professional 46 kHz sampling rate
- ▲ Servo-balanced inputs and outputs on gold-plated XLR and TRS connectors for high signal integrity
- ▲ 100 user preset memories to store programs for instant recall
- ▲ Accurate eight-segment LED level meters simplify level setting for optimum performance
- ▲ "Future-proof" software-upgradeable architecture
- ▲ Full MIDI capability allows real-time parameter control and program selection
- ▲ High-quality components and exceptionally rugged construction ensures long life and durability
- ▲ Internal power supply design for professional application
- ▲ Manufactured under the ISO9000 certified management system

SPECIFICATIONS

Analog Inputs

Connectors	XLR and 1/4" TRS connector
Type	RF filtered, servo balanced input
Impedance	60 kOhms balanced, 30 kOhms unbalanced
Nominal Operating Level	-10 dBV to +4 dBu
Max. Input Level	+16 dBu at +4 dB nominal level, +2 dBV at -10 dBV nominal level

Analog Outputs

Connectors	XLR and 1/4" TRS connector
Type	Electronically servo-balanced output stage
Impedance	60 Ohms balanced, 30 Ohms unbalanced
Max. Output Level	+16 dBu at +4 dB nominal level, +2 dBV at -10 dBV nominal level

System specifications

Bandwidth	20 Hz to 20 kHz, +0/-3 dB
Noise	>94 dBu, unweighted, 20 Hz to 20 kHz
THD	0.0075 % typ. @ +4 dBu, 1 kHz, Gain 1
Crosstalk	< -76 dBu

MIDI Interface

Type	5-Pin-DIN-Socket IN / OUT / THRU
------	----------------------------------

Digital Processing

Converters	24-bit Sigma-Delta, 64/128-times Oversampling
Sampling Rate	46,875 kHz

Display

Type	2 ½-digit numeric LED-Display
------	-------------------------------

Power Supply

Mains Voltages	USA/Canada	120 V ~, 60 Hz
	U.K./Australia	240 V ~, 50 Hz
	Europe	230 V ~, 50 Hz
	General Export Model	100 - 120 V ~, 200 - 240 V ~, 50 - 60 Hz
Fuse	100 - 120 V ~: T 125 mA H 200 - 240 V ~: T 63 mA H	
Power Consumption	max. 15 Watts	
Mains Connection	Standard IEC receptacle	

Physical

Dimensions (H * W * D)	1 3/4" (44.5 mm) * 19" (482.6 mm) * 7 1/2" (190.5 mm)
Net Weight	± 2 kg
Shipping Weight	± 3 kg

The information contained in this manual is subject to change without notice. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER and MODULIZER are registered trademarks. ALL RIGHTS RESERVED.

© 2001 BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER Spezielle Studiotechnik GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Münchheide II, Germany

Tel. +49 (0) 21 54 / 92 06-0, Fax +49 (0) 21 54 / 92 06-30
