
FLATRON L2323T FLATRON L2323T

23" (23.0" VIS) WIDESCREEN LCD COLOR MONITOR/TV



- ▶ Brilliant Active Matrix TFT Display
- ▶ 1280 x 768 Resolution
- **▶** Smart Design with Finished Back
- **▶** One Cable Media Station Minimizes Wire Clutter
- ▶ Picture in Picture and Split Picture Modes
- Multi-Input: A/V, S-Video, DVIx2, DTV, PC VGA, HD Component Video
- **▶** Built-In TV Tuner
- ▶ TCO'99 Low-Emission Compliant
- **▶** Remote Control
- ▶ EPA Energy Star and VESA DPMS Compliant



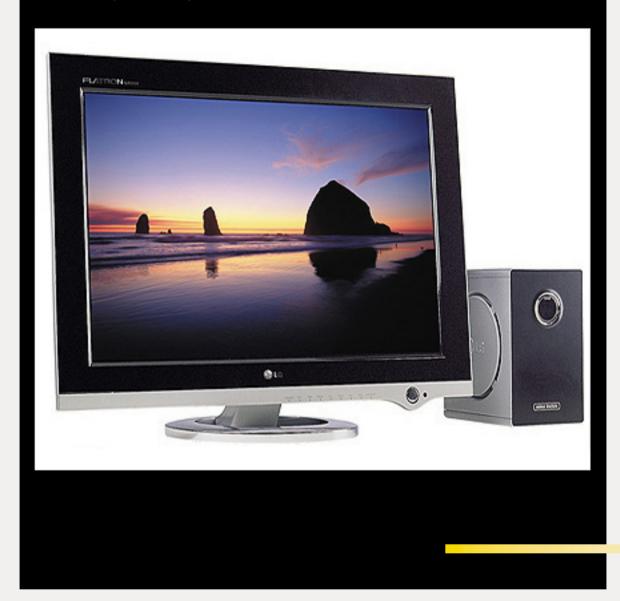

FLATRON L2323T

FLATRON L2323T

23" (23.0" VIS) WIDESCREEN LCD COLOR MONITOR/TV

FLATRONL2 www.LGu\$a.com

A design to please even the toughest critics and with all the features you need. In addition to a sleek profile, it offers inputs for various applications. Plus a powered USB hub with 1 upstream & 2 downstream, Built-in TV Tuner, up to 1280 x 768 resolution, 400:1 contrast ratio, fine pixel pitch for a remarkable viewing experience. The FLATRON L2323T from LG. It's a form and function in a perfect harmony.

23.0" (23.0" VIS) Widescreen Active Matrix TFT Color LCD Screen DISPLAY TYPE

19.5" x 12.2" (495mm x 310mm) DISPLAY AREA (H x V)

DISPLAY COLORS 16.8 Million

0.391mm x 0.391mm Pixel PIXEL PITCH **RGB Stripe Arrangement** PIXEL CONFIGURATION SURFACE TREATMENT Hard Coating 3H, Anti-Glare

ELECTRONIC INTERFACE TMDS BACKLIGHTING 12CCFL 1280 x 768 450cd/m² (Typical) 400:1 (Typical)

RESPONSE TIME 25 ms (Typical)

VIEWING ANGLE H: 176°, V: 176° S-IPS Technology

HORIZONTAL SCANNING 30-66kHz, Auto-Synchronous **FREQUENCIES**

VERTICAL SCANNING FREQUENCIES 56-75Hz, Auto-Synchronous 640 x 350 up to 70Hz, 640 x 480 up to 75Hz, 720 x 400 up to 70Hz, 800 x 600 up to 75Hz, AUTO-SYNC SUPPORT

832 x 624 up to 75Hz, 1024 x 768 up to 75Hz, 1280 x 768 up to 60Hz, 1280 x 1024 up to 60Hz,

CONTROL TYPE On-Screen Display of Adjustments

INPUT SIGNAL **RGB** Analog

DVI-I/DVI-D, 15-pin D-Sub, DTV, HD Component Video, Composite A/V, S-Video **INPUT CONNECTORS** (IN MEDIA STATION)

Separate H/V SYNC SIGNALING

11 Factory Preset, 10 User-Settable **MEMORY MODES**

DDC2B, DDC1 VESA PLUG AND PLAY LEVEL

Brightness, Contrast, Horizontal/Vertical Position, Clock, Phase (+/-), Language Select, **DIGITAL ON-SCREEN CONTROLS**

OSD Position, Color Temp (9300K, 6500K, User), Information, Zoom, Image Size(Full, Normal, 1:1)

Source, Menu, Adjust (Up/Down/Left/Right), Auto-Set/Select, PIP, PBP, Power FRONT PANEL CONTROLS

POWER REQUIREMENTS 90-264 VAC, 50-60Hz

On: 110 Watts, Standby: 5 Watts, DPMS Off: 3 Watts **DPMS POWER CONSUMPTION**

Down 0°/Up 20° TII T

Standard VESA Mounting, 100mm x 100mm Screw Spacing **VESA MOUNTING COMPLIANCE**

DIMENSIONS WITHOUT BASE (WXDXH) 23.1" x 2.6" x 16.1" (588mm x 67mm x 410mm)

DIMENSIONS WITH BASE (WxDxH) 23.1" x 10.3" x 17.5" (588mm x 260mm x 443mm) 28.7" x 12.6" x 24.6" (730mm x 320mm x 625mm) SHIPPING DIMENSIONS (WXDXH) 31.7 lbs (14.4 kg) Net; 40.8 lbs (18.5 kg) Shipping WEIGHT

TCO'99, UL1950, FCC-B, EPA Energy Star, IEC950, CSA, CE, SAFETY/REGULATORY TUV-GS, SEMKO, GOST, ISO 9241-3,7,8, C-TICK, VCCI-2

Power Cord, Signal Cable, DVI-D Cable, USB Cable, PC Audio Cable, Remote Control, Manual, Install Disk **ACCESSORIES**

3 Year limited warranty LGEUS WARRANTY

719192176751 UPC#





HEADQUARTERS







