

Avenview



HDMI-C5 Series


Part #: HDMI-C5-R

Description

HDMI-C5-R receiver can receive HDMI signal over Cat5 / 5e / 6 cable from HDMI-C5 Series Transmitter and Transceivers. The HDMI-C5-R receiver is *a cost effective solution* for digital signage, public information display, and large scale demonstration, where crystal-clear, high-resolution digital video needs to be shown.

Features

- HDMI over Cat 5 / 5e / 6 cable.
- Video Amplifier Bandwidth: 1.65GHz
- Maximum distance between HDMI-C5-SR Transceiver and HDMI-C5-R Receiver (distance is based on UTP cable skew 30ns/100m):
 - 480p / 720p / 1080i = 30m (100ft)
 - 1080p = 15m (50ft)
- Compatible with receiving signal from HDMI-C5-S, HDMI-C5-SR, HDMI-C5-4, HDMI-C5-8
- HMDI Input / Output Connector: HDMI digital signal
- Compact Size

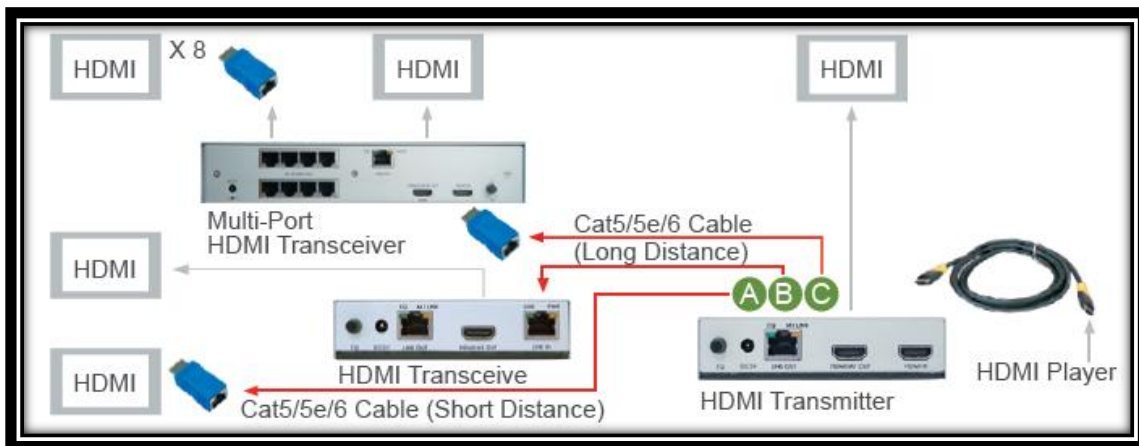

Connection Diagram of HDMI-C5-Series

Cable and Accessories



HDMI Cable (not included)

Package Content

**HDMI-C5-R
Receiver**

- HDMI 1 Port Receiver
- User Manual

Copyright 2007, Avenview® Inc. All rights reserved.
Features, availability and specifications are subject to change without notice.

The logo for Avenview Inc. features the word "Avenview" in a bold, dark blue, sans-serif font. A small red square icon with a white crosshair is positioned above the letter 'v'. The logo is set against a white background that has a folded-top effect on the right side.

Avenview

Avenview Inc.
info@avenview.com
www.avenview.com