




Philips Brilliance
LCD widescreen monitor

19" wide
WSXGA+

Brilliance

190BW9CS

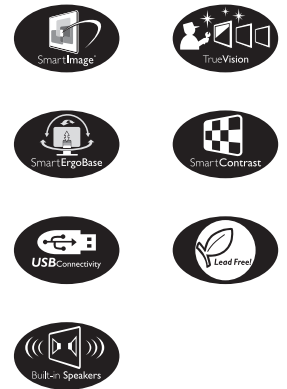

High resolution ergonomic widescreen for business

Better wide screen business display: 1680 x 1050 high resolution Philips Brilliance 190BW9 delivering the best-ever LCD picture quality, compact ergo base, built-in sound, Vista-ready, Eco-friendly design to get your job done.

Designed for maximum productivity

- TrueVision ensures top quality LCD display delivered to you
- Empowered for Windows Vista

Outstanding front of screen performance

- SmartImage: For an optimized display experience
- SmartContrast: Dynamic, optimized contrast for visual clarity
- 1680x1050 display for increased productivity

Great convenience

- Dual input accepts both analog VGA and digital DVI signals
- Hassle-free display performance tuning with SmartControl II
- Auto picture format control switching in wide and 4:3 format
- Tilt, swivel and height-adjust for an ideal viewing position
- USB port for convenient peripheral connections
- Built in stereo audio for a clutter-free desktop

PHILIPS
sense and simplicity

Specifications

Picture/Display

- **Panel Size:** 18.95" / 48.1 cm
- **LCD panel type:** 1680 x 1050 pixels, Anti-glare polarizer, RGB vertical stripe
- **Recommended Resolution:** 1680 x 1050 @ 60 Hz
- **Maximum Resolution:** 1680 x 1050 @ 60 Hz
- **Display colors:** 16.7 M
- **Aspect ratio:** 16:10
- **Brightness:** 300 cd/m²
- **Contrast ratio (typical):** 1000:1
- **SmartContrast ratio (dynamic):** 10000:1
- **Picture enhancement:** SmartImage
- **Viewing angle:** 170° (H) / 160° (V), @ C/R > 10
- **Response time (typical):** 5 ms
- **Effective viewing area:** 408.24 x 255.15 mm
- **Horizontal Scanning Frequency:** 30 - 83 kHz
- **Vertical Scanning Frequency:** 56 - 75 Hz
- **Pixel pitch:** 0.243 x 0.243 mm
- sRGB

Connectivity

- **Signal Input:** Analog (VGA), PC Audio in
- **USB:** 1 x USB 2.0
- **Audio output:** Stereo Audio (3.5 mm jack) 1x
- **Video Sync Input Signal:** Composite Sync, Separate Sync, Sync on Green

Convenience

- **Convenience Enhancements:** SmartControl II, SmartManage enabled, Picture format selection, On-screen Display
- **Built-in Audio:** 1 W x 2
- **Monitor Controls:** Auto (Back), Brightness (Up), Menu (OK), Power On/Off, SmartImage, Volume control (Down)
- **OSD Languages:** English, French, German, Italian, Russian, Simplified Chinese, Spanish, Portuguese
- **Plug & Play Compatibility:** DDC/CI, Mac OS X, sRGB, Windows 98, Windows 2000, Windows XP, Windows Vista

- **Regulatory Approvals:** CE Mark, Energy Star, FCC Class B, SEMKO, TCO '03, TÜV/GS, TÜV Ergo, UL/cUL
- **Height Adjustment:** 70 mm
- **Swivel:** +/- 45°
- **Tilt:** -5° to 20°
- **VESA Mount:** 100 x 100 mm
- **Other convenience:** Kensington lock compatible

Dimensions

- **Set dimensions with stand (W x H x D):** 436 x 421 x 201 mm
- **Set dimensions with stand in inch (W x H x D):** 17.2 x 16.6 x 7.91 inch
- **Relative humidity:** 20% - 80%
- **MTBF:** 50,000 (excl. CCFL 40,000) hrs
- **Set dimensions (W x H x D):** 436 x 305 x 68 mm
- **Set dimensions in inch (W x H x D):** 17.2 x 12.0 x 2.68 inch
- **Height adjustment range (inch):** 2.76 inch
- **Temperature range (operation):** 0°C to 40°C
- **Temperature range (storage):** -20°C to 60°C
- **Box dimensions (W x H x D):** 508 x 485 x 172 mm
- **Box dimensions in inch (W x H x D):** 20.0 x 19.1 x 6.77 inch
- **Product weight (+stand):** 4.45 kg
- **Product weight (+stand) (lb):** 9.81 lb
- **Weight incl. Packaging:** 6.1 kg
- **Weight incl. Packaging (lb):** 13.4

Power

- **Consumption:** < 36W (typical)
- **Consumption (economy mode):** 27 W
- **Off Mode:** < 0.8 W
- **Complies with:** Energy Star
- **Power LED indicator:** Operation - Blue, Stand by/sleep -blue(blinking)
- **Power supply:** Built-in, 100-240VAC, 50/60Hz

Product highlights

SmartImage

SmartImage is an exclusive, leading edge Philips technology that analyzes the content displayed on your screen. Based on a scenario you select, SmartImage dynamically enhances the contrast, color saturation and sharpness of images and videos for ultimate display performance - all in real time with the press on a single button.

TrueVision

TrueVision is industry-leading, proprietary Philips testing and algorithm technology for monitor adjustment and fine tuning, an extensive process that ensures ultimate display performance in compliance with a standard four-times more stringent than Microsoft's Vista requirements from each and every monitor that leaves the factory - not just a few review samples. Only Philips goes to these lengths to deliver this exacting level of color accuracy and display quality in every new monitor.

WSXGA, wide format 1680x1050

Wide format, super extended graphics array is a display specification that is capable of displaying 1680 x 1050 resolution or approximately 1.7 million pixels.

SmartContrast

SmartContrast is Philips technology that analyzes the contents you are displaying, automatically adjusting colors and controlling backlight intensity to dynamically enhance contrast for the best digital images and optimum contrast for more entertainment fun when viewing videos or playing games where dark hues are displayed; when you select the Economy mode, contrast is adjusted and backlighting fine-tuned for just-right display of everyday office applications and lower power consumption.

Dual input

Dual input provides connectors to accommodate input of both analog VGA and digital DVI signals.

SmartControl II

SmartControl II is monitor-based software with an easy-to-use on-screen graphic interface that guides you through fine-tuning resolution, color calibration and other display settings including brightness, contrast, clock & phase, position, RGB, white point and - on models with onboard speakers - volume adjustments.

Compact Ergo Base

The Compact Ergo Base is a 'people friendly' Philips monitor base that tilts, swivels and height adjusts so each user can position the monitor for maximum viewing comfort and efficiency.

USB 2.0 port

The universal serial bus or USB is a standard protocol for linking PCs and peripherals. Because it delivers high speed at a low cost, USB has become the most popular method for connecting peripheral devices to a computer. A port located on a monitor directly in the user's line of sight provides easy, high-speed connectivity for USB devices at a convenient location. (USB 2.0 support is dependent on your PC's USB configuration; when connected to a PC that supports USB 2.0, your monitor is USB 2.0 compatible)

Windows Vista ready

Philips Vista-ready monitors are empowered for vibrant, exciting display of this new, visually sophisticated and demanding Windows operating system, designed to enhance your entertainment experience, make you more productive and help you control your computing experience at home and in the office, making viewing, finding and organizing information for work or play quick, efficient and easy.

Built-in stereo audio

A pair of high quality stereo audio built into a display device.



Issue date 2008-11-15

Version: 5.0.3

12 NC: 8670 000 42071
EAN: 87 12581 44150 0

© 2008 Koninklijke Philips Electronics N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com