

# SANYO

## 15" Screen Super high resolution of more than 800 TV lines

- High-resolution colour monitors with more than 800 TV lines of horizontal resolution
- Dual NTSC / PAL system [automatic detection of input signal] (VMC-8615FP only)
- Multi-voltage applications (100 – 240V)
- Built-in speaker
- On-screen menu setting in up to 8 languages (VMC-8615FP only)

## VMC-8615FP VMC-8415FP

# Super High-resolution

more than 800 TV lines



VMC-8615FP



VMC-8415FP

# VMC-8615FP / VMC-8415FP

## Features


- More than 800 TV lines of horizontal resolution
- Dual NTSC / PAL system [auto sensing] (VMC-8615FP only)
- Two composite signals, one video input with separate Y/C signals, two audio inputs, can be selected via three buttons on the front panel (VMC-8615FP only)

- On-screen mode setting with multiple menu languages (VMC-8615FP only): English / French German / Spanish Italian / Russian / Chinese / Japanese
- Built-in compact loudspeaker (1 W)
- Durable metal cabinet
- Overscan / underscan selectable from the front panel (VMC-8615FP only)
- Auto-termination simplifies bridge wave control
- Automatic voltage selector, 100 V to 240 V AC, 50 / 60 Hz

## Specifications

| Model No.                  | VMC-8615FP  | VMC-8415FP  |
|----------------------------|---|---|
| Colour system              | PAL / NTSC, automatic signal detection  | PAL   |
| Picture tube               | 15", 90° deflection, dot pitch: 0.27 mm   |   |
| Minimum useful screen size | 285.5 x 214.0 mm  |   |
| Scanning frequency         | H: 15.625 kHz, V: 50 Hz (PAL)<br>H: 15.734 kHz, V: 59.94 Hz (NTSC)  | H: 15.625 kHz, V: 50 Hz (PAL)   |
| Horizontal resolution      | More than 800 TV lines  |   |
| Brightness max.            | 45-50 FL  |   |
| Contrast max.              | 100 ± 5 FL  |   |
| Input terminals            | Y/C: Mini-DIN 4-pin x 1<br>Video: BNC x 2, 1.0 V p-p composite video (75 ohms)<br>Audio: RCA x 2, 400 mV    | Y/C: Mini-DIN 4-pin x 1<br>Video: BNC x 1, 1.0 V p-p composite video (75 ohms)<br>Audio: RCA x 1, 400 mV rms Signal: I/P switch |
| Output terminals           | Y/C: Mini-DIN 4-pin x 1, loop-through<br>Video out: BNC x 2, loop-through<br>Audio out: RCA x 2, output 1 W | Y/C: Mini-DIN 4-pin x 1, loop-through<br>Video out: BNC x 1, loop-through<br>Audio out: RCA x 1, output 1 W                     |
| Front panel controls       | Power SW / OSD / Contrast / Brightness / Enter<br>CH A / CH B / CH Y/C / Overscan/Underscan                 | Power SW / VR controller x 4  |
| OSD controls               | Colour / Tint / Brightness / Contrast / Title<br>Sharpness / Volume / Language / Version                    | —   |
| On-screen menu languages   | English / French / German / Spanish<br>Italian / Russian / Chinese / Japanese                               | —   |
| Speaker                    | Built-in x 1, 1 W   |   |
| Power source               | 100 V to 240 V AC, 50 / 60 Hz, automatic  |   |
| Power consumption          | 95 W  |   |
| Operating conditions       | Temperature: -10 to +50°C, Humidity: 15 to 90% RH   |   |
| Storage conditions         | Temperature: -20 to +65°C, Humidity: 15 to 90% RH   |   |
| Dimensions (W x H x D)     | 368 x 361 x 376 mm  |   |
| Weight                     | 15.0 kg   |   |

## Dimensions

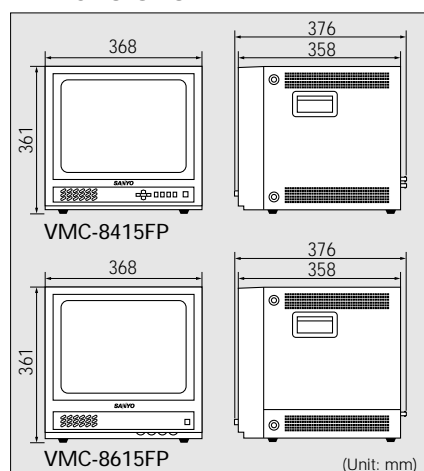

## Other Colour Video Monitors

NOTE: Specifications subject to change without notice.



**VMC-8621PA**  
More than 450 TV lines of horizontal resolution

- Three channels of audio and video input
- Overscan / underscan selectable from front panel
- On-screen mode setting, 6 menu languages built in
- Voltage selector (100-240 V AC)



**VMC-8619PA**  
More than 800 TV lines of horizontal resolution

- EIA rack mountable
- Three channels of audio and video input
- Overscan / underscan selectable from front panel
- On-screen mode setting, 6 menu languages built in
- Auto voltage selector (100-240 V AC)



**VMC-8114PA**  
More than 400 TV lines of horizontal resolution

- S-VIDEO input and output terminals
- Overscan / underscan selectable from front panel
- Built-in compact loudspeaker (1W)
- Auto voltage selector (100-240 V AC)



DI Solutions Company of SANYO Electric Co., Ltd., obtained Quality Management System ISO 9001 and Environmental Management System ISO 14001 certifications.

**Caution:** Please consult the instruction manual to ensure safe and proper operation of the product.

Distributed by:

# SANYO

SANYO Electric Co., Ltd.  
[www.sanyosecurity.com](http://www.sanyosecurity.com)

©2003 SANYO Printed in Japan '03.6.MA.

SMS060