



ITEM NO. _____

ASC-4E

THE PLATINUM SERIES ELECTRIC CONVECTION OVEN



ASC-4E

WITH OPTIONAL STATIONARY OVEN STAND
AND PAN RACK WITH SHELVES - 5003489

- Superior baking and roasting capability.
- A dependent 60/40 door system includes a solid stainless steel door and a double pane thermal window door to view the lighted oven interior.
- Both doors open beyond a 120-degree angle for easier loading; include a spring-loaded roller assembly to provide a positive, pressure-lock seal; and a heavy-duty door hinging system.
- Solid welded construction with stainless steel front, sides, top and rear enclosure panel.
- Removable oven baffle provides easy cleaning.
- Heavy-duty 3/4 hp, two-speed motor provides a fan speed for high volume production or delicate baking.
- Easy to clean porcelain enamel oven interior is standard.
- 10kW element.
- Durable, low maintenance stainless steel door gaskets.

The Platinum Series electric convection oven features solid welded construction, an angle iron frame, and a non-corrosive stainless steel exterior. The oven interior is constructed of porcelain enamel with coved corners, and a heavy duty, 14 gauge bottom liner. It is supplied with six (6) chrome plated wire shelves with 2 removable side racks and 12 shelf positions spaced at 1-3/4" (43mm). The oven is furnished with two interior lights, a 10,000 watt heating element and a heavy duty, 3/4 hp, two-speed fan motor. Control includes a 100°F to 500°F (38°C to 260°C) thermostat and a 60 minute, count-down timer. The control features a oven cool-down function, oven-ready indicator light, and produces an audible signal when time has expired. The oven is supplied with 25" (635mm) legs with bullet feet.

MODEL ASC-4E: MANUAL CONTROL, PORCELAIN ENAMEL INTERIOR

MODEL ASC-4E/e: ELECTRONIC CONTROL WITH FOOD PROBE, PORCELAIN ENAMEL INTERIOR

FACTORY INSTALLED OPTIONS



- Stainless steel oven interior

ADDITIONAL FEATURES

- Stackable design
- Easy access for bulb replacement



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.
 PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY
www.alto-shaam.com

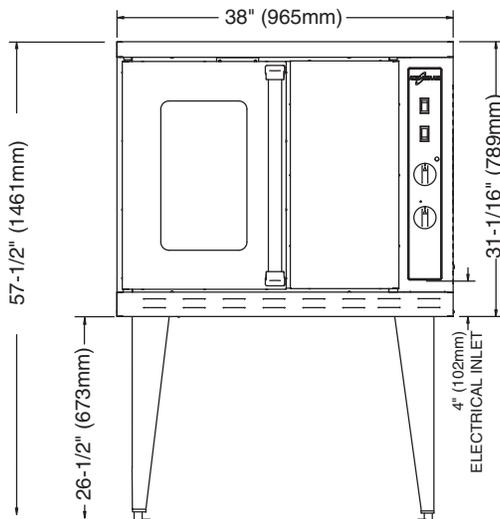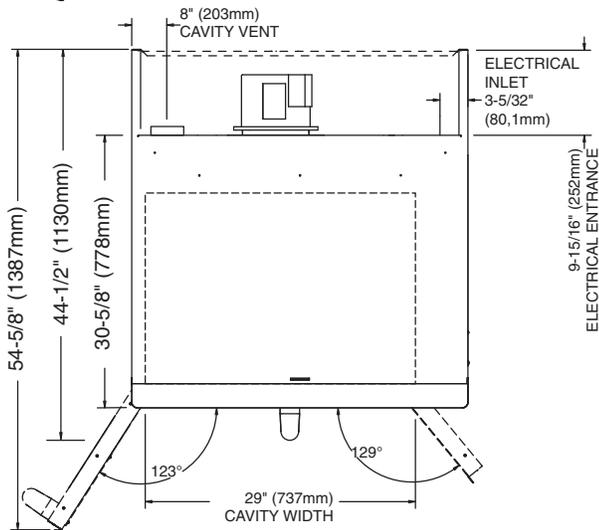

DIMENSIONS: H x W x D

EXTERIOR: 57-1/2" x 38" x 44-1/2" (1461mm x 965mm x 1130mm)

INTERIOR: 24" x 29-1/8" x 25" (610mm x 740mm x 635mm)

ELECTRICAL

VOLTAGE	PHASE	CYCLE/HZ	AWG	AMPS	kW
208 (AGCY)	1	60	6	50.0	10.4
240 (AGCY)	1	60	6	43.3	10.4
208 (AGCY)	3	60	8	28.8	10.4
240 (AGCY)	3	60	8	25.0	10.4
480 (AGCY)	3	60	8	12.5	10.4

NO CORD AND PLUG

MINIMUM CLEARANCE REQUIREMENTS

SIDES	2" (51mm)
BACK SIDE	0" (0mm)
FROM GREASE PRODUCING EQUIPMENT	6" (152mm)
RECOMMENDED SERVICE ACCESS RIGHT SIDE	20" (508mm)

INSTALLATION REQUIREMENTS

- This appliance must be installed level and must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- Mobile appliances must be secured to the building structure by means of a restraining device (NOT FACTORY SUPPLIED).
- Hood installation is recommended (CHECK LOCAL CODES).

OPTIONS & ACCESSORIES

CASTER SET, 6" (152mm) FOR MOBILE STACK APPLICATIONS 5003790

COOLING RACK FOR OVEN STAND 5003791

LEG SET (4)

6" (152mm) with Bullet Feet 5003794

6" (6152mm) with Seismic Feet 5003795

25" (635mm) with Seismic Feet 5003785

PANEL FOR BACK, Stainless Steel 5005876

SHELF, OVEN RACK

INTERCHANGEABLE WITH COOLING RACK SH-26795

STACKING HARDWARE

SEE INDIVIDUAL STACKING COMBINATION SPECIFICATION SHEETS

STAND, STAINLESS STEEL

Mobile, with Cooling Racks & Casters, 38" H (965mm) 5003786

Stationary, with Cooling Racks & Bullet Feet 5003489

Stationary, with Cooling Racks & Seismic Feet 5003787

34-1/4" (870mm) min. • 35-1/2" (902mm) max. H (FEET ARE ADJUSTABLE)

PRODUCT \ PAN CAPACITY

72 lb (33 kg) MAXIMUM • 45 qts (43 liters)

12 (twelve): 18" x 26" x 1" FULL-SIZE SHEET PANS

6 chrome plated wire shelves with
2 removable side racks and 12 shelf positions
spaced at 1-3/4" (43mm)

WEIGHT

NET 393 lb (178 kg)

SHIP 438 lb (199 kg)

CRATE 40" H x 44" W x 53" D
DIMENSIONS: (1016mm x 1118mm x 1346mm)

MINIMUM ENTRY CLEARANCE 31-1/2" (800mm)
UNCRATED, WITHOUT LEGS