


REPLACING LAMP HOOD

(For AeroGarden Classic, AeroGarden Deluxe, AeroGarden PRO¹⁰⁰ and AeroGarden PRO²⁰⁰)


Remove *Lamp Hood* from *Lamp Arm*:

- 1 Unplug AeroGarden; remove *Bowl* from *Base*.
- 2 Disconnect *Lamp Cord* from *Lamp Hood* socket and remove *Grow Bulbs* from *Lamp Hood*. **CAUTION – Grow Bulbs may be hot!**
- 3 Turn AeroGarden around so the back is facing you.
- 4 Press in on *Locking Tab 1* located on *Lamp Hood* vent.
- 5 At the same time, use other hand to push up on silver ring (where *Lamp Hood* attaches to *Lamp Arm*).

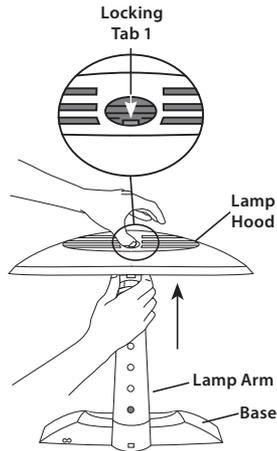

To install *Lamp Hood*:

- 1 Push *Lamp Cord* firmly into socket in new *Lamp Hood*.
- 2 Center hands over *Lamp Arm* and push *Lamp Hood* down until you hear a "click."
- 3 Insert *Grow Bulbs*; return *Bowl* to *Base*; and plug in AeroGarden.



Refer to your Quick Start Guide for more help or find it online at www.aerogardensupport.com.