

COMBINATION INSTALLATIONS




Slide-In Cooktop/Warming Drawers (Side-by-Side)

PLANNING GUIDE

WARNING

- Observe all governing codes and ordinances during planning and installation. Contact your local building department for further information.
- All appliances must be installed in accordance with the accompanying installation instructions.

All tolerances: +1/16", -0, (+1.6 mm, -0) unless otherwise stated

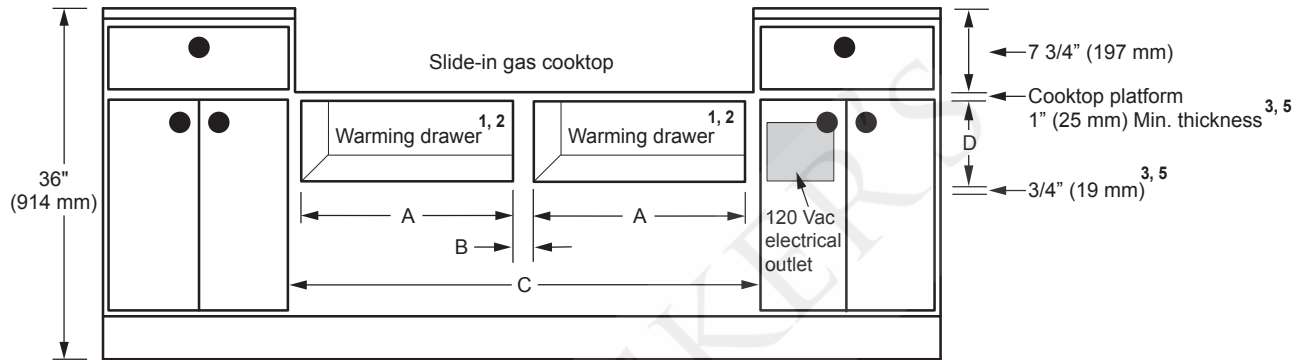

DRT/EG SERIES COOKTOP WITH SIDE BY SIDE WARMING DRAWERS

Dacor Models	(A) Cabinet Cutout Width	(B) Minimum Gap Between Cutouts ^{3, 5}	(C) Minimum Width to Adjacent Door/Drawers ^{3, 5}	(D) Cutout Height
IWD24 EWD24	22 1/2" (572 mm)	1 3/4" (44 mm)	48 1/2" (1232 mm)	9 1/8" (232 mm)
OWD24	22 5/8" (575 mm)	1 3/4" (44 mm)	48 3/4" (1238 mm)	11 15/16" (303 mm)



NOTES:

1. 24" (610 mm) minimum interior cabinet depth (20 1/8" for model OWD24).
2. 3/4" (19 mm) support platform (flush with cutout).
3. Spacing may vary for warming drawers with a custom front panel. See warming drawer installation instructions for further details.
4. See individual appliance planning guide pages for overlay dimensions.
5. Spacing between appliances and doors/drawers is minimum required to allow for ventilation and to prevent scraping. Additional space may be required for appearance.