PGM304-1, PGM365-1




Revised 06/24/08


30", 36", 46" Wide, Preference™ Gas Cooktops

1/2

PLANNING GUIDE

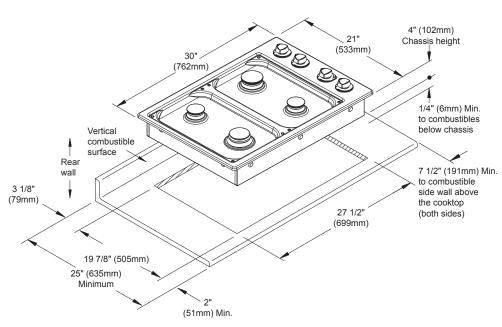

Cutout Dimensions for the PGM304-1

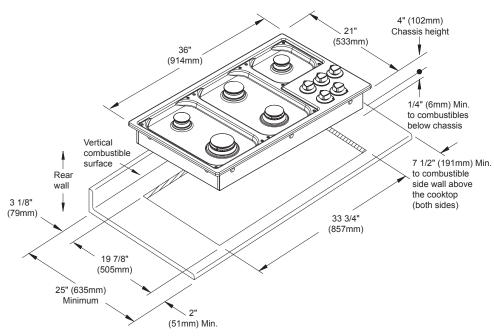

Cutout Dimensions for the PGM365-1

Web: http://www.Dacor.com Corporate Phone: 800-793-0093

PGM304-1, PGM365-1



Revised 06/24/08


30", 36", 46" Wide, Preference™ Gas Cooktops

2/2

PLANNING GUIDE

13" Max. 18" Min. (330 mm) < (457 mm) 30" Min. (762 mm) 🥖 3 1/8" Min. (79 mm)

All tolerances +1/16" -0 (+1.6 mm, 0) unless otherwise noted.



Model	"B" Minimum	
PGM304-1	29" (737 mm)	
PGM365-1	35 1/4" (895 mm)	

Clearances to Combustibles

Model	"A" Minimum	"A" Recommended	
PGM304-1	30" (762 mm)	36" (914 mm)	
PGM365-1	36" (914 mm)	42" (1067 mm)	

Model No.	Dedicated Circuit Required	Total Connected Load	Gas Supply Requirements	Approximate Shipping Weight
PGM304-1	120 Vac, 60 Hz, 15 Amp (Breaker)	0.03 kW (0.25 Amp)	1/2" (13 mm) Regulator - Natural Gas Standard	53 lbs.
PGM365-1			3/4" (19 mm) Regulator - Natural Gas Standard	67 lbs.



NOTES:

- Factory installed propane (LP) special ordered.
- Cooktop is supplied with a 40" (1016 mm) power cord, with a three-prong grounded plug.
- Utilities connections are located on the bottm of 3. the chassis at the right rear corner of the cooktop.
- See the Combination Installation (CI) section if installing with a downdraft, wall oven, or warming oven.