



CE




Owner's Manual



www.pyleaudio.com

PPG260A
Guitar Amplifier

www.pyleaudio.com

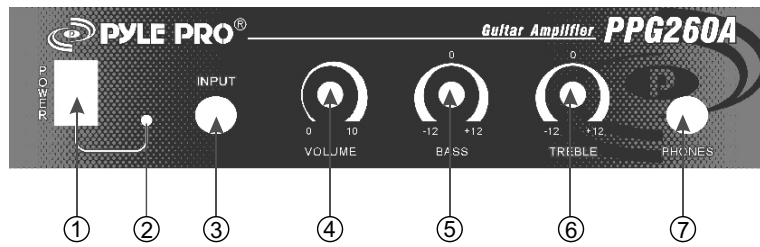

- 1) **Power Switch:** Switches amplifier on/off.
- 2) **Power LED:** Illuminates when power is switched on.
- 3) **Input Jack:** Connect your instrument to this jack.
- 4) **Volume:** This sets the volume gain level.
- 5) **Bass:** This control adjusts the low frequency level.
- 6) **Treble:** This control adjusts the high frequency level.
- 7) **Phones Jack:** This is your headphone connection. Inserting the headphones disables the internal speaker (great for practicing).



- 1) **Voltage Selector:** 110/220 Volt Selectable Switch.
- 2) **Power Cord:** Connect cord to an AC outlet.

Troubleshooting

Distorted Sound:

Check if the amplifier is overdriven. If it is, you will have to turn the level down.

Check signal source.

Signal sounds discolored:

Check and adjust the EQ settings.

Ensure you are using quality cables.

Check signal source.

No Sound:

Check connections.

Try a different cable.

Check level on amplifier.

Confirm amplifier is getting a signal.

Make sure nothing is plugged into the Phones jack.

Intermittent Output:

Check connections.

Try a different cable.

Specifications

Model	Driver	RMS	Peak	Dimensions	Weight
PPG260A	6 .5" High Definition Speaker	20W	80W	W=9 2/3" H=10 1/4" D=6 1/4"	9.37lbs