

Installation Instructions 10271 1-1/2" FPT Cooling Water Flow Switch

Introduction

The Maretron 10271 is an accessory for the SIM100 Switch Indicator Module. The 10271 has a set of normally closed contacts that will open whenever a flow of cooling water of a user-settable amount is detected.

Instructions

Please follow these instructions to connect the 10271 to the NMEA 2000 network via a Maretron SIM100 Switch Indicator Module. The wiring diagram appears in Figure 1. The diagram shows a connection to channel #1, but connections to other channels are similar. Please refer to the original manufacturer's instructions packaged with the product for additional details including setting of the switch activation flow rate.

1. Install the two wires from the 10271 to a free switch channel on the SIM100. The two wires are interchangeable. The example in Figure 1 shows the flow switch connected to switch channel 1, terminals SW1A and SW1B.
2. Use a Maretron DSM250 display (firmware 1.3.5 or higher), or the DSM250 Viewing function of Maretron N2KAnalyzer software, or other Maretron display product capable of configuring the SIM100 to set the switch channel mode (indicated as "Channel #x Mode" on the DSM250) for the appropriate channel to the "No End of Line Resistor" setting. For this example, you would set "Channel #1 Mode" to "No End of Line Resistor".
3. Supply Power to the NMEA 2000 network, Verify that the switch channel indicates an "on" (normal) state using Maretron N2KView software, N2KAnalyzer, or other product capable of displaying switch indicator state.
4. Start cooling water flow through the 10271 and verify that the switch channel indicates an "off" state.

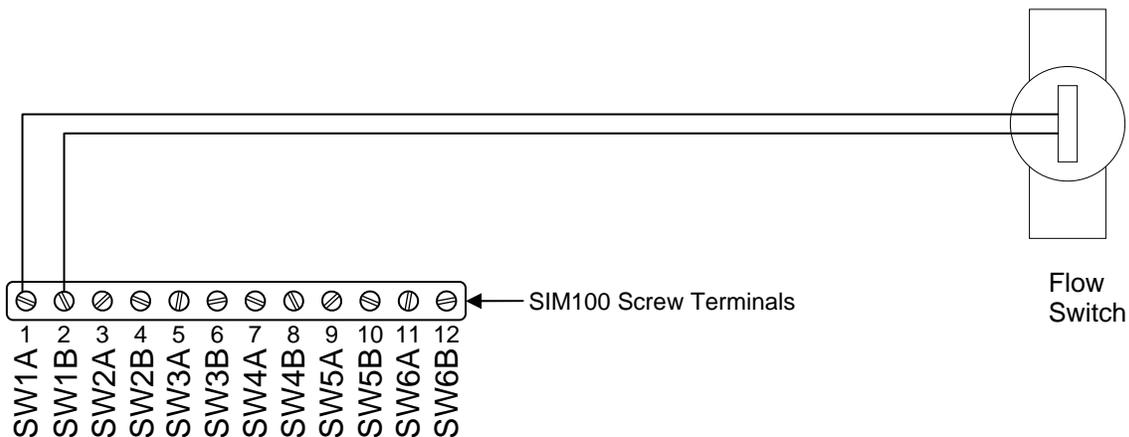


Figure 1 - Wiring Diagram

Device Specifications

Parameter	Value
Inside Diameter	1.5" (38.1mm)
Outside Diameter	2.22" (56.4mm)
Length	4.36" (110.7mm)
Height	3.08" (78.2mm)
Activation Flow Rate W/O Baffle	10-14 GPM (37.9-53.0 LPM)
Activation Flow Rate W/Baffle	6-8 GPM (22.7-30.3 LPM)
Contacts	Normally Closed
Connections	1-1/2" FPT Female
Switching Rating	50W
Switching Voltage (Max)	300VAC / 300VDC
Maximum Switching	0.5A (0.3A inductive)
Heat Resistance, Continuous	210°F (99°C)
Maximum Pressure	120 PSI @ 72°F 8.3 bar @ 22°C
External Fasteners	18-8 Stainless Steel
Construction	CPVC Schedule 80
Connection	5' (1.5m) Marine Grade Tinned Wire Leads
Springs	Hastelloy "C" Springs for Corrosion Resistance
Gasket	EPDM

For installation support, please contact:

Maretron, LLP
9014 N. 23rd Ave #10
Phoenix, AZ 85021-7850
Telephone: (+1) 866-550-9100
E-mail: support@maretron.com
Web: <http://www.maretron.com>