KG 291: Gas cooktop

All-gas cooktop for natural or bottled gas

Brushed stainless steel cooktop with shot-blasted edge

Integrated control panel with cooking zone and power marking

Five brass gas burners:

- **Two two-ring super-high output burners (150–4000 W) 500–13,600 BTU, suitable for pots up to max. ø 11"**
- **Two two-ring standard burners (150–2000 W) 500–6,800 BTU, suitable for pots up to max. ø 9 ½"**
- **One three-ring super-high output burner (300–5000 W) 1,000–17,000 BTU, suitable for pots up to max. ø 12 ⅝"**

High useful benefit due to ideal burner configuration, electronics and a broad output spectrum
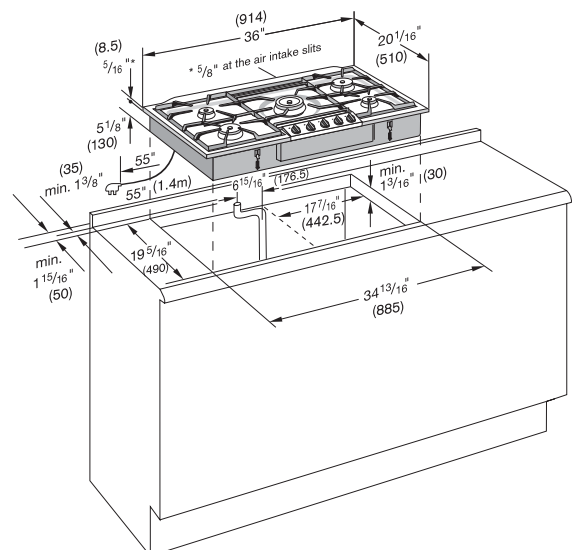
Automatic quick ignition

Electronic flame recognition (ionization principle) with automatic re-ignition

Three-part pan support with flat, continuous pot surface

Operation control indicator lights

Gas valve with fine control

Gas cooktop

200 Series, Stainless Steel Control Panel

Width: 36" (90 cm)

KG 291-220 CA

Natural gas, Stainless Steel Control Panel

KG 291-120 CA

Propane gas, Stainless Steel Control Panel

KG 291-110 CA

Propane gas, Aluminum Control Panel

KG 291-210 CA

Natural gas, Aluminum Control Panel

Installation

Appliance dimensions (D x W x H) in inches (mm)
20 ¹⁄₁₆" (510) x 36" (914) x 5 ⅛" (130)

Cut-out dimensions (D x W) in inches (mm)
19 ⁵⁄₁₆" (490) x 34 ¹³⁄₁₆" (885)

Total rating
58,000 BTU (120 V / 60 Hz)

Total Amps
1 Amp

Planning notes: The appliance is not operable without electrical connection.

Numbers indicated inside parenthesis ( ) = mm

GAGGENAU

Phone: 877.4GAGGENAU   Fax: 714.901.5360   www.gaggenau-usa.com   info@gaggenau-usa.com