
Snell

MODEL AMC650r IN-WALL SYSTEM

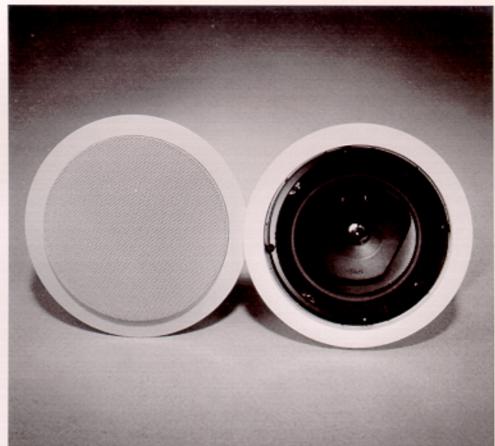

AMC650r

COMPACT FLUSH-MOUNT SPEAKER PERFECT FOR CEILING AND WALLS

The AMC650r utilizes our custom waveguide, giving the sound of a large speaker in the most compact design possible. Unlike other coaxial designs, the angled waveguide assures remarkable clarity and imaging. As with every Snell speaker, the AMC650r is hand tuned by our technicians to ensure that each pair sounds as crisp and detailed as our design engineers intended.

SPECIFICATIONS

Frequency Response

65-20Hz (±3dB)

Tweeter

3/4" (19mm) ferrofluid-cooled titanium dome with neodymium magnet structure.

Frequency Range 55-22Hz (-6dB)

Bass Unit

6-1/2" (165mm) woofer with polypropylene cone

and NBR rubber surround.

Recommended Amplifier Power

15-85 watts

Nominal Impedance

8 ohms

Sensitivity [1 watt (2.83v) at 1m] 88dB SPL

Grille

Perforated steel; 0.02" (0.5mm) thick; painted white.

Dimensions Overall Diameter

9" (227mm)

Mounting Hole Diameter

7-5/8" (194mm)

Weight/Each

3 lbs (1.4kg)

Finish

White (paintable).

143 Essex Street Haverhill, MA 01832 978-373-6114 phone 978-373-6172 fax

Covered by patents issued and or pending. Specifications subject to change, @ 1998 Snell Acoustics.