PGM304, PGM365 SGM304, SGM364, SGM365, SGM466



30", 36", 46" Wide,


91605 Preference™ Gas Cooktops

PLANNING
1/2 GUIDE

2" (51mm) to Combustible Rear Wall 0" (0mm) to Non-Combustible Rear Wall 0" (152mm) Min. from edge of cooktop to combustible side wall above finished countertop (both sides)

Models	"A" Cooktop Width	"B" Cooktop Cutout Width				
30"	30" (762mm)	27 1/2" (699mm)				
36"	36" (914mm)	33 3/4" (857mm)				
46"	46" (1168mm)	44 1/2" (1130mm)				

(PGM304 Shown)

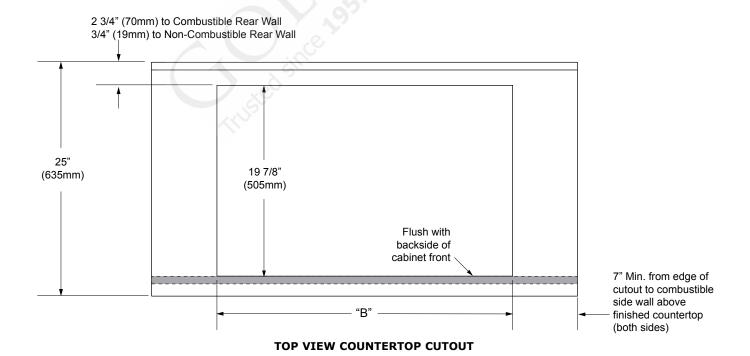

Web: http://www.dacor.com Corporate Phone: 800-793-0093


PGM304, PGM365 SGM304, SGM364, SGM365, SGM466



30", 36", 46" Wide,

91605 Preference™ Gas Cooktops

PLANNING
2/2 GUIDE

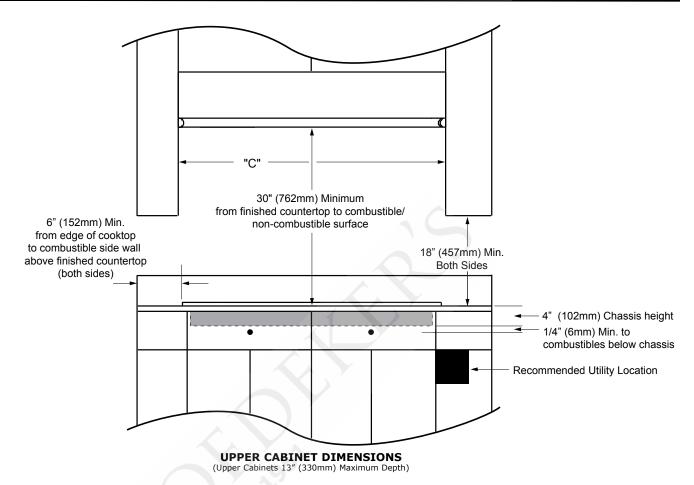

Models	"C" Min. Hood Width	"C" Recommended Hood Width	
30"	30" (762mm)	36" (914mm)	
36"	36" (914mm)	42" (1067mm)	
46"	46" (1166mm)	54" (1372mm)	

Model No.	Dedicated Circuit Required	Total Connected Load	Gas Supply Requirements	Approximate Shipping Weight	
PGM304	120VAC, 60Hz, 15A (Breaker)	0.03kW (0.25A)	1/2" (13mm) Regulator - Natural Gas Standard	53 lbs.	
SGM304					
SGM364				57 lbs.	
PGM365			3/4" (19mm) Regulator - Natural Gas Standard	67 lbs.	
SGM365			1/2" (13mm) Regulator - Natural Gas Standard	57 lbs.	
SGM466				76 lbs.	

Web: http://www.dacor.com

Corporate Phone: 800-793-0093

NO NO

NOTES:

- Factory installed liquid propane (LP) special ordered.
- Cooktop is supplied with a 48" (1219mm) power cord, with a three prong grounded plug.
- Utilities are located in the right rear corner of the cooktop.
- 4. See the Combination Installation (CI) Section if installing with a downdraft, wall oven, or warming oven.

Specifications are subject to change without notice. **4.4**See installation instructions for additional details. L65335 rev E