

## RANGE COMPOSITION

Zanussi Professional offers a range of ice-making machines specially designed to produce ice cubes. All the models, whilst having a compact size, offer excellent performance and maximum efficiency. The range has been specifically designed for use in bars, restaurants, hotels and discos and can also be used in medical facilities.



730521

# 21 KG

**ICE CUBERS** **ZANUSSI**  
PROFESSIONAL

## FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ All models are available in air-cooled or water-cooled versions\*.
- ◆ The ice-making method (spray layering) guarantees compact, hygienically pure ice cubes that are resistant to melting.
- ◆ R404a refrigerant.
- ◆ Reliability is guaranteed by the



quality of the construction materials used (plastic flap on the front, top and side panels in ABS for CIM24AA and CIM24WA models, in stainless steel for CIM24A and CIM24W models) and the sophisticated product and process technology involved.

- ◆ The compact dimensions of the ice cubers make them highly suitable for any location, particularly those where space is at a premium.

- ◆ The metal sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- ◆ All models comply with the standards required by the main international approval bodies and are H marked.

\* Water consumption and productivity have been calculated using a water temperature of 15°C and an ambient temperature of 21°C.

CHARACTERISTICS	MODELS			
	CIM24A 730521	CIM24AA 730559	CIM24W 730522	CIM24WA 730560
Air cooled	●	●		
Water cooled			●	●
Output - kg/day	21	21	21	21
Bin capacity - Kg	4	4	4	4
Kind of cube	D - 13g	D - 13g	D - 13g	D - 13g
External dimensions - mm				
width	345	355	345	355
depth	400	404	400	404
height	590	595	590	595
Refrigerant type	R404a	R404a	R404a	R404a
Power - kW				
installed-electric	0.32	0.32	0.32	0.32
Noise level - dBA	59.1	59.1	59.1	59.1
Net weight - kg.	28	28	28	28
Power supply - V, phases, Hz	220/240 V, 1N, 50			

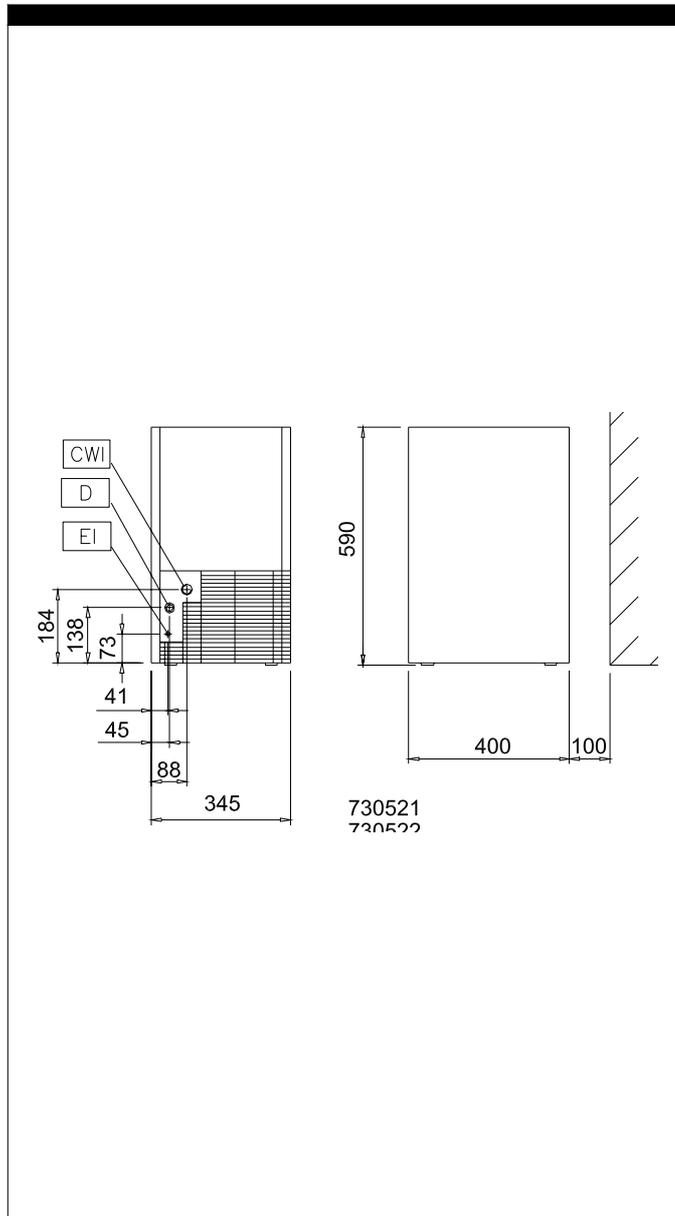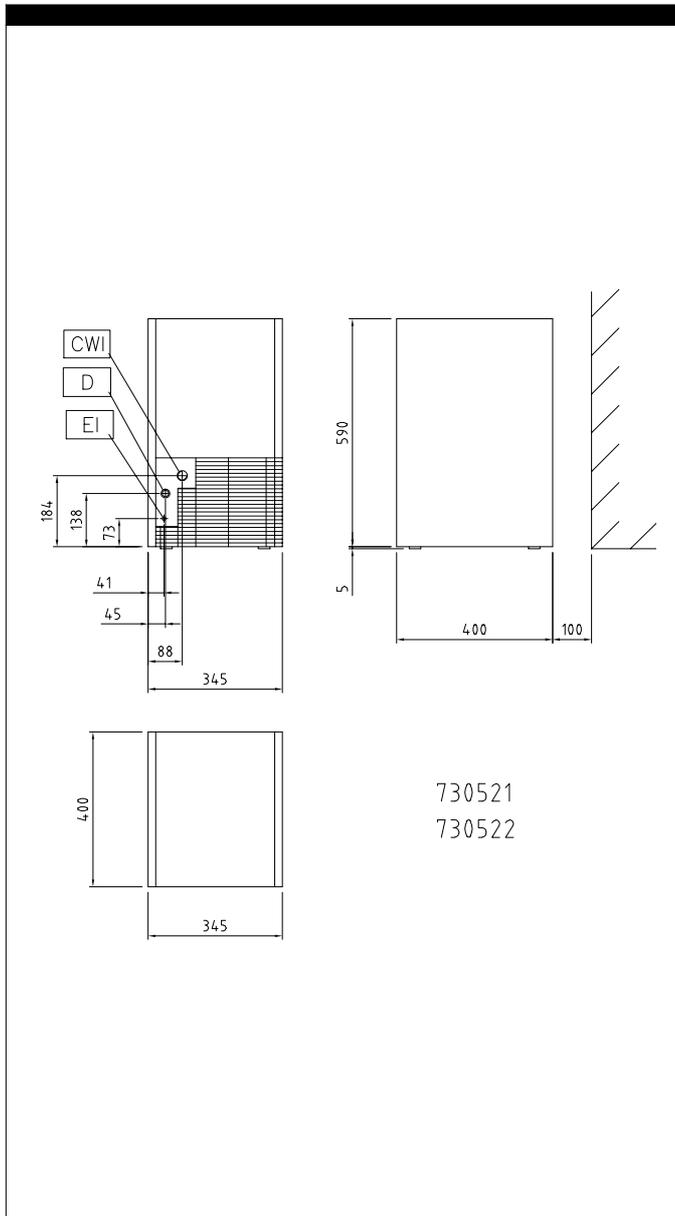

	CIM24A 730521	CIM24AA 730559	CIM24W 730522	CIM24WA 730560
CWI - Cold water inlet	3/4"	3/4"	3/4"	3/4"
D - Water drain	24mm	24mm	24mm	24mm
EI - Electrical connection	220/240 V, 1N, 50			



www.zanussiprofessional.com