
MRES30

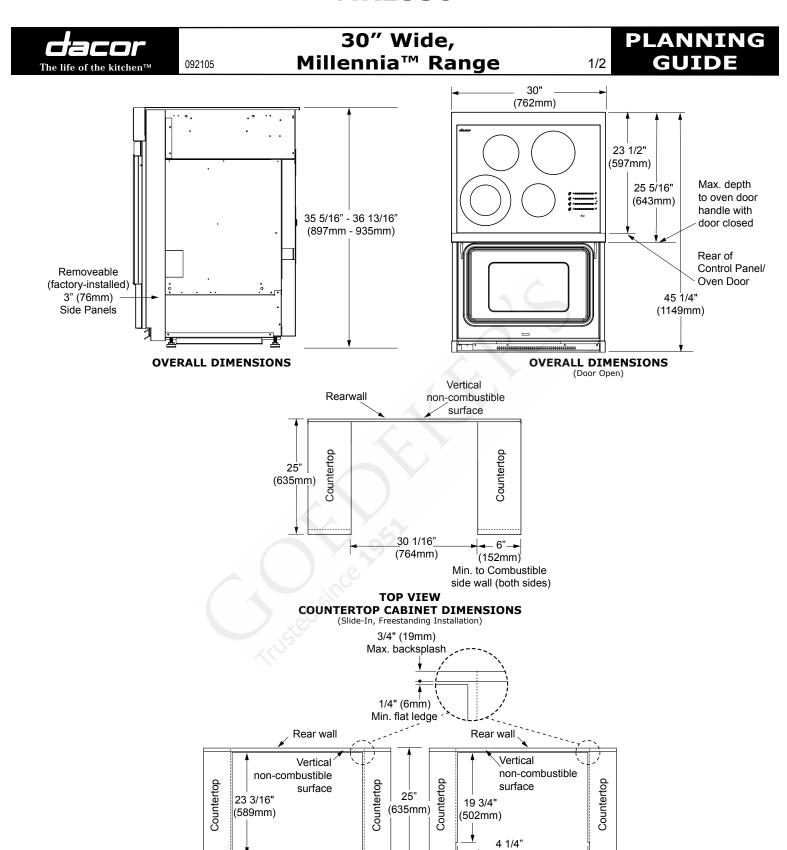

CUTOUT DIMENSIONS
(Slide-In, Self-Rimming Installation with Side Panels and Backguard Removed)
(Slide-In, Self-Rimming Installation with Side Panels Backguard R

13/16" (21mm) - 29 1/4" (743mm) - 30 1/16" (764mm)

(Slide-In, Self-Rimming Installation using accessory 3" Side Panels, Backguard Removed)

(108mm)

29 1/4" (743mm) -30 1/16" (764mm)

Web: http://www.dacor.com Corporate Phone: 800-793-0093

Specifications are subject to change without notice. See installation instructions for additional details.


MRES30



30" Wide, ₀₁₀₀₅ Millennia™ Range

2/2

PLANNING GUIDE

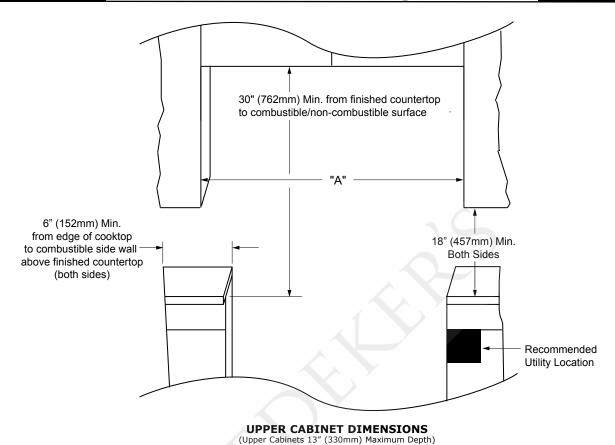

Model No.	"A" Min. Hood Width	"A" Recommended Hood Width	
MRES30	30" (762mm)	36" (914mm)	

Model No.	Dedicated Circuit Required	Total Connected Load	Approximate Shipping Weight
MRES30	240VAC, 4-wire, 60Hz, 50A (Breaker)	11.1kW (46A)	297 lbs.

NOTES:

- 1. Electrical is located in the right rear corner of the unit.
- 2. Range is supplied with a 60" (1524mm) long 240V 4-wire conduit.
- 3. Utilities may be located in the lower left corner of the adjacent right cabinet. (Recommended)
- 4. Alternate location, in the lower right corner behind the range.
- 5. Contact your local building department to verify compliance with local code interpretation.
- 6. MRES30 Range can be installed with slim (ERV/PRV) downdraft ventilation.
- 7. See the Combination Installation (CI) Section if installing with a downdraft.

Web: http://www.dacor.com Corporate Phone: 800-793-0093